


Recommended Land Pattern

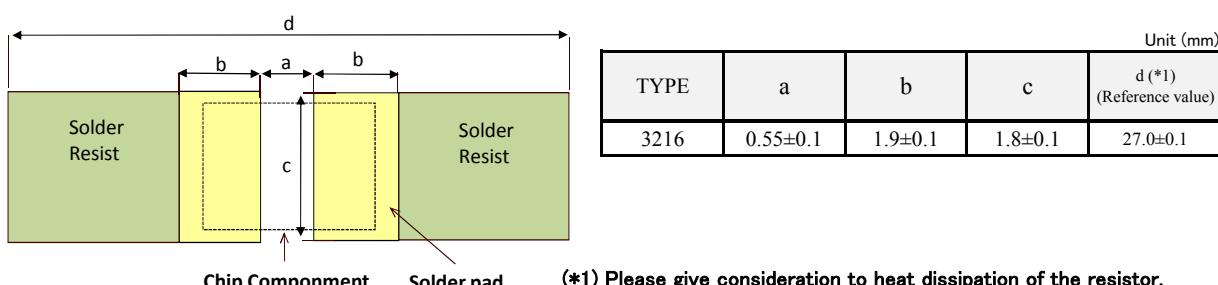

(*1) Please give consideration to heat dissipation of the resistor.

The solder fillet when resistor is powered up should not exceed 155°C.

Power Derating Curve

(HRG3216)

For operation above 70°C, power must be derated according to the following chart.

However, in actual use, verify the fillet temperature is not exceeding 155°C.

