

### Features

- <20 ppm initial tolerance
- <100 ppm stability over -40°C to +85°C
- Small SMD package: 2.0 x 1.2 mm (2012)<sup>[1]</sup>
- SOT23-5 package option for industrial and automotive applications
- Ultra-low power: 1.0 μA typ
- Vdd supply range: 1.5V to 3.63V
- Wide operating temperature range options
- Internal filtering eliminates external Vdd bypass capacitors
- Pb-free, RoHS and REACH compliant

### Applications

- Industrial timekeeping
- Industrial battery management
- Multi-drop 32 kHz clock distribution
- Bluetooth modules
- WiFi modules
- RTC Reference Clock



**Note:**

1. For the smallest 32 kHz XO in CSP (1.2mm<sup>2</sup>), consider the [SiT1532](#).

**Table 1. Electrical Characteristics**

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
<b>Frequency and Stability</b>						
Output Frequency	F <sub>out</sub>	32.768 or 16.384			kHz	
<b>Frequency Stability</b>						
Initial Tolerance <sup>[2]</sup>	F <sub>init</sub>			20	ppm	T <sub>A</sub> = 25°C, post reflow, V <sub>dd</sub> : 1.5V – 3.63V.
Frequency Stability Over Temperature <sup>[3]</sup>	F <sub>stab</sub>			75	ppm	T <sub>A</sub> = -10°C to +70°C, V <sub>dd</sub> : 1.5V – 3.63V.
				100		T <sub>A</sub> = -40°C to +85°C, V <sub>dd</sub> : 1.5V – 3.63V.
				150		T <sub>A</sub> = -40°C to +105°C, -55°C to +85°C, V <sub>dd</sub> : 1.8V – 3.63V.
25°C Aging		-1		1	ppm	1 <sup>st</sup> Year
<b>Supply Voltage and Current Consumption</b>						
Operating Supply Voltage	V <sub>dd</sub>	1.5		3.63	V	T <sub>A</sub> = over temperature
Operating Current	I <sub>dd</sub>		1.0		μA	T <sub>A</sub> = 25°C, V <sub>dd</sub> : 1.5V – 3.3V. No load
				1.3		T <sub>A</sub> = -10°C to +70°C, V <sub>dd</sub> max: 3.63V. No load
				1.4		T <sub>A</sub> = -40°C to +85°C, V <sub>dd</sub> max: 3.63V. No load
				2.80		T <sub>A</sub> = -40°C to +105°C, V <sub>dd</sub> max: 3.63V. No load
Power-Supply Ramp	t <sub>Vdd Ramp</sub>			100	ms	Over temperature, 0 to 90% V <sub>dd</sub>
Start-up Time at Power-up	T <sub>start</sub>		180	300	ms	-40°C ≤ T <sub>A</sub> ≤ 50°C, valid output
				450		-40°C ≤ T <sub>A</sub> ≤ 85°C, valid output
				500 + 1 period		T <sub>A</sub> = -55°C and +105°C
<b>Operating Temperature Range</b>						
Commercial Temperature	T <sub>opn</sub>	-10		70	°C	Temp code "C" in part number ordering
Industrial Temperature		-40		85		Temp code "I" in part number ordering
Extended Industrial Temperature		-40		105		Temp code "E" in part number ordering.
Extended Cold Industrial Temperature		-55		85		Temp Code "D" in part number ordering.
Automotive Temperature Range		-55		105		Contact <a href="#">SiTime</a> for Availability
<b>LVC MOS Output, T<sub>A</sub> = Over Temperature, typical values are at T<sub>A</sub> = 25°C</b>						
Output Rise/Fall Time	t <sub>r</sub> , t <sub>f</sub>		100	200	ns	10-90%, 15 pF load, V <sub>dd</sub> = 1.5V to 3.63V 10-90% (V <sub>dd</sub> ), 5 pF load, V <sub>dd</sub> ≥ 1.62V
Output Clock Duty Cycle	DC	48		52	%	
Output Voltage High	V <sub>OH</sub>	90%			V	V <sub>dd</sub> : 1.5V – 3.63V. I <sub>OH</sub> = -10 μA, 15 pF
Output Voltage Low	V <sub>OL</sub>			10%	V	V <sub>dd</sub> : 1.5V – 3.63V. I <sub>OL</sub> = 10 μA, 15 pF
Maximum Output Drive				50	pF	≥80% LVC MOS swing, T <sub>A</sub> = over temperature, V <sub>dd</sub> = 1.5V to 3.3V
Period Jitter	T <sub>jitt</sub>		35		ns <sub>RMS</sub>	Cycles = 10,000, T <sub>A</sub> = 25°C


**Notes:**

2. Measured peak-to-peak. Tested with Agilent 53132A frequency counter. Due to the low operating frequency, the gate time must be ≥100 ms to ensure an accurate frequency measurement.
3. Measured peak-to-peak. Inclusive of Initial Tolerance at 25°C, and variations over operating temperature, rated power supply voltage and load.

**Table 2. Pin Configuration**


SMD Pin	SOT23-5 Pin	Symbol	I/O	Functionality
1	2, 3	NC/GND	No Connect	Connect to GND or leave floating.
2	1	GND	Power Supply Ground	Connect to ground. All GND pins must be connected to power supply ground.
3	5	CLK Out	OUT	Oscillator clock output. When interfacing to an MCU's XTAL input, the CLK Out is typically connected to the receiving IC's X IN pin.
4	4	Vdd	Power Supply	Connect to power supply $1.5V \leq V_{dd} \leq 3.63V$ . Under normal operating conditions, Vdd does not require external bypass/decoupling capacitor(s). Internal power supply filtering will reject more than $\pm 150$ mVpp with frequency components through 10 MHz.

**SOT23-5 (Top View)**

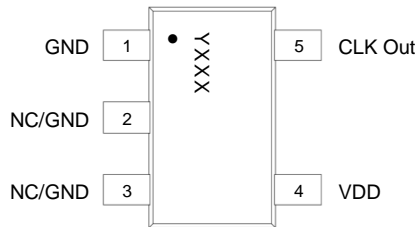


**Figure 1. Pin Assignments**

**SMD Package (Top View)**

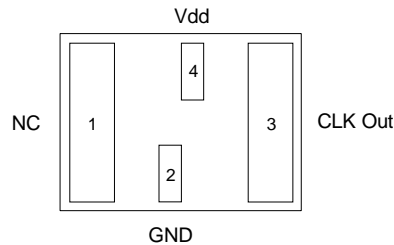

**Figure 2. Pin Assignments**

**System Block Diagram**

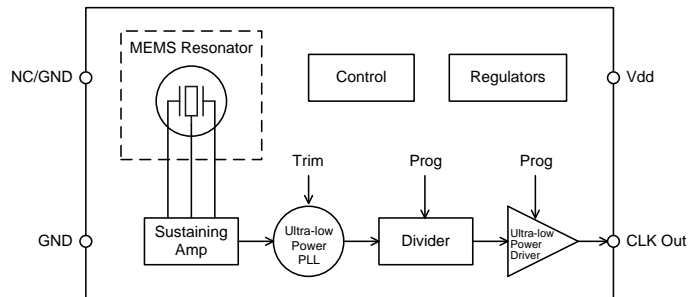

**Figure 3. SiT1630 Block Diagram**

**Table 3. Absolute Maximum**

Attempted operation outside the absolute maximum ratings cause permanent damage to the part. Actual performance of the IC is only guaranteed within the operational specifications, not at absolute maximum ratings.

Parameter	Test Condition	Value	Unit
<b>Continuous Power Supply Voltage Range (Vdd)</b>		-0.5 to 3.63	V
<b>Short Duration Maximum Power Supply Voltage (Vdd)</b>	≤30 minutes, over -40°C to +85°C	4.0	V
<b>Short Duration Maximum Operating Temperature Range</b>	Vdd = 1.5V - 3.63V, ≤30 mins	125	°C
<b>Maximum Continuous Operating Life at Temperature Extreme (meeting datasheet limits)</b>	T <sub>A</sub> = -55°C, Continuous Vdd = 1.8V – 3.3V ±10%	8	Hours
<b>Human Body Model ESD Protection</b>	JESD22-A114	3000	V
<b>Charge-Device Model (CDM) ESD Protection</b>	JESD22-C101	750	V
<b>Machine Model (MM) ESD Protection</b>	JESD22-A115	300	V
<b>Latch-up Tolerance</b>	JESD78 Compliant		
<b>Mechanical Shock Resistance</b>	Mil 883, Method 2002	10,000	g
<b>Mechanical Vibration Resistance</b>	Mil 883, Method 2007	70	g
<b>2012 SMD Junction Temperature</b>		150	°C
<b>SOT23-5 Junction Temperature</b>		150	°C
<b>Storage Temperature</b>		-65°C to 150°C	

## Description


The SiT1630 is an ultra-small and ultra-low power 32.768 kHz oscillator optimized for battery-powered applications.

SiTime’s MEMS oscillators consist of MEMS resonators and a programmable analog circuit. Our MEMS resonators are built with SiTime’s unique MEMS First™ process. A key manufacturing step is EpiSeal™ during which the MEMS resonator is annealed with temperatures over 1000°C. EpiSeal creates an extremely strong, clean, vacuum chamber that encapsulates the MEMS resonator and ensures the best performance and reliability. During EpiSeal, a poly silicon cap is grown on top of the resonator cavity, which eliminates the need for additional cap wafers or other exotic packaging. As a result, SiTime’s MEMS resonator die can be used like any other semiconductor die. One unique result of SiTime’s MEMS First and EpiSeal manufacturing processes is the capability to integrate SiTime’s MEMS die with a SOC, ASIC, microprocessor or analog die within a package to eliminate external timing components and provide a highly integrated, smaller, cheaper solution to the customer.

## Frequency Stability

The SiT1630 is factory calibrated (trimmed) to guarantee frequency stability to be less than 20 ppm at room temperature and very tight stability over temperature. Unlike quartz crystals that have a classic tuning fork parabola temperature curve with a 25°C turnover point, the SiT1630 temperature coefficient is extremely flat across temperature.

When measuring the SiT1630 output frequency with a frequency counter, it is important to make sure the counter’s gate time is >100 ms. The slow frequency of a 32 kHz clock will give false readings with faster gate times.

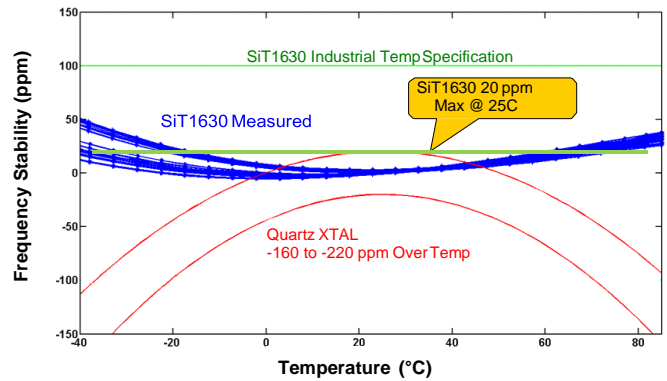

**Figure 4. SiTime vs. Quartz**

## Power Supply Noise Immunity

The SiT1630 is an ultra-small 32 kHz oscillator. In addition to eliminating external output load capacitors common with standard XTALs, this device includes special power supply filtering and thus, eliminates the need for an external Vdd bypass-decoupling capacitor. This feature further simplifies the design and keeps the footprint as small as possible. Internal power supply filtering is designed to reject AC-noise greater than ±150 mVpp magnitude and beyond 10 MHz frequency component.

## Power-up

The SiT1630 starts-up to a valid output frequency within 300 ms (180 ms typ). To ensure the device starts-up within the specified limit, make sure the power-supply ramps-up in approximately 10 – 20 ms (to within 90% of Vdd).

## Typical Operating Curves

( $T_A = 25^\circ\text{C}$ ,  $V_{dd} = 1.8\text{V}$ , unless otherwise stated)

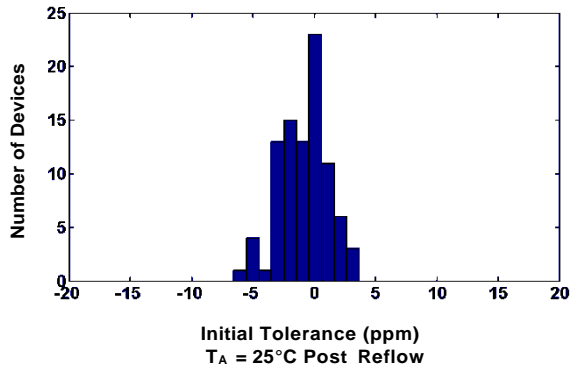


Figure 5. Initial Tolerance Histogram

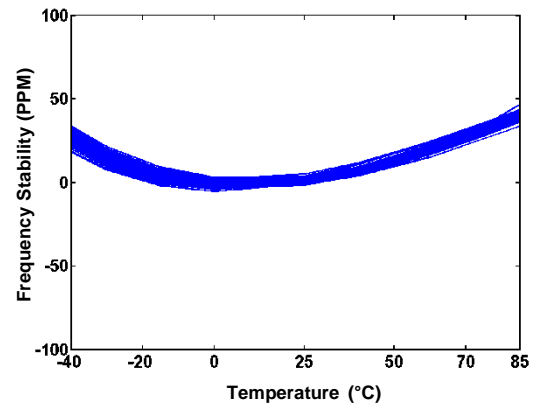


Figure 6. Frequency Stability Over Temperature

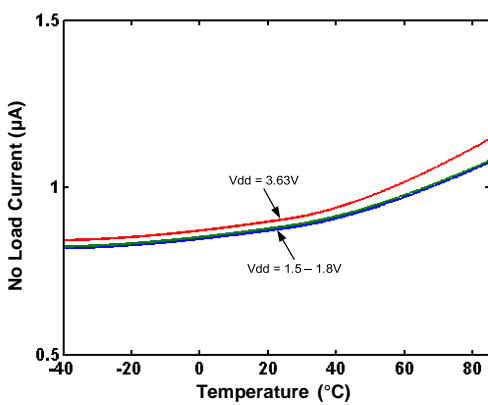


Figure 7. Supply Current Over Temperature (No Load)

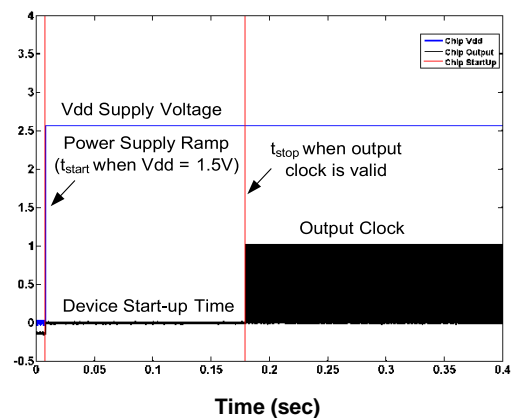


Figure 8. Start-up Time

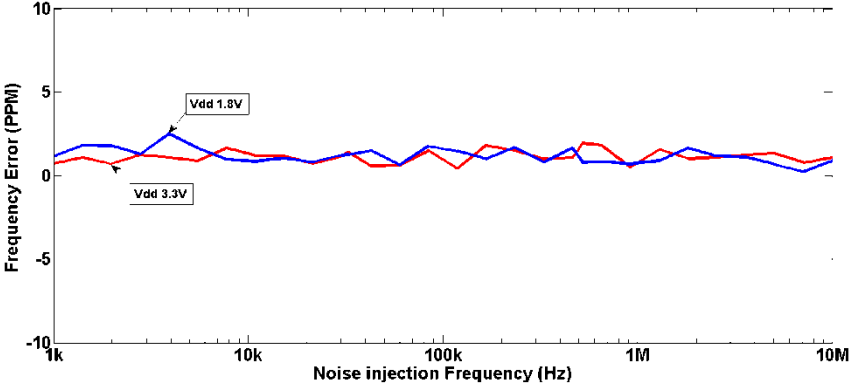


Figure 9. Power Supply Noise Rejection ( $\pm 150\text{mV}$  Noise)

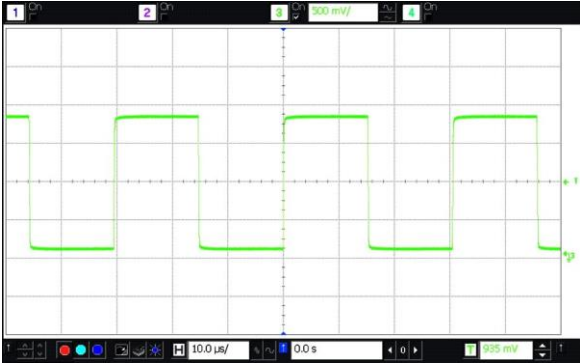


Figure 10. LVC MOS Output Waveform (Vswing = 1.8V, SiT1630AI-H4-DCC-32.768)

### Dimensions and Patterns

Package Size – Dimensions (Unit: mm)	Recommended Land Pattern (Unit: mm)
<p><b>2.0 x 1.2 mm SMD</b></p>	
<p><b>2.90 x 2.80 mm SOT23-5</b></p>	

**Table 4. SOT23-5 Dimension Table**


Symbol	Min.	Nom.	Max.
A	0.90	1.27	1.45
A1	0.00	0.07	0.15
A2	0.90	1.20	1.30
b	0.30	0.35	0.50
c	0.14	0.15	0.20
D	2.75	2.90	3.05
E	2.60	2.80	3.00
E1	1.45	1.60	1.75
L	0.30	0.38	0.55
L1	0.25 REF		
e	0.95 BSC.		
e1	1.90 BSC.		
α	0°	-	8°

## Manufacturing Guidelines

- 1) No Ultrasonic Cleaning. Do not subject the SiT1630 to an ultrasonic cleaning environment. Permanent damage or long term reliability issues to the MEMS structure may occur.
- 2) For Noisy, high EM environments, we recommend the following design guidelines:
  - Place oscillator as far away from EM noise sources as possible (e.g., high-voltage switching regulators, motor drive control).
  - Route noisy PCB traces, such as digital data lines or high di/dt power supply lines, away from the SiTime oscillator.
  - Add a low ESR/ESL, 0.1uF to 1.0uF ceramic capacitor (X7R) to help filter high frequency noise on the Vdd power-supply line. Place it as close to the SiTime oscillator Vdd pin as possible.
  - Place a solid GND plane underneath the SiTime oscillator to shield the oscillator from noisy traces on the other board layers.
- 3) For additional manufacturing guidelines and marking/tape-reel instructions, refer to [SiTime Manufacturing Notes](#).

## Ordering Information

Part number characters in blue represent the customer specific options. The other characters in the part number are fixed.

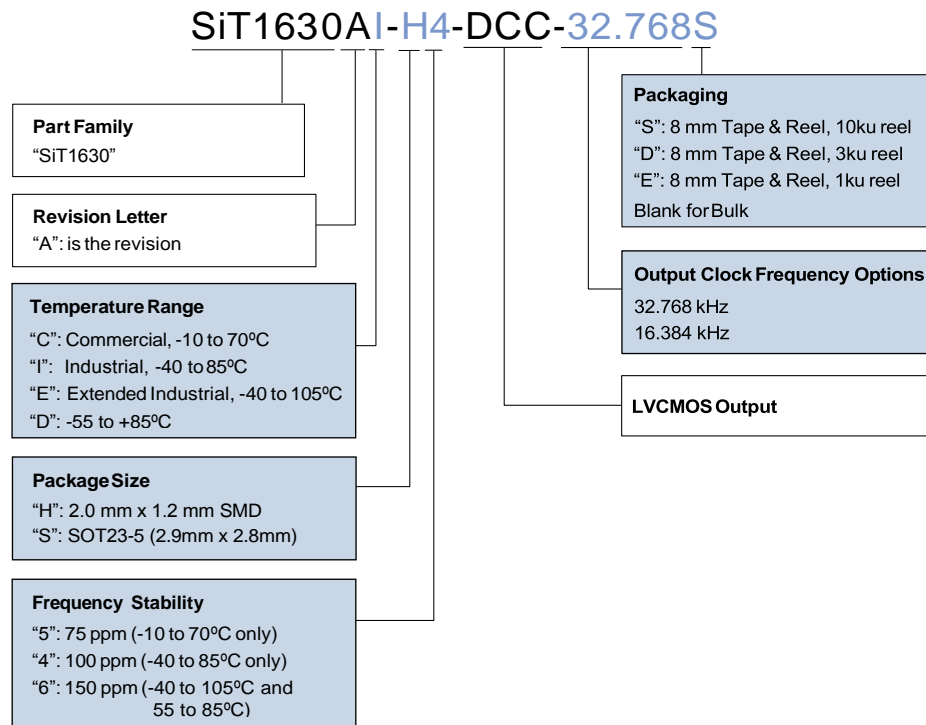



**Table 5. Revision History**

Version	Release Date	Change Summary
1.0	09/03/2014	Rev 0.85 Preliminary to Rev 1.0 Production Release Updated start-up time specification Deleted SOT23 package option Added typical operating plots Added maximum output drive specification Added <i>Manufacturing Guidelines</i> section
1.1	09/03/2014	Updated start-up time plot in <i>Typical Operating Curves</i> section Updated start-up time specification
1.2	11/10/2014	Added additional design-in/mfg guidelines
1.3	02/09/2018	Added SOT23-5 package option Improved max supply current for commercial and industrial temp ranges Improved max start-up time at 85°C Updated start-up time temperature range conditions Updated <i>Ordering Information</i>

**SiTime Corporation, 5451 Patrick Henry Drive, Santa Clara, CA 95054, USA | Phone: +1-408-328-4400 | Fax: +1-408-328-4439**

© SiTime Corporation 2014-2018. The information contained herein is subject to change at any time without notice. SiTime assumes no responsibility or liability for any loss, damage or defect of a Product which is caused in whole or in part by (i) use of any circuitry other than circuitry embodied in a SiTime product, (ii) misuse or abuse including static discharge, neglect or accident, (iii) unauthorized modification or repairs which have been soldered or altered during assembly and are not capable of being tested by SiTime under its normal test conditions, or (iv) improper installation, storage, handling, warehousing or transportation, or (v) being subjected to unusual physical, thermal, or electrical stress.

**Disclaimer:** SiTime makes no warranty of any kind, express or implied, with regard to this material, and specifically disclaims any and all express or implied warranties, either in fact or by operation of law, statutory or otherwise, including the implied warranties of merchantability and fitness for use or a particular purpose, and any implied warranty arising from course of dealing or usage of trade, as well as any common-law duties relating to accuracy or lack of negligence, with respect to this material, any SiTime product and any product documentation. Products sold by SiTime are not suitable or intended to be used in a life support application or component, to operate nuclear facilities, or in other mission critical applications where human life may be involved or at stake. All sales are made conditioned upon compliance with the critical uses policy set forth below.

**CRITICAL USE EXCLUSION POLICY**

**BUYER AGREES NOT TO USE SITIME'S PRODUCTS FOR ANY APPLICATION OR IN ANY COMPONENTS USED IN LIFE SUPPORT DEVICES OR TO OPERATE NUCLEAR FACILITIES OR FOR USE IN OTHER MISSION-CRITICAL APPLICATIONS OR COMPONENTS WHERE HUMAN LIFE OR PROPERTY MAY BE AT STAKE.**

SiTime owns all rights, title and interest to the intellectual property related to SiTime's products, including any software, firmware, copyright, patent, or trademark. The sale of SiTime products does not convey or imply any license under patent or other rights. SiTime retains the copyright and trademark rights in all documents, catalogs and plans supplied pursuant to or ancillary to the sale of products or services by SiTime. Unless otherwise agreed to in writing by SiTime, any reproduction, modification, translation, compilation, or representation of this material shall be strictly prohibited.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А