



### FEATURES

- Efficiency up to 84%
- DIP Package with Industry Standard Pinout
- Ultra-wide 4:1 Input Range
- Isolation Voltage 1500VDC
- Operating Temperature Range -40°C to +85°C
- Complies with EN55022 Class A
- Short Circuit Protection
- CSA 60950-1 Safety Approval
- 3 Years Product Warranty



The DL03S/D series are miniature, DIP Package, isolated 3W DC/DC converters with 1,500VDC isolation. The DL03S/D series feature fully regulated output and ultra wide 4:1 input voltage ranges. It offers short circuit protection and allows a wide operating temperature range of -40°C to +85°C. These isolated DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions.

### Model List

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA(typ.)	Max. capacitive Load µF	Efficiency (typ.)
			Max. mA	Min. mA	@Max. Load mA(typ.)	@No Load mA(typ.)			@Max. Load %
DL03S2403A	24 (9 ~ 36)	3.3	750	93	138	20	15	680	75
DL03S2405A		5	600	75	158			470	79
DL03S2412A		12	250	32	154			330	81
DL03S2415A		15	200	25	152			220	82
DL03D2412A		±12	±125	±16	156			150*	80
DL03D2415A		±15	±100	±13	156			100*	80
DL03S4803A	48 (18 ~ 75)	3.3	750	93	68	10	10	680	76
DL03S4805A		5	600	75	78			470	80
DL03S4812A		12	250	32	75			330	83
DL03S4815A		15	200	25	74			220	84
DL03D4812A		±12	±125	±16	76			150*	82
DL03D4815A		±15	±100	±13	76			100*	82

\* For each output

### Input Characteristics

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	24V Input Models	-0.7	---	50	VDC
	48V Input Models	-0.7	---	100	
Start-Up Threshold Voltage	24V Input Models	6	7.5	9	
	48V Input Models	12	15	18	
Under Voltage Shutdown	24V Input Models	---	---	8.5	
	48V Input Models	---	---	16	
Reverse Polarity Input Current	All Models	---	---	0.5	A
Short Circuit Input Power		---	---	2000	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55022,class A and FCC part 15,class A			



## Output Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Setting Accuracy	At 50% Load and Nominal Vin	---	---	±2.0	%Vom.
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±3.0	%
Line Regulation	Vin=Min. to Max.	---	±0.2	±1.0	%
Load Regulation	Io=Min. to Max.	---	±0.3	±1.0	%
Ripple & Noise (20MHz)		---	40	75	mV <sub>P-P</sub>
Transient Recovery Time	25% Load Step Change	---	150	500	μsec
Transient Response Deviation		---	±3	---	%
Temperature Coefficient		---	±0.01	±0.02	%/°C
Over Load Protection	Foldback	110	300	---	%
Short Circuit Protection		Continuous			

## General Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	1500	---	---	VDC
I/O Isolation Resistance	500 VDC	1000	---	---	MΩ
I/O Isolation Capacitance	100KHz, 1V	---	380	500	pF
Switching Frequency		---	350	---	KHz
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours
Safety Approvals	UL/cUL 60950-1 recognition(CSA certificate), IEC/EN 60950-1				


## Recommended Input Fuse

24V Input Models	48V Input Models
1000mA Slow-Blow Type	500mA Slow-Blow Type

## Environmental Characteristics

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range (See Power Derating Curve)	Natural Convection	-40	+85	°C
Case Temperature		---	+90	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C


## Power Derating Curve

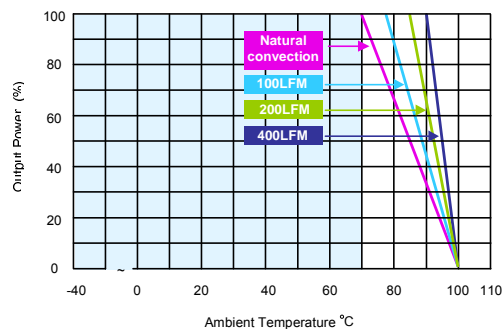

## Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%
- 3 Ripple & Noise measurement bandwidth is 0-20MHz.
- 4 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however they may not meet all specifications listed.
- 5 All DC/DC converters should be externally fused at the front end for protection.
- 6 That "natural convection" is about 20LFM but is not equal to still air (0 LFM).
- 7 Specifications subject to change without notice.

## Package Specifications

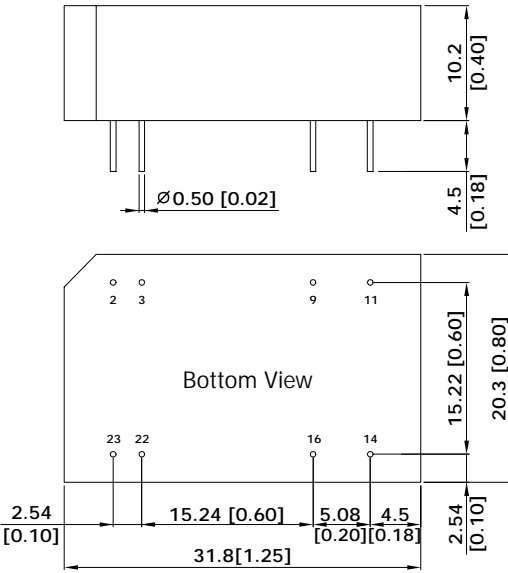Mechanical Dimensions	Pin Connections																											
 <p>The drawing shows two views of the module. The top view shows a rectangular component with a width of 31.8 mm [1.25 inches] and a height of 10.2 mm [0.40 inches]. It has four pins on the bottom edge with a diameter of 0.50 mm [0.02 inches]. The bottom view shows the same component from below, with a width of 31.8 mm [1.25 inches] and a height of 20.3 mm [0.80 inches]. The bottom view shows eight pins: pins 2, 3, 9, and 11 are on the top edge; pins 23, 22, 16, and 14 are on the bottom edge. Dimensions for the bottom view include a total width of 31.8 mm [1.25 inches], a distance of 2.54 mm [0.10 inches] from the left edge to pin 23, a distance of 15.24 mm [0.60 inches] between pins 23 and 22, a distance of 5.08 mm [0.20 inches] between pins 16 and 14, a distance of 4.5 mm [0.18 inches] between pins 16 and 14, and a distance of 2.54 mm [0.10 inches] from pin 14 to the right edge. The distance from the top edge to the bottom edge is 15.22 mm [0.60 inches].</p>	<table border="1"> <thead> <tr> <th>Pin</th> <th>Single Output</th> <th>Dual Output</th> </tr> </thead> <tbody> <tr> <td>2</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>3</td> <td>-Vin</td> <td>-Vin</td> </tr> <tr> <td>9</td> <td>No Pin</td> <td>Common</td> </tr> <tr> <td>11</td> <td>NC</td> <td>-Vout</td> </tr> <tr> <td>14</td> <td>+Vout</td> <td>+Vout</td> </tr> <tr> <td>16</td> <td>-Vout</td> <td>Common</td> </tr> <tr> <td>22</td> <td>+Vin</td> <td>+Vin</td> </tr> <tr> <td>23</td> <td>+Vin</td> <td>+Vin</td> </tr> </tbody> </table> <p>NC: No Connection</p> <ul style="list-style-type: none"> <li>▶ All dimensions in mm (inches)</li> <li>▶ Tolerance: X.X±0.25 (X.XX±0.01) X.XX±0.13 (X.XXX±0.005)</li> <li>▶ Pin diameter ⇔ 0.5 ±0.05 (0.02±0.002)</li> </ul>	Pin	Single Output	Dual Output	2	-Vin	-Vin	3	-Vin	-Vin	9	No Pin	Common	11	NC	-Vout	14	+Vout	+Vout	16	-Vout	Common	22	+Vin	+Vin	23	+Vin	+Vin
Pin	Single Output	Dual Output																										
2	-Vin	-Vin																										
3	-Vin	-Vin																										
9	No Pin	Common																										
11	NC	-Vout																										
14	+Vout	+Vout																										
16	-Vout	Common																										
22	+Vin	+Vin																										
23	+Vin	+Vin																										

## Physical Outline

Case Size : 31.8x20.3x10.2mm (1.25x0.80x0.40 inches)

Case Material : Non-Conductive Black Plastic (flammability to UL 94V-0 rated)

Pin Material : phosphor bronze

Weight : 12.2g



Part Numbering System						
D	L	03	S	24	05	A
Form factor	Family series	Watt	Number of Outputs	Input Voltage	Output Voltage	Option Code
D-DIP	A~Z	01:1W	S - Single	03:3.3V	03:3.3V	A - Std. Functions
P-SIP		02:2W	D- Dual	05: 5V	05: 5V	
S-SMD		03:3W		12:12V	12:12V	
		04:4W		24: 24V	15: 15V	
		06:6W		48:48V	24: 24V	

#### WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А