

## Schottky Diodes

### Features

- For general purpose applications
- These diodes feature very low turn-on voltage and fast guard ring against excessive voltage, such as electrostatic discharges
- These diodes are also available in the SOD123 case with the type designations BAT42W-V to BAT43W-V and in MiniMELF SOD80 case with the type designations LL42 to LL43.
- Lead (Pb)-free component
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



94 9367

### Mechanical Data

**Case:** DO35 Glass Case

**Weight:** approx. 125 mg

**Cathode Band Color:** black

**Packaging Codes/Options:**

TR/10 k per 13" reel (52 mm tape), 50 k/box

TAP/10 k per Ammo tape (52 mm tape), 50 k/box

### Parts Table

| Part  | Ordering code         | Type Marking | Remarks                |
|-------|-----------------------|--------------|------------------------|
| BAT42 | BAT42-TR or BAT42-TAP | BAT42        | Tape and Reel/Ammopack |
| BAT43 | BAT43-TR or BAT43-TAP | BAT43        | Tape and Reel/Ammopack |

### Absolute Maximum Ratings

$T_{amb} = 25 \text{ }^{\circ}\text{C}$ , unless otherwise specified

| Parameter                       | Test condition   | Symbol    | Value             | Unit |
|---------------------------------|--|-----------|-------------------|------|
| Repetitive peak reverse voltage |  | $V_{RRM}$ | 30                | V    |
| Forward continuous current      | $T_{amb} = 25 \text{ }^{\circ}\text{C}$                                  | $I_F$     | 200 <sup>1)</sup> | mA   |
| Repetitive peak forward current | $t_p < 1 \text{ s}, \delta < 0.5, T_{amb} = 25 \text{ }^{\circ}\text{C}$ | $I_{FRM}$ | 500 <sup>1)</sup> | mA   |
| Surge forward current           | $t_p < 10 \text{ ms}, T_{amb} = 25 \text{ }^{\circ}\text{C}$             | $I_{FSM}$ | 4 <sup>1)</sup>   | A    |
| Power dissipation <sup>1)</sup> | $T_{amb} = 65 \text{ }^{\circ}\text{C}$                                  | $P_{tot}$ | 200 <sup>1)</sup> | mW   |

<sup>1)</sup> Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

### Thermal Characteristics

$T_{amb} = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                                  | Test condition | Symbol     | Value             | Unit |
|--|----------------|------------|-------------------|------|
| Thermal resistance junction to ambient air |                | $R_{thJA}$ | 300 <sup>1)</sup> | K/W  |
| Junction temperature                       |                | $T_j$      | 125               | °C   |
| Ambient operating temperature range        |                | $T_{amb}$  | - 65 to + 125     | °C   |
| Storage temperature range                  |                | $T_{stg}$  | - 65 to +150      | °C   |

<sup>1)</sup> Valid provided that leads at a distance of 4 mm from case are kept at ambient temperature

### Electrical Characteristics

$T_{amb} = 25^\circ\text{C}$ , unless otherwise specified

| Parameter                     | Test condition   | Part  | Symbol     | Min | Typ. | Max  | Unit          |
|-------------------------------|--|-------|------------|-----|------|------|---------------|
| Reverse breakdown voltage     | $I_R = 100 \mu\text{A}$ (pulsed)   |       | $V_{(BR)}$ | 30  |      |      | V             |
| Leakage current <sup>1)</sup> | $V_R = 25 \text{ V}$   |       | $I_R$      |     |      | 0.5  | $\mu\text{A}$ |
|                               | $V_R = 25 \text{ V}, T_j = 100^\circ\text{C}$  |       | $I_R$      |     |      | 100  | $\mu\text{A}$ |
| Forward voltage <sup>1)</sup> | $I_F = 200 \text{ mA}$   | BAT42 | $V_F$      |     |      | 1000 | mV            |
|                               | $I_F = 10 \text{ mA}$  |       | $V_F$      |     |      | 400  | mV            |
|                               | $I_F = 50 \text{ mA}$  |       | $V_F$      |     |      | 650  | mV            |
|                               | $I_F = 2 \text{ mA}$   | BAT43 | $V_F$      | 260 |      | 330  | mV            |
|                               | $I_F = 15 \text{ mA}$  |       | $V_F$      |     |      | 450  | mV            |
| Diode capacitance             | $V_R = 1 \text{ V}, f = 1 \text{ MHz}$   |       | $C_D$      |     | 7    |      | pF            |
| Reverse recovery time         | $I_F = 10 \text{ mA}, I_R = 10 \text{ mA}, i_R = 1 \text{ mA}, R_L = 100 \Omega$           |       | $t_{rr}$   |     |      | 5    | ns            |
| Rectification efficiency      | $R_L = 15 \text{ k}\Omega, C_L = 300 \text{ pF}, f = 45 \text{ MHz}, V_{RF} = 2 \text{ V}$ |       | $\eta_V$   | 80  |      |      | %             |

<sup>1)</sup> Pulse test  $t_p < 300 \mu\text{s}, t_p/T < 0.02$

### Typical Characteristics

$T_{amb} = 25^\circ\text{C}$ , unless otherwise specified

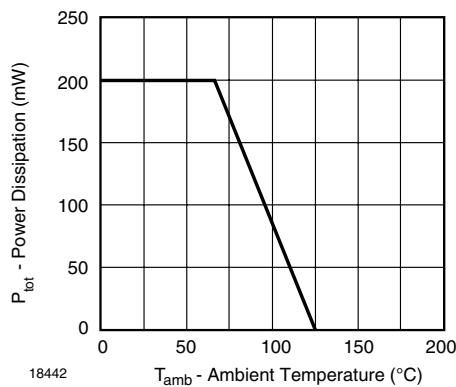


Figure 1. Admissible Power Dissipation vs. Ambient Temperature

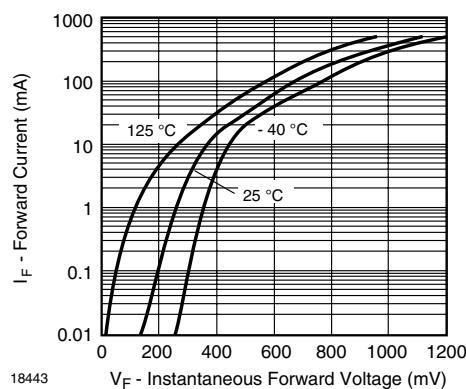


Figure 2. Typical Reverse Characteristics

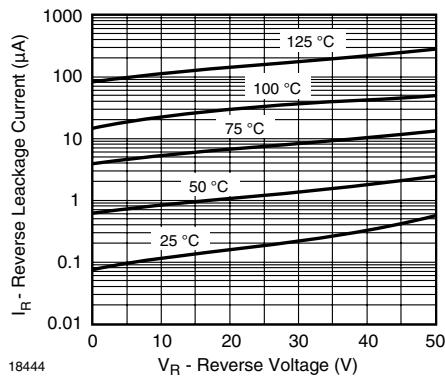


Figure 3. Typical Reverse Characteristics


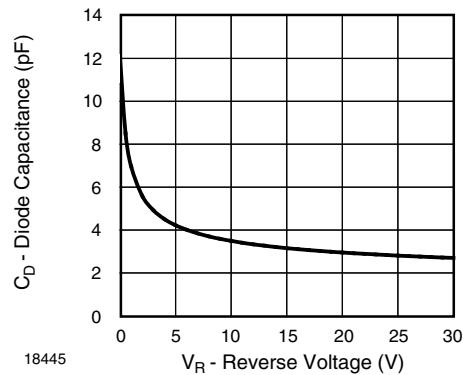


Figure 4. Typical Capacitance vs. Reverse Voltage

### Package Dimensions in millimeters (inches): DO35

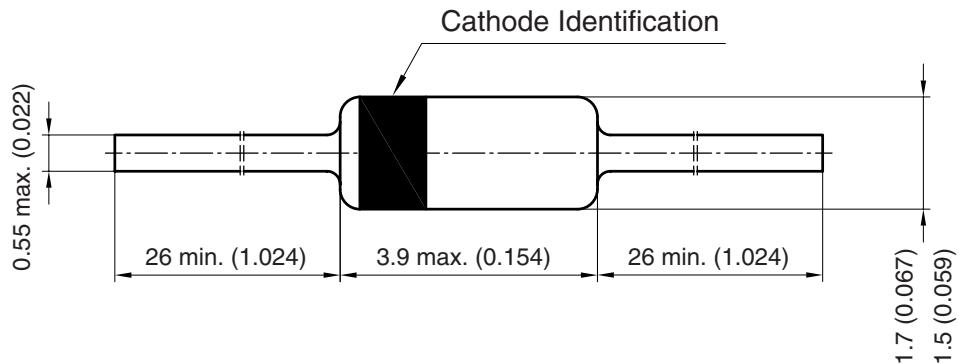

Rev. 6 - Date: 29. January 2007  
 Document no.: 6.560-5004.02-4  
 94 9366

### Ozone Depleting Substances Policy Statement

It is the policy of Vishay Semiconductor GmbH to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design  
and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А