

Power PCB Relay RZ

- 1 pole 12/16 A, 1 form C (CO) or 1 form A (NO) contact
- DC coil 400 mW
- 5kV/10mm coil-contact, reinforced insulation
- Ambient temperature 85°C
- Product in accordance to IEC 60335-1
- Reflow version for THR mounting process



Typical applications
Household appliances, boiler control, timers, garage door control, POS automation



F0305-A

Approvals

VDE Cert. No. 40023970, UL E214025, CQC 12002066685
Technical data of approved types on request

| Contact Data | 12A | 16A |
|---|----------------------------------|--------|
| Contact arrangement | 1 form C (CO) or 1 form A (NO) | |
| Rated voltage | 250VAC | |
| Max. switching voltage | 400VAC | |
| Rated current | 12A | 16A |
| Limiting making current (form A contact) | | |
| max. 4s, duty factor 10% | 30A | |
| max. 20ms (incandescent lamp); AgSnO ₂ | 80A | |
| Breaking capacity max. | 3000VA | 4000VA |
| Contact material | AgNi 90/10 or AgSnO ₂ | |
| Frequency of operation, with/without load | 360/72000h ⁻¹ | |
| Operate/release time max. | 8/6ms | |
| Bounce time max., form A/form B | 4/10ms | |

Contact ratings for standard version



| Type | Contact | Load | Cycles |
|------------------|---------|---------------------|---------------------|
| IEC 61810 | | | |
| RZ03-1A4 | A (NO) | 16A, 250VAC, 85°C | 50x10 ³ |
| RZ03-1C4 | C (CO) | 16A, 250VAC, 85°C | 10x10 ³ |
| RZ01-1A3 | A (NO) | 12A, 250VAC, 85°C | 100x10 ³ |
| RZ01-1A4 | A (NO) | 12A, 250VAC, 85°C | 50x10 ³ |
| RZ01-1C4 | C (CO) | 12A, 250VAC, 85°C | 30x10 ³ |
| RZ01/3-1A4 | A (NO) | 10A, 250VAC, 85°C | 150x10 ³ |
| RZ0H-1A4 | A (NO) | 12A, 250VAC, 85°C | 150x10 ³ |
| RZ0H-1A4 | A (NO) | 16A, 250VAC, 85°C | 50x10 ³ |
| RZ0H-1A4 | A (NO) | 18A, 250VAC, 85°C | 30x10 ³ |
| UL 508 | | | |
| RZ03-1A. | A (NO) | 16A, 250VAC, 85°C | 50x10 ³ |
| RZ03-1A4 | A (NO) | 12A, 250VAC, 85°C | 150x10 ³ |
| RZ01-1A3 | A (NO) | 12A, 250VAC, 85°C | 50x10 ³ |
| RZ03-1.4 | A (NO) | B300, R300, 85°C | 6x10 ³ |
| RZ03-1.4 | A (NO) | 12A, 250VAC, 85°C | 100x10 ³ |
| RZ03-1.4 | A (NO) | 1/2HP, 125VAC, 85°C | 6x10 ³ |
| RZ03-1A. | A (NO) | 1HP, 277VAC, 85°C | 30x10 ³ |

Contact ratings for RZ reinforced flux proof version

| Type | Contact | Load | Cycles |
|----------------------|---------|-------------------|--------------------|
| IEC 61810 | | | |
| RZ03-1C3-D...-R | A (NO) | 16A, 250VAC, 85°C | 30x10 ³ |
| RZ03-1C3-D...-R | C (CO) | 16A, 250VAC, 85°C | 6x10 ³ |
| RZ01-1C3-D...-R | A (NO) | 12A, 250VAC, 85°C | 30x10 ³ |
| RZ01-1C3-D...-R | C (CO) | 12A, 250VAC, 85°C | 6x10 ³ |
| RZ03-1C4-D...-R | A (NO) | 16A, 250VAC, 85°C | 30x10 ³ |
| RZ03-1C4-D...-R | C (CO) | 16A, 250VAC, 85°C | 6x10 ³ |
| RZ02/3-1C4-D...-R | A (NO) | 12A, 250VAC, 85°C | 50x10 ³ |
| RZ02/3-1C4-D...-R | C (CO) | 12A, 250VAC, 85°C | 20x10 ³ |
| IEC 60947-5-1 | | | |
| RZ03-1.4 | A (NO) | 250VAC/6A AC-15 | 6.050 |
| UL 508 | | | |
| RZ03-1C3-D...-R | A (NO) | 16A, 277VAC, 85°C | 30x10 ³ |
| RZ03-1C3-D...-R | C (CO) | 16A, 277VAC, 85°C | 6x10 ³ |
| RZ01-1C3-D...-R | A (NO) | 12A, 277VAC, 85°C | 30x10 ³ |
| RZ01-1C3-D...-R | C (CO) | 12A, 277VAC, 85°C | 6x10 ³ |
| RZ03-1C4-D...-R | A (NO) | 16A, 277VAC, 85°C | 30x10 ³ |
| RZ03-1C4-D...-R | C (CO) | 16A, 277VAC, 85°C | 6x10 ³ |
| RZ02/3-1C4-D...-R | A (NO) | 12A, 277VAC, 85°C | 50x10 ³ |
| RZ02/3-1C4-D...-R | C (CO) | 12A, 277VAC, 85°C | 20x10 ³ |

Contact ratings for RZ reflow version

| Type | Contact | Load | Cycles |
|------------------|---------|----------------------|---------------------|
| IEC 61810 | | | |
| RZR3-1C4-D...-R | A (NO) | 16A, 250Vac, 85°C | 30x10 ³ |
| RZR1-1C4-D...-R | C (CO) | 12A, 250Vac, 85°C | 20x10 ³ |
| RZR1-1C4-D...-R | A (NO) | 12.5A, 400Vac, 85°C | 50x10 ³ |
| UL 508 | | | |
| RZR3-1C4-D...-R | A (NO) | 16A, 277Vac, 85°C | 30x10 ³ |
| RZR1-1C4-D...-R | C (CO) | 12A, 277Vac, 85°C | 30x10 ³ |
| RZR1-1C4-D...-R | A (NO) | 1HP, 277Vac, 85°C | 30x10 ³ |
| RZR3-1C4-D...-R | A (NO) | 1/8 HP, 120Vac, 85°C | 100x10 ³ |



Power PCB Relay RZ (Continued)

Mechanical endurance >10x10⁶ operations

Coil Data

| | |
|---|------------|
| Coil voltage range | 3 to 48VDC |
| Operative range, IEC 61810 | 2 |
| Coil insulation system according UL1446 | class F |

Coil versions, DC coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance $\Omega \pm 10\%$ | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-----------------------------------|---------------------|
| D003 | 3 | 2.1 | 0.3 | 22 | 410 |
| D005 | 5 | 3.5 | 0.5 | 60 | 420 |
| D006 | 6 | 4.2 | 0.6 | 90 | 400 |
| D009 | 9 | 6.3 | 0.9 | 200 | 400 |
| D012 | 12 | 8.4 | 1.2 | 360 | 400 |
| D015 | 15 | 10.5 | 1.5 | 562 | 410 |
| D024 | 24 | 16.8 | 2.4 | 1440 | 400 |
| D048 | 48 | 33.6 | 4.8 | 5730 | 400 |

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

Insulation Data

| | |
|------------------------------------|----------------------|
| Initial dielectric strength | |
| between open contacts | 1000V _{rms} |
| between contact and coil | 5000V _{rms} |
| Clearance/creepage | |
| between contact and coil | ≥10/10mm |
| Material group of insulation parts | IIIa |
| Tracking index of relay base | PTI250V |

Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customer-support/rohssupportcenter

Resistance to heat and fire
standard and reflow cover version according EN 60335-1, par.30

Ambient temperature
standard version -40 to 85°C


Category of environmental protection
IEC 61810 RTII - flux proof

Vibration resistance (functional), 30 to 500Hz
closing form A contact >15g
opening form A contact >20g
opening form B contact >5g

Shock resistance (destructive) 100g


Dimensions

12A, pinning 3.5mm

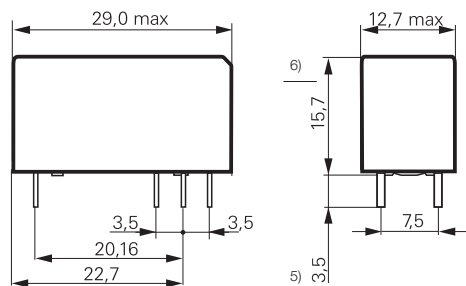

S0557-AB

12A, 16A, pinning 5mm

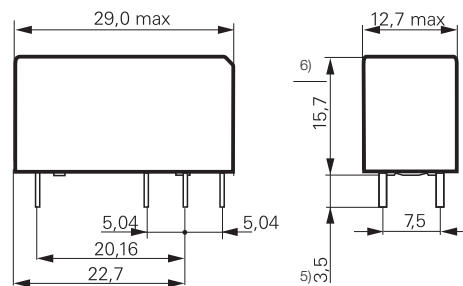

S0557-AA

5) only for reflow version 2,5mm
6) only for reflow version 15,7 +0,3/-0mm

5) only for reflow version 2,5mm
6) only for reflow version 15,7 +0,3/-0mm

Other Data

| | | |
|------------------------------|---------------------------|---|
| Terminal type | standard version | PCB -THT ²⁾ |
| | reinforced sealed version | PCB -THT, plug-in |
| | reflow version | PCB -THR |
| Mounting distance | | ≥0mm |
| Weight | | 10g |
| Resistance to soldering heat | | |
| THT, IEC 60068-2-20 | | RTII 270°C/10s |
| THR: reflow version forced | | gas convection ³⁾ or vapour phase ⁴⁾ |
| temperature profile | | according EN61730 |
| Packaging/unit | | tube/20 pcs., box/500 pcs. |

2) The use of foaming flux is not permitted.

3) Infrared heating not allowed

4) Recommended fluid LS-230

5) only for reflow version 2,5mm


6) only for reflow version 15,7 +0,3/-0mm

Accessories

For details see datasheet [Accessories Industrial Power Relay RT](#)

NOTE: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

Coil operating range RZ 1pol DC-coil

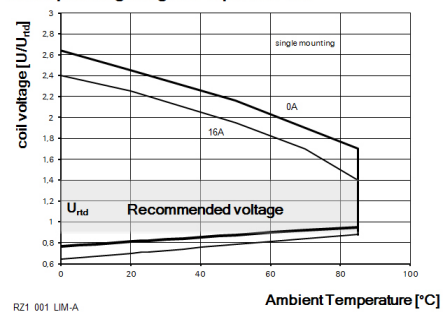

RZ1_001_LIM-A

Power PCB Relay RZ (Continued)

PCB layout / terminal assignment

Bottom view on solder pins

12A, pinning 3.5mm



S0418-CB

12A, pinning 5mm



S0418-CN

16A, pinning 5mm



S0418-CA

1 form C (CO) contact




S0163-BG

1 form C (CO) contact



S0163-BC

1 form C (CO) contact



S0163-BE

1 form A (NO) contact




S0163-BH

1 form A (NO) contact



S0163-BD

1 form A (NO) contact




S0163-BF

Process conditions for Reflow soldering
according to EN61760-1

Recommended pcb hole for manual mounting:
Ø1.3mm

For automated mounting please ask for
detailed drawing.

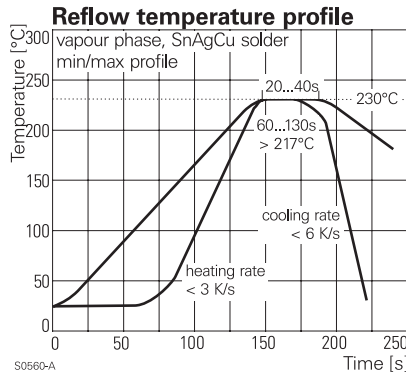

S0560-A



S0561-A

Product code structure

Typical product code

RZ 0 3 -1C 4 -D012

| | | |
|------------------------------|--|--|
| Type | RZ Power PCB Relay RZ | |
| Version | 0 standard version | R reflow version (only with AgNi contacts and reinforced cover) |
| Version | 1 3.5mm pinning, 12 A | 3 5mm double pinning, 16 A |
| | 2 5mm pinning, 12 A | H High Performance 5mm double pinning, 16 A |
| Contact configuration | 1A 1 form A (1 NO) contact | 1C 1 form C (1 CO) contact |
| Contact material | 4 AgNi 90/10 | 3 AgSnO ₂ |
| Coil version | Coil code: please refer to coil versions table | |
| Cover version | blank standard (hot-stamped) | R reinforced flux proof (epoxy) and Plug-In capable (only AgNi contact versions) |

Power PCB Relay RZ (Continued)

| Product code | Version | Contacts | Contact material | Coil | Part number |
|-----------------|---|---------------|--------------------|-------|-------------|
| RZ01-1A3-D005 | 12A | 1 form A (NO) | AgSnO ₂ | 5VDC | 3-1415899-7 |
| RZ01-1A3-D006 | pinning 3.5mm | | | 6VDC | 3-1415899-8 |
| RZ01-1A3-D012 | | | | 12VDC | 3-1415899-9 |
| RZ01-1A3-D024 | | | | 24VDC | 4-1415899-0 |
| RZ01-1A3-D048 | | | | 48VDC | 4-1415899-1 |
| RZ01-1A4-D005 | | | AgNi 90/10 | 5VDC | 1415899-1 |
| RZ01-1A4-D006 | | | | 6VDC | 1415899-2 |
| RZ01-1A4-D009 | | | | 9VDC | 1415899-3 |
| RZ01-1A4-D012 | | | | 12VDC | 1415899-4 |
| RZ01-1A4-D024 | | | | 24VDC | 1415899-5 |
| RZ01-1A4-D048 | | | | 48VDC | 1415899-6 |
| RZ01-1C3-D005 | | 1 form C (CO) | AgSnO ₂ | 5VDC | 4-1415899-2 |
| RZ01-1C3-D006 | | | | 6VDC | 4-1415899-3 |
| RZ01-1C3-D012 | | | | 12VDC | 4-1415899-4 |
| RZ01-1C3-D024 | | | | 24VDC | 4-1415899-5 |
| RZ01-1C3-D048 | | | | 48VDC | 4-1415899-6 |
| RZ01-1C4-D005 | | | AgNi 90/10 | 5VDC | 1415899-7 |
| RZ01-1C4-D006 | | | | 6VDC | 1415899-8 |
| RZ01-1C4-D009 | | | | 9VDC | 1415899-9 |
| RZ01-1C4-D012 | | | | 12VDC | 1-1415899-0 |
| RZ01-1C4-D024 | | | | 24VDC | 1-1415899-1 |
| RZ01-1C4-D048 | | | | 48VDC | 1-1415899-2 |
| RZ03-1A3-D005 | 16A | 1 form A (NO) | AgSnO ₂ | 5VDC | 4-1415899-7 |
| RZ03-1A3-D006 | pinning 5mm | | | 6VDC | 4-1415899-8 |
| RZ03-1A3-D012 | | | | 12VDC | 4-1415899-9 |
| RZ03-1A3-D024 | | | | 24VDC | 5-1415899-0 |
| RZ03-1A3-D048 | | | | 48VDC | 5-1415899-1 |
| RZ03-1A4-D005 | | | AgNi 90/10 | 5VDC | 1-1415899-3 |
| RZ03-1A4-D006 | | | | 6VDC | 1-1415899-4 |
| RZ03-1A4-D009 | | | | 9VDC | 1-1415899-5 |
| RZ03-1A4-D012 | | | | 12VDC | 1-1415899-6 |
| RZ03-1A4-D024 | | | | 24VDC | 1-1415899-7 |
| RZ03-1A4-D048 | | | | 48VDC | 1-1415899-8 |
| RZ03-1C3-D005 | | 1 form C (CO) | AgSnO ₂ | 5VDC | 5-1415899-2 |
| RZ03-1C3-D006 | | | | 6VDC | 5-1415899-3 |
| RZ03-1C3-D012 | | | | 12VDC | 5-1415899-4 |
| RZ03-1C3-D024 | | | | 24VDC | 5-1415899-5 |
| RZ03-1C3-D048 | | | | 48VDC | 5-1415899-6 |
| RZ03-1C4-D005 | | | AgNi 90/10 | 5VDC | 1-1415899-9 |
| RZ03-1C4-D006 | | | | 6VDC | 2-1415899-0 |
| RZ03-1C4-D009 | | | | 9VDC | 2-1415899-1 |
| RZ03-1C4-D012 | | | | 12VDC | 2-1415899-2 |
| RZ03-1C4-D015 | | | | 15VDC | 8-1415899-2 |
| RZ03-1C4-D024 | | | | 24VDC | 2-1415899-3 |
| RZ03-1C4-D048 | | | | 48VDC | 2-1415899-4 |
| RZ03-1A4-D012-R | 16A, pinning 5mm | 1 form A (NO) | AgNi 90/10 | 12VDC | 7-1415899-5 |
| RZ03-1A4-D024-R | reinforced flux proof | | | 24VDC | 9-1415899-1 |
| RZ03-1C4-D005-R | | 1 form C (CO) | | 5VDC | 7-1415899-6 |
| RZ03-1C4-D012-R | | | | 12VDC | 7-1415899-7 |
| RZ03-1C4-D024-R | | | | 24VDC | 7-1415899-9 |
| RZ03-1A3-D012-R | | 1 form A (NO) | AgSnO ₂ | 12VDC | 4-2158000-2 |
| RZ0H-1A4-D012 | 16A, pinning 5mm, High Performance | 1 form A (NO) | AgNi 90/10 | 12VDC | 9-1415899-4 |
| RZR3-1A4-D012 | 16A, pinning 5mm, reinforced flux proof and reflow solderable | 1 form A (NO) | AgNi90/10 | 12VDC | tbd |
| RZR3-1C4-D012 | 16A, pinning 5mm, reinforced flux proof and reflow solderable | 1 form C (CO) | AgNi90/10 | 12VDC | tbd |

This list represents the most common types and does not show all variants covered by this datasheet.
Other types on request

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А