

Features

- Universal input 90-264VAC
- Efficiency up to 86%
- Short circuit and over voltage/current protected
- UL/EN60950 certified, CE marked
- Conformal coated product

Regulated Converter




RAC45-G/OF

45 Watt

4" x 2"

Open Frame

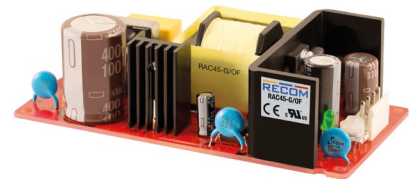

UL60950 certified
 CAN/CSA C22.2 N.60950-1-07 certified
 EN60950-1 certified
 EN55032 compliant
 EN55024 compliant

Description

The RAC45-xxG/OF series are low cost, 4"x2" AC/DC power supplies with universal inputs (90-264VAC) and fully protected and isolated DC outputs in the range of 12V up to 48V. The converters are offered in open frame (/OF) version. The outputs are trimmable to compensate for cable losses and are short circuit and overload protected. The converters work over a wide temperature range of -25°C to +60°C (with derating), are UL60950, EN60950 and CE certified and comply with Class B EMC limits. The RAC45-G series come with a three year warranty.


Selection Guide

| Part Number | Input Voltage Range [VAC] | Output Voltage [VDC] | max. Output Current [mA] | Efficiency typ. ⁽¹⁾ [%] |
|---------------|---------------------------|----------------------|--------------------------|------------------------------------|
| RAC45-12SG/OF | 90-264 | 12 | 3700 | 84 |
| RAC45-24SG/OF | 90-264 | 24 | 1900 | 85 |
| RAC45-48SG/OF | 90-264 | 48 | 1000 | 86 |

Notes:

Note1: Efficiency is tested at nominal input and full load at +25°C ambient

Model Numbering

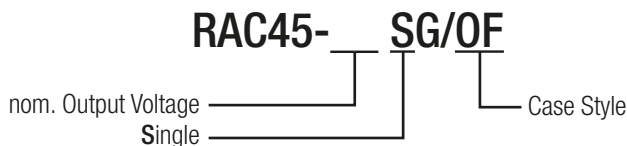

Ordering Examples:

| | | | |
|---------------|--------|--------|--------------------|
| RAC45-24SG/OF | 24Vout | Single | open frame version |
| RAC45-12SG/OF | 12Vout | Single | open frame version |

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)



BASIC CHARACTERISTICS

| Parameter | Condition | Min. | Typ. | Max. |
|--|--|-------------------------------|--------------|-------------------------------|
| Output Power | | | | 48W |
| Input Voltage Range | | 90VAC | 230VAC | 264VAC |
| Input Current | 115VAC 230VAC | | | 1A 0.6A |
| Inrush Current | cold start at 25°C 115VAC 230VAC | | | 20A 40A |
| No load Power Consumption | 230VAC | | 0.5W | |
| Input Frequency Range | | 47Hz | | 63Hz |
| Output Voltage Trimming | 12Vout 24Vout 48Vout | 11.4VDC 22.8VDC 45.6VDC | | 13.2VDC 26.4VDC 52.8VDC |
| Minimum Load | | 0% | | |
| Power Factor | 115VAC 230VAC | | 0.6 0.5 | |
| Start-up Time | 115VAC 230VAC | | | 2s 0.8s |
| Rise Time | 115VAC 230VAC | | 10ms 8ms | |
| Hold-up Time | 115VAC 230VAC | | 16ms 80ms | |
| Internal Operating Frequency | | 65kHz | | 100kHz |
| Output Ripple and Noise ⁽²⁾ | 20MHz BW | | 50mVp-p | 120mVp-p |

Notes:

Note2: Measurements are made with a 1.0µF & 10µF parallel capacitor

Efficiency vs. Load

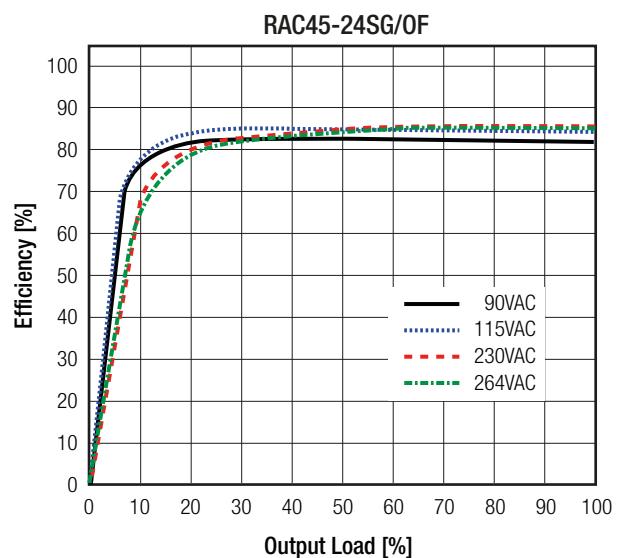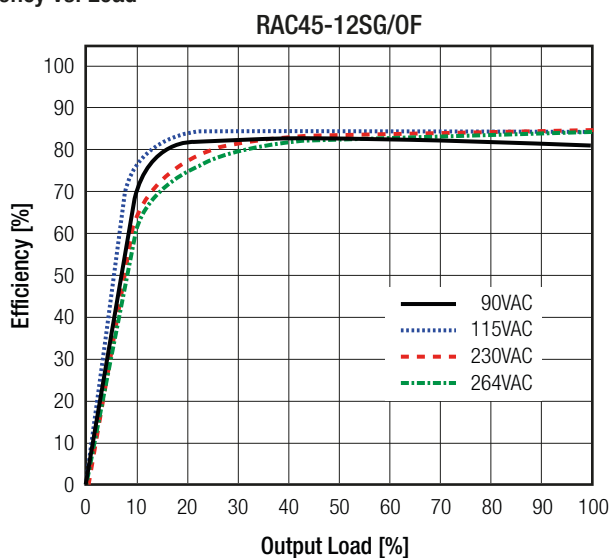

REGULATIONS

| Parameter | Condition | Value |
|-----------------|---------------|-------------------------|
| Output Accuracy | | ±1.0% typ. / ±3.0% max. |
| Line Regulation | | ±0.2% typ. / ±1.0% max. |
| Load Regulation | 10%-100% load | 0.5% typ. / 3.0% max. |

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

| PROTECTIONS | | | |
|---|--------------------------|------------|---------------------------|
| Parameter | Type | | Value |
| Input fuse | internal | | T3.15A / 250V slow blow |
| Short Circuit Protection (SCP) | | | continuous, auto recovery |
| Over Voltage Protection (OVP) | 115-135% of Vout nominal | | Latch OFF |
| Over Voltage Category | | | OVCII |
| Over Current Protection (OCP) | 12VDC | | 3.9 - 6.2A |
| | 24VDC | | 2.0 - 3.2A |
| | 48VDC | | 1.1 - 1.56A |
| Class of Equipment | | | Class I |
| Isolation Voltage | tested for 1 minute | I/P to O/P | 3kVAC |
| | | I/P to PE | 1.5kVAC |
| | | O/P to PE | 0.5kVDC |
| Isolation Resistance | I/P to O/P | | 100MΩ min. |
| Isolation Capacitance | | | 2200pF max. |
| Insulation Grade | | | reinforced |
| Leakage Current | I/P to O/P | | 0.25mA max. |
| | O/P to FG | | 3.5mA max. |
| Notes: Note3: Refer to local safety regulations if input over-current protection is also required | | | |


| ENVIRONMENTAL | | | |
|--|----------------------------------|-------------------------|---------------------------------------|
| Parameter | Condition | | Value |
| Operating Temperature Range | @ natural convection 0.1m/s | full load | -25°C to +50°C |
| | | refer to derating graph | -25°C to +60°C |
| Temperature Coefficient | | | ±0.05%/K typ. |
| Operating Altitude ⁽⁴⁾ | | | 5000m |
| Operating Humidity | non-condensing | | 20% - 90% RH max. |
| Pollution Degree | | | PD2 |
| Conformal Coating | | | provided |
| Shock | | | 20G, 11ms, 3 times for X,Y and Z axis |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 200 x 10 ³ hours |
| Notes: Note4: Recognized by UL for safe operation up to 5000m. High altitude operation may impact the performance and lifetime Contact RECOM techsupport for advice | | | |

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)


Derating Graph

(@ Chamber and natural convection 0.1 m/s)

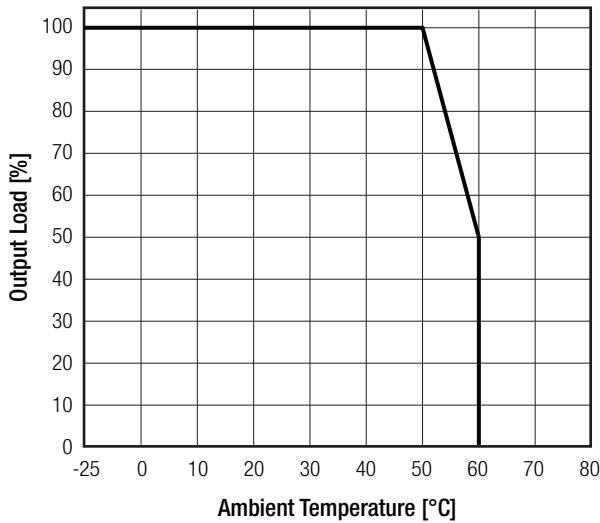

Operating Altitude

(limitation E-Cap heatsink)

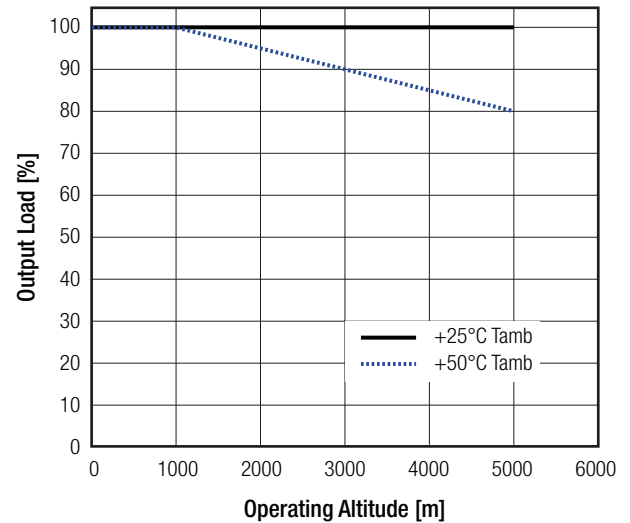

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety | E196683 | UL60950-1, 2nd Edition, 2014 CSA C22.2 No. 60950-1-07, 2nd Ed. 2014 |
| Information Technology Equipment, General Requirements for Safety (LVD) | SA1406027L01001 | EN60950-1, 2nd Edition, 2013 |
| EAC Safety of Low Voltage Equipment | RU-AT.49.09571 | TP TC 004/2011 |
| RoHS2+ | | RoHS 2011/65/EU + AM2015/863 |



| EMC Compliance | Conditions | Standard / Criterion |
|---|---|--|
| Electromagnetic compatibility of multimedia equipment – Emission Requirements | without external filter | EN55032:2015, Class B |
| Information technology equipment - Immunity characteristics - Limits and methods of measurement | | EN55024:2010 + A1:2015 |
| ESD Electrostatic discharge immunity test | ±8kV Air; ±4kV Contact | EN61000-4-2, Criteria A |
| Radiated, radio-frequency, electromagnetic field immunity test | 3V/m | EN61000-4-3, Criteria A |
| Fast Transient and Burst Immunity | AC Power Port: ±1.0kV | EN61000-4-4, Criteria A |
| Surge Immunity | AC Power Port: L-L ±1.0kV L-PE ±2.0kV N-PE ±2.0kV | EN61000-4-5, Criteria B |
| Immunity to conducted disturbances, induced by radio-frequency fields | AC Power Port: 3V | EN61000-4-6, Criteria A |
| Power Magnetic Field Immunity | 50Hz, 1A/m | EN61000-4-8, Criteria A |
| Voltage Dips and Interruptions | Dips: >95% reduction Interruption: >95% | EN61000-4-11, Criteria A EN61000-4-11, Criteria C |
| Limits of Harmonic Current Emissions | | EN61000-3-2, Criteria A |
| Limits of Voltage Fluctuations & Flicker | | EN61000-3-3 |

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

DIMENSION AND PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|------|-----------------------|
| Material | PCB | FR4 (UL94-V0) |
| Dimension (LxWxH) | | 101.6 x 51.0 x 28.0mm |
| Weight | | 126g typ. |

Dimension Drawing Open Frame (mm)

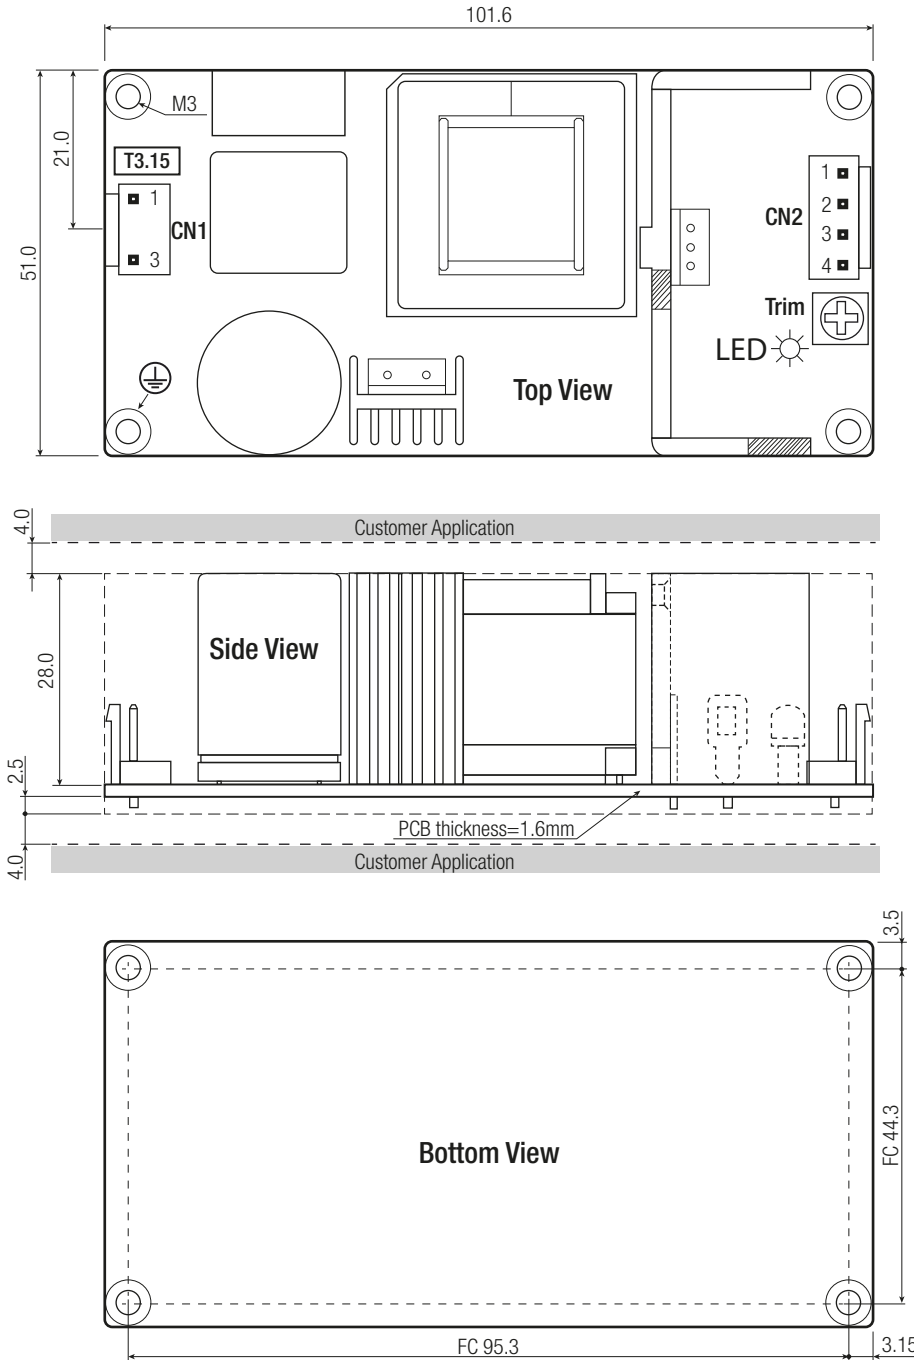

Connections

AC Input (CN1)

| Pin # | Terminal |
|--------|---|
| 1 AC/L | 3 Pins (Pin2 removed) with 3.96mm pitch |
| 3 AC/N | 3.96mm pitch |

DC Output (CN2)

| Pin # | Terminal |
|--------|--------------------------|
| 1,2 V+ | 4 Pins with 3.96mm pitch |
| 3,4 V- | 3.96mm pitch |

FC= fixing centers
Crimp Terminal AWG Range: 18-22AWG
Tolerance: xx.x= ±1.0mm
 xx.xx= ±0.5mm

Compatible Connectors

Housing

Landwin 3960S Series
JST VHR
Molex 51144 Series

Crimp Terminal

Landwin 3963T011R
JST SVH-21T-P1.1
Molex 50539


continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin and full load unless otherwise stated)

APPLICATION and INSTALLATION


Mounting

horizontal (standard)

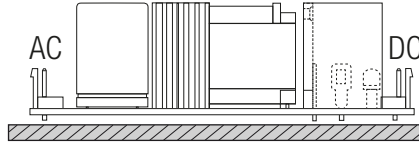


If module is mounted vertical or upside-down with natural convection cooling, the power must be derated $\geq 10\%$.


vertical

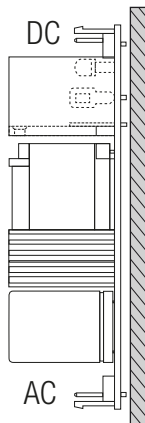

upside-down

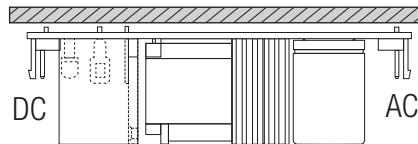

Block diagram

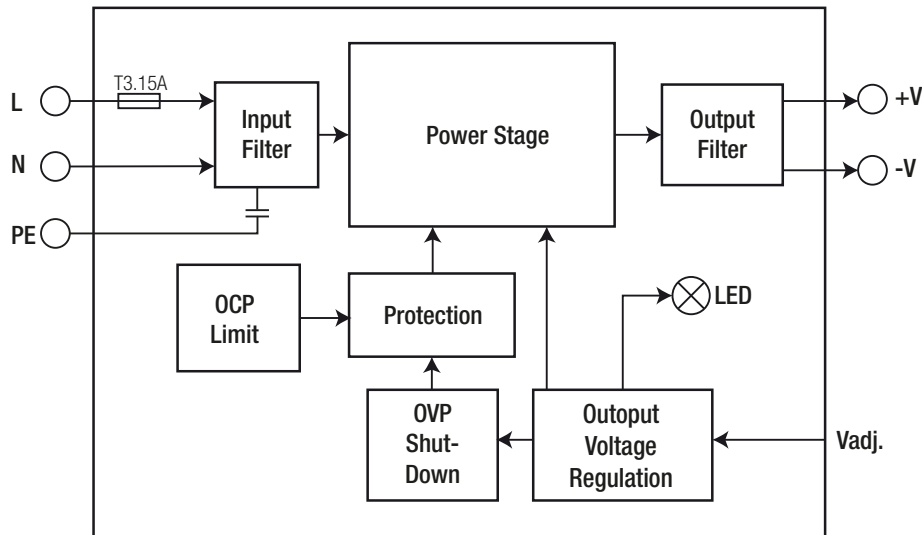

PACKAGING INFORMATION

| Parameter | Type | Value |
|-----------------------------|----------------|-------------------------|
| Packaging Dimension (LxWxH) | cardboard box | 174.0 x 125.0 x 266.0mm |
| Packaging Quantity | | 10pcs |
| Storage Temperature Range | | -40°C to +85°C |
| Storage Humidity | non-condensing | 10% - 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А