

## Transistors

## 4V Drive Nch+Nch MOS FET

## SM6K2


## ●Structure

Silicon N-channel  
MOSFET transistor

## ●Features

- 1) Two RHU002N06 chips in a SMT package.
- 2) Mounting possible with SMT3 automatic mounting machines.
- 3) Transistor elements are independent, eliminating mutual interference.
- 4) Mounting cost and area can be cut in half.


## ●External dimensions (Unit : mm)

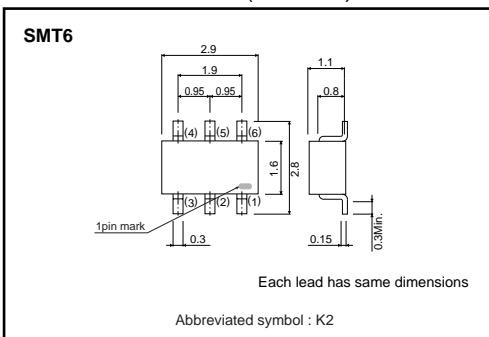

## ●Packaging specifications

	Package	Taping
	Code	T110
Type	Basic ordering unit (pieces)	3000
SM6K2		○

## ●Equivalent circuit

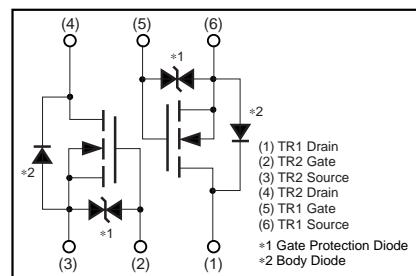

\* A protection diode has been built in between the gate and the source to protect against static electricity when the product is in use.  
Use the protection circuit when fixed voltages are exceeded.

●Absolute maximum ratings ( $T_a=25^\circ\text{C}$ )

<It is the same ratings for the Tr1 and Tr2.>

Parameter	Symbol	Limits	Unit
Drain-source voltage	$V_{DSS}$	60	V
Gate-source voltage	$V_{GSS}$	$\pm 20$	V
Drain current	Continuous $I_D$	200	mA
	Pulsed $I_{DP}$ *1	800	mA
Drain reverse current	Continuous $I_{DR}$	200	mA
	Pulsed $I_{DRP}$ *1	800	mA
Total power dissipation	$P_D$ *2	300	mW / TOTAL
		200	mW / ELEMENT
Channel temperature	$T_{ch}$	150	°C
Storage temperature	$T_{stg}$	-55 to +150	°C

\*1  $P_w \leq 10\mu\text{s}$ , Duty cycles  $\leq 1\%$

\*2 With each pin mounted on the recommended lands.

## ●Thermal resistance

Parameter	Symbol	Limits	Unit
Channel to ambient	$R_{th(ch-a)}$ *	416.7 625	°C / W / TOTAL °C / W / ELEMENT

\* With each pin mounted on the recommended lands.

## Transistors

## ●Electrical characteristics (Ta=25°C)

&lt;It is the same characteristics for the Tr1 and Tr2.&gt;

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Gate leakage current	I <sub>GSS</sub>	—	—	±10	μA	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V
Drain-source breakdown voltage	V <sub>(BR) DSS</sub>	60	—	—	V	I <sub>D</sub> =1mA, V <sub>GS</sub> =0V
Drain cutoff current	I <sub>DSS</sub>	—	—	1	μA	V <sub>DS</sub> =60V, V <sub>GS</sub> =0V
Gate threshold voltage	V <sub>GS (th)</sub>	1	—	2.5	V	V <sub>DS</sub> =10V, I <sub>D</sub> =1mA
Drain-source on-state resistance	R <sub>DSS (on)</sub>	—	1.7	2.4	Ω	I <sub>D</sub> =200mA, V <sub>GS</sub> =10V
			2.8	4.0		I <sub>D</sub> =200mA, V <sub>GS</sub> =4V
Forward transfer admittance	Y <sub>fs</sub>   *	0.1	—	—	S	V <sub>DS</sub> =10V, I <sub>D</sub> =200mA
Input capacitance	C <sub>iss</sub>	—	15	—	pF	V <sub>DS</sub> =10V V <sub>GS</sub> =0V f=1MHz
Output capacitance	C <sub>oss</sub>	—	8	—	pF	
Reverse transfer capacitance	C <sub>rss</sub>	—	4	—	pF	
Turn-on delay time	t <sub>d (on)</sub> *	—	6	—	ns	I <sub>D</sub> =100mA, V <sub>DD</sub> =30V V <sub>GS</sub> =10V R <sub>L</sub> =300Ω R <sub>G</sub> =10Ω
Rise time	t <sub>r</sub> *	—	5	—	ns	
Turn-off delay time	t <sub>d (off)</sub> *	—	12	—	ns	
Fall time	t <sub>f</sub> *	—	95	—	ns	
Total gate charge	Q <sub>g</sub> *	—	2.2	4.4	nC	V <sub>DD</sub> =30V V <sub>GS</sub> =10V I <sub>D</sub> =200mA
Gate-source charge	Q <sub>gs</sub> *	—	0.6	—	nC	
Gate-drain charge	Q <sub>gd</sub> *	—	0.3	—	nC	

\* Pulsed

## ●Body diode characteristics (Source-drain) (Ta=25°C)

&lt;It is the same characteristics for the Tr1 and Tr2.&gt;

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Forward voltage	V <sub>SD</sub>	—	—	1.2	V	I <sub>S</sub> =200mA, V <sub>GS</sub> =0V

## Transistors

## ● Electrical characteristic curves

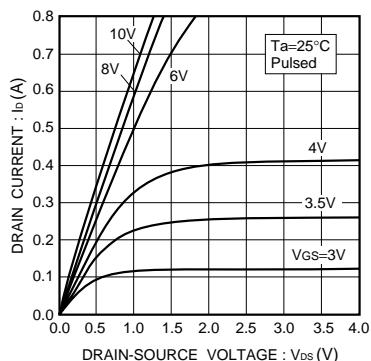


Fig.1 Typical output characteristics

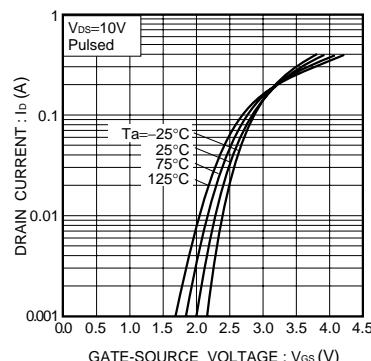


Fig.2 Typical transfer characteristics

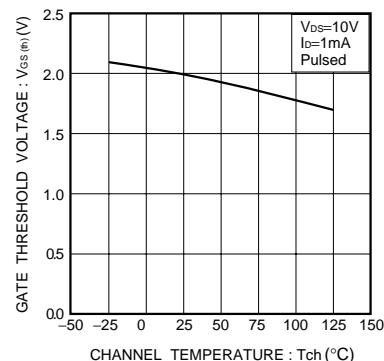


Fig.3 Gate threshold voltage vs. channel temperature

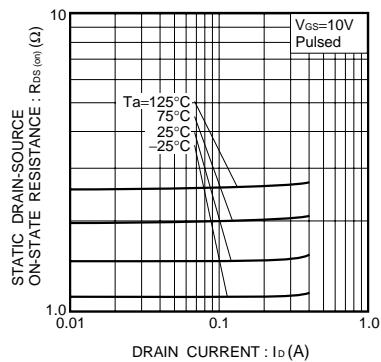


Fig.4 Static drain-source on-state resistance vs. drain current ( I )

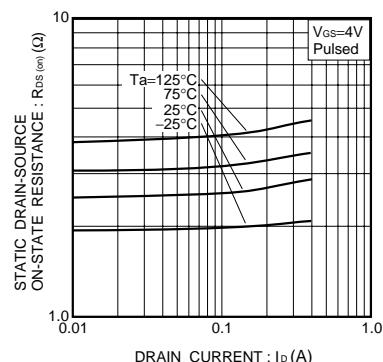


Fig.5 Static drain-source on-state resistance vs. drain current ( II )

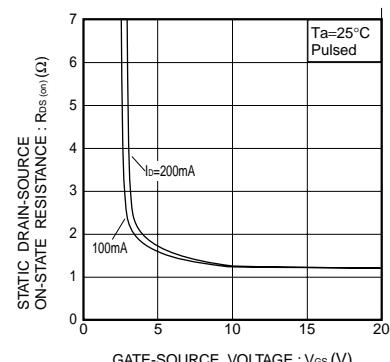


Fig.6 Static drain-source on-state resistance vs. gate-source voltage

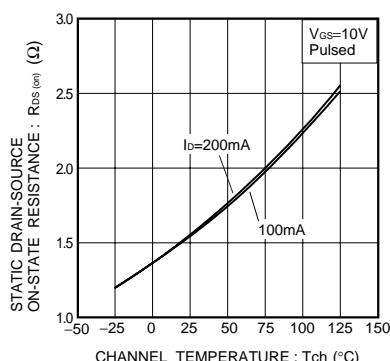


Fig.7 Static drain-source on-state resistance vs. channel temperature

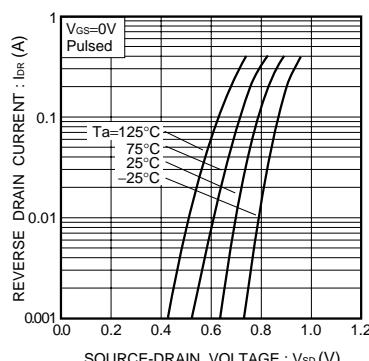


Fig.8 Reverse drain current vs. source-drain voltage ( I )

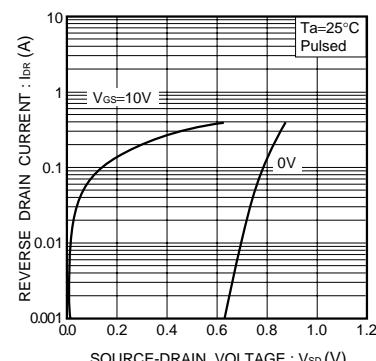


Fig.9 Reverse drain current vs. source-drain voltage ( II )

## Transistors

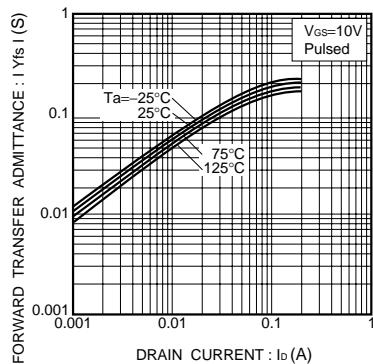


Fig.10 Forward transfer admittance vs. drain current

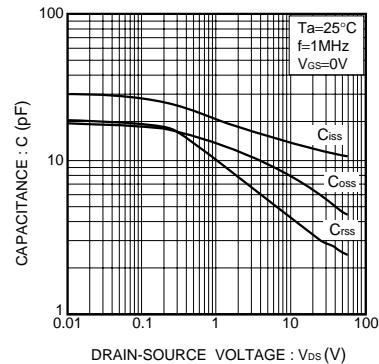


Fig.11 Typical capacitance vs. drain-source voltage

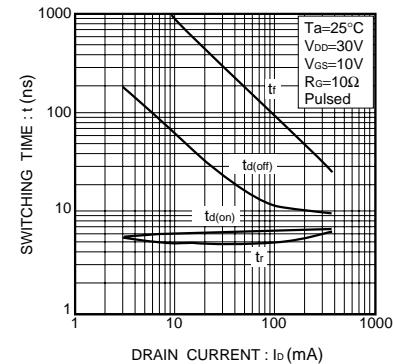


Fig.12 Switching characteristics

## ●Switching characteristics measurement circuit

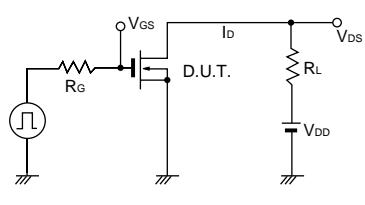


Fig.13 Switching time test circuit

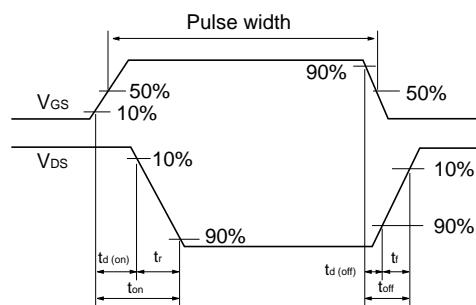


Fig.14 Switching time waveforms

## Appendix

---

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.



# OCEAN CHIPS

## Океан Электроники

### Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А