

Automotive


GENERAL DESCRIPTION

AVX Corporation has supported the Automotive Industry requirements for Multilayer Ceramic Capacitors consistently for more than 10 years. Products have been developed and tested specifically for automotive applications and all manufacturing facilities are QS9000 and VDA 6.4 approved.

As part of our sustained investment in capacity and state of the art technology, we are now transitioning from the established Pd/Ag electrode system to a Base Metal Electrode system (BME).

AVX is using AECQ200 as the qualification vehicle for this transition. A detailed qualification package is available on request and contains results on a range of part numbers including:

- X7R dielectric components containing BME electrode and copper terminations with a Ni/Sn plated overcoat.
- X7R dielectric components, BME electrode with epoxy finish for conductive glue mounting.
- X7R dielectric components BME electrode and soft terminations with a Ni/Sn plated overcoat.
- NP0 dielectric components containing Pd/Ag electrode and silver termination with a Ni/Sn plated overcoat.

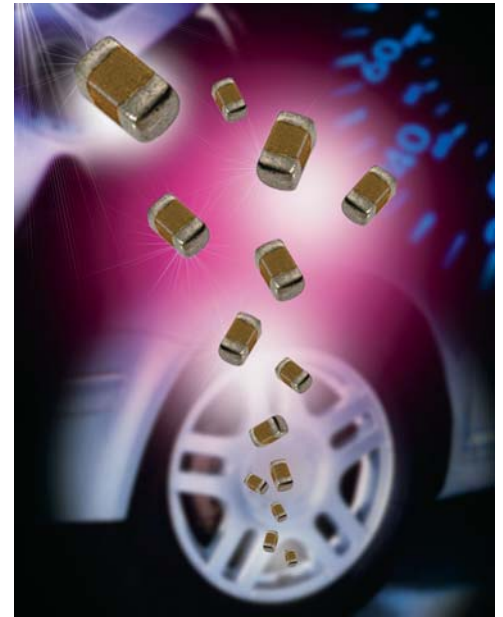

HOW TO ORDER

| 0805 | 5 | A | 104 | K | 4 | T | 2 | A |
|------|----------------------|------------|--|--|----------------|---|-----------------------------|------------------|
| Size | Voltage | Dielectric | Capacitance Code (In pF) | Capacitance Tolerance | Failure Rate | Terminations | Packaging | Special Code |
| 0402 | 10V = Z | NP0 = A | 2 Significant Digits + Number of Zeros | F = ±1% (≥10pF)* G = ±2% (≥10pF)* J = ±5% (≤1µF) K = ±10% M = ±20% | 4 = Automotive | T = Plated Ni and Sn Z = FLEXITERM®*** U = Conductive Epoxy** | 2 = 7" Reel 4 = 13" Reel | A = Std. Product |
| 0603 | 16V = Y | X7R = C | e.g. 10µF = 106 | | | | | |
| 0805 | 25V = 3 | X8R = F | | | | | | |
| 1206 | 50V = 5 | | | | | | | |
| 1210 | 100V = 1 | | | | | | | |
| 1812 | 200V = 2 500V = 7 | | | | | | | |

*NP0 only

Contact factory for availability of Tolerance Options for Specific Part Numbers.

NOTE: Contact factory for non-specified capacitance values.
0402 case size available in T termination only.

COMMERCIAL VS AUTOMOTIVE MLCC PROCESS COMPARISON

| | Commercial | Automotive |
|--|--|---|
| Administrative | Standard Part Numbers. No restriction on who purchases these parts. | Specific Automotive Part Number. Used to control supply of product to Automotive customers. |
| Design | Minimum ceramic thickness of 0.020" | Minimum Ceramic thickness of 0.029" (0.74mm) on all X7R product. |
| Dicing | Side & End Margins = 0.003" min | Side & End Margins = 0.004" min Cover Layers = 0.005" min |
| Lot Qualification (Destructive Physical Analysis - DPA) | As per EIA RS469 | Increased sample plan – stricter criteria. |
| Visual/Cosmetic Quality | Standard process and inspection | 100% inspection |
| Application Robustness | Standard sampling for accelerated wave solder on X7R dielectrics | Increased sampling for accelerated wave solder on X7R and NP0 followed by lot by lot reliability testing. |

All Tests have Accept/Reject Criteria 0/1

Automotive MLCC




NP0/X7R Dielectric

FLEXITERM® FEATURES

a) Bend Test

The capacitor is soldered to the PC Board as shown:

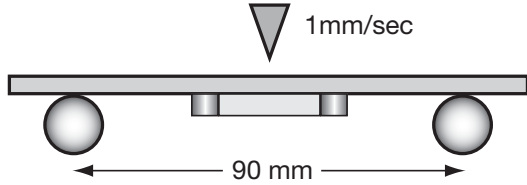

b) Temperature Cycle testing

FLEXITERM® has the ability to withstand at least 1000 cycles between -55°C and +125°C

Typical bend test results are shown below:

| Style | Conventional Term | Soft Term |
|-------|-------------------|-----------|
| 0603 | >2mm | >5 |
| 0805 | >2mm | >5 |
| 1206 | >2mm | >5 |

ELECTRODE AND TERMINATION OPTIONS

NP0 DIELECTRIC

**NP0 Ag/Pd Electrode
Nickel Barrier Termination
PCB Application**

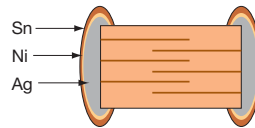


Figure 1 Termination Code T

X7R DIELECTRIC

**X7R Dielectric
PCB Application**

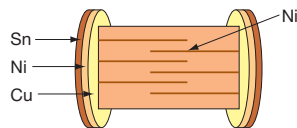


Figure 2 Termination Code T

**X7R Nickel Electrode
Soft Termination
PCB Application**

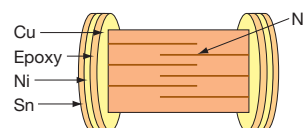


Figure 3 Termination Code Z

**Conductive Epoxy Termination
Hybrid Application**

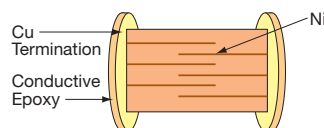


Figure 4 Termination Code U



Automotive MLCC - NP0



Capacitance Range

| | | 0603 | | | 0805 | | | 1206 | | | | | 1210 | | | | 1812 | |
|-----|------|------|-----|------|------|-----|------|------|-----|------|------|------|------|-----|------|------|------|------|
| | | 25V | 50V | 100V | 25V | 50V | 100V | 25V | 50V | 100V | 200V | 500V | 25V | 50V | 100V | 200V | 50V | 100V |
| 100 | 10pF | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 120 | 12 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 150 | 15 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 180 | 18 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 220 | 22 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 270 | 27 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 330 | 33 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 390 | 39 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 470 | 47 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 510 | 51 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 560 | 56 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 680 | 68 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 820 | 82 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 101 | 100 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 121 | 120 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 151 | 150 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 181 | 180 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 221 | 220 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 271 | 270 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 331 | 330 | G | G | G | J | J | J | J | J | J | J | J | | | | | | |
| 391 | 390 | G | G | | J | J | J | J | J | J | J | J | | | | | | |
| 471 | 470 | G | G | | J | J | J | J | J | J | J | J | | | | | | |
| 561 | 560 | | | | J | J | J | J | J | J | J | J | | | | | | |
| 681 | 680 | | | | J | J | J | J | J | J | J | J | | | | | | |
| 821 | 820 | | | | J | J | J | J | J | J | J | J | | | | | | |
| 102 | 1000 | | | | J | J | J | J | J | J | J | J | J | J | J | J | | |
| 122 | 1200 | | | | | | | J | J | J | J | J | J | J | M | M | | |
| 152 | 1500 | | | | | | | J | M | M | M | M | J | J | M | M | | |
| 182 | 1800 | | | | | | | J | M | M | M | M | J | J | M | M | | |
| 222 | 2200 | | | | | | | J | M | M | M | M | J | J | M | M | | |
| 272 | 2700 | | | | | | | J | M | Q | | | J | J | M | | | |
| 332 | 3300 | | | | | | | J | M | Q | | | J | J | P | | K | K |
| 392 | 3900 | | | | | | | | | | | | J | J | P | | K | K |
| 472 | 4700 | | | | | | | | | | | | J | J | P | | K | K |
| 103 | 10nF | | | | | | | | | | | | | | | | | |
| | | 25V | 50V | 100V | 25V | 50V | 100V | 25V | 50V | 100V | 200V | 500V | 25V | 50V | 100V | 200V | 50V | 100V |
| | | 0603 | | | 0805 | | | 1206 | | | | | 1210 | | | | 1812 | |

| Letter | A | C | E | G | J | K | M | N | P | Q | X | Y | Z |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33 (0.013) | 0.56 (0.022) | 0.71 (0.028) | 0.90 (0.035) | 0.94 (0.037) | 1.02 (0.040) | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070) | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |
| | PAPER | | | | | EMBOSSSED | | | | | | | |

 = Under Development

Automotive MLCC - X7R



Capacitance Range

| | | 0402 | | | 0603 | | | | 0805 | | | | 1206 | | | | | 1210 | | | | 1812 | | 2220 | | | | |
|-----|----------|------|-----|-----|------|-----|-----|------|------|-----|-----|-----|------|------|-----|-----|-----|------|------|------|-----|------|-----|------|-----|------|-----|-----|
| | | 16V | 25V | 50V | 16V | 25V | 50V | 100V | 200V | 16V | 25V | 50V | 100V | 200V | 16V | 25V | 50V | 100V | 200V | 500V | 16V | 25V | 50V | 100V | 50V | 100V | 25V | 50V |
| 221 | Cap .22 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 271 | (nF) .27 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 331 | .33 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 391 | .39 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 471 | .47 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 561 | .56 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 681 | .68 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 821 | .82 | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 102 | 1 | | | | G | G | G | G | G | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 182 | 1.8 | | | | G | G | G | G | | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 222 | 2.2 | | | | G | G | G | G | | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 332 | 3.3 | | | | G | G | G | G | | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 472 | 4.7 | | | | G | G | G | G | | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 103 | 10 | | | | G | G | G | G | | J | J | J | J | J | J | J | J | J | J | J | J | K | K | K | K | K | K | K |
| 123 | 12 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 153 | 15 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 183 | 18 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 223 | 22 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 273 | 27 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 333 | 33 | | | | G | G | G | | | J | J | J | M | | J | J | J | J | J | | | K | K | K | K | K | K | K |
| 473 | 47 | | | | G | G | G | | | J | J | J | M | | J | J | J | M | J | | | K | K | K | K | K | K | K |
| 563 | 56 | | | | G | G | G | | | J | J | J | M | | J | J | J | M | J | | | K | K | K | M | K | K | K |
| 683 | 68 | | | | G | G | G | | | J | J | J | M | | J | J | J | M | J | | | K | K | K | M | K | K | K |
| 823 | 82 | | | | G | G | G | | | J | J | J | M | | J | J | J | M | J | | | K | K | K | M | K | K | K |
| 104 | 100 | | | | G | G | G | | | J | J | M | M | | J | J | J | M | J | | | K | K | K | M | K | K | K |
| 124 | 120 | | | | | | | | | J | J | M | M | | J | J | M | M | | | | K | K | K | P | K | K | K |
| 154 | 150 | | | | | | | | | M | N | M | | | J | J | M | M | | | | K | K | K | P | K | K | K |
| 224 | 220 | | | | | | | | | M | N | M | | | J | M | M | Q | | | | M | M | M | P | M | M | M |
| 334 | 330 | | | | | | | | | N | N | M | | | J | M | P | Q | | | | P | P | P | Q | X | X | X |
| 474 | 470 | | | | | | | | | N | N | M | | | M | M | P | Q | | | | P | P | P | Q | X | X | X |
| 684 | 680 | | | | | | | | | N | N | | | | M | Q | Q | Q | | | | P | P | Q | X | X | X | X |
| 105 | Cap 1 | | | | | | | | | N | N | | | | M | Q | Q | Q | | | | P | Q | Q | X | X | X | X |
| 155 | (µF) 1.5 | | | | | | | | | | | | | | Q | Q | | | | | | P | Q | Z | Z | X | X | X |
| 225 | 2.2 | | | | | | | | | | | | | | Q | Q | | | | | | X | Z | Z | Z | Z | Z | Z |
| 335 | 3.3 | | | | | | | | | | | | | | | | | | | | | X | Z | Z | | Z | | |
| 475 | 4.7 | | | | | | | | | | | | | | | | | | | | | X | Z | Z | | Z | | |
| 106 | 10 | | | | | | | | | | | | | | | | | | | | | | | | | | | Z |
| 226 | 22 | | | | | | | | | | | | | | | | | | | | | | | | | | | Z |
| | | 16V | 25V | 50V | 16V | 25V | 50V | 100V | 200V | 16V | 25V | 50V | 100V | 200V | 16V | 25V | 50V | 100V | 200V | 500V | 16V | 25V | 50V | 100V | 50V | 100V | 25V | 50V |
| | | 0402 | | | 0603 | | | | 0805 | | | | 1206 | | | | | 1210 | | | | 1812 | | 2220 | | | | |

= Under Development

| Letter | A | C | E | G | J | K | M | N | P | Q | X | Y | Z |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33 (0.013) | 0.56 (0.022) | 0.71 (0.028) | 0.90 (0.035) | 0.94 (0.037) | 1.02 (0.040) | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070) | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |
| | PAPER | | | | | EMBOSSSED | | | | | | | |

Automotive MLCC - X8R



Capacitance Range

| SIZE | | 0603 | | 0805 | | 1206 | |
|------|------|------|-----|------|-----|------|-----|
| | WVDC | 25V | 50V | 25V | 50V | 25V | 50V |
| 271 | Cap | G | G | | | | |
| 331 | (pF) | G | G | J | J | | |
| 471 | | G | G | J | J | | |
| 681 | | G | G | J | J | | |
| 102 | | G | G | J | J | J | J |
| 152 | | G | G | J | J | J | J |
| 182 | | G | G | J | J | J | J |
| 222 | | G | G | J | J | J | J |
| 272 | | G | G | J | J | J | J |
| 332 | | G | G | J | J | J | J |
| 392 | | G | G | J | J | J | J |
| 472 | | G | G | J | J | J | J |
| 562 | | G | G | J | J | J | J |
| 682 | | G | G | J | J | J | J |
| 822 | | G | G | J | J | J | J |
| 103 | Cap | G | G | J | J | J | J |
| 123 | (µF) | G | G | J | J | J | J |
| 153 | | G | G | J | J | J | J |
| 183 | | G | G | J | J | J | J |
| 223 | | G | G | J | J | J | J |
| 273 | | G | G | J | J | J | J |
| 333 | | G | G | J | J | J | J |
| 393 | | G | G | J | J | J | J |
| 473 | | G | G | J | J | J | J |
| 563 | | G | | N | N | M | M |
| 683 | | G | | N | N | M | M |
| 823 | | | | N | N | M | M |
| 104 | | | | N | N | M | M |
| 124 | | | | N | N | M | M |
| 154 | | | | N | N | M | M |
| 184 | | | | N | | M | M |
| 224 | | | | N | | M | M |
| 274 | | | | | | M | M |
| 334 | | | | | | M | M |
| 394 | | | | | | M | |
| 474 | | | | | | M | |
| 684 | | | | | | | |
| 824 | | | | | | | |
| 105 | | | | | | | |
| | WVDC | 25V | 50V | 25V | 50V | 25V | 50V |
| SIZE | | 0603 | | 0805 | | 1206 | |

| Letter | A | C | E | G | J | K | M | N | P | Q | X | Y | Z |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Max. Thickness | 0.33 (0.013) | 0.56 (0.022) | 0.71 (0.028) | 0.90 (0.035) | 0.94 (0.037) | 1.02 (0.040) | 1.27 (0.050) | 1.40 (0.055) | 1.52 (0.060) | 1.78 (0.070) | 2.29 (0.090) | 2.54 (0.100) | 2.79 (0.110) |
| | PAPER | | | | | EMBOSSED | | | | | | | |

= AEC-Q200 Qualified

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А