


## Types D, E, F, FM, 2F, F9, interface connectors I/U


Page

Technical characteristics types D and E ..... **02.10**

Type D connectors ..... **02.11**




Type E connectors ..... **02.15**




Technical characteristics piggyback connectors ..... **02.20**

Piggyback connectors ..... **02.21**

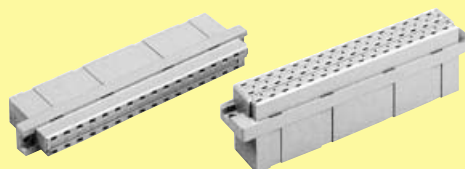

Technical characteristics types F, F9, FM and 2F ..... **02.24**


Type F connectors ..... **02.25**




Type F9 connectors ..... **02.35**



Type FM connectors ..... **02.36**

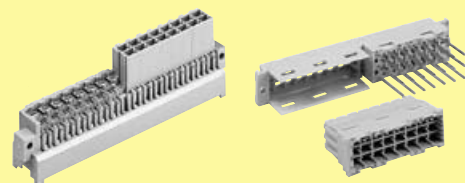

Type 2F connectors ..... **02.38**

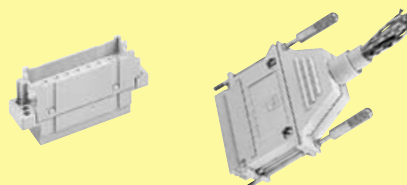

Coding systems ..... **02.41**

## Number of contacts

|        |    |
|--------|----|
| Type D | 32 |
| Type E | 48 |

## Contact spacing (mm)

|        |                  |             |
|--------|------------------|-------------|
| Type D | 5,08             |             |
| Type E | male connector   | 5.08 x 5.08 |
|        | male connector   | 2.54 x 5.08 |
|        | female connector | 5.08 x 5.08 |

## Working current

|          |
|----------|
| 6 A max. |
|----------|

see current carrying capacity chart

## Clearance

|                       |          |
|-----------------------|----------|
| Types D und E         | ≥ 3.0 mm |
| Type E male connector | ≥ 1.6 mm |

row separation 2.54 mm

## Creepage

≥ 3.0 mm

## Working voltage

The working voltage also depends on the clearance and creepage dimensions of the pcb itself and the associated wiring according to the safety regulations of the equipment  
Explanations see chapter 00

## Test voltage $U_{r.m.s.}$

1.55 kV

## Contact resistance

≤ 15 mΩ for wire wrap and solder connections  
≤ 20 mΩ including crimp connections

## Insulation resistance

≥ 10<sup>12</sup> Ω

## Temperature range

– 55 °C ... + 125 °C

The higher temperature limit includes the local ambient and heating effects of the contacts under load

## Degree of protection for crimp terminal

IP 20 according to DIN 40 050

## Electrical termination

|                  |                                                                          |
|------------------|--------------------------------------------------------------------------|
| Male connector   | Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3 |
| Female connector | Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm                                |
|                  | Solder pins for pcb connections Ø 1.0 ± 0.1 mm according to IEC 60 326-3 |
|                  | Angled solder pins 1 x 1 mm for pcb connections Ø 1.6 ± 0.1 mm           |
|                  | Solder lugs                                                              |
|                  | Crimp terminal 0.09-1.5 mm <sup>2</sup>                                  |

## Insertion and withdrawal force

32 way ≤ 40 N  
48 way ≤ 75 N

## Materials

|           |                                                   |
|-----------|---------------------------------------------------|
| Mouldings | Thermoplastic resin, glass-fibre filled, UL 94-V0 |
| Contacts  | Copper alloy                                      |

## Contact surface

|              |                                                                      |
|--------------|----------------------------------------------------------------------|
| Contact zone | Selectively gold plated according to performance level <sup>1)</sup> |
|--------------|----------------------------------------------------------------------|


<sup>1)</sup> Explanation of performance levels see chapter 00

|                   |                           |
|-------------------|---------------------------|
| Mating conditions | see chapter 00            |
| Coding systems    | see pages 02.41 and 02.42 |
| Mounting clips    | see chapter 00            |

## Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

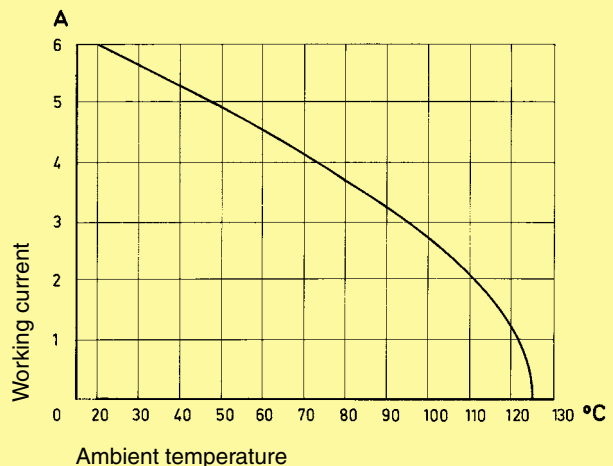


## Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm<sup>2</sup> an insertion tool is necessary.

## Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

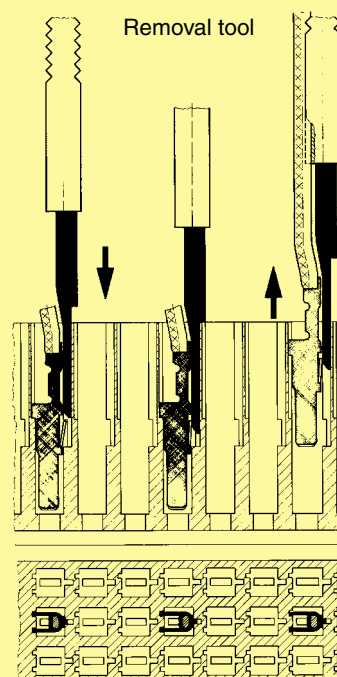

Number of contacts

32



## Male connectors

| Identification                           | Number of contacts | Contact arrangement | Part No.       | Performance levels according to IEC 60603-2. Explanation chapter 00            |                              |                     |  |
|------------------------------------------|--------------------|---------------------|----------------|--------------------------------------------------------------------------------|------------------------------|---------------------|--|
|                                          |                    |                     | 3              | 2                                                                              | 1                            |                     |  |
| Male connector with angled solder pins   | 32                 |                     | 09 04 132 7921 | 09 04 132 6921<br>09 04 332 6921 <sup>b)</sup><br>09 04 632 6921 <sup>c)</sup> | 09 04 132 2921               | DIN Power<br>to 6 A |  |
|                                          | 30 + 2▲            |                     |                | 09 04 132 6951<br>09 04 632 6951 <sup>c)</sup>                                 | 09 04 632 2951 <sup>c)</sup> |                     |  |
| Male connector with straight solder pins | 32                 |                     |                | 09 04 132 6922                                                                 |                              |                     |  |
|                                          | 30 + 2▲            |                     |                | 09 04 132 6952                                                                 |                              |                     |  |
| Dimensions                               |                    |                     |                |                                                                                |                              |                     |  |
| Board drillings<br>Mounting side         |                    |                     |                |                                                                                |                              |                     |  |

Dimensions in mm

Dimensions in mm


▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a2 and a32]

Other contact arrangements on request

<sup>b)</sup> Connectors with snap-in clips see chapter 00

<sup>c)</sup> Connectors with coding see page 02.42

32

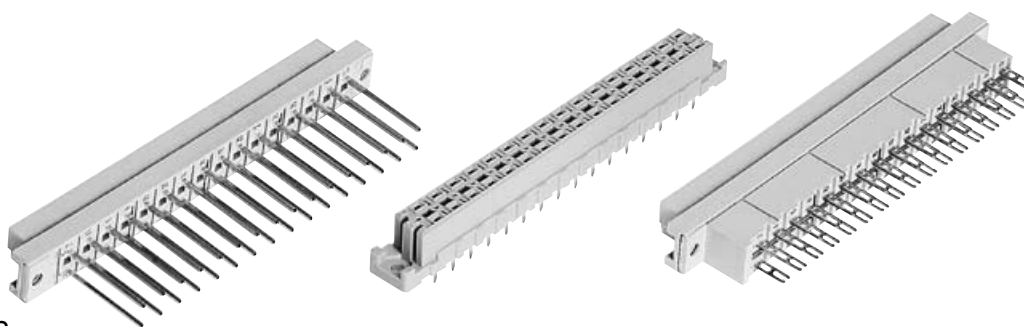

| Identification | Number of contacts | Contact arrangement | Part No. | Performance levels according to IEC 60 603-2. | Explanation chapter 00 |
|----------------|--------------------|---------------------|----------|-----------------------------------------------|------------------------|
|                | 3                  | 2                   |          |                                               | 1                      |

|                                                |    |  |                |                                                                                |                |
|------------------------------------------------|----|--|----------------|--------------------------------------------------------------------------------|----------------|
| Female connector<br>with solder pins<br>2.9 mm | 32 |  | 09 04 232 7832 | 09 04 232 6832<br>09 04 732 6832 <sup>c)</sup>                                 | 09 04 232 2832 |
| Female connector<br>with solder pins<br>4.5 mm | 32 |  | 09 04 232 7831 | 09 04 232 6831<br>09 04 332 6831 <sup>b)</sup><br>09 04 732 6831 <sup>c)</sup> | 09 04 232 2831 |
| Female connector<br>with wrap posts<br>20 mm   | 32 |  | 09 04 232 7821 | 09 04 232 6821<br>09 04 732 6821 <sup>c)</sup>                                 | 09 04 232 2821 |
| Female connector<br>with solder lugs           | 32 |  | 09 04 232 7823 | 09 04 232 6823                                                                 | 09 04 232 2823 |

**Solder pins**

| a   |
|-----|
| 2.9 |
| 4.5 |

**Wrap posts**

| a  | b |
|----|---|
| 20 | 1 |

**Solder lugs**

| a   | b   | c   |
|-----|-----|-----|
| 2.9 | 1.1 | 0.8 |
| 4.5 | 1.1 | 0.8 |

### Contact arrangement

View from termination side

all holes

15 x 5.08 (=76.20)

32

Dimensions in mm

32



| Identification                                             | Number<br>of contacts | Contact<br>arrangement                                                            | Part No.                     | Performance levels according to IEC 60 603-2. Explanation chapter 00                 |                |  |  |  |
|------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------|------------------------------|--------------------------------------------------------------------------------------|----------------|--|--|--|
|                                                            |                       |                                                                                   | 3                            | 2                                                                                    | 1              |  |  |  |
| Female connector<br>with angled<br>solder pins<br>1 x 1 mm | 32                    |  | 09 04 232 7826               | 09 04 232 6826                                                                       | 09 04 232 2826 |  |  |  |
| Dimensions                                                 |                       |                                                                                   |                              |  |                |  |  |  |
| Fixing bracket<br>Metal                                    |                       |                                                                                   | 09 06 000 9912 <sup>1)</sup> |  |                |  |  |  |
| <sup>1)</sup> order 2 pieces<br>for one connector          |                       |                                                                                   |                              |                                                                                      |                |  |  |  |
| Board drillings<br>Mounting side                           |                       |                                                                                   |                              |  |                |  |  |  |


Dimensions in mm

**DIN Power  
to 6 A**

02  
13



Number of contacts

max. 32

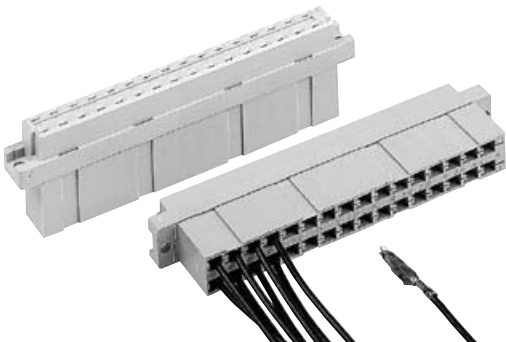


Female connectors

DIN Power  
to 6 A
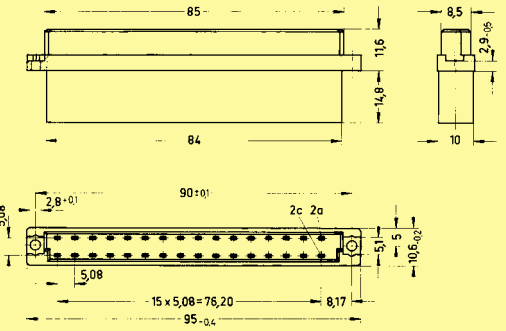
| Identification                                                   | Number of contacts | Part No.       | Drawing                                                                                                                                                                                                                                                                                                                                                                                 | Dimensions in mm |
|------------------------------------------------------------------|--------------------|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Female connector for crimp contacts<br>Order contacts separately | 32                 | 09 04 032 3213 |  <p>85, 84, 11.5, 14.8, 8.5, 2.9, 10, 2.8, 90, 2c, 2a, 5.08, 5, 10.6, 15 x 5.08 = 76.20, 8.17, 95, 5</p> <p>Contact arrangement View from termination side</p>  <p>Shell housing 09 03 096 0501 see chapter 20</p> |                  |

| Identification                                            | Identification Wire gauge | Part No.       | Performance levels according to IEC 60 603-2. Explanation chapter 00 |
|-----------------------------------------------------------|---------------------------|----------------|----------------------------------------------------------------------|
| Female crimp FC contacts                                  |                           |                | 21                                                                   |
| Bandoliered contacts (approx. 2,500 pieces)               | 1                         | 09 06 000 6484 | 09 06 000 6474                                                       |
|                                                           | 2                         | 09 06 000 6481 | 09 06 000 6471                                                       |
|                                                           | 3                         | 09 06 000 6482 | 09 06 000 6472                                                       |
| Bandoliered contacts (approx. 250 pieces)                 | 1                         | 09 06 000 7484 | 09 06 000 7474                                                       |
|                                                           | 2                         | 09 06 000 7481 | 09 06 000 7471                                                       |
|                                                           | 3                         | 09 06 000 7482 | 09 06 000 7472                                                       |
| Individual contacts <sup>1)</sup>                         | 1                         | 09 06 000 8484 | 09 06 000 8474                                                       |
|                                                           | 2                         | 09 06 000 8481 | 09 06 000 8471                                                       |
|                                                           | 3                         | 09 06 000 8482 | 09 06 000 8472                                                       |
| Female contacts with solder lugs <sup>2)</sup> (lockable) |                           |                | 09 06 000 6420                                                       |

|                                                                     |   | Wire gauge mm² | AWG     | Insulation ø mm | Identification                                                                                                                               |
|---------------------------------------------------------------------|---|----------------|---------|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| FC 1                                                                | 1 | 0.09 - 0.25    | 28 - 24 | 0.7 - 1.5       |  <p>Bandoliered contacts</p> <p>Individual contacts</p> |
| FC 2                                                                | 2 | 0.14 - 0.56    | 26 - 20 | 0.8 - 2.0       |                                                                                                                                              |
| FC 3                                                                | 3 | 0.5 - 1.5      | 20 - 16 | 1.6 - 2.8       |                                                                                                                                              |
| 3.5 + 0.5 mm of insulation is stripped from the wires to be crimped |   |                |         |                 |                                                                                                                                              |
| Insertion, removal and crimping tools see chapter 30                |   |                |         |                 |                                                                                                                                              |

<sup>1)</sup> Packaging unit 1,000 pieces

<sup>2)</sup> Solder contacts must not be used together with shell housing A. Special contact surface: 2 µm gold.

Number of contacts

# 48




## Male connectors

| Identification                               | Number of contacts  | Contact arrangement | Part No.       | Performance levels according to IEC 60 603-2. Explanation chapter 00           |                                                |
|----------------------------------------------|---------------------|---------------------|----------------|--------------------------------------------------------------------------------|------------------------------------------------|
|                                              |                     |                     | 3              | 2                                                                              | 1                                              |
| Male connector with angled solder pins       |                     |                     |                |                                                                                |                                                |
| Row separation termination side 5.08 mm<br>① | 48                  |                     | 09 05 148 7921 | 09 05 148 6921<br>09 05 348 6921 <sup>b)</sup><br>09 05 648 6921 <sup>c)</sup> | 09 05 148 2921<br>09 05 648 2921 <sup>c)</sup> |
|                                              | 46 + 2 <sup>▲</sup> |                     |                | 09 05 148 6951                                                                 |                                                |
| Row separation termination side 2.54 mm<br>② | 48                  |                     | 09 05 148 7931 | 09 05 148 6931                                                                 | 09 05 148 2931                                 |
|                                              | 46 + 2 <sup>▲</sup> |                     |                | 09 05 148 6961                                                                 |                                                |


DIN Power  
to 6 A

## Dimensions

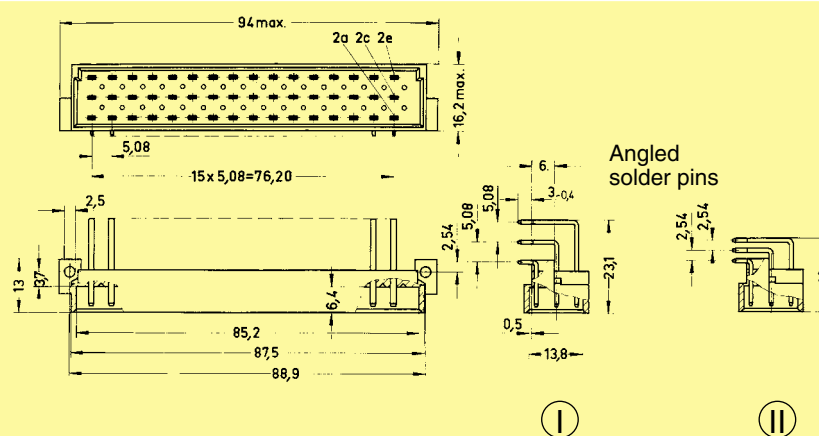

## Board drillings

Mounting side

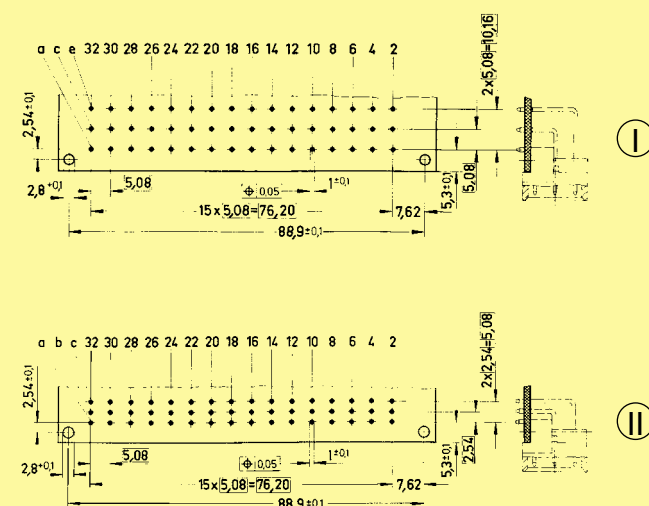

Dimensions in mm

▲ Male connectors with 2 leading contacts [(0.8 mm) pos. a2 and a32]


Other contact arrangements on request

<sup>b)</sup> Connectors with snap-in clips see chapter 00

<sup>c)</sup> Connectors with coding see page 02.42

Number of contacts

48

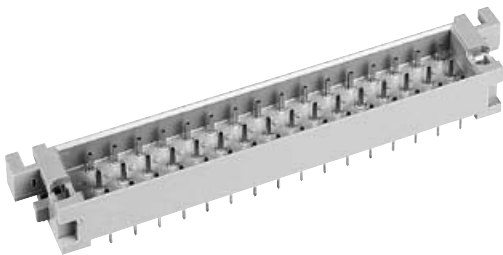


Interface connector I

| Identification                                         | Number of contacts | Part No.                                                          | Drawing                                                                                                                                                                                                                                                                                      | Dimensions in mm                                                                                                                                                                                                                                                                                                                  |
|--------------------------------------------------------|--------------------|-------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interface connector I with solder pins<br>0.6 x 0.6 mm | 48                 | Performance level 2<br>acc. to IEC 60 603-2<br><br>09 05 048 6924 | <p>Top view dimensions: 95, 90 ± 0.1, 97.5, 13.8, 16.2, 2a, 2c, 2e, 2.7, 6.4, 85.2, 88, 106, 12.2, 5.25, 17.5.</p> <p>Side view dimensions: 106, 88, 85.2, 6.4, 12.2, 5.25, 17.5.</p> <p>Detail view dimensions: 5.25, 12.2, 17.5.</p> <p>Contact arrangement View from termination side</p> | <p>Panel cut out dimensions: 10.2, 85.2, 90 ± 0.1, 106.5, 5.35, 16.4, 17.78, 5.08, 2.54, 2.8 ± 0.1, 1.05, 15 x 5.08 = 76.20, 90 ± 0.1, 8.17, 0.3, 2.54, 5.08, 2 x 5.08 = 10.16, 6.2.</p> <p>Mounting side</p> <p>Board drillings dimensions: 0.3, 5.08, 15 x 5.08 = 76.20, 90 ± 0.1, 8.17, 2.54, 5.08, 2 x 5.08 = 10.16, 6.2.</p> |
| Panel cut out                                          |                    |                                                                   |                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                   |
| Board drillings<br>Mounting side                       |                    |                                                                   |                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                   |



48

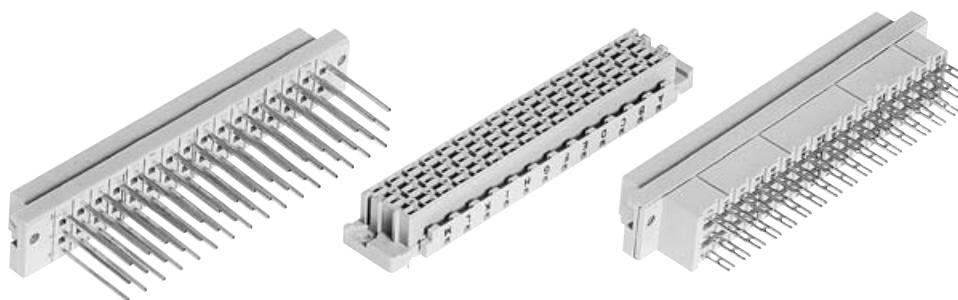

| Identification                              | Number of contacts | Contact arrangement                                                                | Part No.       | Performance levels according to IEC 60603-2. Explanation chapter 00            |                                                |  |
|---------------------------------------------|--------------------|------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------|------------------------------------------------|--|
|                                             |                    |                                                                                    | 3              | 2                                                                              | 1                                              |  |
| Female connector with solder pins<br>2.9 mm | 48                 |   | 09 05 248 7832 | 09 05 248 6832                                                                 | 09 05 248 2832                                 |  |
| Female connector with solder pins<br>4.5 mm | 48                 |   | 09 05 248 7831 | 09 05 248 6831<br>09 05 348 6831 <sup>b)</sup><br>09 05 748 6831 <sup>c)</sup> | 09 05 248 2831<br>09 05 748 2831 <sup>c)</sup> |  |
| Female connector with wrap posts<br>20 mm   | 48                 |   | 09 05 248 7821 | 09 05 248 6821                                                                 | 09 05 248 2821                                 |  |
| Female connector with solder lugs           | 48                 |  | 09 05 248 7823 | 09 05 248 6823                                                                 | 09 05 248 2823                                 |  |

Part Nos. and variants see chapter 04

**Solder pins**

|     |
|-----|
| a   |
| 2.9 |
| 4.5 |

**Wrap posts**

|    |   |
|----|---|
| a  | b |
| 20 | 1 |

**Solder lugs**


Technical drawing of the 4R connector showing three views:

- Top View:** Shows the overall dimensions of the connector. The width is 25.5 ± 0.16 mm. The length is 95.5 mm, with a central section of 90.0 mm. The mounting holes are spaced 12.5 mm apart. The distance between the mounting holes and the edge is 15.9 mm. The distance between the mounting holes and the center of the connector is 51 mm.
- Side View:** Shows the profile of the connector. The height is 17.78 mm. The distance between the mounting holes and the edge is 15.9 mm. The distance between the mounting holes and the center of the connector is 51 mm.
- Contact Arrangement View:** Shows the 37 contacts arranged in a 4x9 grid. The contacts are numbered 1 to 37. The distance between the mounting holes and the edge is 15.9 mm. The distance between the mounting holes and the center of the connector is 51 mm.

Mounting side

Dimensions in mm

max. 48

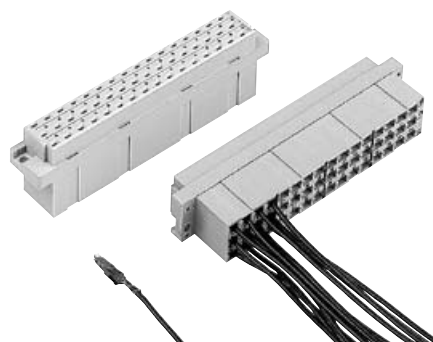


| Identification                                                          | Number of contacts | Part No.                                       | Drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Dimensions in mm                                                                                                                                                         |                                             |
|-------------------------------------------------------------------------|--------------------|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|
| <b>Female connector for crimp contacts</b><br>Order contacts separately | 48                 | 09 05 048 3202<br>09 05 548 3202 <sup>c)</sup> |  <p>Technical drawing of the female connector showing side and top views with dimensions. The side view shows a length of 85 mm, a width of 11.6 mm, and a mounting tab width of 14.8 mm. The top view shows a length of 84 mm, a width of 15.1 mm, and a mounting tab width of 15.7 mm. The contact arrangement is shown as a 4x12 grid of contacts, with dimensions 2.8 mm for the contact pitch, 5.08 mm for the contact width, and 15 x 5.08 mm for the contact area. The total length of the contact area is 76.20 mm. The drawing also shows the termination side with dimensions 2e, 2c, and 2a.</p> |  <p>View from termination side</p> <p>32 30 28 26 24 22 20 18 16 14 12 10 8 6 4 2</p> | Shell housing 09 05 048 0501 see chapter 20 |

| Identification                                                  | Identification Wire gauge | Part No. | Performance levels according to IEC 60 603-2. | Explanation chapter 00 |
|-----------------------------------------------------------------|---------------------------|----------|-----------------------------------------------|------------------------|
|                                                                 |                           |          | 2                                             | 1                      |
| Female crimp FC contacts                                        |                           |          |                                               |                        |
| Bandoliered contacts<br>(approx. 2,500 pieces)                  | 1                         |          | 09 06 000 6484                                | 09 06 000 6474         |
|                                                                 | 2                         |          | 09 06 000 6481                                | 09 06 000 6471         |
|                                                                 | 3                         |          | 09 06 000 6482                                | 09 06 000 6472         |
| Bandoliered contacts<br>(approx. 250 pieces)                    | 1                         |          | 09 06 000 7484                                | 09 06 000 7474         |
|                                                                 | 2                         |          | 09 06 000 7481                                | 09 06 000 7471         |
|                                                                 | 3                         |          | 09 06 000 7482                                | 09 06 000 7472         |
| Individual contacts <sup>1)</sup>                               | 1                         |          | 09 06 000 8484                                | 09 06 000 8474         |
|                                                                 | 2                         |          | 09 06 000 8481                                | 09 06 000 8471         |
|                                                                 | 3                         |          | 09 06 000 8482                                | 09 06 000 8472         |
| Female contacts with<br>solder lugs <sup>2)</sup><br>(lockable) |                           |          |                                               | 09 06 000 6420         |

|      |   | Wire gauge<br>mm <sup>2</sup> | AWG     | Insulation ø<br>mm | Identification                                                                        |
|------|---|-------------------------------|---------|--------------------|---------------------------------------------------------------------------------------|
| FC 1 | 1 | 0.09 - 0.25                   | 28 - 24 | 0.7 - 1.5          |  |
| FC 2 | 2 | 0.14 - 0.56                   | 26 - 20 | 0.8 - 2.0          |                                                                                       |
| FC 3 | 3 | 0.5 - 1.5                     | 20 - 16 | 1.6 - 2.8          |                                                                                       |

3.5 + 0.5 mm of insulation is stripped from the wires to be crimped

Insertion, removal and crimping tools see chapter 30

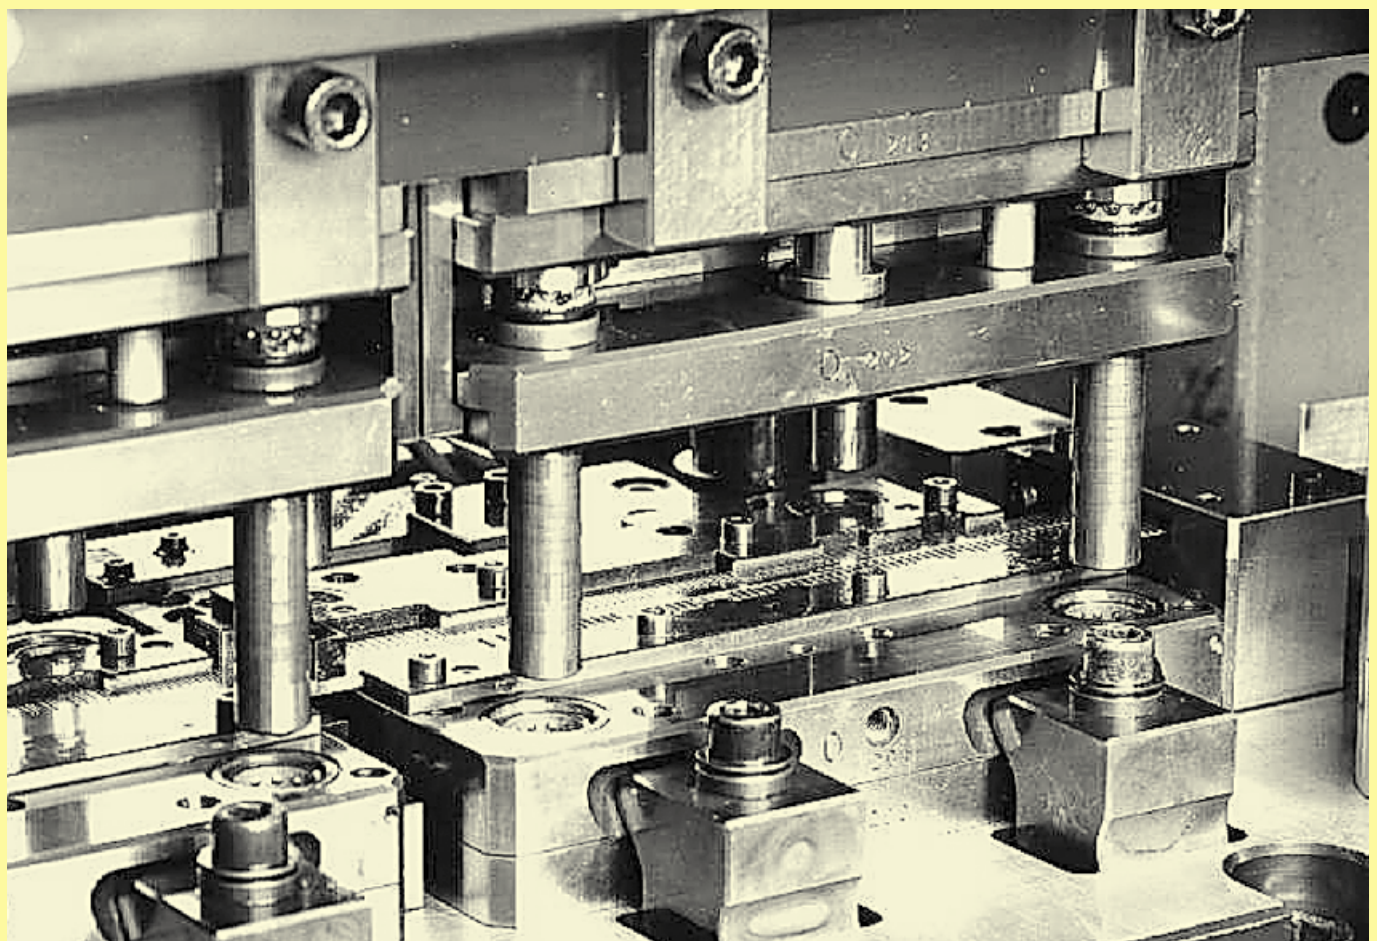

DIN Power  
to 6 A



Our claim is quality.

Simultaneous and fully automated high-speed stamping of several contacts with small tolerances.



Number of contacts 16, 32, 48

Working current 6 A max.  
see current carrying capacity chart

## Clearance

16 ways  $\geq 1.6$  mm  
32, 48 ways  $\geq 1.6$  mm

## Creepage

16 ways  $\geq 1.6$  mm  
32, 48 ways  $\geq 3.0$  mm

## Working voltage

The working voltage also depends on the clearance and creepage dimensions of the pcb itself and the associated wiring according to the safety regulations of the equipment  
Explanations see chapter 00

Contact resistance  $\leq 20$  m $\Omega$

Insulation resistance  $\geq 10^{12}$   $\Omega$

Termination Crimp terminal  
0.09-1.5 mm<sup>2</sup>

## Materials

Mouldings and hoods Thermoplastic resin,  
glass-fibre filled  
Contacts Copper alloy

## Piggyback connectors for interfacing with female connectors with wrap posts 1 x 1 mm

The problem of interfacing systems designed for the distribution or collection of electronic signals can be overcome by the use of piggyback connectors. Designed to be mounted on the rear of DIN 41 612 type wire wrap female connectors (1 x 1 mm posts) these piggyback elements can be used to terminate input and output cables.

Distance fixing brackets are fitted to provide either a latching or screw fixing facility over the two level wire wrap plane.

The female crimp contacts used in these versions are designed for 1 x 1 mm posts.


After crimping they can be easily inserted into the chambers of the connector body with the aid of an insertion tool. Insertion errors can be simply rectified with the use of a removal tool.

2 and 3 row piggyback connectors can be mounted in shell housings C and open hood G. Security is provided by either latches or screws to the distance fixing brackets.


## Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

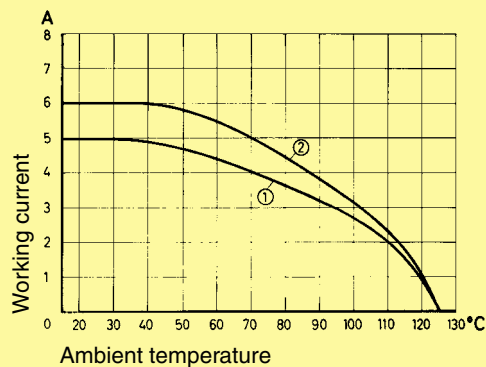

① with shell housing    ② without shell housing

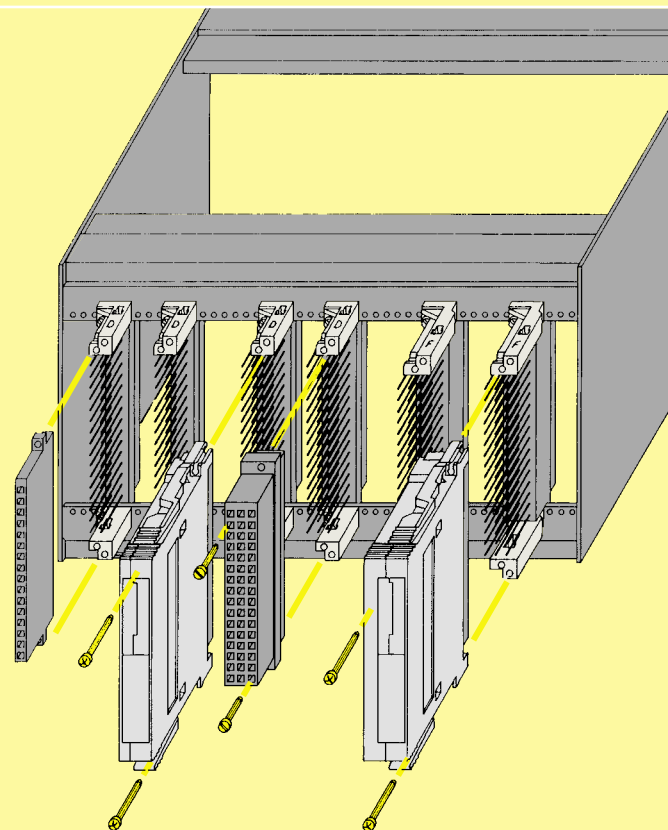

# Piggyback connectors




Number of contacts

## max. 48


III



I

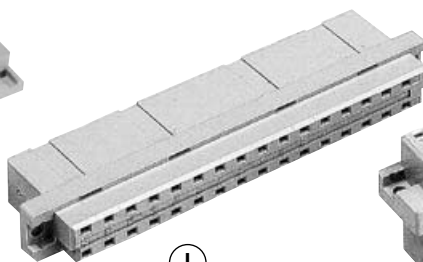

II

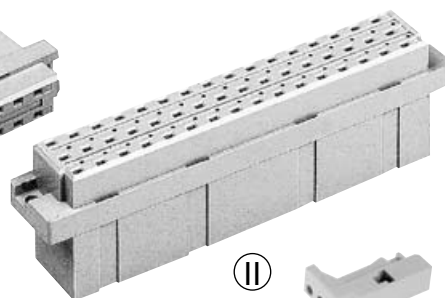

IV



Piggyback connectors for 1 x 1 mm wrap posts

| Identification                                                                                                                                                         | Number of contacts            | Part No.                                                                                                 | Drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Dimensions in mm    |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------------|-----|---------------------|---|-----------|-------|---------|---|-----------|-------|---------|---|-----------|-------|---------|---|-----------|-------|---------|---|-----------|-------|---------|---|-----------|-------|---------|--|
| <b>Piggyback connector for crimp contacts</b><br><br>Order contacts separately                                                                                         | 16                            | 09 04 016 3201                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
|                                                                                                                                                                        | 32                            | 09 04 032 3215                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
|                                                                                                                                                                        | 48                            | 09 05 048 3204                                                                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| <b>Female FC crimp contacts</b><br><br>individual contacts <sup>1)</sup><br>FC1<br>FC2<br>FC3<br><br>Bandoliered contacts<br>FC1<br>(approx. 2,500 pcs.)<br>FC2<br>FC3 |                               | 09 06 000 6464<br>09 06 000 6461<br>09 06 000 6462<br>09 06 000 6454<br>09 06 000 6451<br>09 06 000 6452 | <table><tr><th>Identi-<br/>fication</th><th>Wire gauge<br/>mm<sup>2</sup></th><th>AWG</th><th>Insulations ø<br/>mm</th></tr><tr><td>1</td><td>0.09-0.25</td><td>28-24</td><td>0.7-1.5</td></tr><tr><td>2</td><td>0.14-0.56</td><td>26-20</td><td>0.8-2.0</td></tr><tr><td>3</td><td>0.50-1.50</td><td>20-16</td><td>1.6-2.8</td></tr></table><br><table><tr><td>1</td><td>0.09-0.25</td><td>28-34</td><td>0.7-1.5</td></tr><tr><td>2</td><td>0.14-0.56</td><td>26-20</td><td>0.8-2.0</td></tr><tr><td>3</td><td>0.50-1.50</td><td>20-16</td><td>1.6-2.8</td></tr></table> | Identi-<br>fication | Wire gauge<br>mm <sup>2</sup> | AWG | Insulations ø<br>mm | 1 | 0.09-0.25 | 28-24 | 0.7-1.5 | 2 | 0.14-0.56 | 26-20 | 0.8-2.0 | 3 | 0.50-1.50 | 20-16 | 1.6-2.8 | 1 | 0.09-0.25 | 28-34 | 0.7-1.5 | 2 | 0.14-0.56 | 26-20 | 0.8-2.0 | 3 | 0.50-1.50 | 20-16 | 1.6-2.8 |  |
| Identi-<br>fication                                                                                                                                                    | Wire gauge<br>mm <sup>2</sup> | AWG                                                                                                      | Insulations ø<br>mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 1                                                                                                                                                                      | 0.09-0.25                     | 28-24                                                                                                    | 0.7-1.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 2                                                                                                                                                                      | 0.14-0.56                     | 26-20                                                                                                    | 0.8-2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 3                                                                                                                                                                      | 0.50-1.50                     | 20-16                                                                                                    | 1.6-2.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 1                                                                                                                                                                      | 0.09-0.25                     | 28-34                                                                                                    | 0.7-1.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 2                                                                                                                                                                      | 0.14-0.56                     | 26-20                                                                                                    | 0.8-2.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| 3                                                                                                                                                                      | 0.50-1.50                     | 20-16                                                                                                    | 1.6-2.8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| <b>Mateable with<br/>1 x 1 mm wrap posts</b>                                                                                                                           |                               |                                                                                                          | 3.5 + 0.5 mm of insulation is stripped from the wires to be crimped.<br>Crimping tools see chapter 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
| <b>Distance fixing bra-<br/>ckets for female con-<br/>nectors</b><br><br>Type D<br>Type E                                                                              |                               | top (pos. 2)<br>09 04 000 9907<br><br>bottom (pos. 32)<br>09 04 000 9906                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |
|                                                                                                                                                                        | Type F                        | top (pos. 2)<br>09 06 000 9936<br><br>bottom (pos. 32)<br>09 06 000 9937                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                     |                               |     |                     |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |   |           |       |         |  |

DIN Power to 6 A

<sup>1)</sup> Packaging unit 1,000 pieces

## Identification





## Drawing

## Dimensions in mm

Mounting examples  
of piggyback  
connectors

without housings

with housings

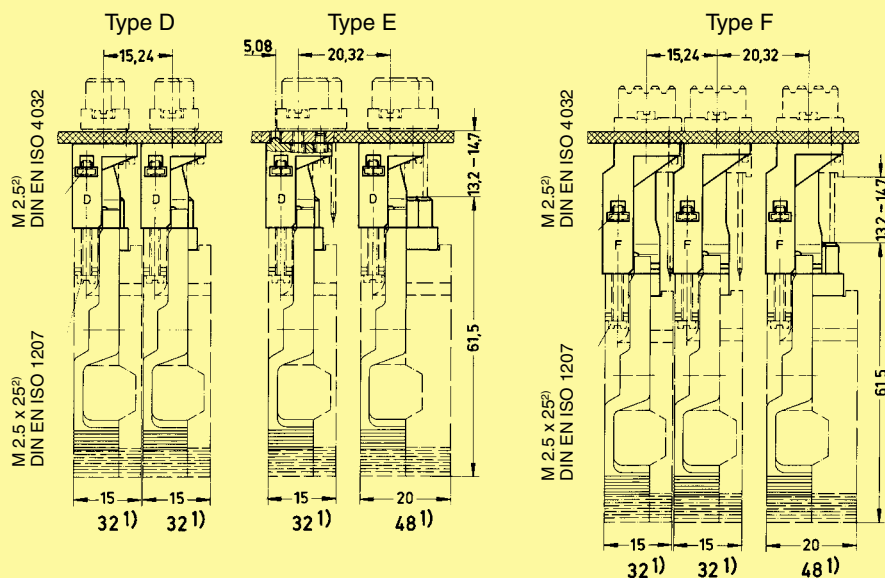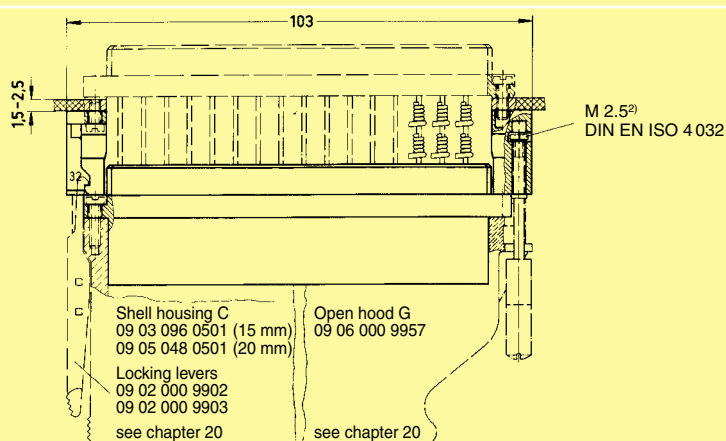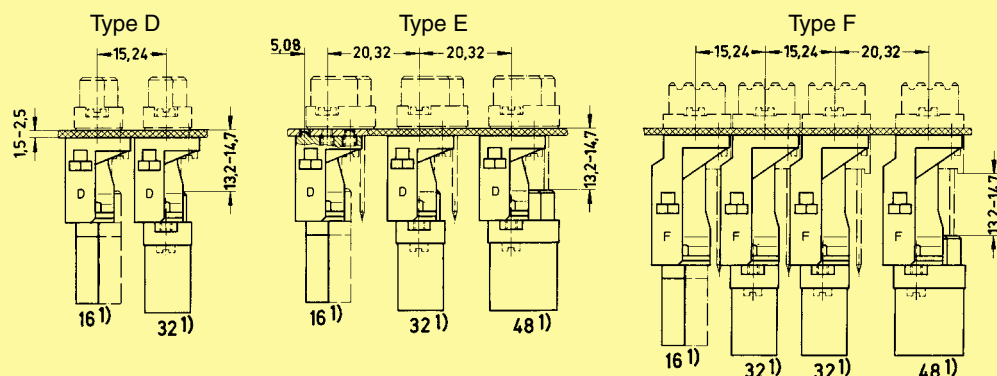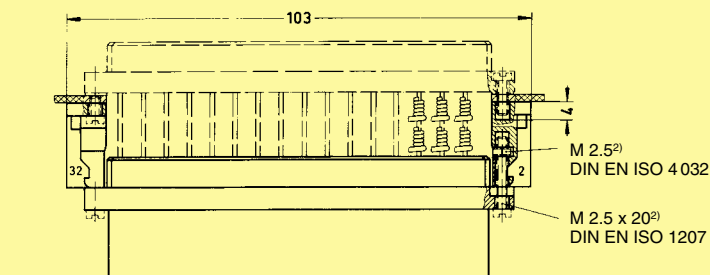

<sup>1)</sup> Number of contacts piggyback connector

<sup>2)</sup> Doesn't belong to the scope of supply





## Number of contacts

|         |         |
|---------|---------|
| Type F  | 48, 32  |
| Type FM | 45      |
| Type 2F | max. 24 |
| Type F9 | max. 9  |

Contact spacing (mm) 5.08

Working current 6 A max.  
see current carrying capacity chart

Clearance  $\geq 1.6$  mm

Creepage  $\geq 3.0$  mm

## Working voltage

The working voltage also depends on the clearance and creepage dimensions on the pcb itself and the associated wiring according to the safety regulations of the equipment  
Explanations see chapter 00

Test voltage  $U_{r.m.s.}$  1.55 kV (contact-contact)  
2.5 kV (contact-ground)

Contact resistance  $\leq 15$  m $\Omega$  for wire wrap and solder connections  
 $\leq 20$  m $\Omega$  including crimp connections

Insulation resistance  $\geq 10^{12}$   $\Omega$

Temperature range  $-55$   $^{\circ}\text{C}$  ...  $+125$   $^{\circ}\text{C}$

The higher temperature limit includes the local ambient and heating effects of the contacts under load

## Electrical termination

|                  |                                                                                                                                                                                                                                                                             |
|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Male connector   | Solder pins for pcb connections $\varnothing 1 \pm 0.1$ mm according to IEC 60 326-3<br>Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm<br>Crimp terminal 0.09-1.5 mm <sup>2</sup>                                                                                                |
| Female connector | Wrap posts 1 x 1 mm diagonal 1.34-1.45 mm<br>Solder pins for pcb connections $\varnothing 1 \pm 0.1$ mm according to IEC 60 326-3<br>Angled solder pins 1 x 1 mm for pcb connections $\varnothing 1.6 \pm 0.1$ mm<br>Solder lugs<br>Crimp terminal 0.09-1.5 mm <sup>2</sup> |
| Distributor      | Crimp terminal 0.09-1.5 mm <sup>2</sup>                                                                                                                                                                                                                                     |

Insertion and withdrawal force  
48 way  $\leq 75$  N  
45 way  $\leq 70$  N  
32 way  $\leq 50$  N  
24 way  $\leq 37$  N

## Materials

Mouldings Thermoplastic resin, glass-fibre filled, UL 94-V0  
Contacts Copper alloy

## Contact surface

Contact zone Selectively plated according to performance level<sup>1)</sup>


<sup>1)</sup> Explanation of performance levels see chapter 00

Mating conditions see chapter 00  
Coding systems see pages 02.41 and 02.42  
Mounting clips see chapter 00

## Current carrying capacity

The current carrying capacity is limited by maximum temperature of materials for inserts and contacts including terminals. The current capacity curve is valid for continuous, non interrupted current loaded contacts of connectors when simultaneous power on all contacts is given, without exceeding the maximum temperature.

Control and test procedures according to DIN IEC 60 512

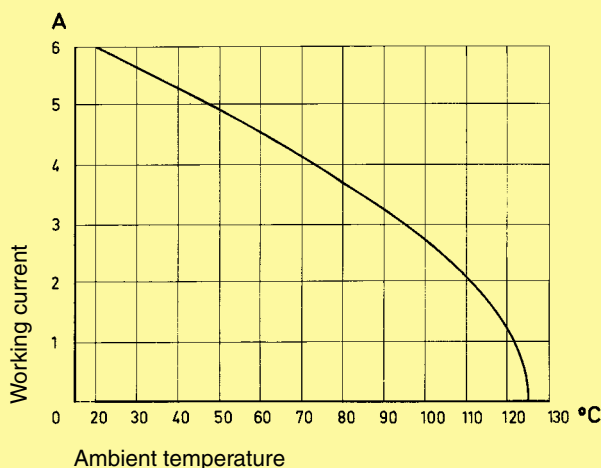


## Fitting the crimp contacts

After crimping the wires onto the contacts with the help of a crimping tool or an automatic crimping machine the contacts should be correctly oriented and inserted into the cavities of the connector moulding in the required configuration. They snap into position and are firmly held in place. A light pull on the wire assures the correct tensile strength of the contact. When using stranded wires with a gauge below 0.37 mm<sup>2</sup> an insertion tool is necessary.


## Removing the crimp contacts

The removal tool is inserted into a slot on the side of the respective crimp cavity. This action compresses the contact retaining spring therefore the contact can then be easily withdrawn using a light pull on the wire. This action will cause no damage to the contact/wire which can be repositioned/refitted as necessary. The drawing demonstrates the crimp removal procedure (max. 5x).

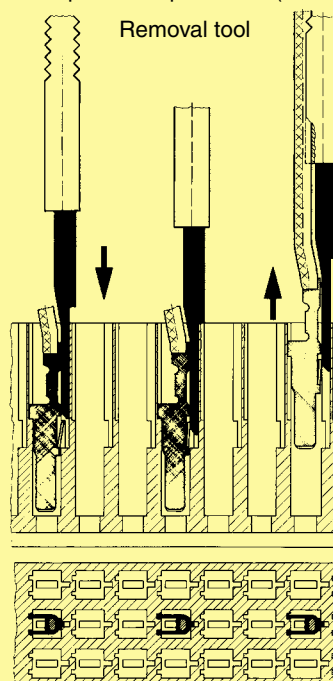



48, 32

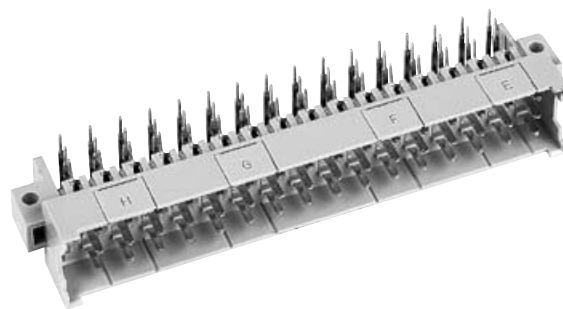

| Identification                                       | Number of contacts | Contact arrangement | Part No.                                       | Performance levels according to IEC 60603-2. Explanation chapter 00 |                |  |
|------------------------------------------------------|--------------------|---------------------|------------------------------------------------|---------------------------------------------------------------------|----------------|--|
|                                                      |                    |                     | 3                                              | 2                                                                   | 1              |  |
| Male connector with angled solder pins <sup>1)</sup> | 48                 |                     | 09 06 148 7901                                 | 09 06 148 6901<br>09 06 348 6901 <sup>b)</sup>                      | 09 06 148 2901 |  |
|                                                      | 32                 |                     | 09 06 132 7901<br>09 06 332 7901 <sup>b)</sup> | 09 06 132 6901                                                      | 09 06 132 2901 |  |
|                                                      | 32                 |                     | 09 06 132 7931                                 | 09 06 132 6931<br>09 06 332 6931 <sup>b)</sup>                      | 09 06 132 2931 |  |
| 1 leading contact (position z 32)                    | 47 + 1             |                     |                                                | 09 06 148 6921<br>09 06 348 6921 <sup>b)</sup>                      | 09 06 148 2921 |  |
|                                                      | 31 + 1             |                     | 09 06 132 7921                                 | 09 06 132 6921                                                      | 09 06 132 2921 |  |
| 2 leading contacts (positions b 2 + b 32)            | 46 + 2             |                     |                                                | 09 06 148 6925                                                      | 09 06 148 2925 |  |

Technical drawing of a 15x508 PCB showing top, side, and detail views with dimensions in mm.

**Top View Dimensions:**

- Overall length: 94 max.
- Overall width: 14,8 ±0,2
- Internal width: 15 x 5,08 = 76,20
- Distance from edge to first hole: 5,08
- Hole diameter: 2,5
- Distance between holes: 2z, 2b, 2d

**Side View Dimensions:**

- Overall height: 8,4 ±0,3
- Internal height: 1,5
- Distance from edge to first hole: 85,4
- Overall length: 87,5
- Overall length: 88,9

**Detail View Dimensions (Angled solder pins):**


- Pin height: 6
- Pin diameter: 3,85
- Pin width: 3,0
- Pin angle: 2,54
- Pin length: 2,54
- Pin width: 12,7
- Pin height: 22

Angled solder pins

[illegible]

Number of contacts

48, 32

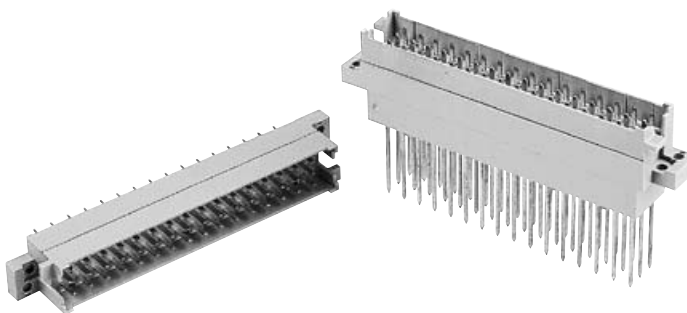

## Interface connectors I


| Identification                                                       | Number of contacts | Contact arrangement | Part No.             | Drawing | Dimensions in mm |
|----------------------------------------------------------------------|--------------------|---------------------|----------------------|---------|------------------|
| Interface connector I with solder pins <sup>1)</sup><br>0.6 x 0.6 mm |                    |                     | Performance level 1* |         |                  |
|                                                                      | 48                 |                     | 09 06 048 2905       |         |                  |
|                                                                      | 32                 |                     | 09 06 032 2905       |         |                  |
|                                                                      | 32                 |                     | 09 06 032 2941       |         |                  |
|                                                                      |                    |                     |                      |         |                  |
| Board drillings<br>Mounting side                                     |                    |                     |                      |         |                  |
| Interface connector I with wrap posts <sup>1)</sup><br>1 x 1 mm      |                    |                     | Performance level 1* |         |                  |
|                                                                      | without nut        |                     | 09 06 048 2903       |         |                  |
|                                                                      | with nut           |                     | 09 06 048 2963       |         |                  |
|                                                                      | without nut        |                     | 09 06 032 2903       |         |                  |
|                                                                      | with nut           |                     | 09 06 032 2963       |         |                  |
| Panel cut out                                                        |                    |                     |                      |         |                  |

\* Acc. to IEC 60 603-2, performance level 2 on request

<sup>1)</sup> With shroud coding, see also page 02.41

Number of contacts

48

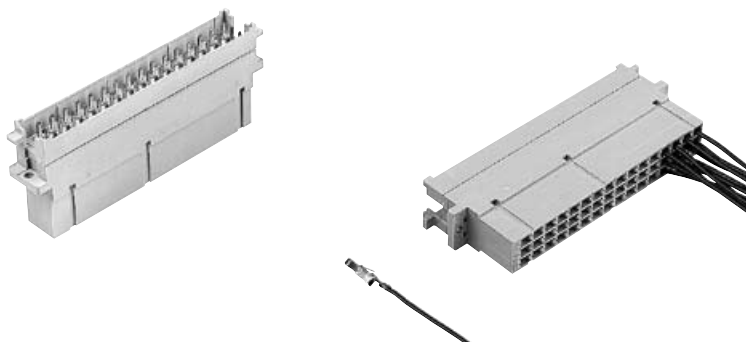

Interface connector I


| Identification                                                                                                                  | Number of contacts | Part No.                                                              | Drawing                                                                                                                                                                                                                                                                                                                                                                                                      | Dimensions in mm                                                                                                                                                                                                                                                                                                                                                                              |
|---------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>Interface connector I utilising female crimp contacts<sup>1)</sup></p> <p>Order crimp contacts separately see page 02.29</p> | 48                 | <p>Performance level 1 acc. to IEC 60 603-2</p> <p>09 06 048 2906</p> | <p>Drawing</p> <p>Top view dimensions: 90, 5,08, 2z, 2b, 2d, 2,8, 0,3, 15 x 5,08 = 76,20, 8,17, 95 -0,4, 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Side view dimensions: 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Cross-section view: "X"</p> <p>Contact arrangement View from termination side</p> <p>Shell housing see chapter 20</p> | <p>Top view dimensions: 90, 5,08, 2z, 2b, 2d, 2,8, 0,3, 15 x 5,08 = 76,20, 8,17, 95 -0,4, 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Side view dimensions: 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Cross-section view: "X"</p> <p>Contact arrangement View from termination side</p> <p>Shell housing see chapter 20</p> |
| <p>Panel cut out</p> <p>Mounted in shell housing B</p>                                                                          |                    |                                                                       | <p>Top view dimensions: 90, 5,08, 2z, 2b, 2d, 2,8, 0,3, 15 x 5,08 = 76,20, 8,17, 95 -0,4, 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Side view dimensions: 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Cross-section view: "X"</p> <p>Contact arrangement View from termination side</p> <p>Shell housing see chapter 20</p>                | <p>Top view dimensions: 90, 5,08, 2z, 2b, 2d, 2,8, 0,3, 15 x 5,08 = 76,20, 8,17, 95 -0,4, 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Side view dimensions: 84, 12,7, 12,3, 2,9 -0,3, 38, 14,8 -0,2, 85,4, 20, 14,8, 8 -0,3, "X"</p> <p>Cross-section view: "X"</p> <p>Contact arrangement View from termination side</p> <p>Shell housing see chapter 20</p> |

DIN Power  
to 6 A

<sup>1)</sup> With shroud coding, see also page 02.41

Number of contacts

48

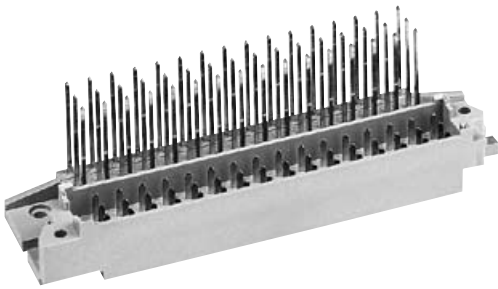


Interface connector U

| Identification                                 | Number of contacts | Part No.                                                   | Drawing                                                                                                                                                                                                                                                                                                                                        | Dimensions in mm |
|------------------------------------------------|--------------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Interface connector U with wrap posts 1 x 1 mm | 48                 | Performance level 1 acc. to IEC 60 603-2<br>09 06 048 2981 | <p>Technical drawing of the connector showing side and top views with dimensions. The side view includes dimensions: 3+0.2, 2, 12.5, 15x5.08=76.20, 101+0.2, 106.5-0.2, 15.24, 6.8, 22, 14.8, 15.2, 2x5.08=10.16, 3.2+0.1, 31.9+0.3, 17.24, 1, 1. The top view shows a grid of contacts with dimensions: 94, 90, 90, 8.17, 8.17, 0.3, 0.3.</p> |                  |
| Mounting example                               |                    |                                                            | <p>Technical drawing of the connector showing mounting example with dimensions. The drawing includes dimensions: 0.3, 5.08, M 3 x 8 DIN EN ISO 1207, 8.17, 17.23, 10.16, 90+0.1, 5.63, 5.08, 14.69, 2.4, M 2.5 x 6 DIN EN ISO 1207, A-B.</p>                                                                                                   |                  |

Number of contacts

max. 48

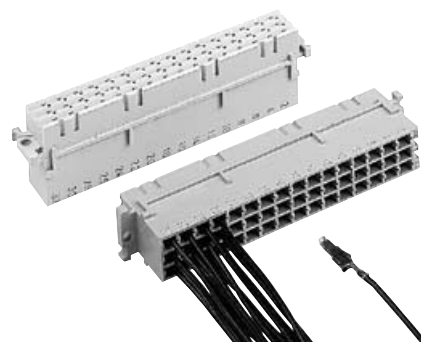

## Female connectors

| Identification                                                                 | Number of contacts | Part No.       | Drawing                                                                                   | Dimensions in mm |
|--------------------------------------------------------------------------------|--------------------|----------------|-------------------------------------------------------------------------------------------|------------------|
| Female connector for crimp contacts <sup>1)</sup><br>Order contacts separately | 48                 | 09 06 248 3201 | <p>Contact arrangement View from termination side</p> <p>Shell housing see chapter 20</p> |                  |

DIN Power  
to 6 A


| Identification                                                                                                              | Identification Wire gauge | Part No.                                                                     | Performance levels according to IEC 60 603-2. Explanation chapter 00 |
|-----------------------------------------------------------------------------------------------------------------------------|---------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------|
|                                                                                                                             |                           | 2                                                                            | 1                                                                    |
| Female crimp FC contacts                                                                                                    |                           |                                                                              |                                                                      |
| Bandoliered contacts (approx. 2,500 pieces)                                                                                 | 1                         | 09 06 000 6484                                                               | 09 06 000 6474                                                       |
|                                                                                                                             | 2                         | 09 06 000 6481                                                               | 09 06 000 6471                                                       |
|                                                                                                                             | 3                         | 09 06 000 6482                                                               | 09 06 000 6472                                                       |
| Bandoliered contacts (approx. 250 pieces)                                                                                   | 1                         | 09 06 000 7484                                                               | 09 06 000 7474                                                       |
|                                                                                                                             | 2                         | 09 06 000 7481                                                               | 09 06 000 7471                                                       |
|                                                                                                                             | 3                         | 09 06 000 7482                                                               | 09 06 000 7472                                                       |
| Individual contacts <sup>2)</sup>                                                                                           | 1                         | 09 06 000 8484                                                               | 09 06 000 8474                                                       |
|                                                                                                                             | 2                         | 09 06 000 8481                                                               | 09 06 000 8471                                                       |
|                                                                                                                             | 3                         | 09 06 000 8482                                                               | 09 06 000 8472                                                       |
| Female contacts with solder lugs <sup>3)</sup> (lockable)                                                                   |                           |                                                                              | 09 06 000 6420                                                       |
| FC 1                                                                                                                        | 1                         | Wire gauge mm <sup>2</sup> 0.09 - 0.25 AWG 28 - 24 Insulation ø mm 0.7 - 1.5 | Identification                                                       |
| FC 2                                                                                                                        | 2                         | 0.14 - 0.56 26 - 20 0.8 - 2.0                                                | Bandoliered contacts                                                 |
| FC 3                                                                                                                        | 3                         | 0.5 - 1.5 20 - 16 1.6 - 2.8                                                  | Individual contacts                                                  |
| 3.5 + 0.5 mm of insulation is stripped from the wires to be crimped<br>Insertion, removal and crimping tools see chapter 30 |                           |                                                                              |                                                                      |

<sup>1)</sup> With shroud coding, see also page 02.41<sup>2)</sup> Packaging unit 1,000 pieces<sup>3)</sup> Solder contacts must not be used together with shell housing A. Special contact surface: 2 µm gold.



Number of contacts

48, 32

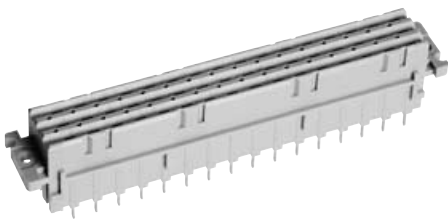


Female connectors

DIN Power  
to 6 A


| Identification                                         | Number of contacts | Contact arrangement | Part No.<br>3  | Performance levels according to IEC 60 603-2. Explanation chapter 00 |                |
|--------------------------------------------------------|--------------------|---------------------|----------------|----------------------------------------------------------------------|----------------|
|                                                        |                    |                     |                | 2                                                                    | 1              |
| Female connector with solder pins 3.7 mm <sup>1)</sup> | 48                 |                     | 09 06 248 7848 | 09 06 248 6848                                                       | 09 06 248 2848 |
|                                                        | 32                 |                     |                | 09 06 232 6848                                                       | 09 06 232 2848 |
|                                                        | 32                 |                     |                | 09 06 232 6858                                                       | 09 06 232 2858 |
| Female connector with solder pins 4.5 mm <sup>1)</sup> | 48                 |                     | 09 06 248 7835 | 09 06 248 6835                                                       | 09 06 248 2835 |
|                                                        | 32                 |                     |                | 09 06 232 6835                                                       | 09 06 232 2835 |
|                                                        | 32                 |                     |                | 09 06 232 6845                                                       | 09 06 232 2845 |

Dimensions

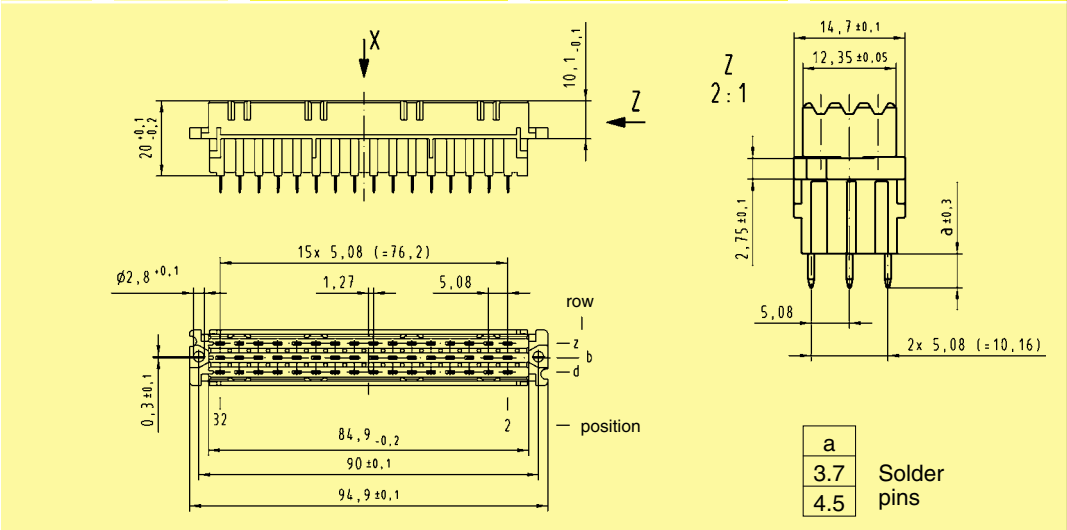

Board drillings


Mounting side

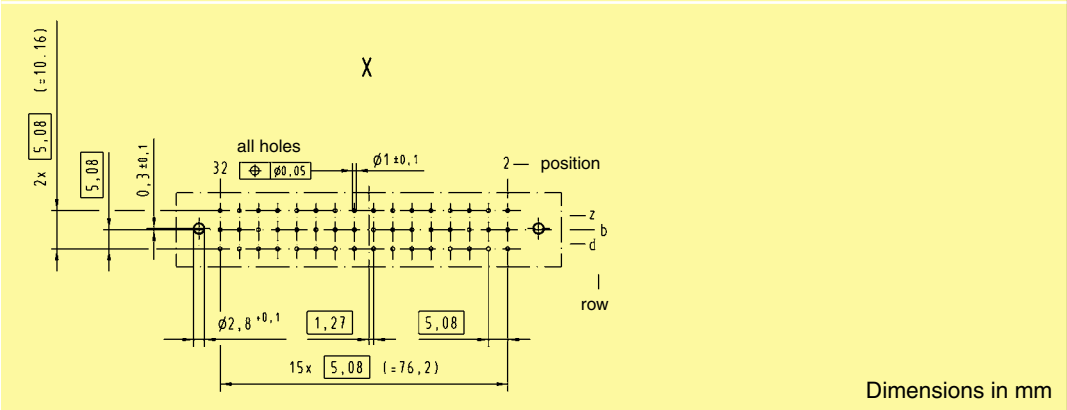

<sup>1)</sup> With shroud coding, see also page 02.41

Number of contacts

48, 32

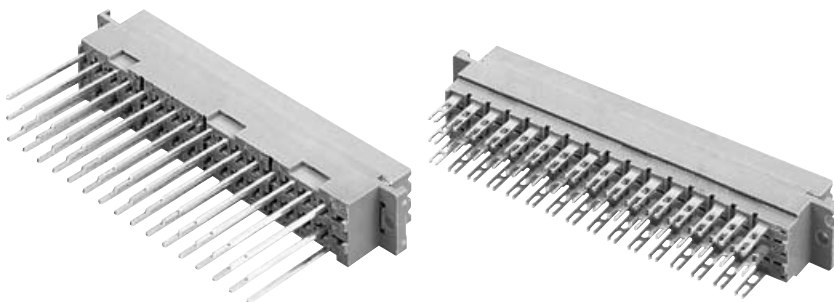


## Female connectors

| Identification                                               | Number of contacts                                                                                        | Contact arrangement | Part No.<br>3  | Performance levels according to IEC 60 603-2.<br>2 | Explanation chapter 00<br>1 |
|--------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|---------------------|----------------|----------------------------------------------------|-----------------------------|
| Female connector with wrap posts 22 mm                       | 48                                                                                                        |                     | 09 06 248 7821 | 09 06 248 6821                                     | 09 06 248 2821              |
|                                                              | 32                                                                                                        |                     | 09 06 232 7821 | 09 06 232 6821                                     | 09 06 232 2821              |
|                                                              | 32                                                                                                        |                     | 09 06 232 7831 | 09 06 232 6831                                     | 09 06 232 2831              |
| Female connector with solder lugs<br><br>open solder lug<br> | 48                                                                                                        |                     | 09 06 248 7823 | 09 06 248 6823                                     | 09 06 248 2823              |
|                                                              | 32                                                                                                        |                     | 09 06 232 7823 | 09 06 232 6823                                     | 09 06 232 2823              |
|                                                              | 32                                                                                                        |                     | 09 06 232 7843 | 09 06 232 6843                                     | 09 06 232 2843              |
| Dimensions                                                   |                                                                                                           |                     |                |                                                    |                             |
| Panel cut out                                                | <p>Dimensions in mm</p> <p>Identification strips for female connectors with wrap posts 09 06 000 9939</p> |                     |                |                                                    |                             |



Number of contacts

48, 32

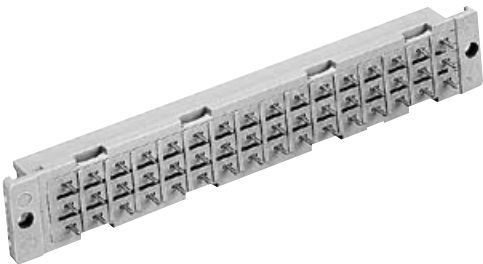

Female connectors

DIN Power  
to 6 A

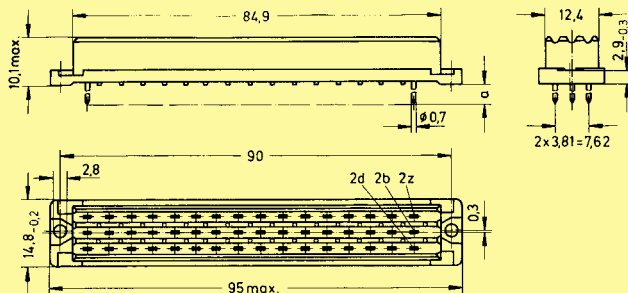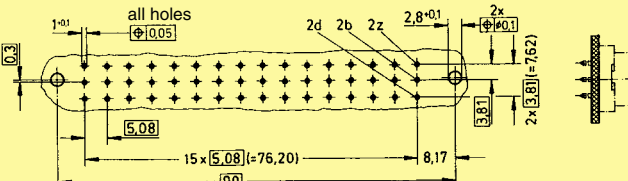
| Identification                                                  | Number of contacts                                                                                                                                                                                 | Contact arrangement | Part No.<br>3  | Performance levels according to IEC 60 603-2.<br>2 | Explanation chapter 00<br>1 |   |     |     |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|----------------|----------------------------------------------------|-----------------------------|---|-----|-----|
| Female connector<br>“low profile”<br>with solder pins<br>3.2 mm | 48                                                                                                                                                                                                 |                     | 09 06 248 7833 | 09 06 248 6833                                     | 09 06 248 2833              |   |     |     |
|                                                                 | 32                                                                                                                                                                                                 |                     |                | 09 06 232 6833                                     |                             |   |     |     |
|                                                                 | 32                                                                                                                                                                                                 |                     |                | 09 06 232 6893                                     |                             |   |     |     |
| Female connector<br>“low profile”<br>with solder pins<br>4.5 mm | 48                                                                                                                                                                                                 |                     | 09 06 248 7834 | 09 06 248 6834                                     | 09 06 248 2834              |   |     |     |
|                                                                 | 32                                                                                                                                                                                                 |                     |                | 09 06 232 6834                                     |                             |   |     |     |
|                                                                 | 32                                                                                                                                                                                                 |                     | 09 06 232 7894 | 09 06 232 6894                                     | 09 06 232 2894              |   |     |     |
| Female connector<br>with press-in pins                          | Part Nos. and variants<br>see chapter 04                                                                                                                                                           |                     |                |                                                    |                             |   |     |     |
| Dimensions                                                      | <div></div> <div><table><tr><td>a</td></tr><tr><td>3.2</td></tr><tr><td>4.5</td></tr></table>Solder pins</div> |                     |                |                                                    |                             | a | 3.2 | 4.5 |
| a                                                               |                                                                                                                                                                                                    |                     |                |                                                    |                             |   |     |     |
| 3.2                                                             |                                                                                                                                                                                                    |                     |                |                                                    |                             |   |     |     |
| 4.5                                                             |                                                                                                                                                                                                    |                     |                |                                                    |                             |   |     |     |
| Board drillings<br>Mounting side                                | <div></div>                                                                                                    |                     |                |                                                    |                             |   |     |     |

Dimensions in mm

Dimensions in mm

Number of contacts

48, 32

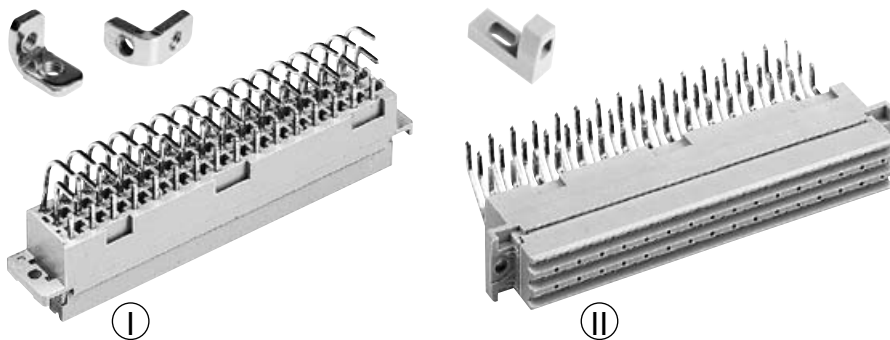


Female connectors

| Identification                                    | Number of contacts | Contact arrangement | Part No.<br>3                                                 | Performance levels according to IEC 60 603-2. Explanation chapter 00 |                                                               |
|---------------------------------------------------|--------------------|---------------------|---------------------------------------------------------------|----------------------------------------------------------------------|---------------------------------------------------------------|
|                                                   |                    |                     |                                                               | 2                                                                    | 1                                                             |
| Female connector with angled solder pins 1 x 1 mm | 48                 |                     | performance level 3<br><br>or special gold plating on request | 09 06 248 6826                                                       | performance level 1<br><br>or special gold plating on request |
|                                                   | 32                 |                     |                                                               | 09 06 232 6826                                                       |                                                               |
|                                                   | 48                 |                     |                                                               | 09 06 248 6836                                                       |                                                               |
|                                                   | 32                 |                     |                                                               | 09 06 232 6846                                                       |                                                               |
|                                                   | 32                 |                     |                                                               | 09 06 232 6836                                                       |                                                               |
| Dimensions                                        |                    |                     |                                                               |                                                                      |                                                               |
| Fixing bracket                                    |                    | Metal               | 09 06 000 9912 <sup>1)</sup>                                  | for version                                                          |                                                               |
|                                                   |                    | Plastic             | 09 06 000 9975 <sup>1)</sup>                                  | for version                                                          |                                                               |
| Board drillings<br>Mounting side                  |                    |                     |                                                               |                                                                      |                                                               |
| Dimensions in mm                                  |                    |                     |                                                               |                                                                      |                                                               |

Number of contacts

64, 16

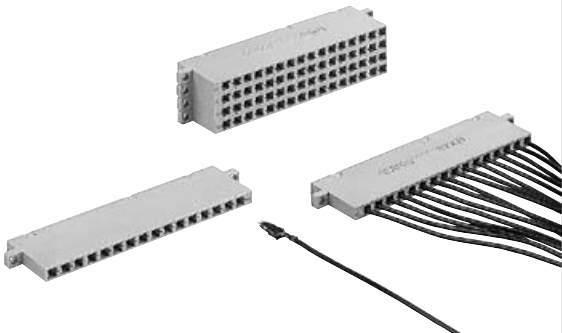


Universal adaptors

DIN Power  
to 6 A

| Identification                                                              | Number of contacts | Part No.       | Drawing | Dimensions in mm |
|-----------------------------------------------------------------------------|--------------------|----------------|---------|------------------|
| Universal adaptor utilising crimp contacts<br>crimp contacts see page 02.29 | 4 x 4              | 09 06 016 3301 |         |                  |
|                                                                             | 16 x 1             | 09 06 016 3302 |         |                  |
|                                                                             | 16 x 4             | 09 06 064 3302 |         |                  |
| Panel cut out                                                               |                    |                |         |                  |



Number of contacts

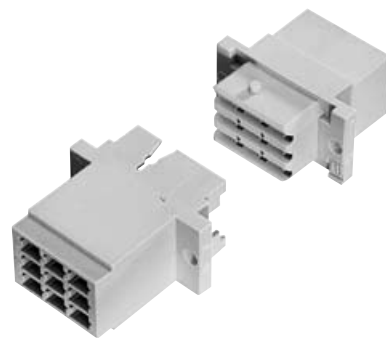
**max. 9**

Female and male connectors

| Identification                                                          | Number of contacts | Part No.       | Drawing | Dimensions in mm |
|-------------------------------------------------------------------------|--------------------|----------------|---------|------------------|
| <b>Female connector for crimp contacts</b><br>Order contacts separately | 9                  | 09 06 209 3201 |         |                  |
| <b>Female crimp contacts</b>                                            |                    | see page 02.29 |         |                  |
| <b>Male connector for crimp contacts</b><br>Order contacts separately   | 9                  | 09 06 109 3401 |         |                  |
| <b>Male crimp contacts</b>                                              |                    | see page 02.38 |         |                  |

Number of contacts

45

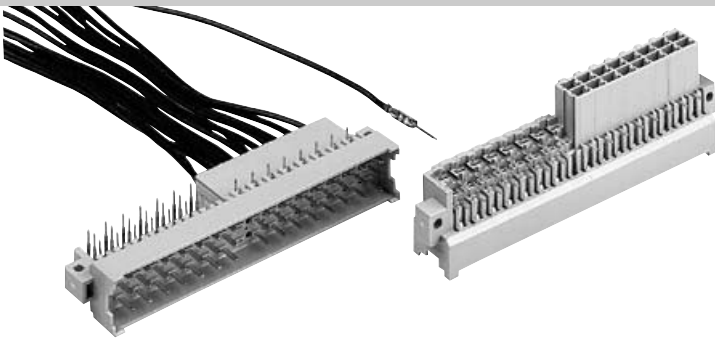

Male connectors


DIN Power  
to 6 A

| Identification                                                                                                          | Number of contacts | Part No.                                                          | Drawing | Dimensions in mm |
|-------------------------------------------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------------------|---------|------------------|
| Male connector<br><br>29 angled solder pins<br>16 cavities for male crimp contacts<br><br>crimp contacts see page 02.38 | 45                 | Performance level 1<br>acc. to IEC 60 603-2<br><br>09 06 145 2971 |         |                  |
| Board drillings<br>Mounting side                                                                                        |                    |                                                                   |         |                  |

1) A special 48 way version with 3 extra angled solder contacts at position 16 (rows d, b, z) can be supplied

Number of contacts

45

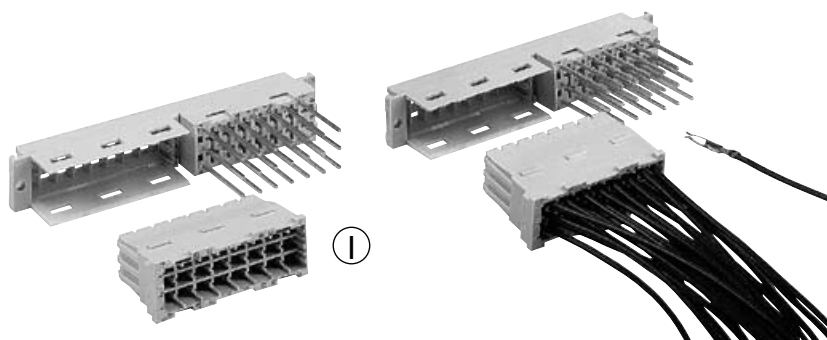


## Female connectors

| Identification                                    | Number of contacts | Part No.                                                          | Drawing                                                                                                     | Dimensions in mm |
|---------------------------------------------------|--------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|------------------|
| Female connector                                  |                    |                                                                   |                                                                                                             |                  |
| Female moulding<br>with 21 wrap posts<br>22 mm    | 45                 | Performance level 1<br>acc. to IEC 60 603-2<br><br>09 06 045 2871 | <p>Latches</p> <p>Crimp moulding is supplied with the female moulding</p> <p>View from termination side</p> |                  |
| with 21 solder pins<br>4.5 mm                     | 45                 | 09 06 045 2875                                                    |                                                                                                             |                  |
| Crimp moulding<br>for 24 female<br>crimp contacts |                    | 09 06 024 3202                                                    |                                                                                                             |                  |
| crimp contacts<br>see page 02.29                  |                    |                                                                   |                                                                                                             |                  |
| Panel cut out                                     |                    |                                                                   |                                                                                                             |                  |
| Removal tool<br>for the crimp<br>moulding         |                    | 09 99 000 0172                                                    |                                                                                                             |                  |
|                                                   |                    |                                                                   | <p>The crimp moulding can be extracted with the help of the removal tool.</p>                               |                  |


Number of contacts

max. 24


Interface connector I

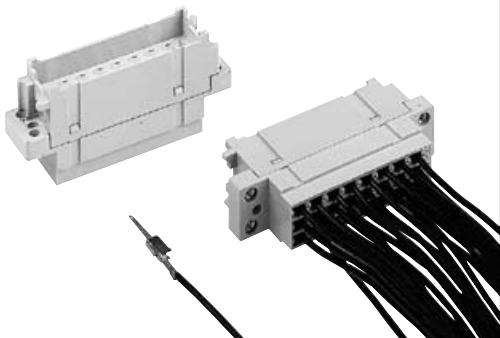

DIN Power  
to 6 A

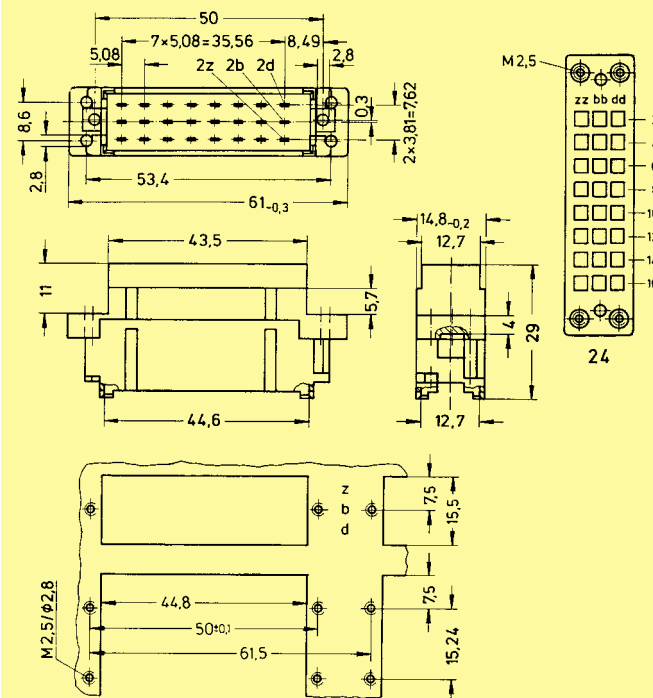
| Identification                                                             | Number of contacts | Part No.       | Drawing                                                                             | Dimensions in mm |
|----------------------------------------------------------------------------|--------------------|----------------|-------------------------------------------------------------------------------------|------------------|
| Interface connector I for male crimp contacts<br>Order contacts separately | 24                 | 09 26 024 3411 |  |                  |

| Identification                              | Identification Wire gauge | Part No.                   | Performance levels according to IEC 60 603-2. Explanation chapter 00 |                                                                     |
|---------------------------------------------|---------------------------|----------------------------|----------------------------------------------------------------------|---------------------------------------------------------------------|
|                                             |                           |                            | 2                                                                    | 1                                                                   |
| Male crimp FC contacts                      |                           |                            |                                                                      |                                                                     |
| Bandoliered contacts (approx. 2,500 pieces) | 1                         | 09 06 000 9564             |                                                                      | 09 06 000 9544                                                      |
|                                             | 2                         | 09 06 000 9561             |                                                                      | 09 06 000 9541                                                      |
|                                             | 3                         | 09 06 000 9562             |                                                                      | 09 06 000 9542                                                      |
| Bandoliered contacts (approx. 2 50 pieces)  | 2                         |                            |                                                                      | 09 06 000 5541                                                      |
|                                             | 3                         |                            |                                                                      | 09 06 000 5542                                                      |
| Individual contacts <sup>1)</sup>           | 1                         | 09 06 000 9574             |                                                                      | 09 06 000 9554                                                      |
|                                             | 2                         | 09 06 000 9571             |                                                                      | 09 06 000 9551                                                      |
|                                             | 3                         | 09 06 000 9572             |                                                                      | 09 06 000 9552                                                      |
| FC 1                                        | 1                         | Wire gauge mm <sup>2</sup> | AWG                                                                  | Insulation ø mm                                                     |
| FC 2                                        | 2                         | 0.09 - 0.25                | 28 - 24                                                              | 0.7 - 1.5                                                           |
| FC 3                                        | 3                         | 0.14 - 0.56                | 26 - 20                                                              | 0.8 - 2.0                                                           |
|                                             |                           | 0.5 - 1.5                  | 20 - 16                                                              | 1.6 - 2.8                                                           |
|                                             |                           |                            |                                                                      | Identification                                                      |
|                                             |                           |                            |                                                                      | Bandoliered contacts                                                |
|                                             |                           |                            |                                                                      | Individual contacts                                                 |
|                                             |                           |                            |                                                                      | 3.5 + 0.5 mm of insulation is stripped from the wires to be crimped |
|                                             |                           |                            |                                                                      | Insertion, removal and crimping tools see chapter 30                |



<sup>1)</sup> Packaging unit 1,000 pieces

max. 24




| Identification                                 | Number of contacts | Part No.       | Drawing | Dimensions in mm                                                                                                                          |
|------------------------------------------------|--------------------|----------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Interface connector U with wrap posts 1 x 1 mm | 24                 | 09 26 024 2981 |         | <p>Performance level 1 acc. to IEC 60 603-2</p> <p>24</p> <p>09 26 024 2981</p> <p>Contact arrangement<br/>View from termination side</p> |
| Mounting example                               |                    |                |         | <p>M 3 x 8<br/>DIN EN ISO 1207</p> <p>A-B</p>                                                                                             |

**DIN Power  
to 6 A**

Number of contacts

max. 24




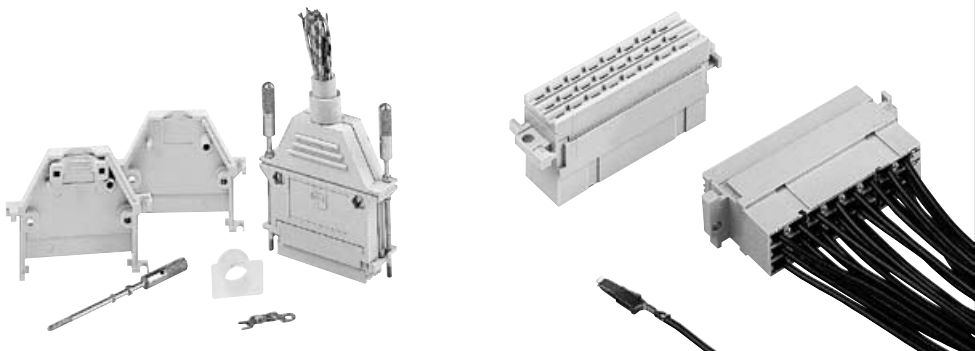



Female connectors

DIN Power  
to 6 A

| Identification                                                                                                                                                                                                                      | Number of contacts | Part No.       | Drawing | Dimensions in mm |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|---------|------------------|
| <p>Female connector for crimp contacts</p> <p>Order contacts separately see page 02.29</p>                                                                                                                                          | 24                 | 09 26 024 3201 |         |                  |
| <p>Shell housing A with integrated fixing screws</p> <p>Supplied with:</p> <p>Shell 2x</p> <p>Locking screw 2x</p> <p>Screw M3x10 2x</p> <p>Nut M3 2x</p> <p>Screw BZ 2.9x9.5 2x</p> <p>Cable clamp 1x</p> <p>Tension relief 1x</p> |                    | 09 26 024 0401 |         |                  |
| <p>Open hood</p> <p>Supplied with:</p> <p>Open hood 1x</p> <p>Locking screw 2x</p> <p>Screw BZ 2.2x9.5 2x</p> <p>Cable tie 1x</p>                                                                                                   |                    | 09 26 000 9901 |         |                  |

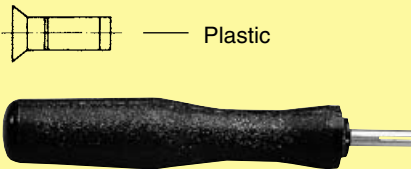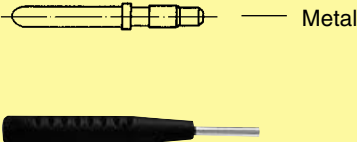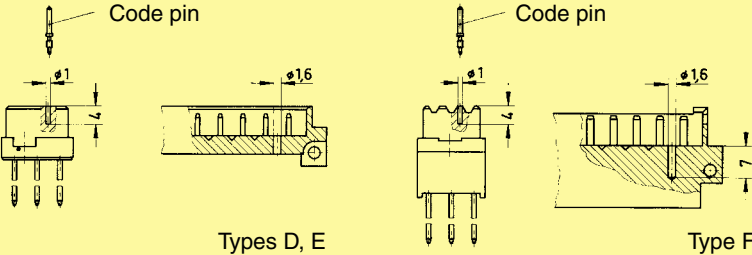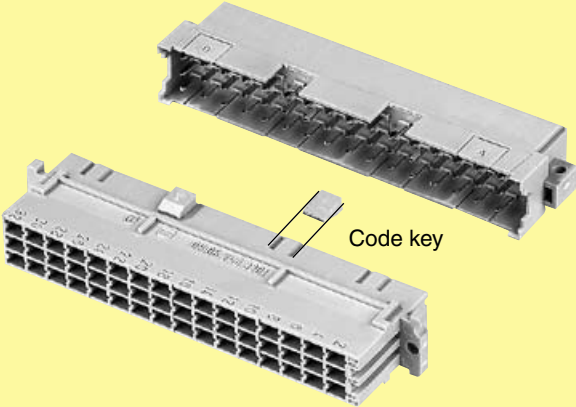

| Identification                                                        | Part No.                                                                                                                           | Drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Dimensions in mm |
|-----------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <b>Coding system <u>with</u> contact loss</b>                         | <b>Code pin for types D, E, F, FM, 2F</b><br><br>09 04 000 9908<br><br><b>Removal tool for male contacts</b><br><br>09 99 000 0038 | <p>To avoid accidental and incorrect mating of adjacent connectors a coding system is required. The coding is achieved by means of a code pin which is inserted into the selected chamber of the female connector (the contact cavity must be filled with a female contact!). The opposite male contact must be removed with the help of the specially designed tool.</p>                                                                                                                 |                  |
| <b>Coding system <u>without</u> contact loss</b><br><br>with code pin | <b>Code pin</b><br>09 06 000 9950<br><br><b>Insertion tool</b><br>09 99 000 0103                                                   | <p>With the aid of the marked indents between the contact rows of the male connector a hole has to be drilled at the desired position (also see drawing). The code pin can then be inserted into the corresponding cavity of the female connector by means of the insertion tool. This coding system is available only for the types D, E, F and interface connectors I</p>  <p>Mounting example</p>  |                  |
| shroud coding<br><br>Type F                                           | <b>Code key</b><br>09 06 001 9919                                                                                                  | <p>Insert the code key into one of the keyways of the female connector as shown in the drawing. Break out the corresponding area of the male shroud. Connectors coded this way can only be applied in a minimum rack spacing of 20.32 mm.</p>                                                                                                                                                                                                                                           |                  |
| Tool for breaking out the coding area of the male shroud              | 09 99 000 0242                                                                                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                  |
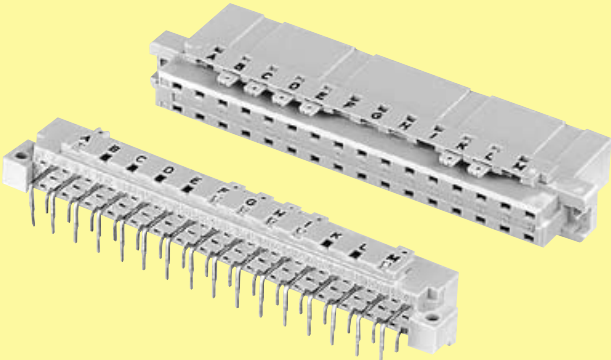
| Identification                                       | Part No.                                                                                                                | Drawing                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Dimensions in mm |
|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| <p>Coding system<br/><u>without</u> contact loss</p> | <p>Male and<br/>female<br/>connectors</p> <p>Types<br/>B, C, D and E</p> <p>see product pages<br/>or<br/>on request</p> | <p>To avoid accidental and incorrect mating of adjacent connectors a coding system is required. This coding system is an integral part of both male and female connectors. A comb with 12 coding pins, which is supplied under a single part number, allows over 900 coding variations. The pins are to be locked into the male and female connectors.</p> <p>The connectors with the integrated coding facility are supplied for types B, C, D and E and are available for all variants.</p> <p>Please contact us.</p>  |                  |
| <p>Coding pins</p> <p>Mounting example</p>           | <p>12 pins<br/>on a comb</p> <p>09 02 000 9928</p>                                                                      |  <p>Technical drawings of connector types B, C, D, and E showing pin layouts and dimensions.</p> <p>Dimensions shown in drawings:</p> <ul style="list-style-type: none"><li>Pin pitch: 2.54 mm</li><li>Pin diameter: 0.8 mm</li><li>Pin length: 12.7 mm</li><li>Pin spacing: 15.24 mm</li><li>Pin offset: 15.24 mm</li><li>Pin offset: 15.24 mm</li><li>Pin offset: 15.24 mm</li><li>Pin offset: 20.32 mm</li><li>Pin offset: 27 mm</li><li>Pin offset: 39 mm</li><li>Pin offset: 11 x 6 = 66 mm</li></ul>              |                  |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А