



# BIPOLAR ANALOG INTEGRATED CIRCUIT

# UPC3224TB

## 5 V, SILICON MMIC WIDEBAND AMPLIFIER

### DESCRIPTION

The  $\mu$ PC3224TB is a silicon monolithic IC designed as IF amplifier for DBS tuners. This IC is manufactured using our 30 GHz  $f_{max}$  UHS0 (Ultra High Speed Process) silicon bipolar process.

### FEATURES

- Wideband response :  $f_u = 3.2$  GHz TYP. @ 3 dB bandwidth
- Low current :  $I_{CC} = 9.0$  mA TYP.
- Power gain :  $G_P = 21.5$  dB TYP. @  $f = 1.0$  GHz  
:  $G_P = 21.5$  dB TYP. @  $f = 2.2$  GHz
- Supply voltage :  $V_{CC} = 4.5$  to  $5.5$  V
- Port impedance : input/output  $50 \Omega$

### APPLICATION

- IF amplifiers in DBS converters etc.

### ORDERING INFORMATION (Solder Contains Lead)

Part Number	Package	Marking	Supplying Form
$\mu$ PC3224TB-E3	6-pin super minimold	C3K	<ul style="list-style-type: none"><li>• Embossed tape 8 mm wide</li><li>• 1, 2, 3 pins face the perforation side of tape</li><li>• Qty 3 kpcs/reel</li></ul>

### ORDERING INFORMATION (Pb-Free)

Part Number	Package	Marking	Supplying Form
$\mu$ PC3224TB-E3-A	6-pin super minimold	C3K	<ul style="list-style-type: none"><li>• Embossed tape 8 mm wide</li><li>• 1, 2, 3 pins face the perforation side of tape</li><li>• Qty 3 kpcs/reel</li></ul>



**Remark** To order evaluation samples, contact your nearby sales office.

Part number for sample order:  $\mu$ PC3224TB-A

**Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge**

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

**PIN CONNECTIONS**



Pin No.	Pin Name
1	INPUT
2	GND
3	GND
4	OUTPUT
5	GND
6	V <sub>cc</sub>

**PRODUCT LINE-UP OF 5 V-BIAS SILICON MMIC MEDIUM WIDEBAND AMPLIFIER**  
 (T<sub>A</sub> = +25°C, f = 1 GHz, V<sub>cc</sub> = V<sub>out</sub> = 5.0 V, Z<sub>s</sub> = Z<sub>L</sub> = 50 Ω)

Part No.	f <sub>u</sub> (GHz)	P <sub>O(sat)</sub> (dBm)	G <sub>P</sub> (dB)	NF (dB)	I <sub>cc</sub> (mA)	Package	Marking
μPC2711TB	2.9	+1.0	13	5.0	12	6-pin super minimold	C1G
μPC2712TB	2.6	+3.0	20	4.5	12		C1H
μPC3215TB <sup>Note</sup>	2.9	+3.5	20.5	2.3	14		C3H
μPC3224TB	3.2	+4.0	21.5	4.3	9.0		C3K

**Note** μPC3215TB is f = 1.5 GHz

**Remark** Typical performance. Please refer to **ELECTRICAL CHARACTERISTICS** in detail.

**PIN EXPLANATIONS**

PIN No.	Pin Name	Applied Voltage (V)	Pin Voltage (V) Note	Function and Applications
1	INPUT	–	0.91	Signal input pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. A multi-feedback circuits is designed to cancel the deviations of $h_{FE}$ and resistance. This pin must be coupled to signal source with capacitor for DC cut.
4	OUTPUT	–	4.42	Signal output pin. A internal matching circuit, configured with resistors, enables 50 Ω connection over a wide band. This pin must be coupled to next stage with capacitor for DC cut.
6	Vcc	4.5 to 5.5	–	Power supply pin. This pin should be externally equipped with bypass capacitor to minimize its impedance.
2 3 5	GND	0	–	Ground pin. This pin should be connected to system ground with minimum inductance. Ground pattern on the board should be formed as wide as possible. All the ground pins must be connected together with wide ground pattern to decrease impedance difference.

**Note** Pin Voltage is measured at Vcc = 5.0 V

**ABSOLUTE MAXIMUM RATINGS**

Parameter	Symbol	Conditions	Ratings	Unit
Supply Voltage	V <sub>CC</sub>	T <sub>A</sub> = +25°C	6.0	V
Total Circuit Current	I <sub>CC</sub>	T <sub>A</sub> = +25°C	25	mA
Power Dissipation	P <sub>D</sub>	T <sub>A</sub> = +85°C <b>Note</b>	270	mW
Operating Ambient Temperature	T <sub>A</sub>		-40 to +85	°C
Storage Temperature	T <sub>stg</sub>		-55 to +150	°C
Input Power	P <sub>in</sub>	T <sub>A</sub> = +25°C	+10	dBm

**Note** Mounted on double-sided copper-clad 50 × 50 × 1.6 mm epoxy glass PWB

**RECOMMENDED OPERATING RANGE**

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Supply Voltage	V <sub>CC</sub>		4.5	5.0	5.5	V
Operating Ambient Temperature	T <sub>A</sub>		-40	+25	+85	°C


**ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = +25°C, V<sub>CC</sub> = 5.0 V, Z<sub>S</sub> = Z<sub>L</sub> = 50 Ω)**

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Circuit Current	I <sub>CC</sub>	No input signal	7.0	9.0	12.0	mA
Power Gain	G <sub>P</sub>	f = 1.0 GHz, P <sub>in</sub> = -30 dBm	19.0	21.5	24.0	dB
		f = 2.2 GHz, P <sub>in</sub> = -30 dBm	18.5	21.5	24.5	
Saturated Output Power	P <sub>O(sat)</sub>	f = 1.0 GHz, P <sub>in</sub> = -5 dBm	+1.5	+4.0	-	dBm
		f = 2.2 GHz, P <sub>in</sub> = -5 dBm	-1.5	+1.5	-	
Gain 1 dB Compression Output Power	P <sub>O(1 dB)</sub>	f = 1.0 GHz	-6.5	-3.5	-	dBm
		f = 2.2 GHz	-8.5	-5.5	-	
Noise Figure	NF	f = 1.0 GHz	-	4.3	5.8	dB
		f = 2.2 GHz	-	4.3	5.8	
Upper Limit Operating Frequency	f <sub>u</sub>	3 dB down below flat gain at f = 0.1 GHz	2.8	3.2	-	GHz
Isolation	ISL	f = 1.0 GHz, P <sub>in</sub> = -30 dBm	35.0	40.0	-	dB
		f = 2.2 GHz, P <sub>in</sub> = -30 dBm	37.0	42.0	-	
Input Return Loss	RL <sub>in</sub>	f = 1.0 GHz, P <sub>in</sub> = -30 dBm	9.0	12.0	-	dB
		f = 2.2 GHz, P <sub>in</sub> = -30 dBm	10.0	14.0	-	
Output Return Loss	RL <sub>out</sub>	f = 1.0 GHz, P <sub>in</sub> = -30 dBm	11.0	17.0	-	dB
		f = 2.2 GHz, P <sub>in</sub> = -30 dBm	8.0	12.0	-	
Gain Flatness	ΔG <sub>P</sub>	f = 0.1 to 2.2 GHz	-	±0.8	-	dB

**OTHER CHARACTERISTICS, FOR REFERENCE PURPOSES ONLY**  
**(T<sub>A</sub> = +25°C, V<sub>CC</sub> = 5.0 V, Z<sub>S</sub> = Z<sub>L</sub> = 50 Ω)**

Parameter	Symbol	Test Conditions	Reference Value	Unit
Output Intercept Point	OIP <sub>3</sub>	f = 1.0 GHz	+7.0	dBm
		f = 2.2 GHz	+5.5	

TEST CIRCUIT

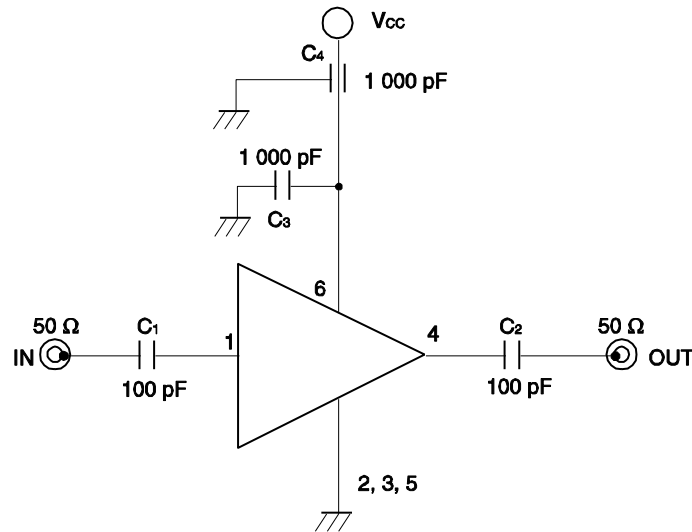

The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

COMPONENTS OF TEST CIRCUIT FOR MEASURING ELECTRICAL CHARACTERISTICS

	Type	Value
C <sub>1</sub> , C <sub>2</sub>	Chip Capacitor	100 pF
C <sub>3</sub>	Chip Capacitor	1 000 pF
C <sub>4</sub>	Feed-through Capacitor	1 000 pF

CAPACITORS FOR THE V<sub>CC</sub>, INPUT AND OUTPUT PINS


Capacitors of 1000 pF are recommendable as the bypass capacitor for the V<sub>CC</sub> pin and the coupling capacitors for the input and output pins.

The bypass capacitor connected to the V<sub>CC</sub> pin is used to minimize ground impedance of V<sub>CC</sub> pin. So, stable bias can be supplied against V<sub>CC</sub> fluctuation.

The coupling capacitors, connected to the input and output pins, are used to cut the DC and minimize RF serial impedance. Their capacitances are therefore selected as lower impedance against a 50 Ω load. The capacitors thus perform as high pass filters, suppressing low frequencies to DC.

To obtain a flat gain from 100 MHz upwards, 1 000 pF capacitors are used in the test circuit. In the case of under 10 MHz operation, increase the value of coupling capacitor such as 10 000 pF. Because the coupling capacitors are determined by equation,  $C = 1/(2 \pi Rfc)$ .

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

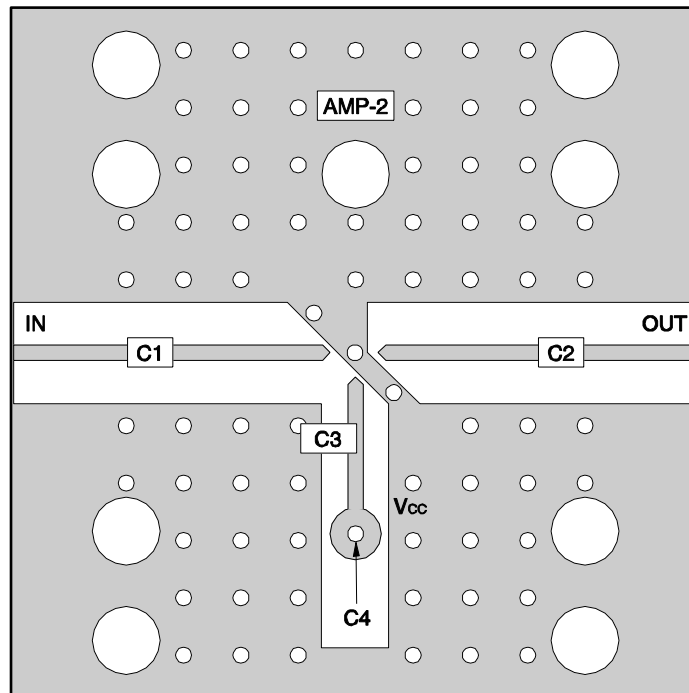

COMPONENT LIST


	Value
C1, C2	100 pF
C3, C4	1 000 pF

Notes


1. 30 × 30 × 0.4 mm double sided copper clad polyimide board.
2. Back side: GND pattern
3. Solder plated on pattern
4. ◦○: Through holes

TYPICAL CHARACTERISTICS ( $T_A = +25^\circ\text{C}$ , unless otherwise specified)


CIRCUIT CURRENT vs. SUPPLY VOLTAGE

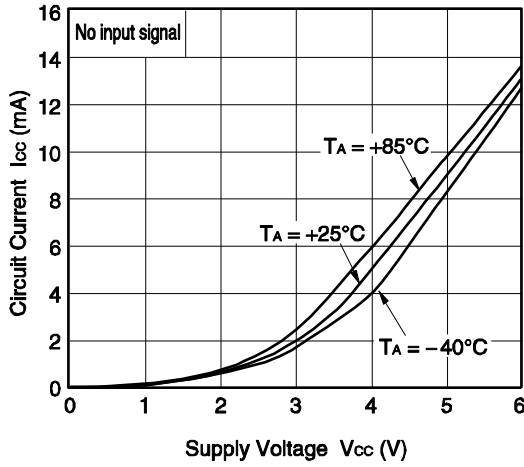


CIRCUIT CURRENT vs. OPERATING AMBIENT TEMPERATURE

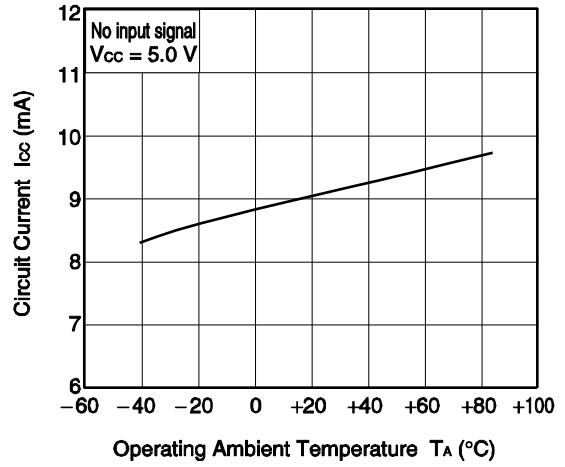


POWER GAIN vs. FREQUENCY

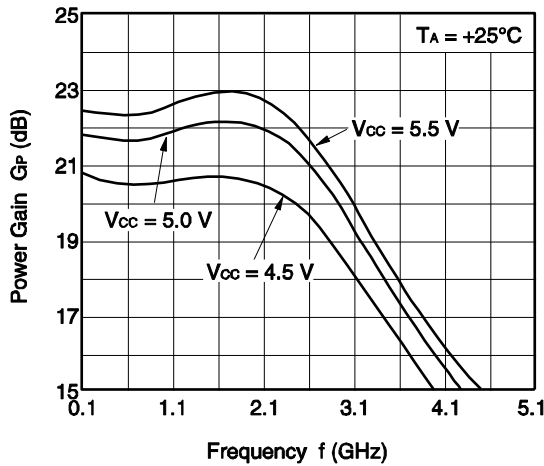


INPUT RETURN LOSS vs. FREQUENCY

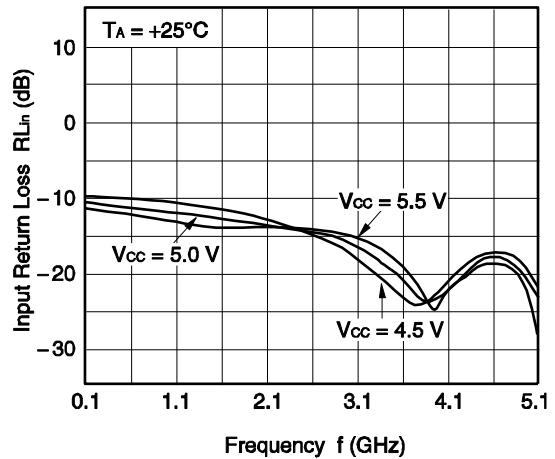

ISOLATION vs. FREQUENCY

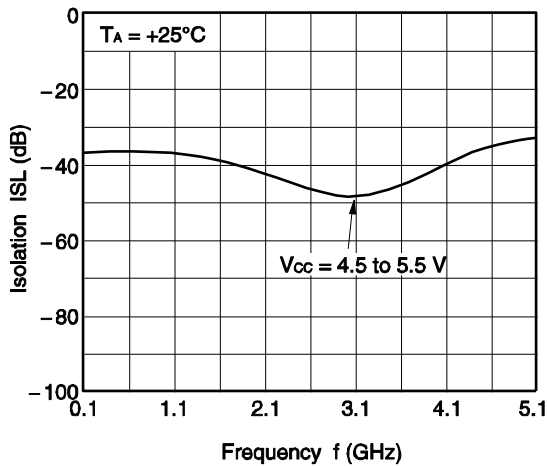


OUTPUT RETURN LOSS vs. FREQUENCY

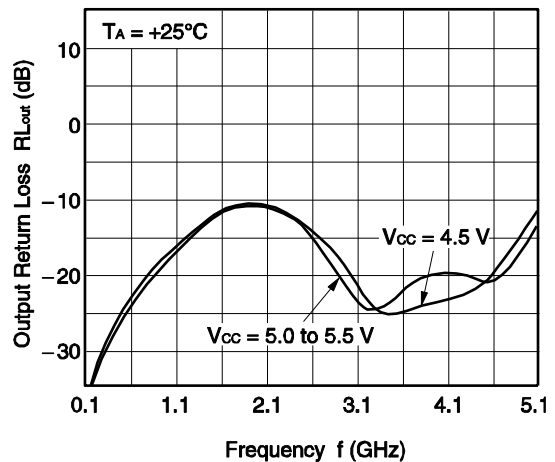


Remark The graphs indicate nominal characteristics.




POWER GAIN vs. FREQUENCY

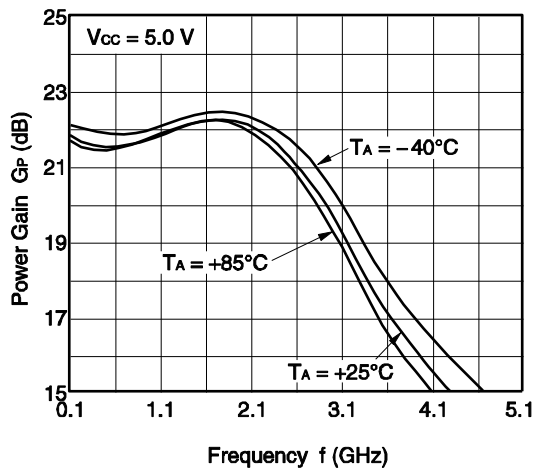


INPUT RETURN LOSS vs. FREQUENCY

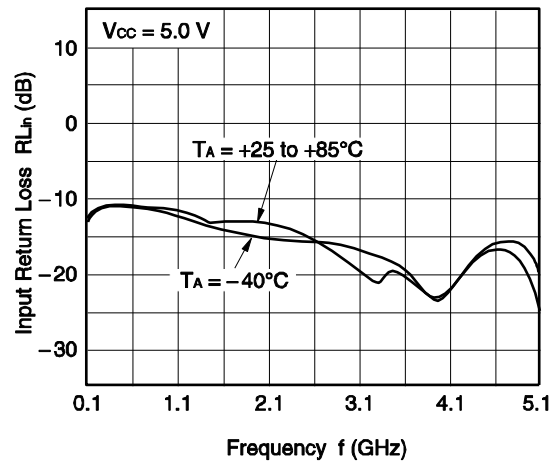

ISOLATION vs. FREQUENCY

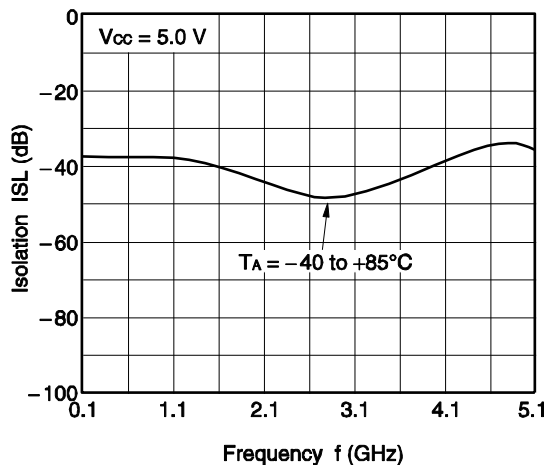


OUTPUT RETURN LOSS vs. FREQUENCY

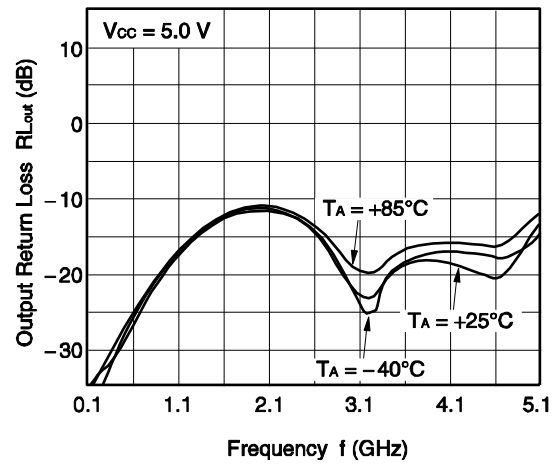


Remark The graphs indicate nominal characteristics.


OUTPUT POWER vs. INPUT POWER

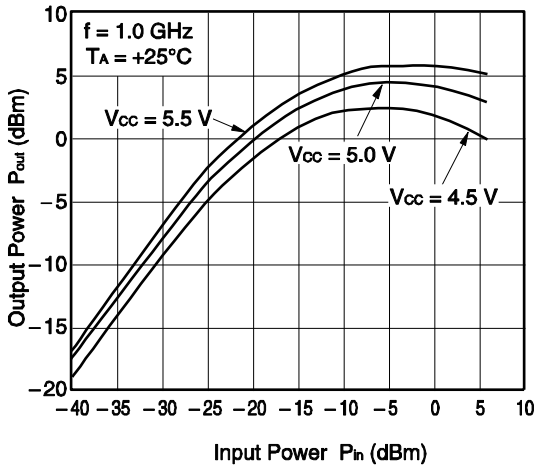


OUTPUT POWER vs. INPUT POWER

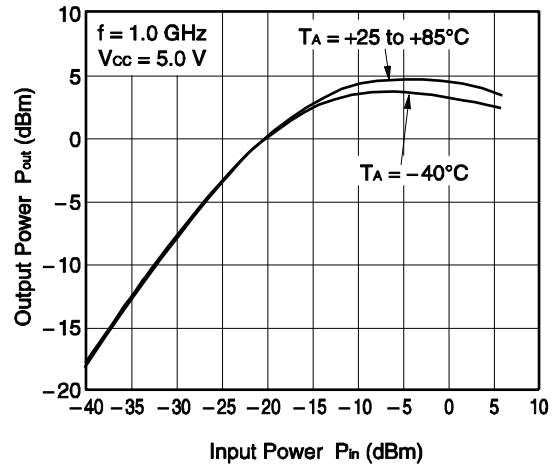


OUTPUT POWER vs. INPUT POWER

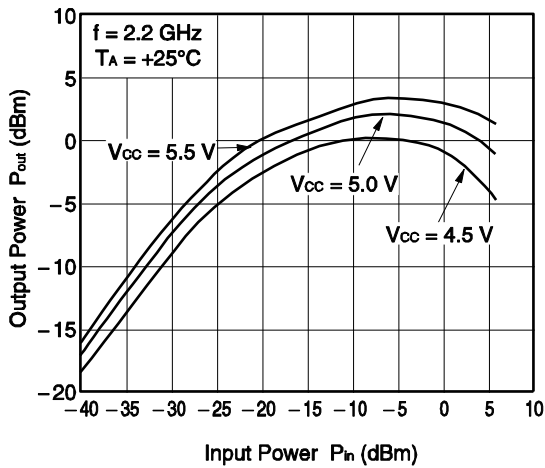


OUTPUT POWER vs. INPUT POWER

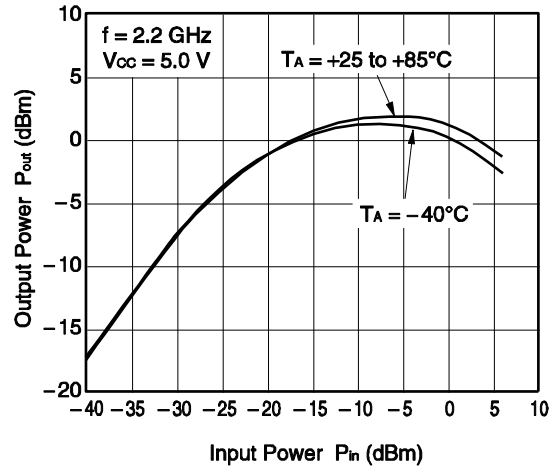

OUTPUT POWER (2 tones), IM3 vs. INPUT POWER

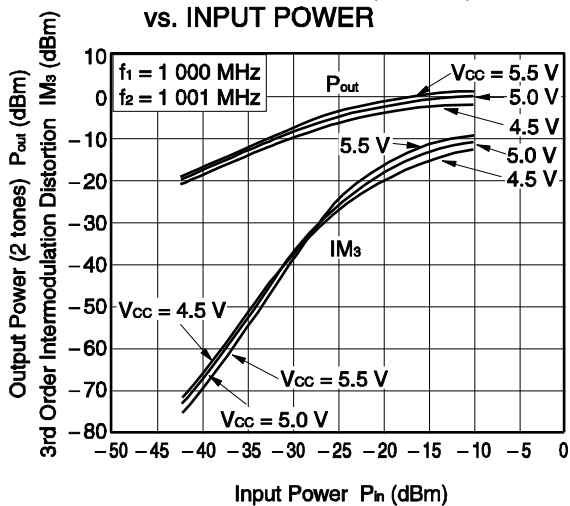


OUTPUT POWER (2 tones), IM3 vs. INPUT POWER

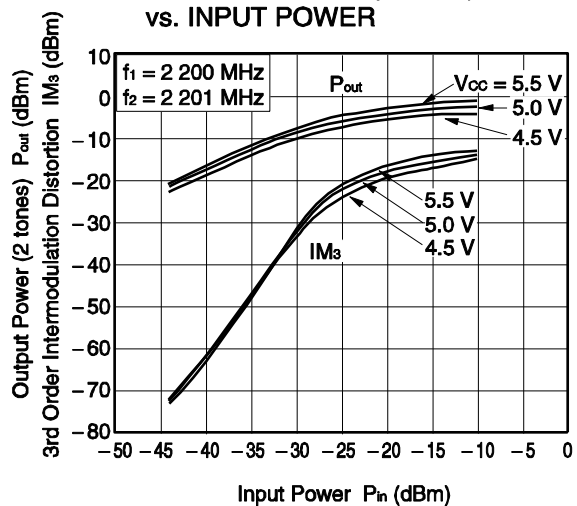


Remark The graphs indicate nominal characteristics.

**S-PARAMETERS ( $T_A = +25^\circ\text{C}$ ,  $V_{CC} = 5.0\text{ V}$ )**

**S<sub>11</sub>-FREQUENCY**

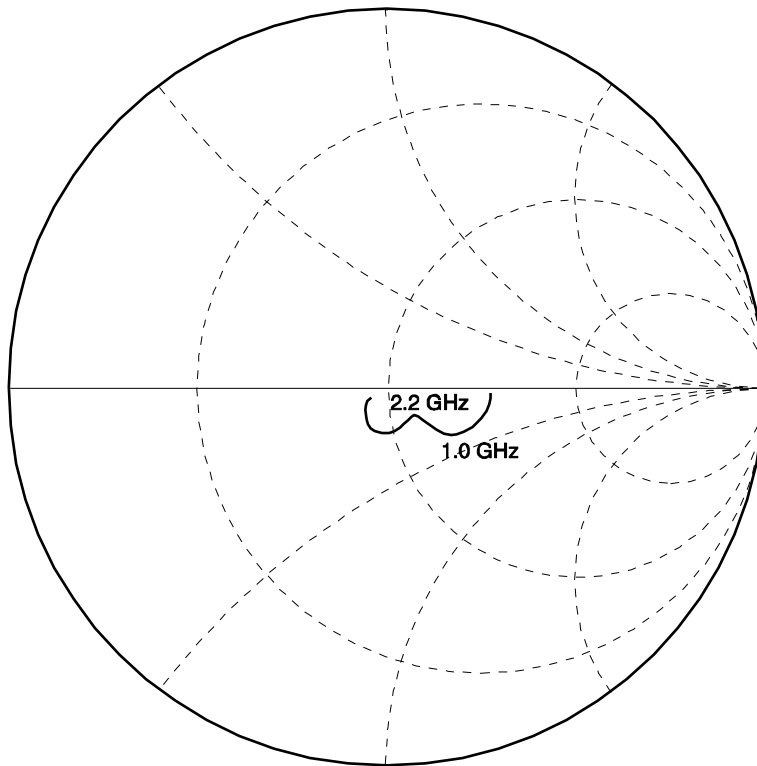


**S<sub>22</sub>-FREQUENCY**

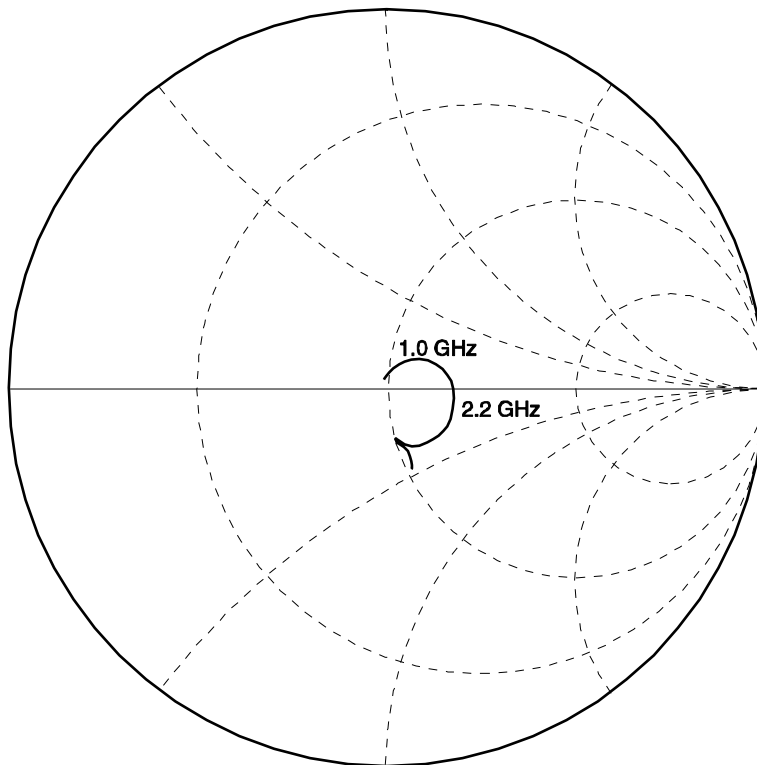

**PACKAGE DIMENSIONS**

**6-PIN SUPER MINIMOLD (UNIT: mm)**

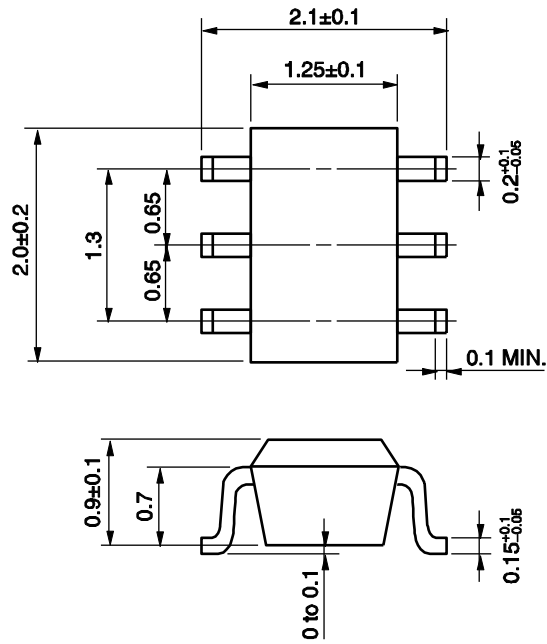

**NOTES ON CORRECT USE**

- (1) Observe precautions for handling because of electro-static sensitive devices.
- (2) Form a ground pattern as widely as possible to minimize ground impedance (to prevent undesired oscillation).  
All the ground pins must be connected together with wide ground pattern to decrease impedance difference.
- (3) The bypass capacitor should be attached to V<sub>cc</sub> line.
- (4) The DC cut capacitor must be each attached to input and output pin.

**RECOMMENDED SOLDERING CONDITIONS**

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
Wave Soldering	Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	WS260
Partial Heating	Peak temperature (pin temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

**Caution Do not use different soldering methods together (except for partial heating).**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А