

# DATA SHEET

**74ALVCH16841**

20-bit bus interface D-type latch (3-State)

Product specification

1998 Jul 27

IC24 Data Handbook

## 20-bit bus interface D-type latch (3-State)

## 74ALVCH16841

## FEATURES

- Wide supply voltage range of 1.2V to 3.6V
- Complies with JEDEC standard no. 8-1A
- Wide supply voltage range of 1.2V to 3.6V
- CMOS low power consumption
- Direct interface with TTL levels
- MULTIBYTE™ flow-through standard pin-out architecture
- Low inductance multiple  $V_{CC}$  and GND pins for minimum noise and ground bounce
- Current drive  $\pm 24$  mA at 3.0 V
- All inputs have bus hold circuitry
- Output drive capability 50 $\Omega$  transmission lines @ 85°C
- 3-State non-inverting outputs for bus oriented applications


## DESCRIPTION

The 74ALVCH16841 has two 10-bit D-type latch featuring separate D-type inputs for each latch and 3-State outputs for bus oriented applications. The two sections of each register are controlled independently by the latch enable ( $nLE$ ) and output enable ( $nOE$ ) control gates.

When  $nOE$  is LOW, the data in the registers appears at the outputs. When  $nOE$  is High the outputs are in High-impedance OFF state. Operation of the  $nOE$  input does not affect the state of the flip-flops.

The 74ALVCH16841 has active bus hold circuitry which is provided to hold unused or floating data inputs at a valid logic level. This feature eliminates the need for external pull-up or pull-down resistors.

## PIN CONFIGURATION

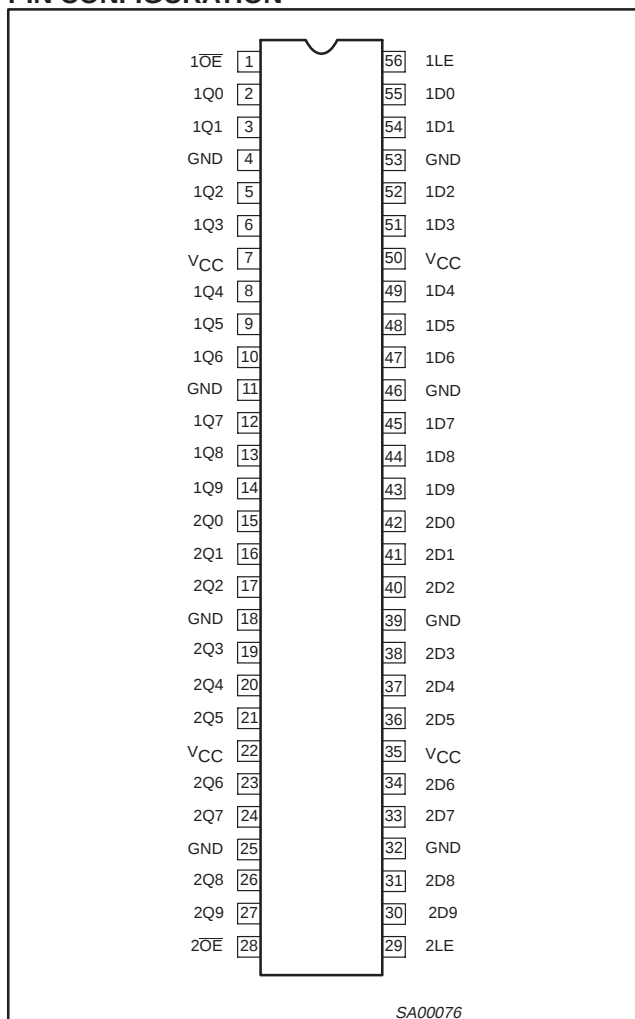

## QUICK REFERENCE DATA

GND = 0V;  $T_{amb} = 25^{\circ}\text{C}$ ;  $t_r = t_f \leq 2.5\text{ns}$

| SYMBOL            | PARAMETER                                | CONDITIONS                                                                                   |                  | TYPICAL    | UNIT |
|-------------------|------------------------------------------|----------------------------------------------------------------------------------------------|------------------|------------|------|
| $t_{PHL}/t_{PLH}$ | Propagation delay<br>$nD_n$ to $nQ_n$    | $V_{CC} = 2.5\text{V}$ , $C_L = 30\text{pF}$<br>$V_{CC} = 3.3\text{V}$ , $C_L = 50\text{pF}$ |                  | 2.5<br>2.4 | ns   |
| $t_{PHL}/t_{PLH}$ | Propagation delay<br>$nLE$ to $nQ_n$     | $V_{CC} = 2.5\text{V}$ , $C_L = 30\text{pF}$<br>$V_{CC} = 3.3\text{V}$ , $C_L = 50\text{pF}$ |                  | 2.5<br>2.4 | ns   |
| $C_I$             | Input capacitance                        |                                                                                              |                  | 5.0        | pF   |
| $C_{PD}$          | Power dissipation capacitance per buffer | $V_I = \text{GND to } V_{CC}^1$                                                              | Outputs enabled  | 19         | pF   |
|                   |                                          |                                                                                              | Outputs disabled | 3          |      |

## NOTES:

- $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ):  
 $P_D = C_{PD} \times V_{CC}^2 \times f_i + \Sigma (C_L \times V_{CC}^2 \times f_o)$  where:  $f_i$  = input frequency in MHz;  $C_L$  = output load capacitance in pF;  
 $f_o$  = output frequency in MHz;  $V_{CC}$  = supply voltage in V;  $\Sigma (C_L \times V_{CC}^2 \times f_o)$  = sum of outputs.

## ORDERING INFORMATION

| PACKAGES                     | TEMPERATURE RANGE                              | OUTSIDE NORTH AMERICA | NORTH AMERICA | DWG NUMBER |
|------------------------------|------------------------------------------------|-----------------------|---------------|------------|
| 56-Pin Plastic TSSOP Type II | $-40^{\circ}\text{C}$ to $+85^{\circ}\text{C}$ | 74ALVCH16841 DGG      | ACH16841 DGG  | SOT364-1   |

20-bit bus interface D-type latch (3-State)

74ALVCH16841

PIN DESCRIPTION


| PIN NUMBER                             | SYMBOL    | FUNCTION                          |
|----------------------------------------|-----------|-----------------------------------|
| 1                                      | 1OE       | Output enable inputs (active-LOW) |
| 56                                     | 1LE       | Latch enable inputs (active HIGH) |
| 55, 54, 52, 51, 49, 48, 47, 45, 44, 43 | 1D0 – 1D9 | Data inputs                       |
| 2, 3, 5, 6, 8, 9, 10, 12, 13, 14       | 1Q0 – 1Q9 | Data outputs                      |
| 4, 11, 18, 25, 32, 39, 46, 53          | GND       | Ground (0V)                       |
| 7, 22, 35, 50                          | VCC       | Positive supply voltage           |
| 28                                     | 2OE       | Output enable inputs (active-LOW) |
| 29                                     | 2LE       | Latch enable inputs (active HIGH) |
| 42, 41, 40, 38, 37, 36, 34, 33, 31, 30 | 2D0 – 2D9 | Data inputs                       |
| 15, 16, 17, 19, 20, 21, 23, 24, 26, 27 | 2Q0 – 2Q9 | Data outputs                      |

FUNCTION TABLE


| INPUTS |    |    | OUTPUT         |
|--------|----|----|----------------|
| nOE    | LE | Dx | Q              |
| L      | H  | L  | L              |
| L      | H  | H  | H              |
| L      | L  | X  | Q <sub>0</sub> |
| H      | X  | X  | Z              |

H = High voltage level  
L = Low voltage level  
X = Don't care  
Z = High impedance "off" state


LOGIC SYMBOL

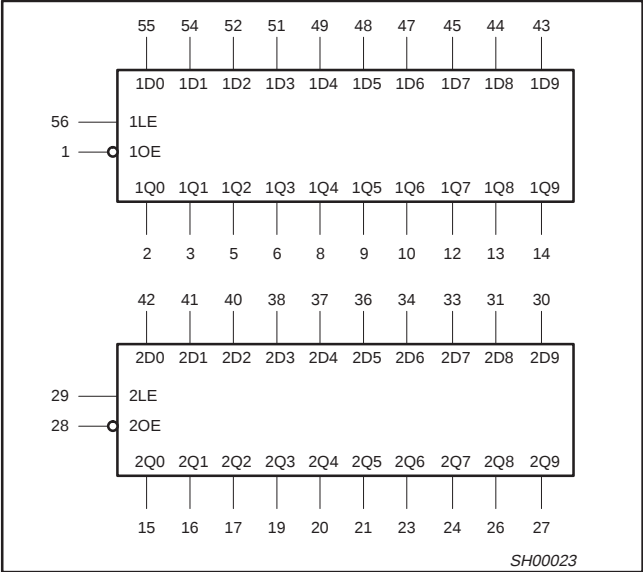

LOGIC SYMBOL (IEEE/IEC)

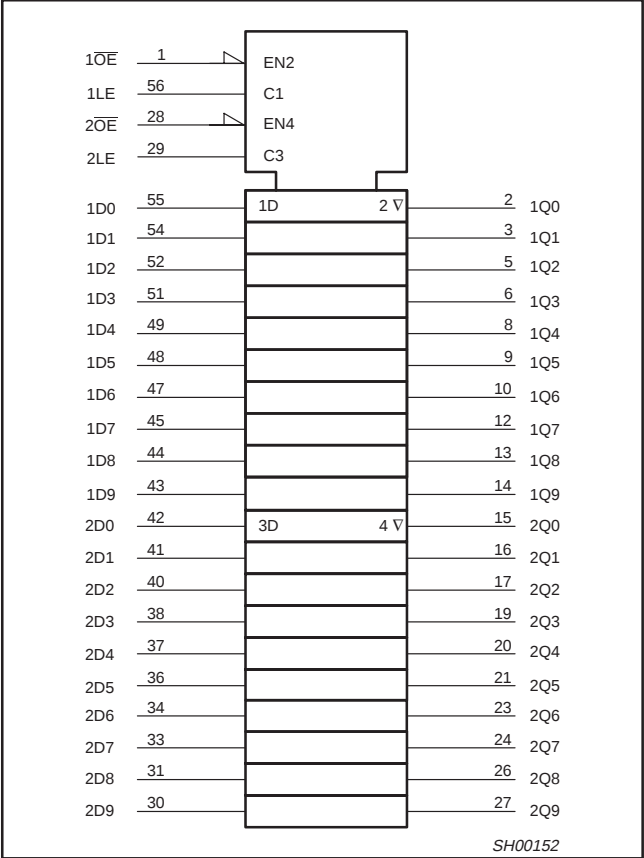


LOGIC DIAGRAM

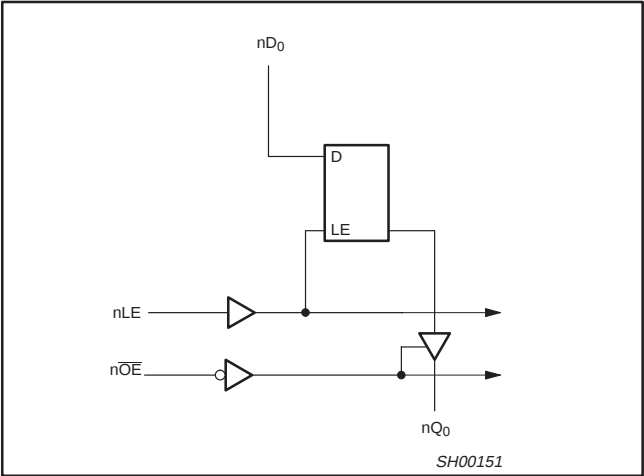

### 20-bit bus interface D-type latch (3-State)

74ALVCH16841

## BUS HOLD CIRCUIT

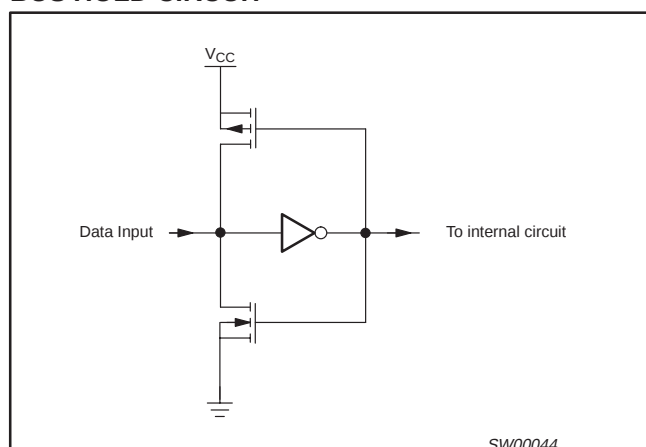

## RECOMMENDED OPERATING CONDITIONS

| SYMBOL                          | PARAMETER                                                                     | CONDITIONS                                                     | MIN    | MAX             | UNIT |
|---------------------------------|-------------------------------------------------------------------------------|----------------------------------------------------------------|--------|-----------------|------|
| V <sub>CC</sub>                 | DC supply voltage 2.5V range (for max. speed performance @ 30 pF output load) |                                                                | 2.3    | 2.7             | V    |
|                                 | DC supply voltage 3.3V range (for max. speed performance @ 50 pF output load) |                                                                | 3.0    | 3.6             |      |
| V <sub>I</sub>                  | DC Input voltage range                                                        |                                                                | 0      | V <sub>CC</sub> | V    |
| V <sub>O</sub>                  | DC output voltage range                                                       |                                                                | 0      | V <sub>CC</sub> | V    |
| T <sub>amb</sub>                | Operating free-air temperature range                                          |                                                                | −40    | +85             | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input rise and fall times                                                     | V <sub>CC</sub> = 2.3 to 3.0V<br>V <sub>CC</sub> = 3.0 to 3.6V | 0<br>0 | 20<br>10        | ns/V |

### ABSOLUTE MAXIMUM RATINGS

In accordance with the Absolute Maximum Rating System (IEC 134)  
 Voltages are referenced to GND (ground = 0V)

| SYMBOL            | PARAMETER                                                                                             | CONDITIONS                                                                                                                     | RATING                 | UNIT |
|-------------------|-------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|------------------------|------|
| $V_{CC}$          | DC supply voltage                                                                                     |                                                                                                                                | −0.5 to +4.6           | V    |
| $I_{IK}$          | DC input diode current                                                                                | $V_I < 0$                                                                                                                      | −50                    | mA   |
| $V_I$             | DC input voltage                                                                                      | For control pins <sup>1</sup>                                                                                                  | −0.5 to +4.6           | V    |
|                   |                                                                                                       | For data inputs <sup>1</sup>                                                                                                   | −0.5 to $V_{CC} + 0.5$ |      |
| $I_{OK}$          | DC output diode current                                                                               | $V_O > V_{CC}$ or $V_O < 0$                                                                                                    | ± 50                   | mA   |
| $V_O$             | DC output voltage                                                                                     | Note 1                                                                                                                         | −0.5 to $V_{CC} + 0.5$ | V    |
| $I_O$             | DC output source or sink current                                                                      | $V_O = 0$ to $V_{CC}$                                                                                                          | ± 50                   | mA   |
| $I_{GND}, I_{CC}$ | DC $V_{CC}$ or GND current                                                                            |                                                                                                                                | ± 100                  | mA   |
| $T_{stg}$         | Storage temperature range                                                                             |                                                                                                                                | −65 to +150            | °C   |
| $P_{TOT}$         | Power dissipation per package<br>—plastic medium-shrink (SSOP)<br>—plastic thin-medium-shrink (TSSOP) | For temperature range: −40 to +125 °C<br>above +55°C derate linearly with 11.3 mW/K<br>above +55°C derate linearly with 8 mW/K | 850<br>600             | mW   |

**NOTE:**

1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

## 20-bit bus interface D-type latch (3-State)

## 74ALVCH16841

## DC ELECTRICAL CHARACTERISTICS

Over recommended operating conditions. Voltage are referenced to GND (ground = 0 V).

| SYMBOL                         | PARAMETER                           | TEST CONDITIONS                                                                                                                 | LIMITS                |                        |      | UNIT |
|--------------------------------|-------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------|------|------|
|                                |                                     |                                                                                                                                 | Temp = -40°C to +85°C |                        |      |      |
|                                |                                     |                                                                                                                                 | MIN                   | TYP <sup>1</sup>       | MAX  |      |
| V <sub>IH</sub>                | HIGH level Input voltage            | V <sub>CC</sub> = 2.3 to 2.7V                                                                                                   | 1.7                   | 1.2                    |      | V    |
|                                |                                     | V <sub>CC</sub> = 2.7 to 3.6V                                                                                                   | 2.0                   | 1.5                    |      |      |
| V <sub>IL</sub>                | LOW level Input voltage             | V <sub>CC</sub> = 2.3 to 2.7V                                                                                                   |                       | 1.2                    | 0.7  | V    |
|                                |                                     | V <sub>CC</sub> = 2.7 to 3.6V                                                                                                   |                       | 1.5                    | 0.8  |      |
| V <sub>OH</sub>                | HIGH level output voltage           | V <sub>CC</sub> = 2.3 to 3.6V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -100μA                    | V <sub>CC</sub> - 0.2 | V <sub>CC</sub>        |      | V    |
|                                |                                     | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -6mA                             | V <sub>CC</sub> - 0.3 | V <sub>CC</sub> - 0.08 |      |      |
|                                |                                     | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -12mA                            | V <sub>CC</sub> - 0.6 | V <sub>CC</sub> - 0.26 |      |      |
|                                |                                     | V <sub>CC</sub> = 2.7V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -12mA                            | V <sub>CC</sub> - 0.5 | V <sub>CC</sub> - 0.14 |      |      |
|                                |                                     | V <sub>CC</sub> = 3.0V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -12mA                            | V <sub>CC</sub> - 0.6 | V <sub>CC</sub> - 0.09 |      |      |
|                                |                                     | V <sub>CC</sub> = 3.0V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = -24mA                            | V <sub>CC</sub> - 1.0 | V <sub>CC</sub> - 0.28 |      |      |
| V <sub>OL</sub>                | LOW level output voltage            | V <sub>CC</sub> = 2.3 to 3.6V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = 100μA                     |                       | GND                    | 0.20 | V    |
|                                |                                     | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = 6mA                              |                       | 0.07                   | 0.40 | V    |
|                                |                                     | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = 12mA                             |                       | 0.15                   | 0.70 | V    |
|                                |                                     | V <sub>CC</sub> = 2.7V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = 12mA                             |                       | 0.14                   | 0.40 |      |
|                                |                                     | V <sub>CC</sub> = 3.0V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; I <sub>O</sub> = 24mA                             |                       | 0.27                   | 0.55 |      |
| I <sub>I</sub>                 | Input leakage current               | V <sub>CC</sub> = 2.3 to 3.6V;<br>V <sub>I</sub> = V <sub>CC</sub> or GND                                                       |                       | 0.1                    | 5    | μA   |
| I <sub>OZ</sub>                | 3-State output OFF-state current    | V <sub>CC</sub> = 2.3 to 3.6V; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ;<br>V <sub>O</sub> = V <sub>CC</sub> or GND |                       | 0.1                    | 10   | μA   |
| I <sub>CC</sub>                | Quiescent supply current            | V <sub>CC</sub> = 2.3 to 3.6V; V <sub>I</sub> = V <sub>CC</sub> or GND; I <sub>O</sub> = 0                                      |                       | 0.2                    | 40   | μA   |
| ΔI <sub>CC</sub>               | Additional quiescent supply current | V <sub>CC</sub> = 2.3V to 3.6V; V <sub>I</sub> = V <sub>CC</sub> - 0.6V; I <sub>O</sub> = 0                                     |                       | 150                    | 750  | μA   |
| I <sub>BHL</sub> <sup>2</sup>  | Bus hold LOW sustaining current     | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = 0.7V                                                                                   | 45                    | —                      |      | μA   |
|                                |                                     | V <sub>CC</sub> = 3.0V; V <sub>I</sub> = 0.8V                                                                                   | 75                    | 150                    |      |      |
| I <sub>BHH</sub> <sup>2</sup>  | Bus hold HIGH sustaining current    | V <sub>CC</sub> = 2.3V; V <sub>I</sub> = 1.7V                                                                                   | -45                   |                        |      | μA   |
|                                |                                     | V <sub>CC</sub> = 3.0V; V <sub>I</sub> = 2.0V                                                                                   | -75                   | -175                   |      |      |
| I <sub>BHLO</sub> <sup>2</sup> | Bus hold LOW overdrive current      | V <sub>CC</sub> = 3.6V                                                                                                          | 500                   |                        |      | μA   |
| I <sub>BHHO</sub> <sup>2</sup> | Bus hold HIGH overdrive current     | V <sub>CC</sub> = 3.6V                                                                                                          | -500                  |                        |      | μA   |

## NOTES:

1. All typical values are at T<sub>amb</sub> = 25°C.
2. Valid for data inputs of bus hold parts.

## 20-bit bus interface D-type latch (3-State)

74ALVCH16841

**AC CHARACTERISTICS FOR  $V_{CC} = 2.3V$  TO  $2.7V$  RANGE**GND = 0V;  $t_r = t_f \leq 2.0ns$ ;  $C_L = 30pF$ 

| SYMBOL                             | PARAMETER                                                          | WAVEFORM | LIMITS                        |                  |     | UNIT |
|------------------------------------|--------------------------------------------------------------------|----------|-------------------------------|------------------|-----|------|
|                                    |                                                                    |          | V <sub>CC</sub> = 2.3 to 2.7V |                  |     |      |
|                                    |                                                                    |          | MIN                           | TYP <sup>1</sup> | MAX |      |
| t <sub>PLH</sub> /t <sub>PHL</sub> | Propagation delay<br>nD <sub>n</sub> to nQ <sub>n</sub>            | 1, 5     | 1.0                           | 2.5              | 5.0 | ns   |
| t <sub>PLH</sub> /t <sub>PHL</sub> | Propagation delay<br>nLE to nQ <sub>n</sub>                        | 2, 5     | 1.0                           | 2.5              | 5.6 | ns   |
| t <sub>PZH</sub> /t <sub>PZL</sub> | 3-State output enable time<br>nOE <sub>n</sub> to nQ <sub>n</sub>  | 4, 5     | 1.0                           | 2.7              | 6.2 | ns   |
| t <sub>PHZ</sub> /t <sub>PLZ</sub> | 3-State output disable time<br>nOE <sub>n</sub> to nQ <sub>n</sub> | 4, 5     | 1.1                           | 2.2              | 5.3 | ns   |
| t <sub>W</sub>                     | nLE pulse width HIGH                                               | 2, 5     | 3.3                           | 1.5              | —   | ns   |
| t <sub>SU</sub>                    | Set up time nD <sub>n</sub> to nLE                                 | 3, 5     | 1.3                           | 0.1              | —   | ns   |
| T <sub>h</sub>                     | Hold time nD <sub>n</sub> to nLE                                   | 3, 5     | 1.4                           | 0.3              | —   | ns   |

**NOTE:**1. All typical values are at  $V_{CC} = 3.3V$  and  $T_{amb} = 25^\circ C$ .**AC CHARACTERISTICS FOR  $V_{CC} = 3.0V$  TO  $3.6V$  RANGE AND  $V_{CC} = 2.7V$** GND = 0V;  $t_r = t_f \leq 2.5ns$ ;  $C_L = 50pF$ 

| SYMBOL                             | PARAMETER                                                          | WAVEFORM | LIMITS                       |                     |     | LIMITS                 |                  |     | UNIT |
|------------------------------------|--------------------------------------------------------------------|----------|------------------------------|---------------------|-----|------------------------|------------------|-----|------|
|                                    |                                                                    |          | V <sub>CC</sub> = 3.3 ± 0.3V |                     |     | V <sub>CC</sub> = 2.7V |                  |     |      |
|                                    |                                                                    |          | MIN                          | TYP <sup>1, 2</sup> | MAX | MIN                    | TYP <sup>1</sup> | MAX |      |
| t <sub>PLH</sub> /t <sub>PHL</sub> | Propagation delay<br>nD <sub>n</sub> to nQ <sub>n</sub>            | 1, 5     | 1.0                          | 2.4                 | 3.9 | 1.0                    | 2.6              | 4.7 | ns   |
| t <sub>PLH</sub> /t <sub>PHL</sub> | Propagation delay<br>nLE to nQ <sub>n</sub>                        | 2, 5     | 1.0                          | 2.4                 | 4.3 | 1.0                    | 2.6              | 5.1 | ns   |
| t <sub>PZH</sub> /t <sub>PZL</sub> | 3-State output enable time<br>nOE <sub>n</sub> to nQ <sub>n</sub>  | 4, 5     | 1.0                          | 2.3                 | 4.9 | 1.0                    | 3.1              | 6.0 | ns   |
| t <sub>PHZ</sub> /t <sub>PLZ</sub> | 3-State output disable time<br>nOE <sub>n</sub> to nQ <sub>n</sub> | 4, 5     | 1.3                          | 2.9                 | 4.1 | 1.3                    | 3.1              | 4.3 | ns   |
| t <sub>W</sub>                     | nLE pulse width HIGH                                               | 2, 5     | 3.3                          | 1.5                 | —   | 3.3                    | 1.5              | —   | ns   |
| t <sub>SU</sub>                    | Set up time nD <sub>n</sub> to nLE                                 | 3, 5     | 1.0                          | 0.6                 | —   | 1.1                    | 0.1              | —   | ns   |
| t <sub>h</sub>                     | Hold time nD <sub>n</sub> to nLE                                   | 3, 5     | 1.4                          | 0.2                 | —   | 1.7                    | 0.2              | —   | ns   |


**NOTES:**1. All typical values are measured  $T_{amb} = 25^\circ C$ .2. Typical value is measured at  $V_{CC} = 3.3V$

20-bit bus interface D-type latch (3-State)


74ALVCH16841

**AC WAVEFORMS FOR  $V_{CC} = 2.3V$  TO  $2.7V$  AND  $V_{CC} < 2.3V$  RANGE**  
 $V_M = 0.5 V_{CC}$   
 $V_X = V_{OL} + 0.15V$   
 $V_Y = V_{OH} - 0.15V$   
 $V_{OL}$  and  $V_{OH}$  are the typical output voltage drop that occur with the output load.


**AC WAVEFORMS FOR  $V_{CC} = 3.0V$  TO  $3.6V$  AND  $V_{CC} = 2.7V$  RANGE**  
 $V_M = 1.5 V$   
 $V_X = V_{OL} + 0.3V$   
 $V_Y = V_{OH} - 0.3V$   
 $V_{OL}$  and  $V_{OH}$  are the typical output voltage drop that occur with the output load.  
 $V_I = 2.7V$   
 $V_I = V_{CC}$

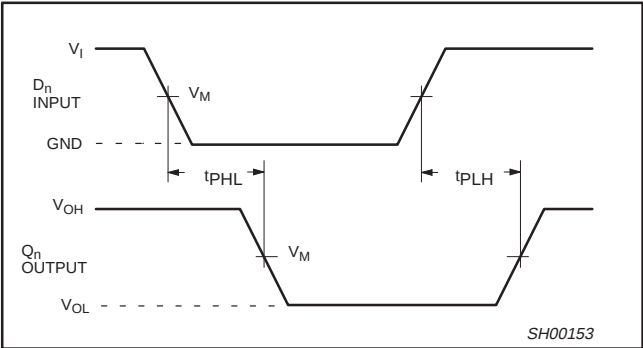


Waveform 1. The input ( $D_n$ ) to output ( $Q_n$ ) propagation delay

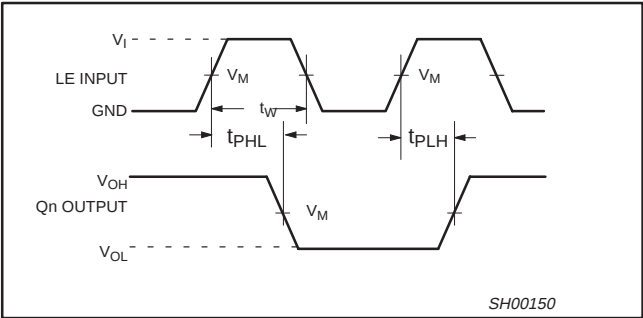

Waveform 2. The latch enable (LE) pulse width, the latch enable input to output ( $Q_n$ ) propagation delay

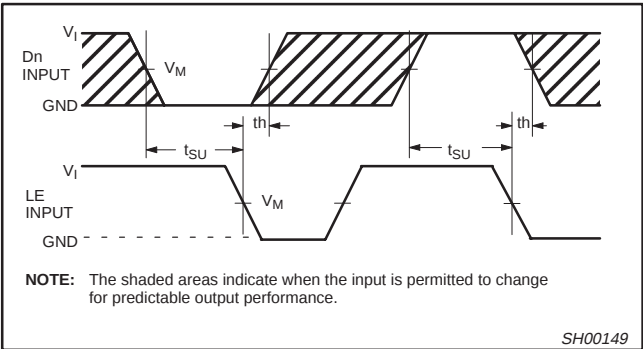


Waveform 3. The data set up and hold times for the  $D_n$  input to the LE input

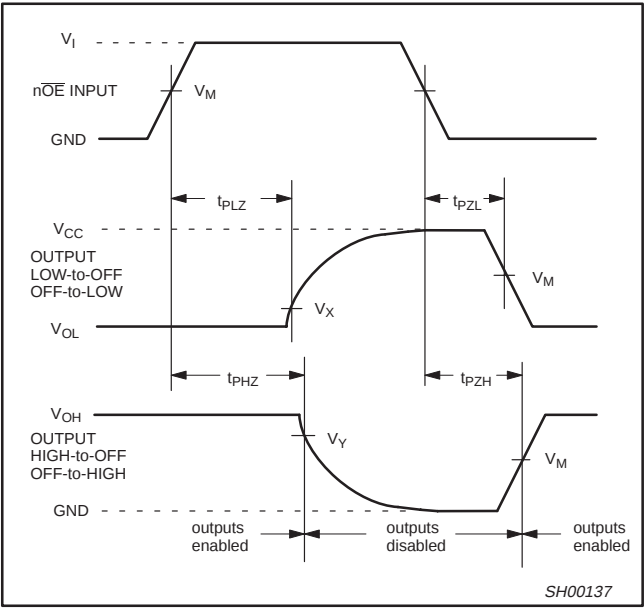

Waveform 4. 3-State enable and disable times

TEST CIRCUIT

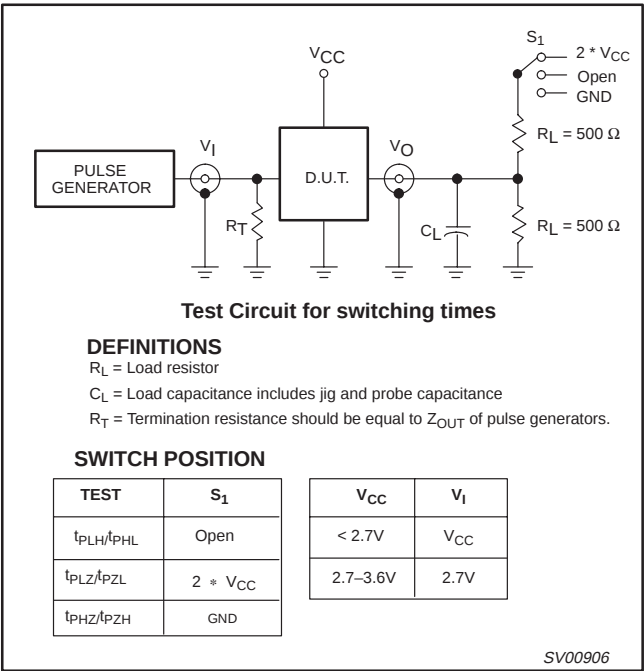

**DEFINITIONS**  
 $R_L$  = Load resistor  
 $C_L$  = Load capacitance includes jig and probe capacitance  
 $R_T$  = Termination resistance should be equal to  $Z_{OUT}$  of pulse generators.

SWITCH POSITION

| TEST              | $S_1$        | $V_{CC}$   | $V_I$    |
|-------------------|--------------|------------|----------|
| $t_{PLH}/t_{PHL}$ | Open         | $< 2.7V$   | $V_{CC}$ |
| $t_{PLZ}/t_{PZL}$ | $2 * V_{CC}$ | $2.7-3.6V$ | $2.7V$   |
| $t_{PHZ}/t_{PZH}$ | GND          |            |          |


Waveform 5. Load circuitry for switching times

20-bit bus interface D-type latch (3-State)

74ALVCH16841

TSSOP56: plastic thin shrink small outline package; 56 leads; body width 6.1mm

SOT364-1

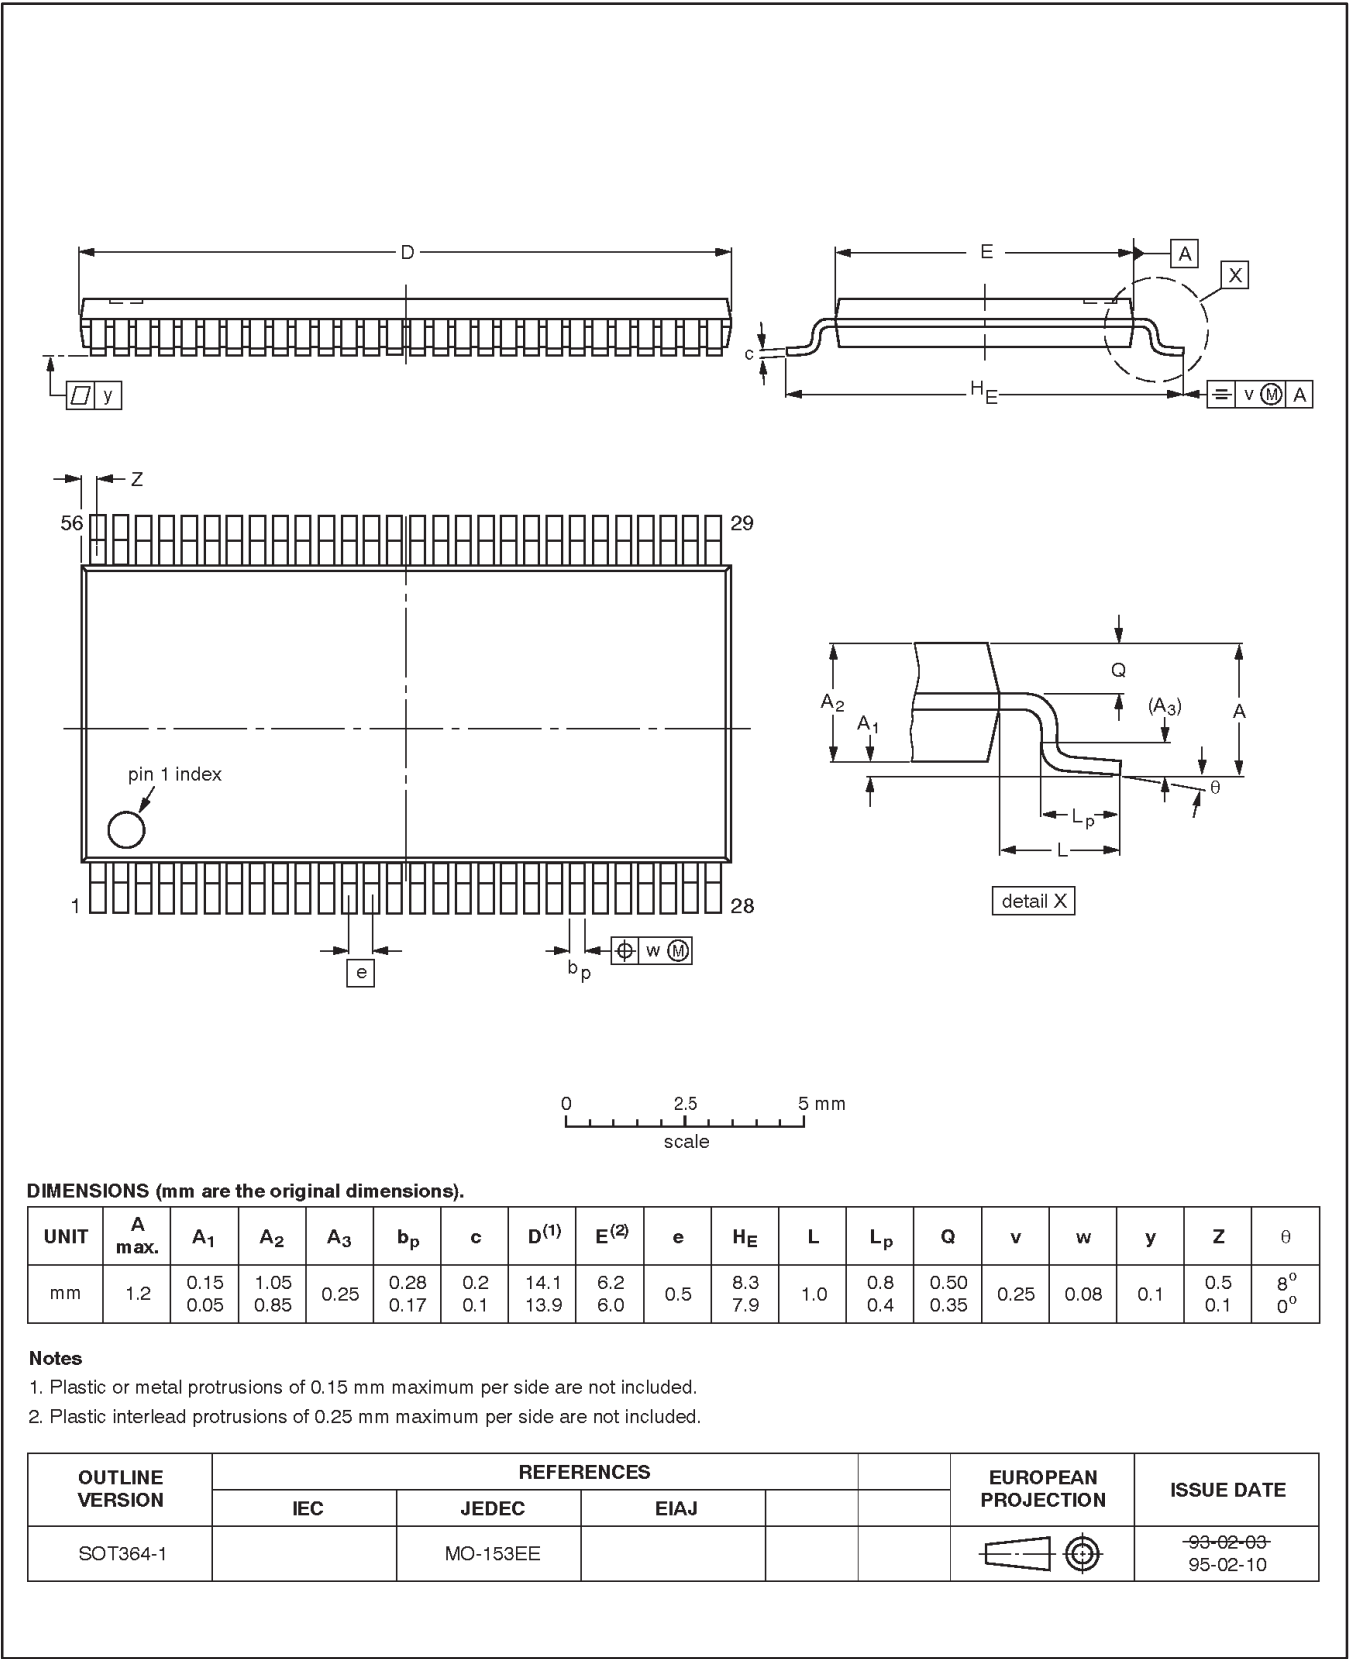

---

20-bit bus interface D-type latch (3-State)74ALVCH16841

---

**NOTES**

## 20-bit bus interface D-type latch (3-State)

74ALVCH16841

## Data sheet status

| Data sheet status         | Product status | Definition [1]                                                                                                                                                                                                                                             |
|---------------------------|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Objective specification   | Development    | This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.                                                                                                          |
| Preliminary specification | Qualification  | This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product. |
| Product specification     | Production     | This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.                                                       |

[1] Please consult the most recently issued datasheet before initiating or completing a design.

## Definitions

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Disclaimers

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors  
811 East Arques Avenue  
P.O. Box 3409  
Sunnyvale, California 94088-3409  
Telephone 800-234-7381

© Copyright Philips Electronics North America Corporation 1998  
All rights reserved. Printed in U.S.A.

print code

Date of release: 07-98

Document order number:

9397-750-04561

*Let's make things better.*

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А