

PTVA120251EA


Thermally-Enhanced High Power RF LDMOS FET 25 W, 50 V, 500 – 1400 MHz

Description

The PTVA120251EA LDMOS FET is designed for use in power amplifier applications in the 500 MHz to 1400 MHz frequency band. Features include high gain and a thermally-enhanced package with bolt-down flange. Manufactured with Wolfspeed's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.



PTVA120251EA
Package H-36265-2

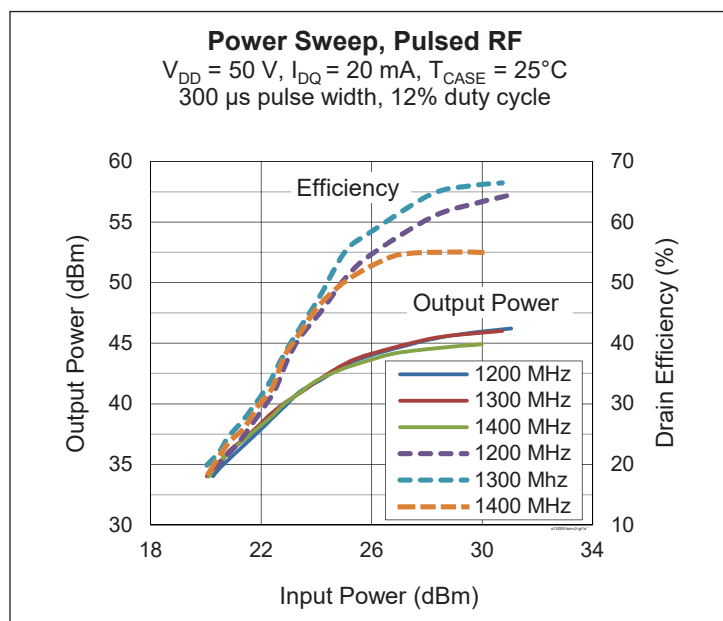

Features

- Unmatched input and output
- High gain and efficiency
- Integrated ESD protection
- ESD HBM Class 2, per ANSI/ESDA/JEDEC JS-001
- Low thermal resistance
- Excellent ruggedness
- Pb-free and RoHS-compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at $P_{OUT} = 25\text{ W}$, under CW conditions

RF Characteristics

Typical RF Performance (not subject to production test, verified by design/characterization in Wolfspeed test fixture)
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 0.02\text{ A}$, Input signal ($t_r = 5\text{ ns}$, $t_f = 6.5\text{ ns}$), 300 μs pulse width, 12% duty cycle, class AB test

Mode of operation	f (MHz)	IRL (dB)	P _{1dB}			P _{3dB}			P _{droop(pulse)} dB @ 30 W	t _r (ns)	t _f (ns)
			Gain (dB)	Eff (%)	P _{OUT} (W)	Gain (dB)	Eff (%)	P _{OUT} (W)			
Pulsed RF	1200	12	16.4	52	31	14.4	56	41	0.27	6	8
Pulsed RF	1300	11	16.0	56	32	14.0	59	40	0.20	6	8
Pulsed RF	1400	14	15.8	53	34	13.8	56	38	0.24	6	8

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics

Pulsed RF Performance (tested in WolfSpeed test fixture)

$V_{DD} = 50\text{ V}$, $I_{DQ} = 0.02\text{ A}$, $P_{OUT} = 25\text{ W}$, $f_1 = 1200\text{ MHz}$, $f_2 = 1300\text{ MHz}$, $f_3 = 1400\text{ MHz}$, 300 μs pulse width, 10% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	17	18	—	dB
Drain Efficiency	η_D	47	54	—	%
Return Loss	IRL	—	-13	-9	dB

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 105\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	1.4	—	Ω
Operating Gate Voltage	$V_{DS} = 50\text{ V}$, $I_{DQ} = 150\text{ mA}$	V_{GS}	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA





Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	105	V
Gate-Source Voltage	V_{GS}	-6 to +12	V
Operating Voltage	V_{DD}	0 to +55	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$, $V_{DD} = 50\text{ V}$, 25 W CW)	$R_{\theta JC}$	3.7	$^{\circ}\text{C/W}$

Ordering Information





Type and Version	Order Code	Package and Description	Shipping
PTVA120251EA V2 R0	PTVA120251EA-V2-R0	H-36265-2, bolt-down	Tape & Reel, 50 pcs
PTVA120251EA V2 R250	PTVA120251EA-V2-R250	H-36265-2, bolt-down	Tape & Reel, 250 pcs

Typical RF Performance (data taken in production test fixture)

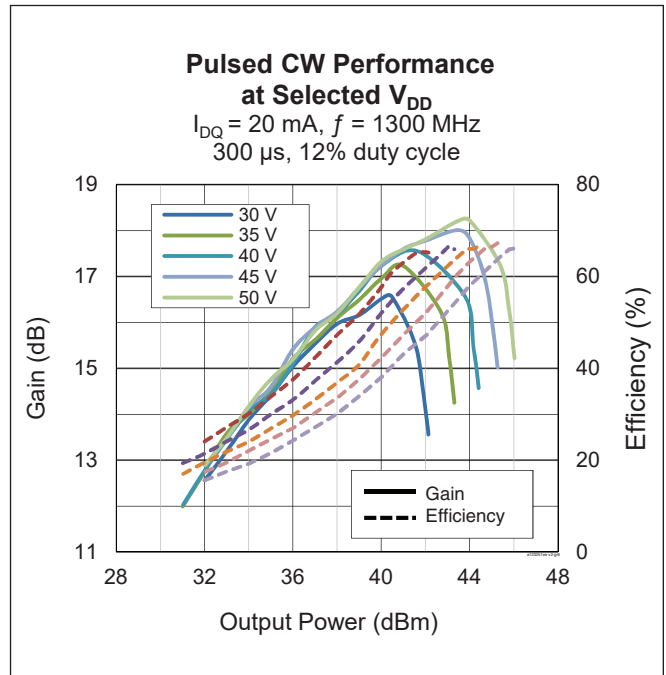
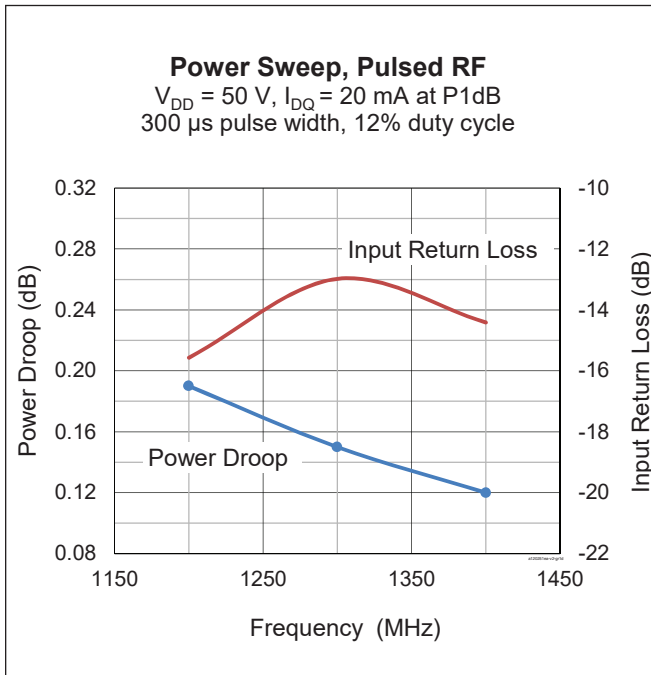
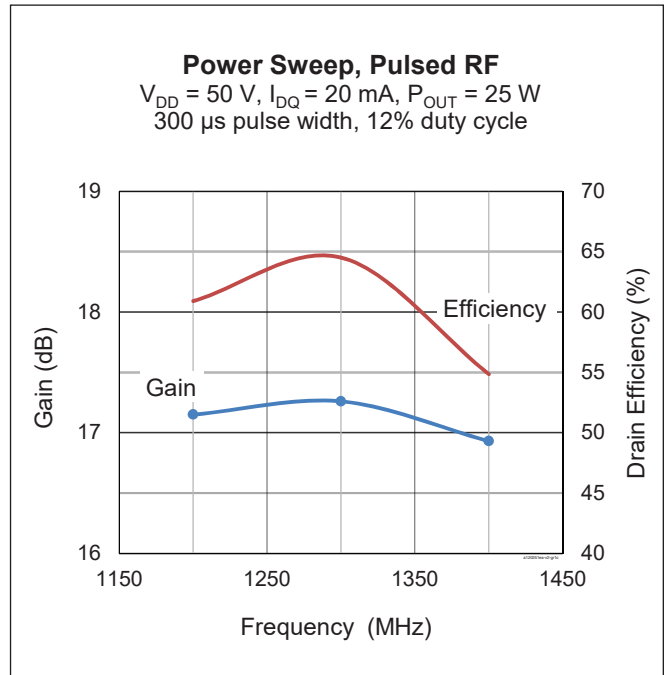
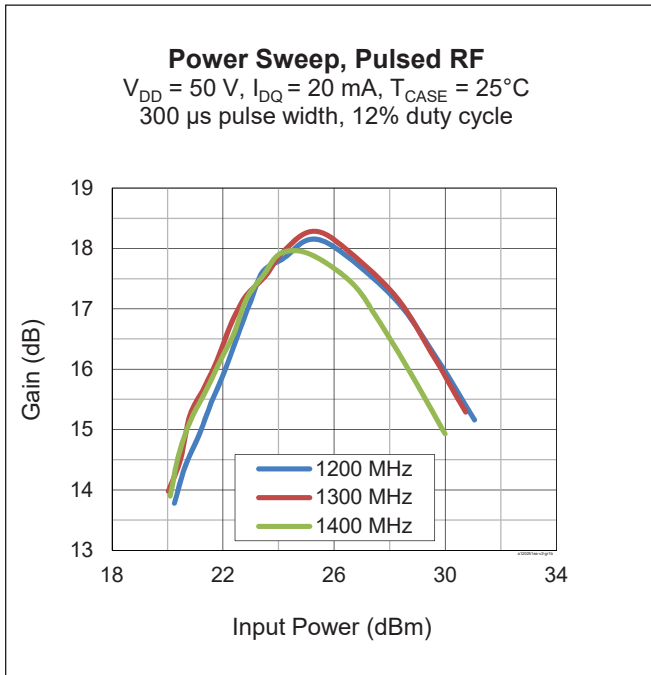




Typical RF Performance (cont.)

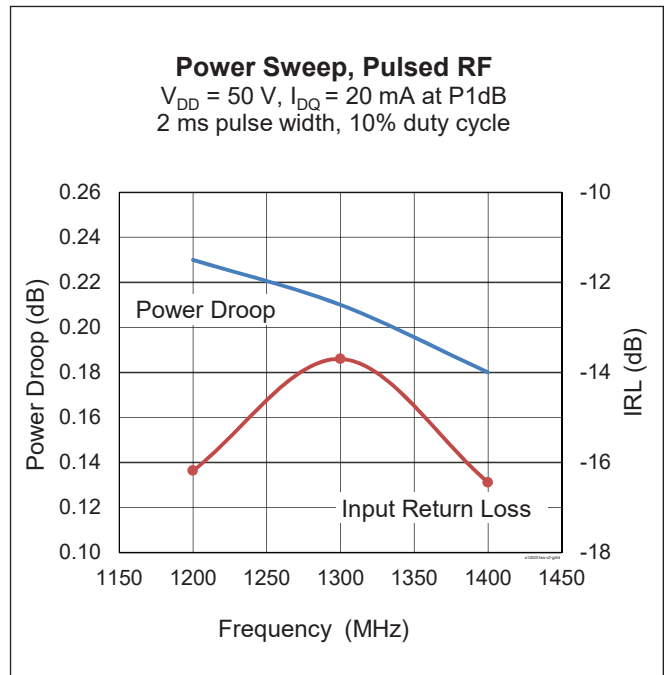
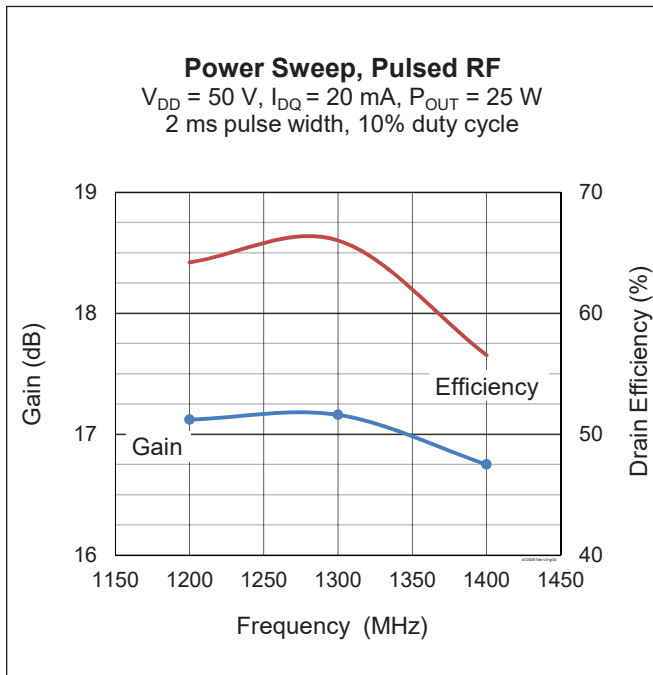
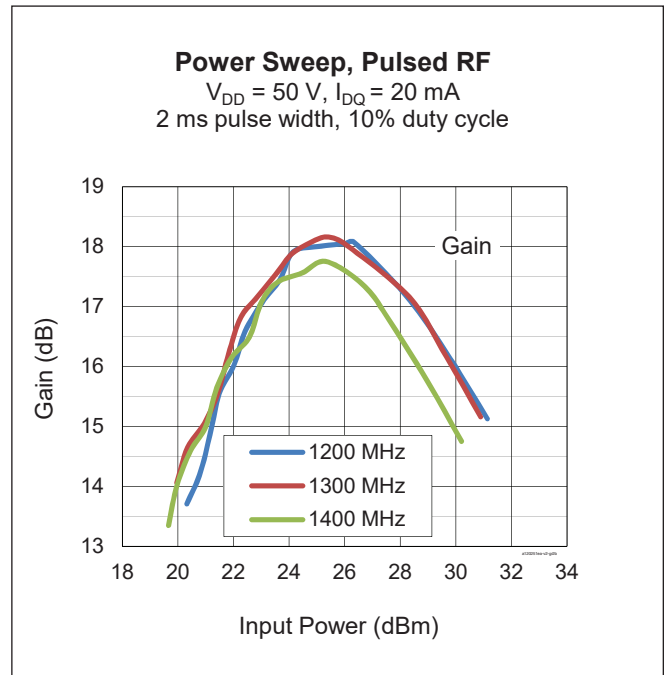
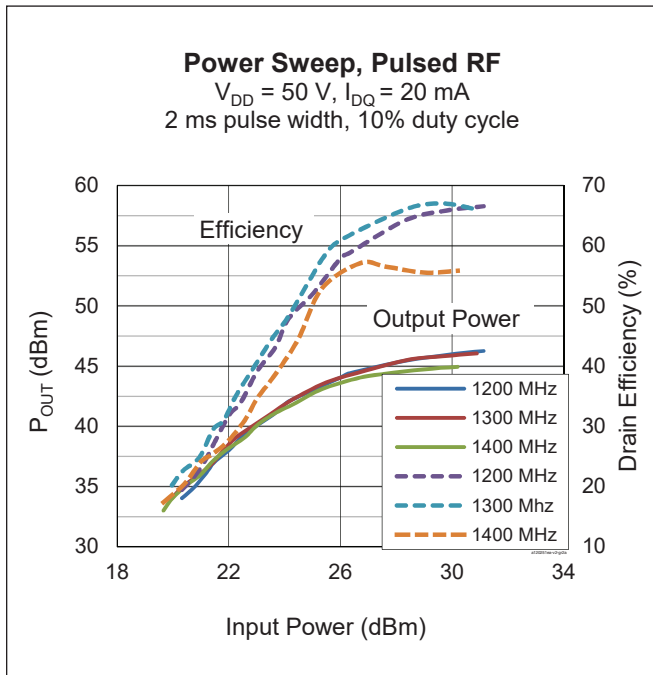


Typical RF Performance (cont.)

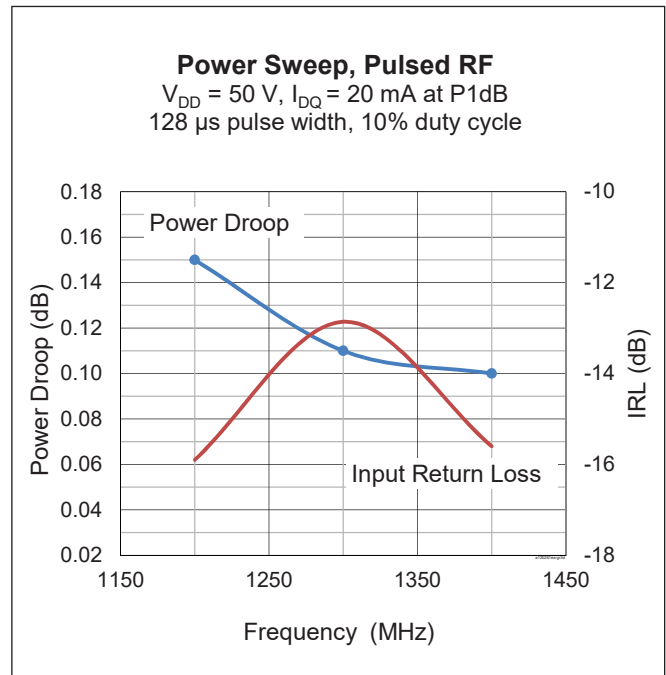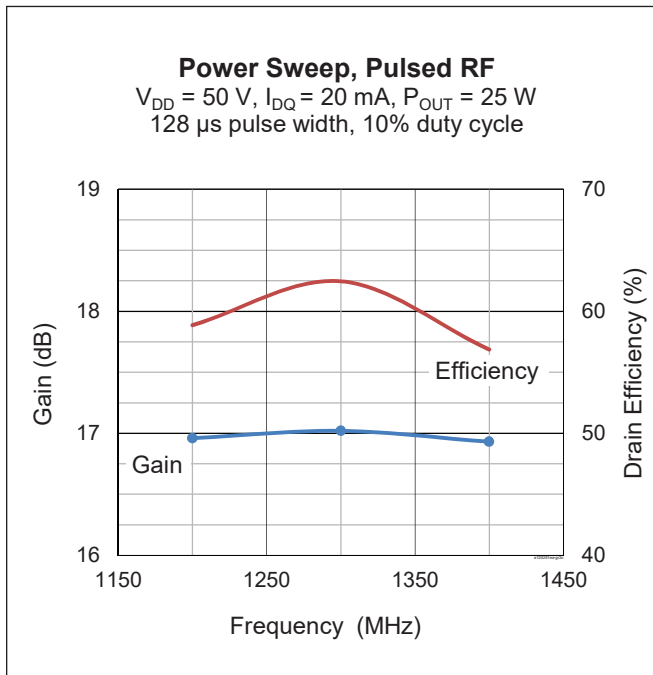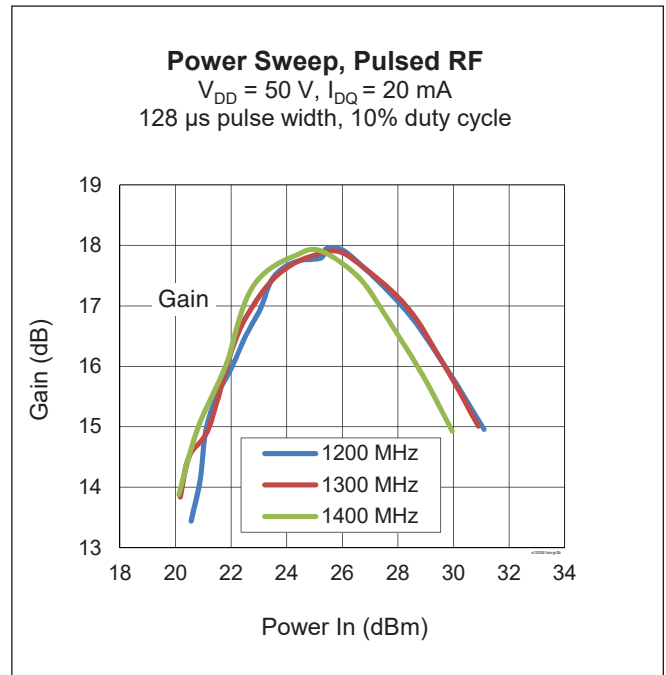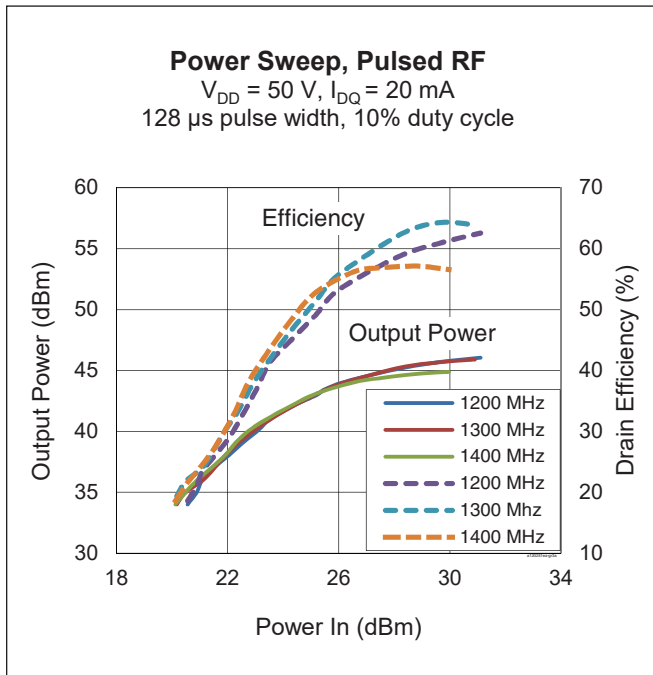





Typical RF Performance (cont.)

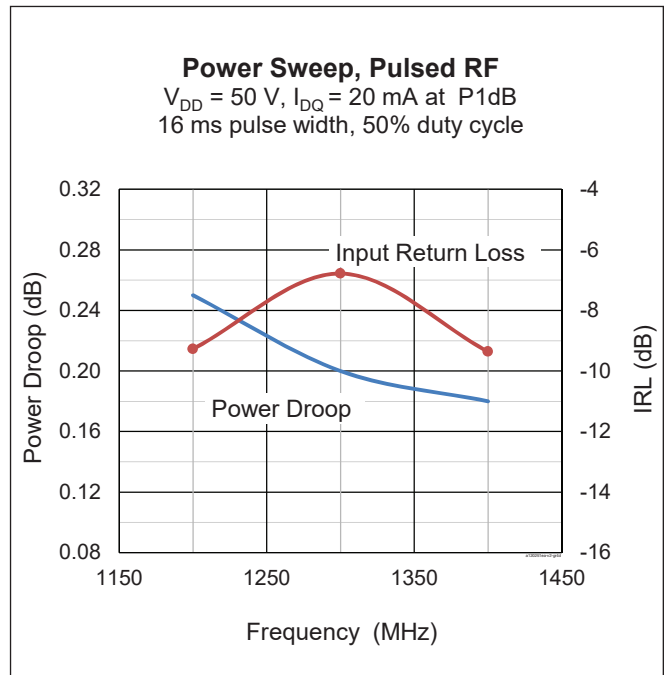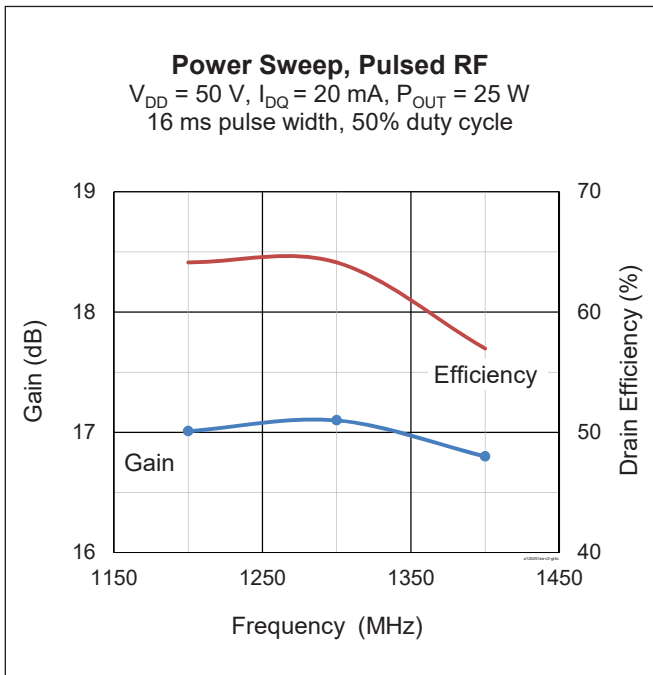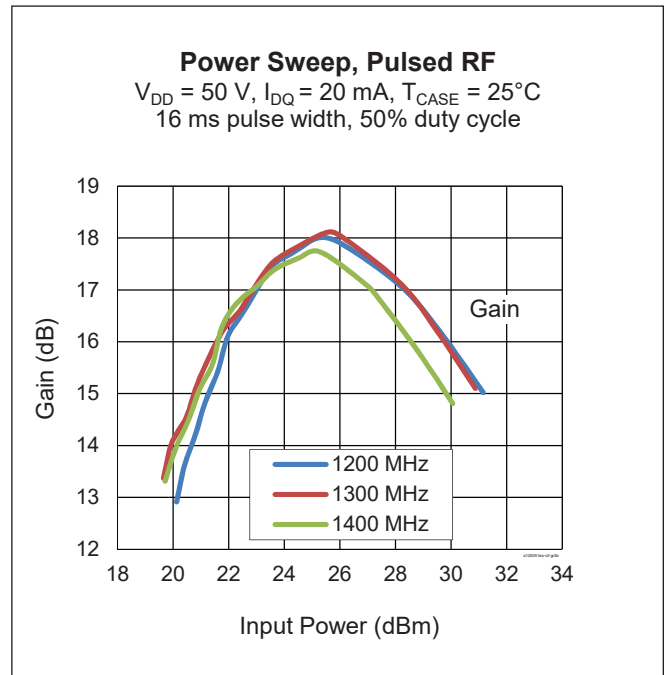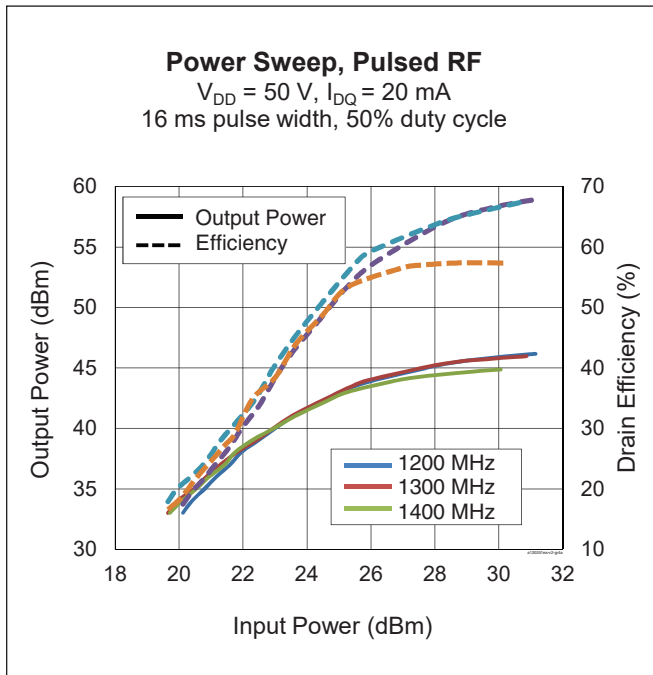







Typical RF Performance (tested with LTN/PTVA120251EA E4 test fixture, 960 MHz – 1215 MHz)

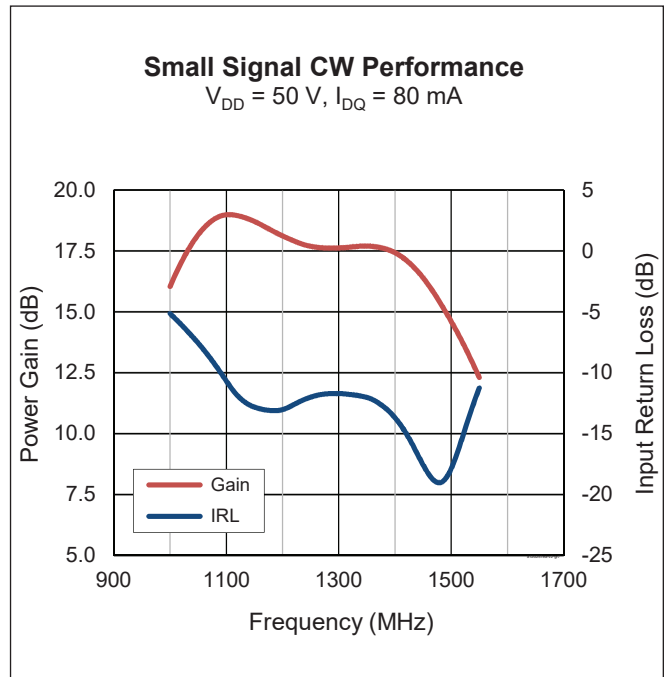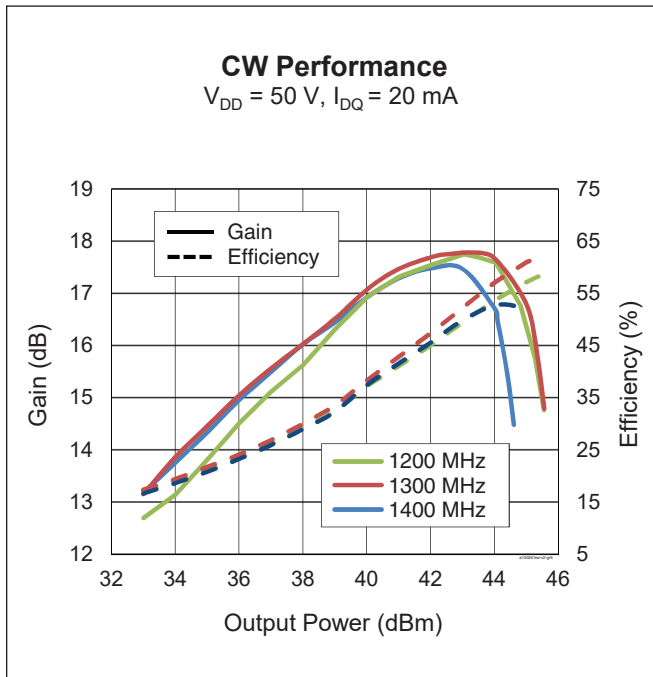




See next page for further performance characterization

Typical RF Performance (cont.) (tested with LTN/PTVA120251EA E4 test fixture, 960 MHz – 1215 MHz)

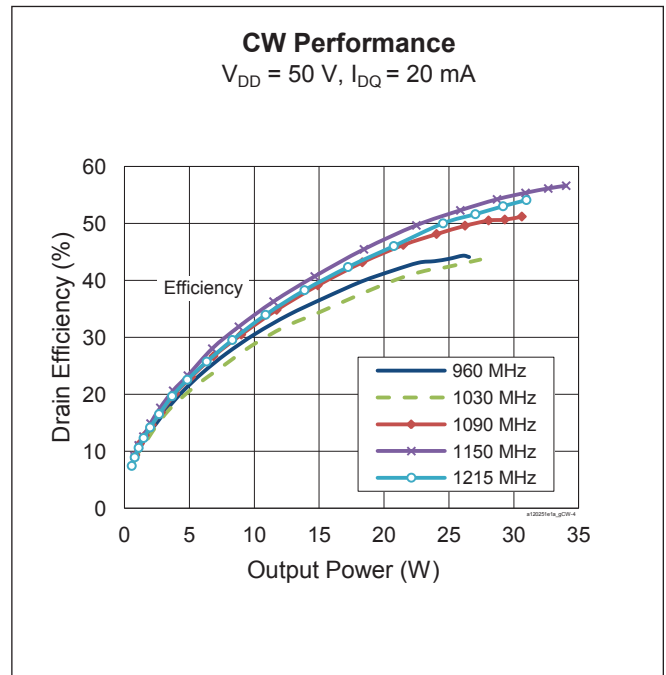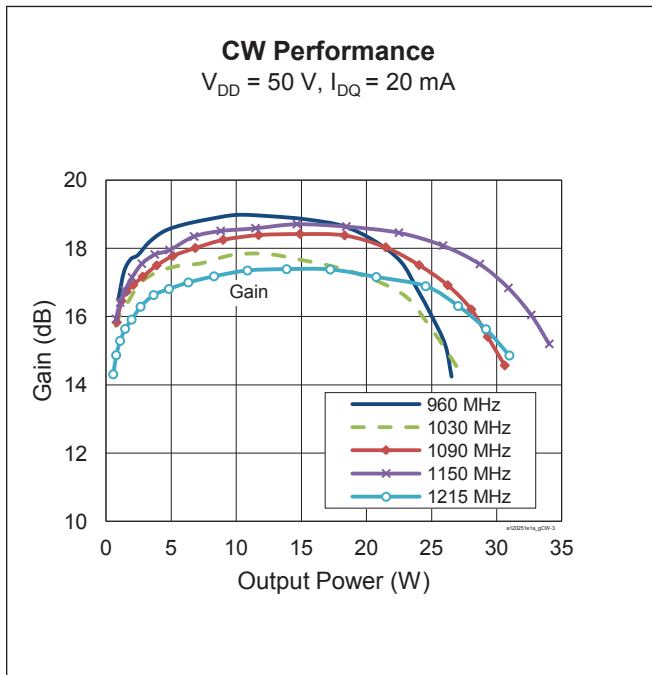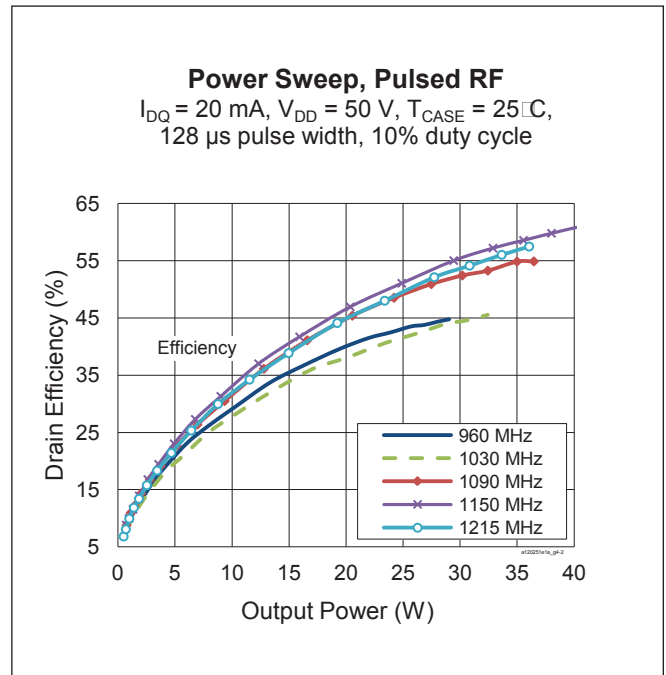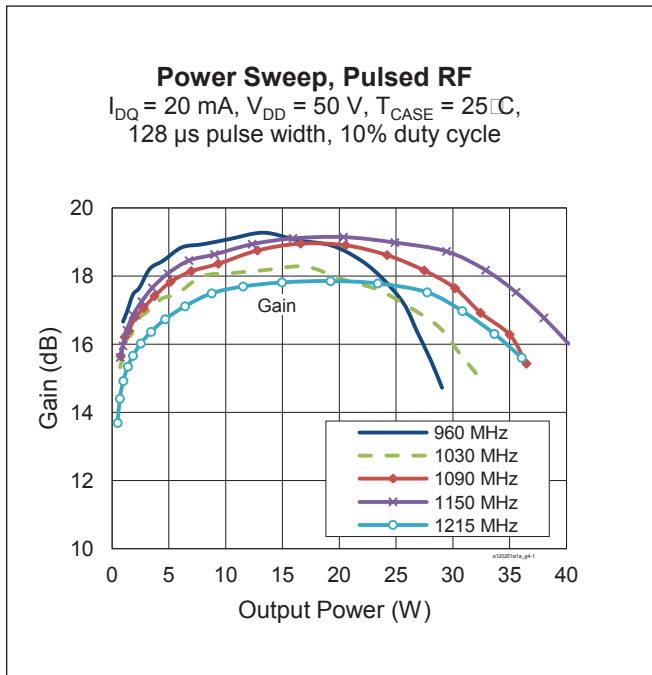


Typical RF Performance (cont.) (tested with LTN/PTVA120251EA E3 test fixture, 470 MHz – 860 MHz)

Test Conditions: DVB-T 8 MHz unclipped input signal, output PAR measured at 0.01% point of CCDF curve, ACPR measured over 200 KHz BW at 4.1 MHz offset from carrier center frequency.

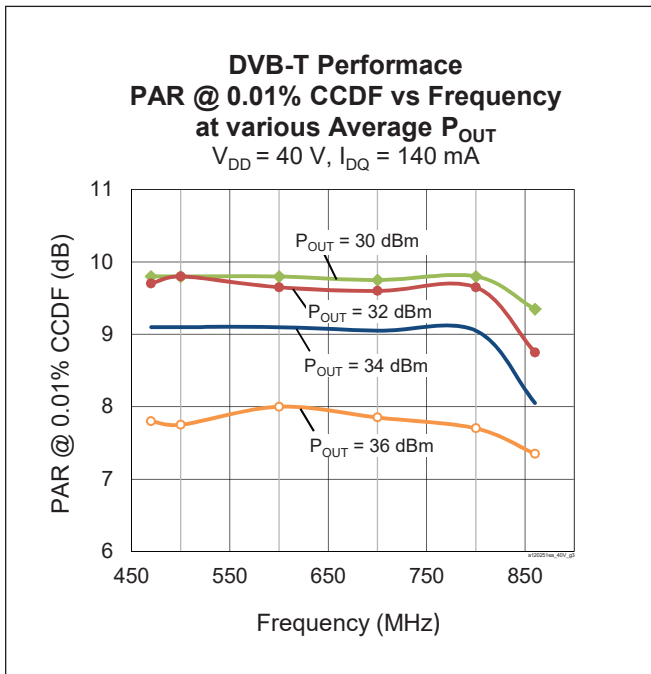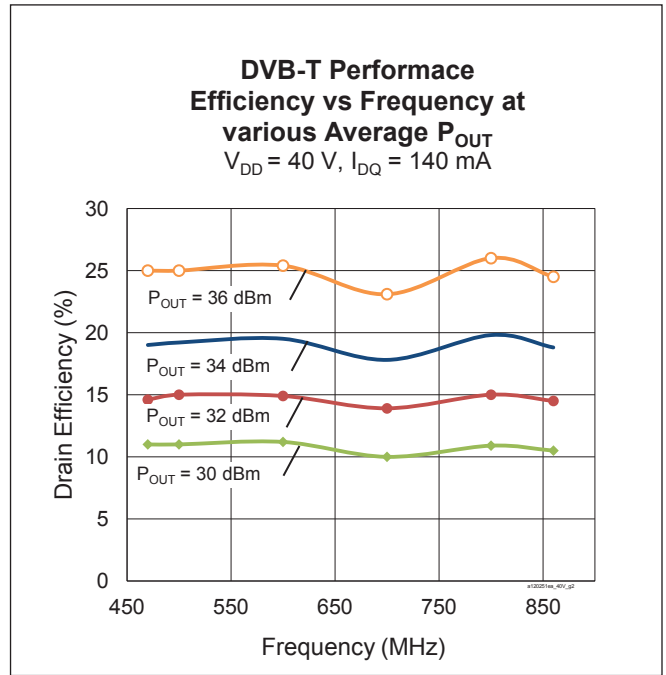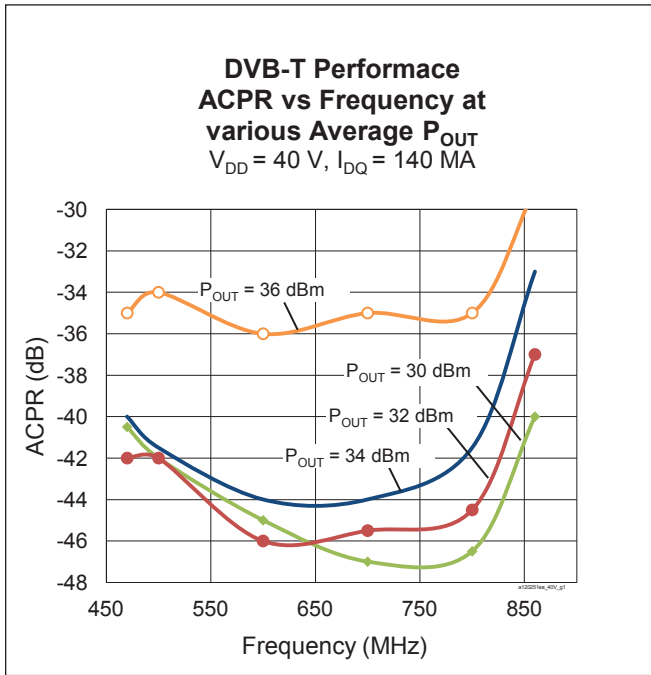

Broadband Circuit Impedance

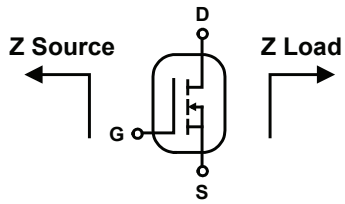

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
1200	4.31	-0.22	6.46	7.63
1300	5.06	-0.79	6.29	7.27
1400	4.94	-1.96	6.14	8.72

See next page for reference circuit information




Reference Circuits

DUT	Test Fixture Part No.	PCB	Frequency (MHz)
PTVA120251EA	LTN/PTVA120251EA V2 *	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$	1200 – 1400
PTVA120251EA	LTN/PTVA120251EA E2 †	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	1200 – 1400
PTVA120251EA	LTN/PTVA120251EA E3 †	Rogers 4350B, 0.762mm [.030"] thick, 2 oz. copper, $\epsilon_r = 3.48$	470 – 860
PTVA120251EA	LTN/PTVA120251EA E4 †	Rogers 3010, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 10.2$	960 – 1215

* See pages 11 – 12 for assembly information. Find Gerber files for this reference circuit on the Wolfspeed Web site at www.wolfspeed.com/RF

† Gerber files for this reference circuit are available on request.

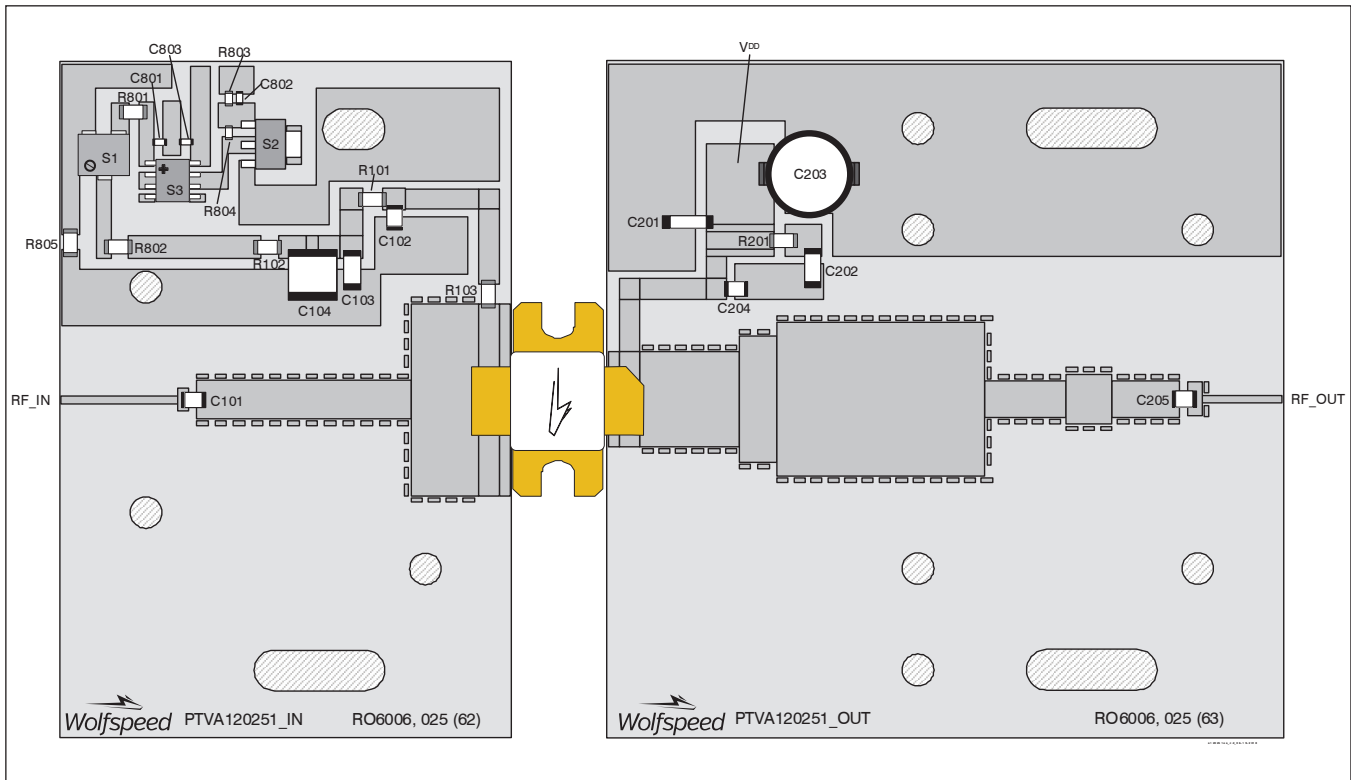

Assembly diagram for reference circuit LTN/PTVA120251EA V2, 1200 MHz to 1400 MHz (not to scale)




Reference Circuit (cont.)

Components Information

Component	Description	Manufacturer	P/N
Input			
C101, C102	Capacitor, 56 pF	ATC	ATC100B560JW500XB
C103	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
C104	Capacitor, 10 μF	TDK Corporation	C5750X5R1H106K230KA
C801, C802, C803	Capacitor, 1000 pF	Kemet	C1812C560KHGACTU
R101	Resistor, 5.6 ohms	Panasonic Electronic Components	ERJ-8RQJ5R6V
R102	Resistor, 0 ohms	Panasonic Electronic Components	ERJ-8RQJ5R6V
R103, R801	Resistor, 10 ohms	Panasonic – ECG	ERJ-3GEYJ100V
R802, R805	Resistor, 2K ohms	Panasonic Electronic Components	ERJ-8GEYJ202V
R803	Chip resistor, 1.3K ohms	Panasonic Electronic Components	ERJ-3GEYJ132V
R804	Chip resistor, 1.2K ohms	Panasonic Electronic Components	ERJ-3GEYJ122V
S1	Potentiometer 2K ohms	Bourns Inc.	3224W-1-202E
S2	Voltage regulator	Fairchild Semiconductor	LM7805
S3	Transistor	Fairchild Semiconductor	BCP56
Output			
C201	Capacitor, 10 μF	TDK Corporation	C5750X5R1H106K230KA
C202	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
C203	Capacitor, 100 μF	Cornell Dubilier Electronics	SK101M100ST
C204, C205	Capacitor, 56 pF	ATC	ATC100B560JW500XB
C206	Capacitor, 6800 μF	Panasonic Electronic Components	ECO-S2AP682EA
R101	Resistor, 5.6 ohms	Panasonic Electronic Components	ERJ-8GEYJ5R6V

Package Outline Specifications

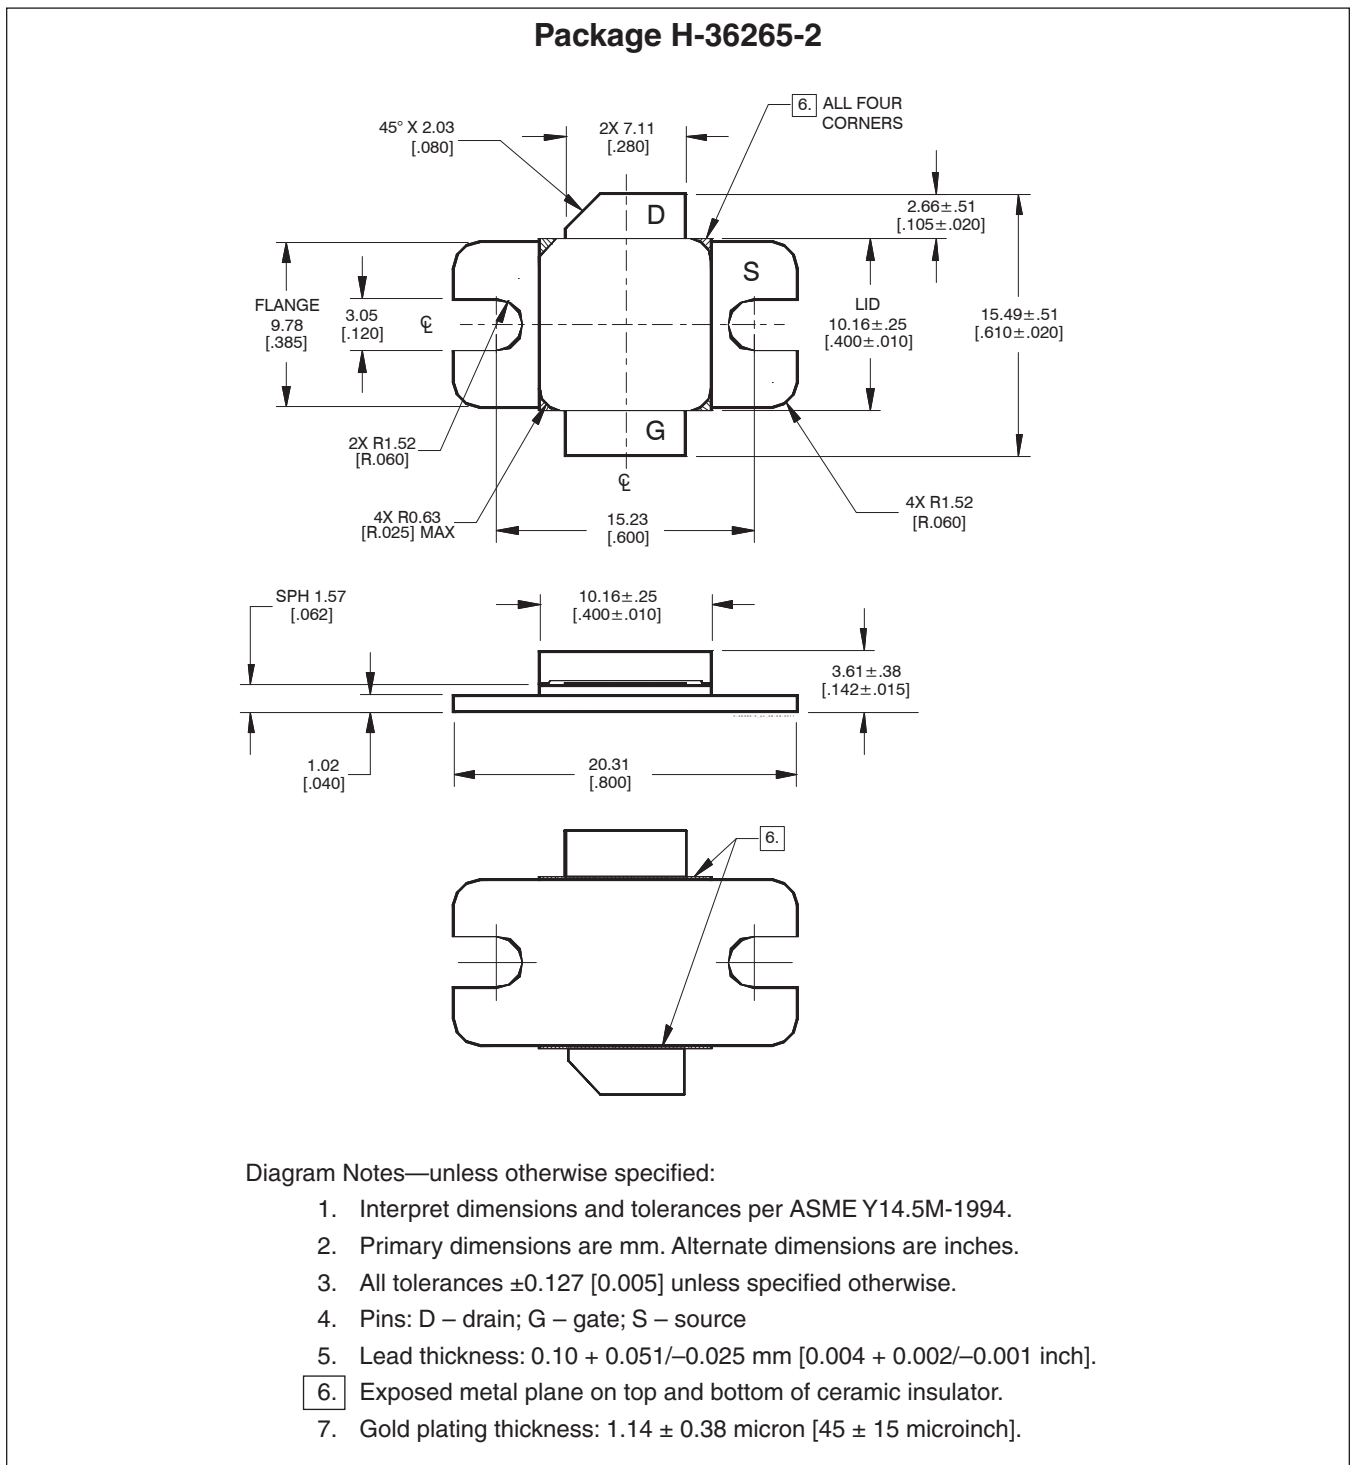

Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2012-06-04	Preliminary	All	First release of Data Sheet for pre-production product
02	2012-10-29	Preliminary	6	Add DVB-T performance graphs
03	2013-03-25	Production	All 1 – 2 3 – 8 9 – 11	Data Sheet reflects released product specifications and performance Update tables with current data Add further graphs Add load pull performance and reference circuit information
04	2014-10-03	Production	11 – 12 1, 3 – 7	New circuit design. Characterization in new circuit.
04.1	2015-06-15	Production	2	Updated max of IRL in pulsed RF performance table
04.2	2016-04-19	Production	2	Updated ordering information
04.3	2017-02-07	Production	2	Updated operating voltage and junction temperature
05	2018-06-19	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. “Typical” parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer’s technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А