


## FF6 Series

### Magnetically Actuated Non-Contact Safety Switches

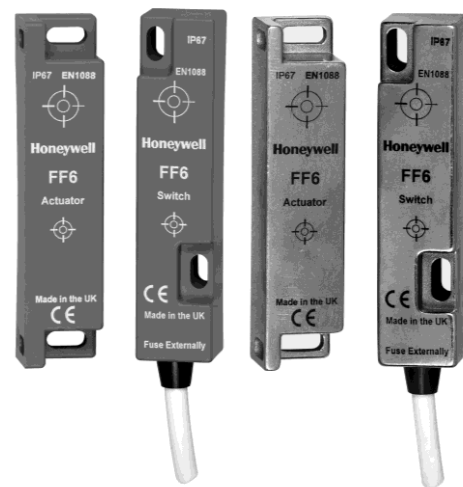

#### DESCRIPTION

Honeywell FF6 switches are magnetically operated, non-contact safety switches designed for use in many machine-guarding applications. The FF6 is available in both ABS and 316 grade stainless steel. The switch and actuator are fully

sealed to IP67 and can often be used in wet or dusty environments. With correct installation, the FF6 safety switches comply with the guidelines given in EN1088.

#### FEATURES

- Non-contact safety switches
- Up to three contacts
- 10 mm [0.4 in] operating distance
- Up to 2 A switching
- IP67
- Stainless steel option
- CE and UL approvals

#### POTENTIAL APPLICATIONS

- Can forming and filling (aluminum, steel, and plastic)
- Pick and place packaging equipment
- Pick and place/assembly equipment
- Semicon equipment
- Plastic molding equipment
- Woodworking machinery
- Textile machinery
- Printing machinery

# FF6 Series

## TECHNICAL SPECIFICATIONS

Type	FF6 ac	FF6 dc	FF6-SS ac	FF6-SS dc
Contact arrangement	Max: 2NC safety and 1NO auxiliary	Max: 2NC safety and 1NO auxiliary	1NC safety	Max: 2NC safety and 1NO auxiliary
Safety contact rating	230 Vac/2 A	30 Vdc/1 A inductive/resistive	230 Vac/2A	30 Vdc/1 A inductive/resistive
Safety contact operating distance	10 mm [0.4 in] ON; 30 mm [ 1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [ 1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [ 1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [ 1.18 in] OFF
Safety contact close/drop/bounce	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms
Auxiliary contact rating	15 W/10 VA	15 W/10 VA		15 W/10 VA
Auxiliary contact operating distance	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON		7 mm [0.28 in] OFF; 20 mm [0.79 in] ON
Auxiliary contact close/drop/bounce	0.5 ms/0.3 ms/0.7 ms	0.5 ms/0.3 ms/0.7 ms		0.5 ms/0.3 ms/0.7 ms
Internal fuse	ac: 2 A fast acting	dc: 1 A fast acting	ac: 2 A fast acting	dc: 1 A fast acting
External fuse (customer supplied)	ac: 1.6 A fast acting	dc: 0.8 A fast acting	ac: 1.6 A fast acting	dc: 0.8 A fast acting
IP rating	IP67	IP67	IP67	IP67
Vibration/shock	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g
Operating temperature	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]
Mounting and fixture	Target to target	Target to target	Target to target	Target to target
Construction	Red ABS resin filled	Red ABS resin filled	316 grade stainless steel resin filled	316 grade stainless steel resin filled

# Magnetically Actuated Non-Contact Safety Switches

## CONTACTS AND CONNECTIONS: PRE-WIRED SWITCHES

<b>FF6-21-ABS (ac &amp; dc)</b> <b>FF6-21-SS (dc only)</b>	<b>FF6-20 ABS (ac &amp; dc)</b> <b>FF6-20 SS (dc only)</b>	<b>FF6-11 ABS (ac &amp; dc)</b> <b>FF6-11 (dc only)</b>	<b>FF6-10 ABS (ac &amp; dc)</b> <b>FF6-10 SS (ac &amp; dc)</b>
<b>FF6-10-03-SS</b>			

NOTE: Contact configurations show under closed condition for guard device.



## CONTACTS AND CONNECTIONS: QUICK DISCONNECT CONNECTIONS

<b>FF6-21-AC-QD05</b> <b>FF6-21-DC-QD05</b>	<b>FF6-20-AC-QD05</b> <b>FF6-20-DC-QD05</b>	<b>FF6-11-AC-QD05</b> <b>FF6-11-DC-QD05</b>	<b>FF6-10-AC-QD05</b> <b>FF6-10-DC-QD05</b>
<b>FF6-10-AC-QD05-SS</b>			

# FF6 Series

## DIMENSIONS

### FF6 STAINLESS STEEL PRE-WIRED mm[in]

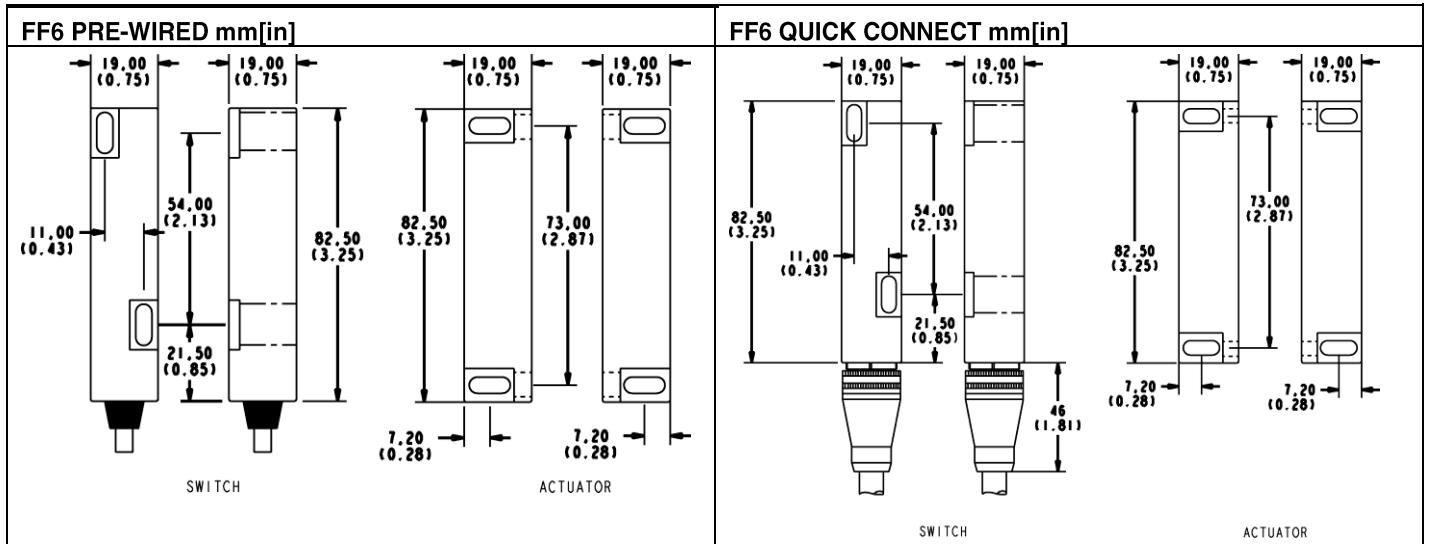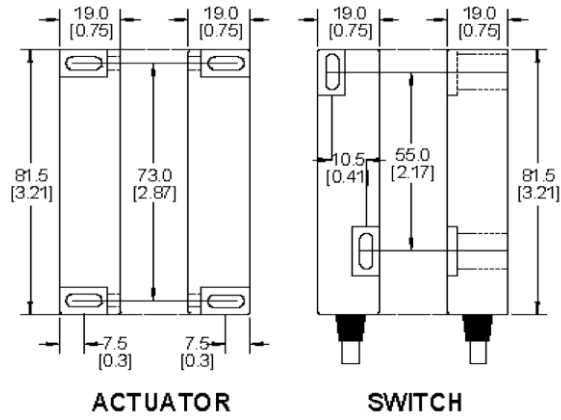

# Magnetically Actuated Non-Contact Safety Switches

## ORDER GUIDE

Catalog Listing	Description
FF6-10-DC-03-SS	Safety switch and actuator, stainless steel, 1NC safety, dc, 3 m pre-wired
FF6-11-DC-03-SS	Safety switch and actuator, stainless steel, 1NC safety and 1 NO auxiliary, dc, 3 m pre-wired
FF6-20-DC-03-SS	Safety switch and actuator, stainless steel, 2NC safety, dc, 3 m pre-wired
FF6-10-AC-03-SS	Safety switch and actuator, stainless steel, 1NC safety, ac, 3 m pre-wired
FF6-10-AC-QD-SS	Safety switch and actuator, stainless steel, 1NC safety, ac, M12 quick disconnect, no cable
FF6-10-AC-QD05-SS	Safety switch and actuator complete, stainless steel, 1NC safety, ac, M12 quick disconnect, 5 m cable
FF6-10-DC-03	Safety switch and actuator, red ABS, 1NC safety, dc, 3 m pre-wired
FF6-11-DC-03	Safety switch and actuator, red ABS, 1NC safety and 1NO auxiliary, dc, 3 m pre-wired
FF6-20-DC-03	Safety switch and actuator, red ABS, 2NC safety, dc, 3 m pre-wired
FF6-21-DC-03	Safety switch and actuator, red ABS, 2NC safety and 1NO auxiliary, dc, 3 m pre-wired
FF6-10-AC-03	Safety switch and actuator, red ABS, 1NC safety, ac, 3 m pre-wired
FF6-11-AC-03	Safety switch and actuator, red ABS, 1NC safety and 1NO auxiliary, ac, 3 m pre-wired
FF6-20-AC-03	Safety switch and actuator, red ABS, 2NC safety, ac, 3 m pre-wired
FF6-21-AC-03	Safety switch and actuator, red ABS, 2NC safety and 1NO auxiliary, ac, 3 m pre-wired
FF6-10-DC-QD05	Safety switch and actuator, red ABS, 1NC safety, dc, M12 quick disconnect, 5 m cable
FF6-11-DC-QD05	Safety switch and actuator, red ABS, 1NC safety and 1NO auxiliary, dc, M12 quick disconnect, 5 m cable
FF6-20-DC-QD05	Safety switch and actuator, red ABS, 2NC safety and 1NO auxiliary, dc, M12 quick disconnect, 5 m cable
FF6-21-DC-QD05	Safety switch and actuator, red ABS, 2NC safety and 1NO auxiliary, dc, M12 quick disconnect, 5 m cable
FF6-10-AC-QD05	Safety switch and actuator, red ABS, 1NC safety, ac, M12 quick disconnect, 5 m cable
FF6-11-AC-QD05	Safety switch and actuator, red ABS, 1NC safety and 1NO auxiliary, dc, M12 quick disconnect, 5 m cable
FF6-20-AC-QD05	Safety switch and actuator, red ABS, 2NC safety, ac, M12 quick disconnect, 5 m cable
FF6-21-AC-QD05	Safety switch and actuator, red ABS, 2NC safety and 1NO auxiliary, ac, M12 quick disconnect, 5 m cable

## **WARNING**

### **RISK TO LIFE OR PROPERTY**

Never use this product for an application involving serious risk to life or property without ensuring that the system as a whole has been designed to address the risks, and that this product is properly rated and installed for the intended use within the overall system.

**Failure to comply with these instructions could result in death or serious injury.**

### **WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

## **WARNING**

### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

### **SALES AND SERVICE**

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

**E-mail:** [info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**Internet:** [www.honeywell.com/sensing](http://www.honeywell.com/sensing)

#### **Phone and Fax:**

Asia Pacific	+65 6355-2828
	+65 6445-3033 Fax
Europe	+44 (0) 1698 481481
	+44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188
	+1-305-883-8257 Fax
USA/Canada	+1-800-537-6945
	+1-815-235-6847
	+1-815-235-6545 Fax

Sensing and Control  
Honeywell  
1985 Douglas Drive North  
Golden Valley, MN 55422  
[www.honeywell.com](http://www.honeywell.com)

004745-2-EN IL50 GLO Printed in USA  
June 2009  
Copyright © 2009 Honeywell International Inc. All rights reserved.

# **Honeywell**

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



## JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А