





**DIP8-pin type featuring
low on-resistance
200V/400V load voltage**

**PhotoMOS[®]
RF 2 Form A**
Low on-resistance (AQW22○N)

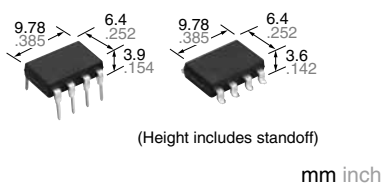

RoHS compliant

FEATURES

- 1. 2-channels (Form A) type with high response speed, low leakage current and low on-resistance.**
- 2. Applicable for 2 Form A use as well as two independent 1 Form A use**
- 3. Low capacitance between output terminals ensures high response speed:**
The capacitance between output terminals is small; Typ. 10 pF. This enables for a fast operation speed of Typ. 0.2 ms.
- 4. High sensitivity and low on-resistance:**
Max. 0.07 A of load current can be controlled with input current of 5 mA. The on-resistance is less than our conventional models.
- 5. Low-level off state leakage current**

6. Controls low-level analog signals:
PhotoMOS features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

TYPICAL APPLICATIONS

- **Measuring instruments**
Scanner, IC checker, Board tester, etc.
- Telephones
- Computer input machines
- Industrial robots

TYPES

	Output rating*		Package	Part No.				Packing quantity	
				Through hole terminal	Surface-mount terminal		Tube		
	Load voltage	Load current			Tube packing style	Tape and reel packing style			
				Picked from the 1/2/3-pin side	Picked from the 4/5/6-pin side				
AC/DC dual use	200 V	50 mA	DIP8-pin	AQW227N	AQW227NA	AQW227NAX	AQW227NAZ	1 tube contains: 50 pcs. 1 batch contains: 500 pcs.	1,000 pcs.
	400 V	40 mA		AQW224N	AQW224NA	AQW224NAX	AQW224NAZ		

*Indicate the peak AC and DC values.

Note: The surface mount terminal indicator "A" and the packing style indicator "X" or "Z" are not marked on the device.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQW227N(A)	AQW224N(A)	Remarks	
Input	LED forward current	I _F	50 mA		
	LED reverse voltage	V _R	5 V		
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}	75 mW		
Output	Load voltage (peak AC)	V _L	200 V	400 V	
	Continuous load current	I _L	0.05 A (0.07 A)	0.04 A (0.05 A)	Peak AC, DC (): in case of using only 1 channel
	Peak load current	I _{peak}	0.15 A	0.12 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	800 mW		
Total power dissipation	P _T	850 mW			
I/O isolation voltage	V _{iso}	1,500 Vrms			
Ambient temperature	Operating	T _{opr}	-40 to +85°C -40 to +185°F	(Non-icing at low temperatures)	
	Storage	T _{stg}	-40 to +100°C -40 to +212°F		


RF 2 Form A Low on-resistance (AQW220N)

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQW227N(A)	AQW224N(A)	Condition
Input	LED operate current	Typical	0.9 mA		I _L = Max.
		Maximum	3.0 mA		
	LED turn off current	Minimum	0.4 mA		I _L = Max.
		Typical	0.8 mA		
LED dropout voltage	Typical	1.25 V (1.14 V at I _F = 5 mA)		I _F = 50 mA	
	Maximum	1.5 V			
Output	On resistance	Typical	30 Ω	70 Ω	I _F = 5 mA I _L = Max. Within 1 s
		Maximum	50 Ω	100 Ω	
	Output capacitance	Typical	10 pF		I _F = 0 V _B = 0 f = 1 MHz
		Maximum	15 pF		
Off state leakage current	Maximum	I _{Leak}	*10 nA		I _F = 0 V _L = Max.
Transfer characteristics	Turn on time**	Typical	0.2 ms		I _F = 5 mA I _L = Max.
		Maximum	0.5 ms		
	Turn off time**	Typical	0.08 ms		I _F = 5 mA I _L = Max.
		Maximum	0.2 ms		
	I/O capacitance	Typical	0.8 pF		f = 1 MHz V _B = 0
Maximum		1.5 pF			
Initial I/O isolation resistance	Minimum	R _{iso}	1,000 MΩ		500 V DC

*Available as custom orders (1 nA or less)

**Turn on/Turn off time

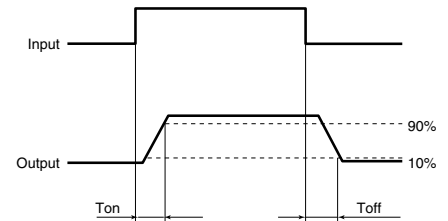

3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item	Symbol	Number of used channels	Min.	Max.	Unit
LED current	I _F		5	30	mA
Load voltage (Peak AC)	V _L		—	160	V
AQW227N(A)	Continuous load current	1ch	—	0.07	A
		2ch	—	0.05	A
AQW224N(A)	Load voltage (Peak AC)		—	320	V
		Continuous load current	1ch	—	0.05
		2ch	—	0.04	A

■ These products are not designed for automotive use.


If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

REFERENCE DATA

1. Load current vs. ambient temperature characteristics


Allowable ambient temperature: -40 to +85°C
-40 to +185°F

When using 2 channels

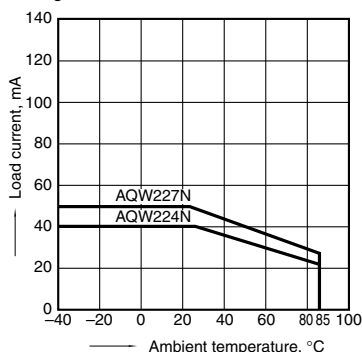


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 5 and 6,
7 and 8; LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

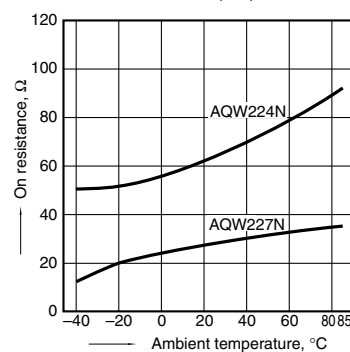


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

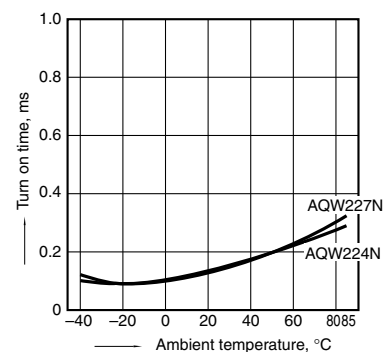


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

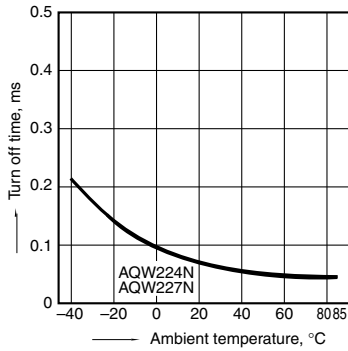


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

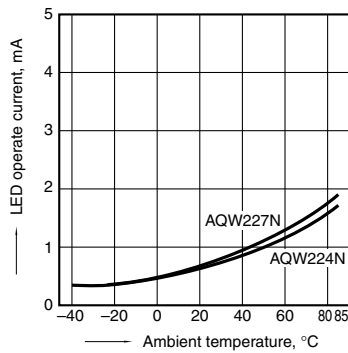


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max. (DC); Continuous load current: Max. (DC)

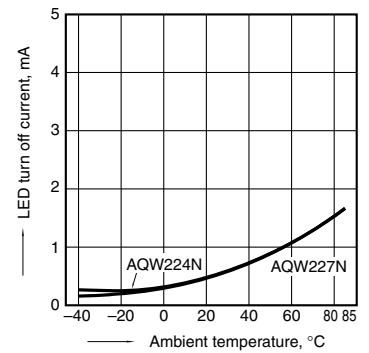


7. LED dropout voltage vs. ambient temperature characteristics

Sample: All types; LED current: 5 to 50 mA

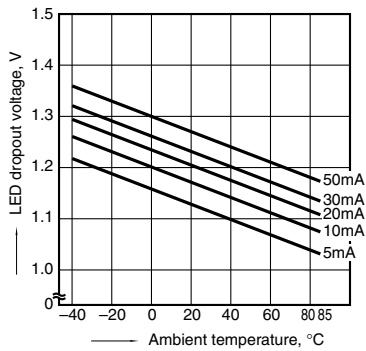


8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

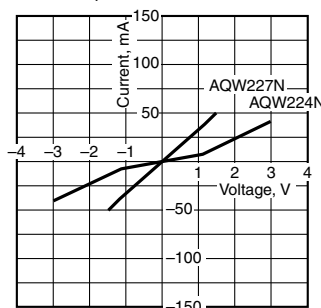


9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

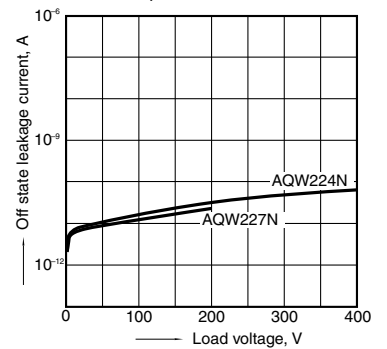


10. Turn on time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

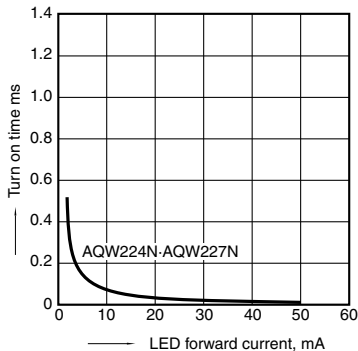


11. Turn off time vs. LED forward current characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

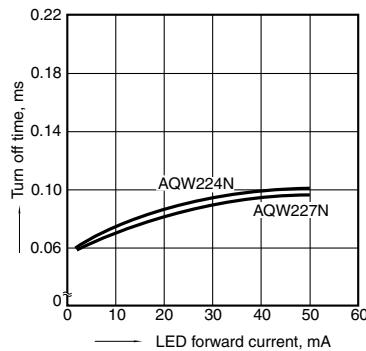


12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 5 and 6, 7 and 8; Frequency: 1 MHz, 30mVrms; Ambient temperature: 25°C 77°F

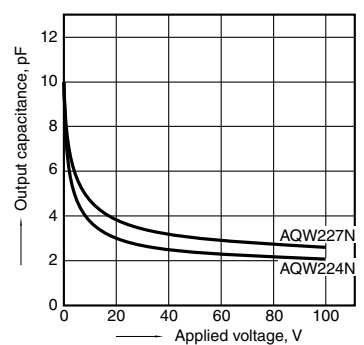


13. Isolation vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

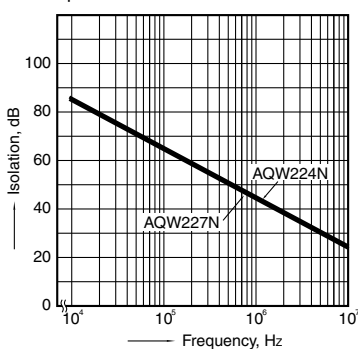

14. Insertion loss vs. frequency characteristics (50 Ω impedance)

Measured portion: between terminals 5 and 6, 7 and 8; Ambient temperature: 25°C 77°F

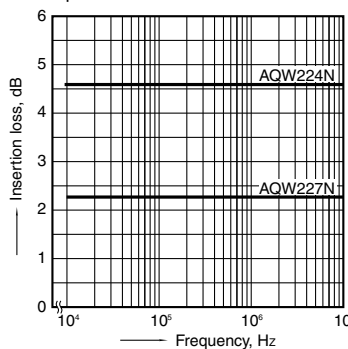

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

*Recognized in Japan, the United States, all member states of European Union and other countries.

Please contact

Panasonic Corporation

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8506, Japan
industrial.panasonic.com/ac/e/

Panasonic®

©Panasonic Corporation 2017

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Panasonic:](#)

[AQW224NA](#) [AQW224NAX](#) [AQW224N](#) [AQW224NAZ](#) [AQW227N](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А