


Bridgetek Pte Ltd

Datasheet

CleO35-WIFI Module

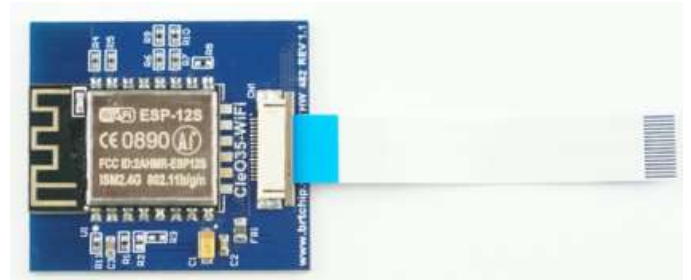

1 Introduction

The CleO35-WIFI module is a Wi-Fi accessory for the CleO series – the smart TFT display for Arduino. Designed with an ESP-12S Wi-Fi module from Ai-thinker using core processor ESP8266, the ESP8266 is among the most integrated Wi-Fi chips in the industry. Measuring just 5mm X 5mm, it requires minimal external circuitry and integrates a 32-bit Tensilica MCU, digital peripheral interface, antenna switch, RF balun, power amplifier, low noise receive amplifier, filters and power management modules all in one small package.

The CleO35-WIFI module comes with a standard 16 pin 0.5mm pitch FFC cable, suitable for connecting directly to CleO35 modules or via the CleO_IO Shield to CleO50 modules enabling wireless communications to the system.

As a plug in accessory to CleO it extends the CleO modules capabilities to include wireless monitor and control for smart devices around the home.

1.1 Features

The CleO35-WIFI consists of ESP-12S WIFI module developed by Ai-thinker using an ESP8266. For the full list of ESP8266's features, refer to the [ESP8266 Datasheet](#). In addition, CleO35-WIFI has the following features:

- Supports standard IEEE802.11 b/g/n
- Integrated low power 32-bit MCU
- Wi-Fi 2.4GHz, Support WPA/WPA2
- Support STA/AP/STA+AP operation mode
- +20dBm output power in 802.11b mode
- On board PCB antenna
- Compatible with Bridgetek CleO35
- 16 Pin 0.5mm Pitch FFC Flex interface

Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. Bridgetek Pte Ltd will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device or system in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Bridgetek Pte Ltd, 178 Paya Lebar Road, #07-03, Singapore 409030. Singapore Registered Company Number: 201542387H

2 Ordering Information

Part No.	Description
CleO35-WiFi1	Wi-Fi accessory, built-in ESP-12S Wi-Fi module with 16pin 0.5mm pitch FFC flex interface

3 Program Support

Demo applications are provided for CleO Wi-Fi modules by Bridgetek. Visit Bridgetek's website <http://brtchip.com/m-cleo/> for more information.

Table of Contents

1	Introduction	1
1.1	Features.....	1
2	Ordering Information	2
3	Program Support.....	2
4	Pin Out and Signal Description	4
4.1	Module Description	4
4.2	Module Interface Signal Description	4
5	Device Major Parameters	6
5.1	Parameters	6
6	Board Schematics.....	7
7	Mechanical Dimensions	8
8	Contact Information.....	9
	Appendix A – References	10
	Document References	10
	Acronyms and Abbreviations	10
	Appendix B - List of Figures and Tables	11
	List of Tables	11
	List of Figures	11
	Appendix C – Revision History	12

4 Pin Out and Signal Description

4.1 Module Description

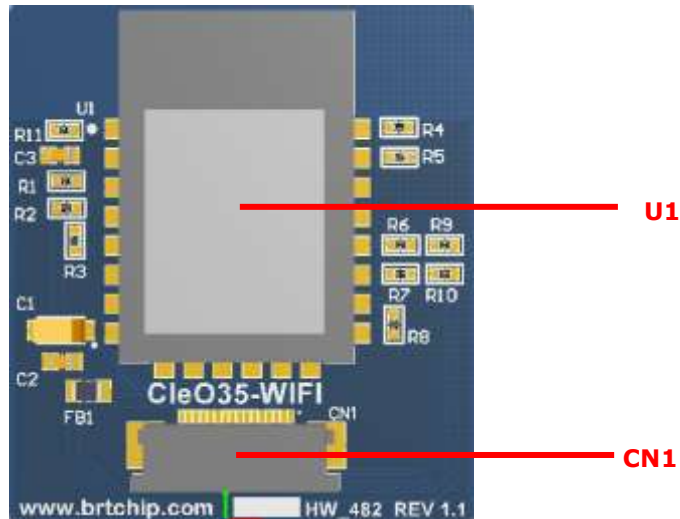


Figure 1 – CleO35-WIFI Top View

No	Feature	Reference Designator
1	ESP-12S WIFI Module	U1
2	16 pin 0.5mm pitch FFC Connector	CN1

Table 1 - Module Feature Description

4.2 Module Interface Signal Description

The pin description of **CN1** is given in **Table 2**.

Pin No	Pin Name	Type	Description
1	WIFI_RST	Input	Reset Wi-Fi module (Active low signal)
2	WIFI_EN	Input	Enable Wi-Fi module ('1' to enable module)
3	WIFI_CFG0	I/O	GPIO0
4	-	NC	No connection
5	VDD_3V3	Power	3V3 Supply
6	GND	Ground	Power ground
7	-	NC	No connection
8	-	NC	No connection
9	WIFI_TXD	Output	UART TXD
10	WIFI_RXD	Input	UART RXD

11	VDD_3V3	Power	3V3 Supply
12	GND	Ground	Power ground
13	-	NC	No connection
14	-	NC	No connection
15	-	NC	No connection
16	-	NC	No connection

Table 2 - CN1 Pin Description

Note: GPIO 0 is configurable which can determines the booting mode

'0' : boot from UART

'1' : boot from flash boot

5 Device Major Parameters

5.1 Parameters

Categories	Items	Values
WiFi parameters	Wi-Fi Protocols	802.11 b/g/n
	Frequency Range	2.4GHz -2.5GHz (2400M-2483.5M)
Hardware Parameters	Operating Voltage	3.3V
	Operating Current	80mA (Average)
	Operating Temperature Range	-40 °C ~ 125 °C
	Ambient Temperature Range	Normal Temperature
	External Interface	N/A
Software Parameters	Wi-Fi Mode	Station/SoftAP/SoftAP+Station
	Security	WPA/WPA2
	Network Protocols	IPv4,TCP/UDP/HTTP/FTP
	User Configuration	AT Instruction Set, Cloud Server, Android/iOS App
	Firmware Upgrade	UART Download/OTA(via network)/download and write firmware via host

Table 3 - Parameters

Parameters	Min	Typical	Max	Unit
Frequency Range	2.4		2.4825	GHz
Impedance		50		Ohm

Table 4 – Antenna Parameters

6 Board Schematics

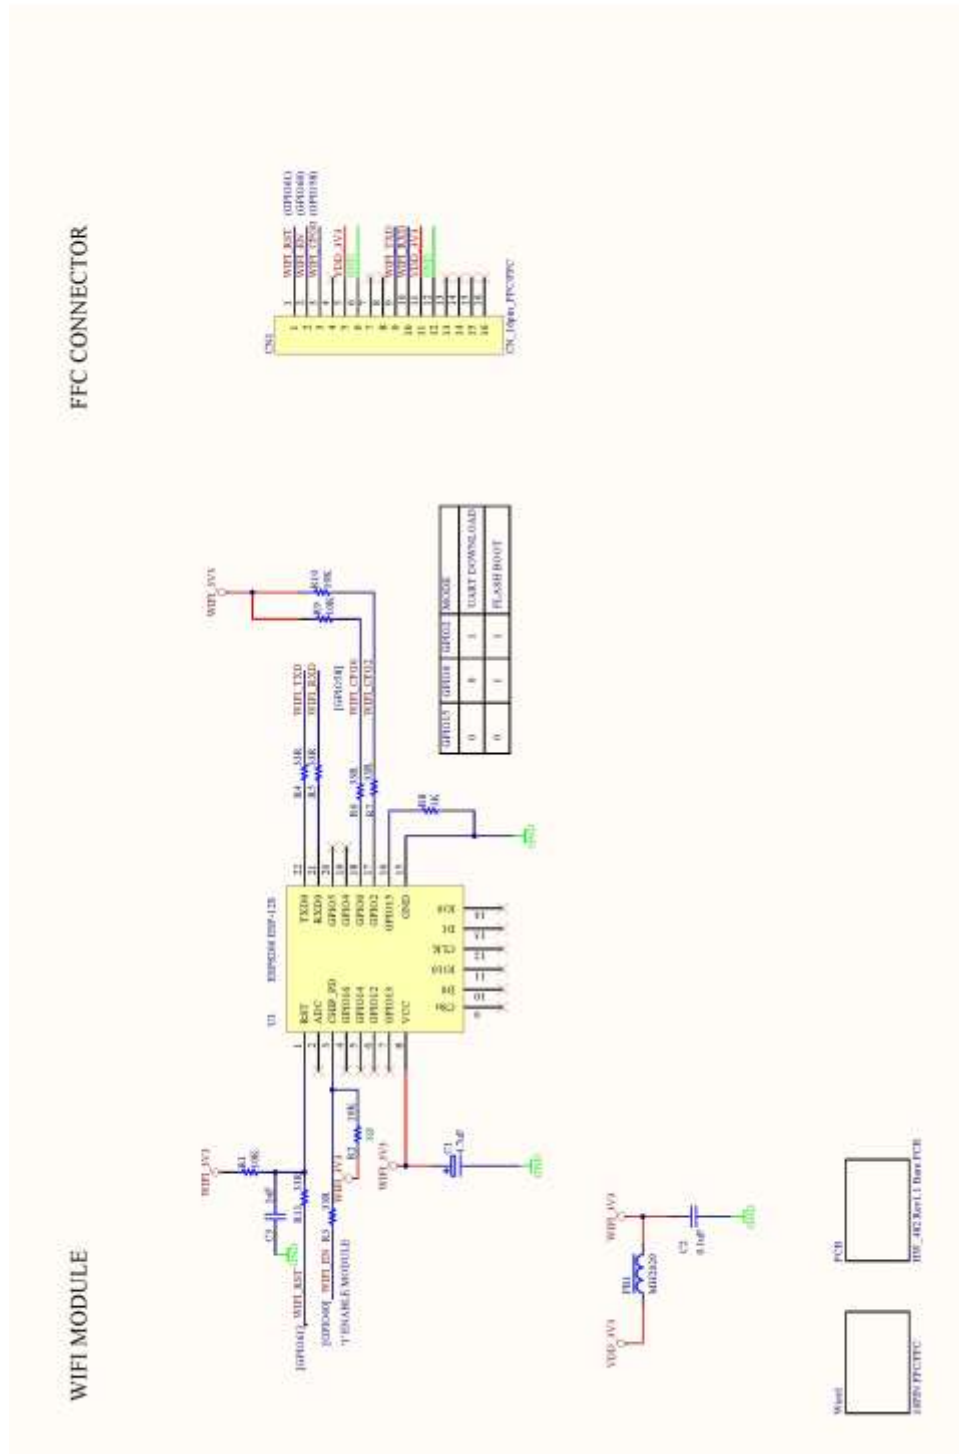


Figure 2 - Sheet 1 – CleO35-WIFI Board

7 Mechanical Dimensions

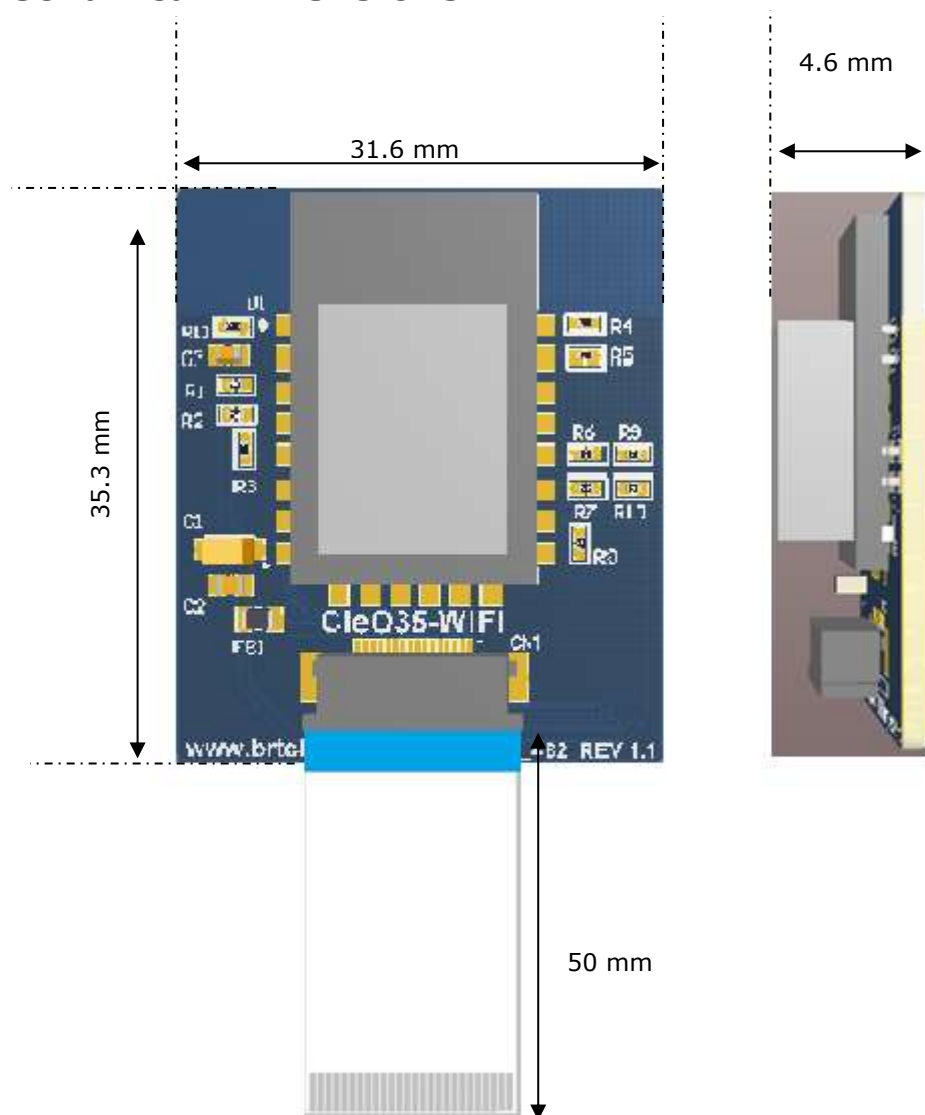


Figure 3 – CleO35-WIFI Module Dimensions

8 Contact Information

Head Quarters – Singapore

Bridgetek Pte Ltd
178 Paya Lebar Road, #07-03
Singapore 409030
Tel: +65 6547 4827
Fax: +65 6841 6071

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Branch Office – Taipei, Taiwan

Bridgetek Pte Ltd, Taiwan Branch
2 Floor, No. 516, Sec. 1, Nei Hu Road, Nei Hu
District
Taipei 114
Taiwan, R.O.C.
Tel: +886 (2) 8797 5691
Fax: +886 (2) 8751 9737

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Branch Office - Glasgow, United Kingdom

Bridgetek Pte. Ltd.
Unit 1, 2 Seaward Place, Centurion Business Park
Glasgow G41 1HH
United Kingdom
Tel: +44 (0) 141 429 2777
Fax: +44 (0) 141 429 2758

E-mail (Sales) sales.emea@brtchip.com
E-mail (Support) support.emea@brtchip.com

Branch Office – Vietnam

Bridgetek VietNam Company Limited
Lutaco Tower Building, 5th Floor, 173A Nguyen
Van Troi,
Ward 11, Phu Nhuan District,
Ho Chi Minh City, Vietnam
Tel : 08 38453222
Fax : 08 38455222

E-mail (Sales) sales.apac@brtchip.com
E-mail (Support) support.apac@brtchip.com

Web Site

<http://brtchip.com/>

Distributor and Sales Representatives

Please visit the Sales Network page of the [Bridgetek Web site](http://brtchip.com/) for the contact details of our distributor(s) and sales representative(s) in your country.

System and equipment manufacturers and designers are responsible to ensure that their systems, and any Bridgetek Pte Ltd (BRT Chip) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested Bridgetek devices and other materials) is provided for reference only. While Bridgetek has taken care to assure it is accurate, this information is subject to customer confirmation, and Bridgetek disclaims all liability for system designs and for any applications assistance provided by Bridgetek. Use of Bridgetek devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify and hold harmless Bridgetek from any and all damages, claims, suits or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted or reproduced in any material or electronic form without the prior written consent of the copyright holder. Bridgetek Pte Ltd, 178 Paya Lebar Road, #07-03, Singapore 409030. Singapore Registered Company Number: 201542387H.

Appendix A – References

Document References

For module documentations, please refer to URL below:

ESP8266 Datasheet : [_ESP8266 Datasheet](#)

ESP-12S Datasheet : [_ESP-12S Datasheet](#)

Arduino: <https://www.arduino.cc/>

CleOStuff tools: [CleOstuff](#)

Acronyms and Abbreviations

Terms	Description
CCK	Complementary Code Keying
DSSS	Direct-Sequence Spread Spectrum
OFDM	Orthogonal Frequency-Division Multiplexing
MCU	MicroController Unit
UART	Universal Asynchronous Receiver/Transmitter
WPA	Wi-Fi Protected Access

Appendix B - List of Figures and Tables

List of Tables

Table 1 - Module Feature Description	4
Table 2 - CN1 Pin Description.....	5
Table 3 - Parameters	6
Table 4 – Antenna Parameters	6

List of Figures

Figure 1 – CleO35-WIFI Top View	4
Figure 2 - Sheet 1 – CleO35-WIFI Board	7
Figure 3 – CleO35-WIFI Module Dimensions.....	8

Appendix C – Revision History

Document Title: Cle035-WIFI Module Datasheet
Document Reference No.: BRT_000117
Clearance No.: BRT#082
Product Page: <http://brtchip.com/m-cleo/>
Document Feedback: [Send Feedback](#)

Revision	Changes	Date
Version 1.0	Initial Release	2017-06-09

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А