


STM17S-3AE

NEMA 17 Integrated Drive+Motor w/ Encoder

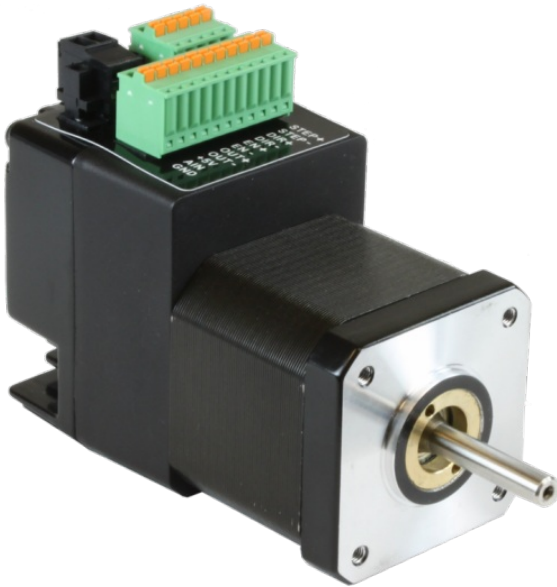

Product Features

- *Sophisticated current control*
- *Anti-resonance*
- *Torque ripple smoothing*
- *Microstep emulation*
- *NEMA 17 frame size*
- *Step & direction, CW/CCW pulse, and A/B quadrature pulse control modes*
- *Velocity (oscillator) control mode*
- *Streaming serial commands (SCL) control mode*
- *RS-232 port for programming and communications*
- *Built-in incremental encoder*



Description

The STM17S-3AE integrated stepper is a drive+motor unit, fusing a NEMA 17 step motor and a sophisticated 2.0 A/phase (peak-of-sine) stepper drive into a single device. Power to the drive, located at the rear of the motor, must be supplied by an external DC supply. See Related and Recommended Products below for compatible 24 and 48 volt DC [power supplies](#) .

The STM17S-3AE integrated stepper can operate in the following control modes: step (pulse) & direction, velocity (oscillator), and streaming serial commands (SCL). (*STM17 integrated steppers do not support operation with the Applied Motion 4-axis and 8-axis SiNet Hubs*). All STM17 units are setup and configured using Applied Motion's [ST Configurator™](#) software.

An integral 1000-line (4000 count/rev) incremental encoder is housed inside the same enclosure as the drive electronics, providing protection from dust and debris. The integration of the encoder means the STM17S-3AE can perform special functions not available otherwise. Stall Detection notifies the system as soon as the required torque is too great for the motor, which results in a loss of synchronization between the rotor and stator, also known as stalling. Stall Prevention actually prevents stalling of the step motor by dynamically adjusting motor speed to maintain synchronization of the rotor to the stator under all conditions. This unique feature allows step motors to operate in a much broader range of applications than previously available to step motors, such as torque-control applications. The Stall Prevention feature also performs static position maintenance, which maintains the position of the motor shaft when at rest.







Each STM17 integrated stepper comes with 3 digital inputs, 1 digital output, and 1 analog input. The digital inputs accept signals of 5-24 VDC and can be used for connecting pulse & direction signals, end-of-travel limit switches, jog switches, quadrature encoder signals, PLC outputs, sensors, or many other signal types. The digital output can be connected to PLC inputs, counters, lights, relays, or other devices. The analog input accepts 0-5 VDC signals and can be used for velocity and position control.

The STM17S-3AE comes with an RS-232 port for programming and serial communications.


Specifications

Part Number:	STM17S-3AE
Supply Voltage:	12-48 VDC
Supply Voltage Type:	DC
Control Modes:	Step & Direction Velocity (Oscillator) Streaming Commands
Communication Ports:	RS-232
Encoder Feedback:	Yes
Step Resolution:	Full Half Microstepping Microstep Emulation
Idle Current Reduction:	0-90%
Setup Method:	Software setup
Digital Inputs:	3
Digital Outputs:	1
Analog Inputs:	1 single-ended
Circuit Protection:	Short circuit Over-voltage Under-voltage Over-temp
Status LEDs:	1 red, 1 green
Frame Size:	NEMA 17
Holding Torque:	68 oz-in
Step Angle:	1.8 deg
Rotor Inertia:	1.16E-03 oz-in-sec ²
Length:	3.19 inches
Weight:	15.6 oz
Operating Temperature Range:	0-85 °C
Ambient Temperature Range:	0-40 °C
Ambient Humidity:	90% max, non-condensing
Insulation Class:	Class B (130 °C)

Downloads

Speed-Torque Curves:	 STM17-3_torque_curves.pdf
Manuals:	 STM17_Hardware_Manual.pdf  STM17_Quick_Setup_Guide.pdf  Host Command Reference Rev I.pdf
Datasheet:	http://s3.amazonaws.com/applied-motion-pdf/STM17S-3AE.pdf
Family Datasheet:	 STM-Datasheet-925-0009.pdf
2D Drawing:	 STM17S-3X_3D.pdf  STM17S-Q-C-3XX_RevB.pdf
3D Drawing:	 STM17S-3X_Simple.igs  STM17X-3X_NEW.igs
Agency Approvals:	 STM17_23_24_CE_DOC.pdf
Application Notes:	 APPN0026B-LabVIEW-communication-using-streaming-commands.zip  APPN0018_EZ-Series-Touchpanel-HMI.zip

Torque Curves

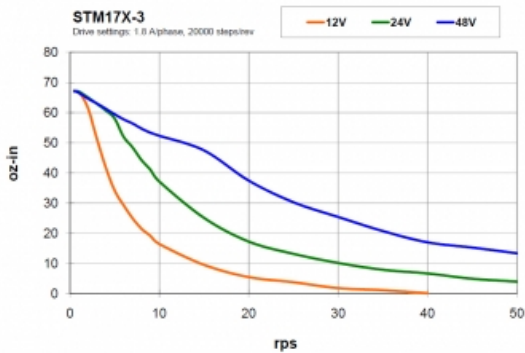

Software

Software:	SCL Utility ST Configurator™
Sample Code:	 scldemo.zip

Products in the Series *STM17 Integrated Steppers*

Part Number	Frame Size	Supply Voltage	Control Modes	Holding Torque	Communication Ports	Encoder Feedback	1pc.
STM17C-3CE	NEMA 17	12-48 VDC	CANopen	68	RS-232, CANopen	Yes	\$470.00
STM17C-3CN	NEMA 17	12-48 VDC	CANopen	68	RS-232, CANopen	No	\$395.00
STM17Q-1AE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	31	RS-232	Yes	\$347.00
STM17Q-1AN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	31	RS-232	No	\$272.00
STM17Q-1RE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	31	RS-485	Yes	\$353.00
STM17Q-1RN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	31	RS-485	No	\$278.00
STM17Q-2AE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	54	RS-232	Yes	\$350.00
STM17Q-2AN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	54	RS-232	No	\$275.00
STM17Q-2RE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	54	RS-485	Yes	\$356.00
STM17Q-2RN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	54	RS-485	No	\$281.00
STM17Q-3AE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	68	RS-232	Yes	\$353.00
STM17Q-3AN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	68	RS-232	No	\$288.00
STM17Q-3RE	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	68	RS-485	Yes	\$360.00
STM17Q-3RN	NEMA 17	12-48 VDC	Streaming Commands, Analog Positioning, Encoder Following, Q Programming, Modbus	68	RS-485	No	\$295.00
STM17R-3ND	NEMA 17	12-48 VDC	Step & Direction	68	NA	No	\$118.00
STM17R-3NE	NEMA 17	12-48 VDC	Step & Direction	68	NA	Yes	\$192.00
STM17R-3NN	NEMA 17	12-48 VDC	Step & Direction	68	NA	No	\$117.00
STM17S-1AE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	31	RS-232	Yes	\$317.00
STM17S-1AN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	31	RS-232	No	\$242.00
STM17S-1RE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	31	RS-485	Yes	\$325.00
STM17S-1RN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	31	RS-485	No	\$250.00
STM17S-2AE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	54	RS-232	Yes	\$324.00
STM17S-2AN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	54	RS-232	No	\$249.00
STM17S-2RE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	54	RS-485	Yes	\$331.00
STM17S-2RN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	54	RS-485	No	\$256.00
STM17S-3AE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	68	RS-232	Yes	\$328.00
STM17S-3AN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	68	RS-232	No	\$263.00
STM17S-3RE	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	68	RS-485	Yes	\$335.00

STM17S-3RN	NEMA 17	12-48 VDC	Step & Direction, Velocity (Oscillator), Streaming Commands	68	RS-485	No	\$270.00
----------------------------	---------	-----------	--	----	--------	----	----------

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А