



VOIDLESS HERMETICALLY SEALED STANDARD RECOVERY GLASS RECTIFIERS

Qualified to MIL-PRF-19500/420

Qualified Levels:
JAN, JANTX, JANTXV
and JANS

DESCRIPTION

This “standard recovery” rectifier diode series is military qualified and is ideal for high-reliability applications where a failure cannot be tolerated. These industry-recognized 5.0 amp rated rectifiers for working peak reverse voltages from 200 to 1000 volts are hermetically sealed with voidless-glass construction using an internal “Category 1” metallurgical bond. These devices are also available in surface mount MELF package configurations. Microsemi also offers numerous other rectifier products to meet higher and lower current ratings with various recovery time speed requirements including fast and ultrafast device types in both through-hole and surface mount packages.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- JEDEC registered 1N5550 thru 1N5554 series.
- Voidless hermetically sealed glass package.
- Extremely robust construction.
- Quadruple-layer passivation.
- Internal “Category 1” metallurgical bonds.
- JAN, JANTX, JANTXV and JANS qualified versions available per MIL-PRF-19500/420.
- RoHS compliant versions available (commercial grade only).

APPLICATIONS / BENEFITS

- Standard recovery 5 amp 200 to 1000 volts rectifier series.
- Military and other high-reliability applications.
- General rectifier applications including bridges, half-bridges, catch diodes, etc.
- High forward surge current capability.
- Low thermal resistance.
- Controlled avalanche with peak reverse power capability.
- Extremely robust construction.
- Inherently radiation hard as described in Microsemi “[MicroNote 050](#)”.

MAXIMUM RATINGS @ T_A = 25 °C unless otherwise noted.

| Parameters/Test Conditions | Symbol | Value | Unit |
|---|-------------------------------------|----------------------------------|------|
| Junction and Storage Temperature | T _J and T _{STG} | -65 to +175 | °C |
| Thermal Resistance Junction-to-Lead ⁽¹⁾ | R _{θJL} | 22 | °C/W |
| Thermal Impedance @ 10 ms heating time | Z _{θJX} | 1.5 | °C/W |
| Maximum Forward Surge Current (8.3 ms half sine) | I _{FSM} | 100 | A |
| Average Rectified Forward Current ⁽¹⁾ @ T _L = 30 °C | I _{O(L)} | 5 | A |
| Average Rectified Forward Current ⁽³⁾ @ T _A = 55 °C | I _{O2} ⁽²⁾ | 3 | A |
| @ T _A = 100 °C | I _{O3} ⁽⁴⁾ | 2 | A |
| Working Peak Reverse Voltage | V _{RWM} | 200 400 600 800 1000 | V |
| Solder Temperature @ 10 s | T _{SP} | 260 | °C |

See notes on next page.



“B” Package

Also available in:

“B” SQ-MELF
(D-5B) Package

(surface mount)

 [1N5550US – 1N5554US](#)

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
Tel: 1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298

Website:

www.microsemi.com

MAXIMUM RATINGS

- Notes:**
1. At .375 inch (9.52 mm) lead length from body.
 2. Derate linearly at 22.2 mA/°C from +55 °C to +100 °C.
 3. These I_O ratings are for a thermally (PC boards or other) mounting methods where the lead or end-cap temperatures cannot be maintained and where thermal resistance from mounting point to ambient is still sufficiently controlled where $T_{J(MAX)}$ does not exceed 175 °C. This equates to $R_{\theta,JX} \leq 47$ °C/W.
 4. Derate linearly at 26.7 mA/°C above $T_A = +100$ °C to +175 °C ambient.

MECHANICAL and PACKAGING

- CASE: Hermetically sealed voidless hard glass with tungsten slugs.
- TERMINALS: Axial-leads are tin/lead (Sn/Pb) over copper. RoHS compliant matte-tin is available for commercial only.
- MARKING: Body paint and part number.
- POLARITY: Cathode band.
- TAPE & REEL option: Standard per EIA-296. Consult factory for quantities.
- WEIGHT: 750 milligrams.
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

JAN 1N5550 (e3)

Reliability Level

JAN = JAN Level
 JANTX = JANTX Level
 JANTXV = JANTXV Level
 JANS = JANS Level
 Blank = commercial

JEDEC type number

See [Electrical Characteristics](#) table

RoHS Compliance

e3 = RoHS compliant (available on commercial grade only)
 Blank = non-RoHS compliant

SYMBOLS & DEFINITIONS

| Symbol | Definition |
|-----------|---|
| V_{BR} | Minimum Breakdown Voltage: The minimum voltage the device will exhibit at a specified current. |
| V_{RWM} | Working Peak Reverse Voltage: The maximum peak voltage that can be applied over the operating temperature range excluding all transient voltages (ref JESD282-B). |
| I_O | Average Rectified Output Current: The Output Current averaged over a full cycle with a 50 Hz or 60 Hz sine-wave input and a 180 degree conduction angle. |
| V_F | Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current. |
| I_R | Maximum Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature. |
| t_{rr} | Reverse Recovery Time: The time interval between the instant the current passes through zero when changing from the forward direction to the reverse direction and a specified decay point after a peak reverse current occurs. |

ELECTRICAL CHARACTERISTICS @ $T_A = 25^\circ\text{C}$ unless otherwise noted.

| TYPE | MINIMUM BREAKDOWN VOLTAGE V_{BR} $I_R @ 50 \mu\text{A}$ Volts | FORWARD VOLTAGE $V_F @ I_F = 9 \text{ A (pk)}$ | | MAXIMUM REVERSE CURRENT $I_R @ V_{RWM}$ μA | REVERSE RECOVERY t_{rr} (Note 1) μs |
|--------|--|---|---------------|---|--|
| | | MIN. Volts | MAX. Volts | | |
| 1N5550 | 220 | 0.6 V (pk) | 1.2 V (pk) | 1.0 | 2.0 |
| 1N5551 | 440 | 0.6 V (pk) | 1.2 V (pk) | 1.0 | 2.0 |
| 1N5552 | 660 | 0.6 V (pk) | 1.2 V (pk) | 1.0 | 2.0 |
| 1N5553 | 880 | 0.6 V (pk) | 1.3 V (pk) | 1.0 | 2.0 |
| 1N5554 | 1100 | 0.6 V (pk) | 1.3 V (pk) | 1.0 | 2.0 |

NOTE 1: $I_F = 0.5 \text{ A}$, $I_{RM} = 1.0 \text{ A}$, $I_{R(REC)} = .250 \text{ A}$.

GRAPHS

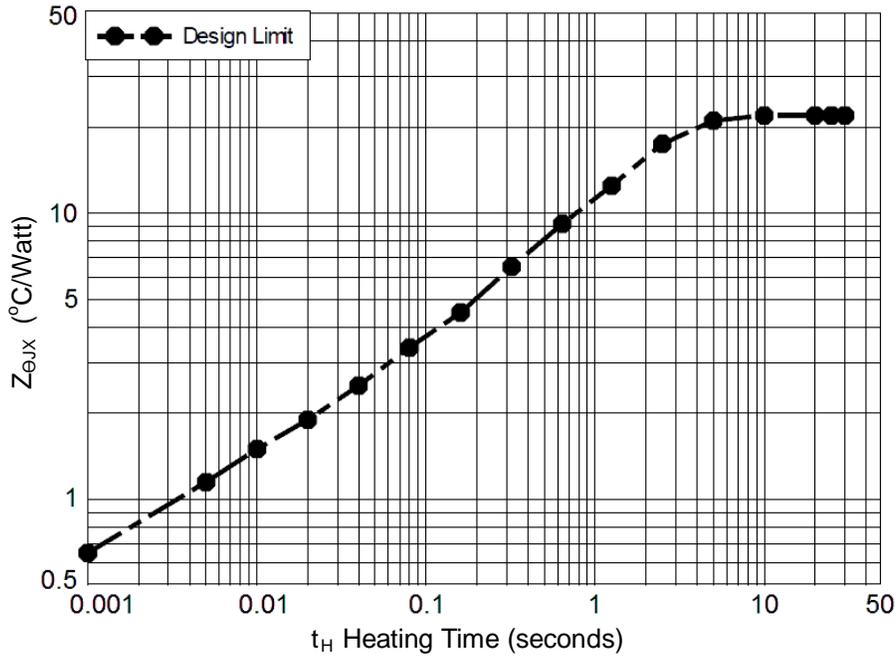


FIGURE 1
Maximum Thermal Impedance

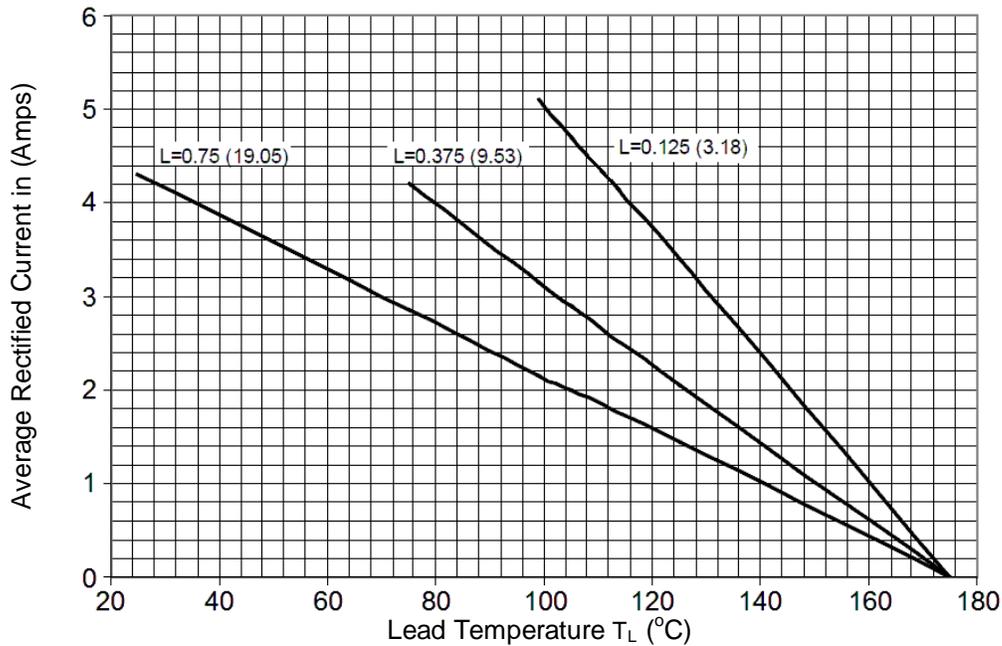


FIGURE 2
Maximum Current vs. Lead Temperature

- NOTES:** 1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

GRAPHS (continued)

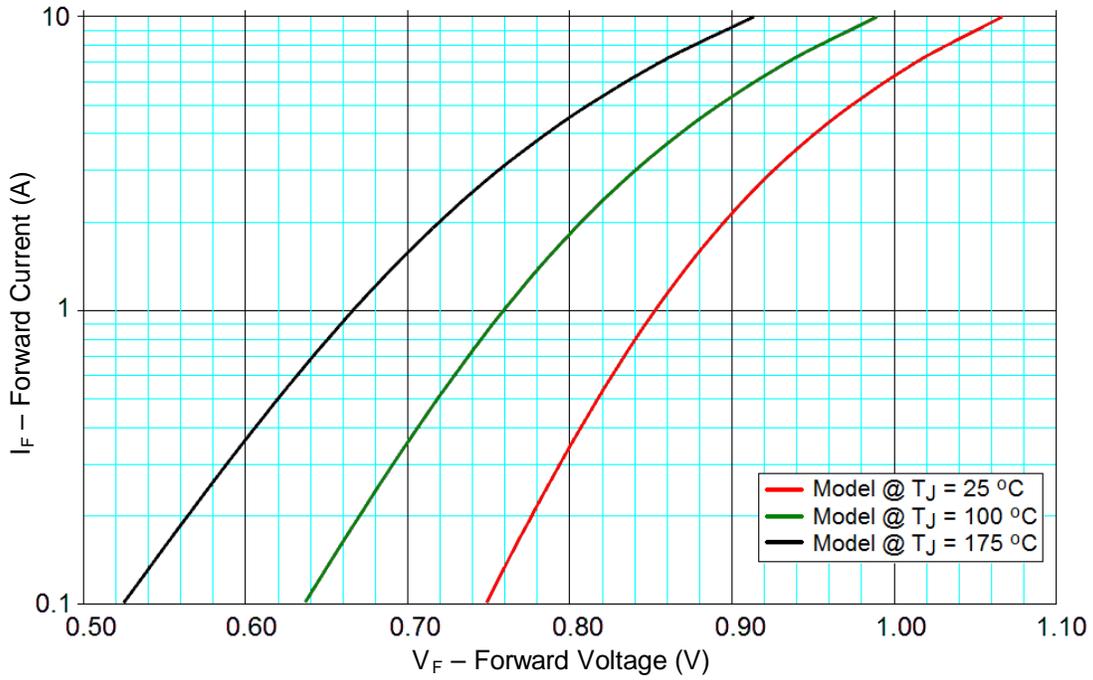
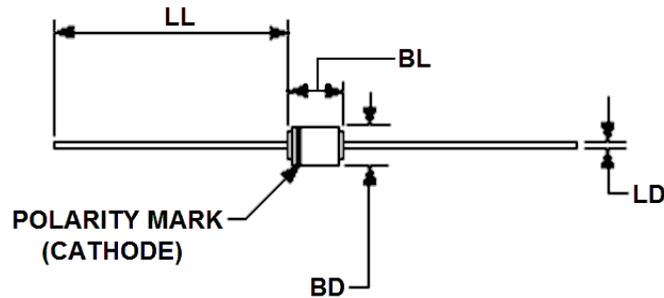


FIGURE 3
Typical Forward Voltage vs. Forward Current

PACKAGE DIMENSIONS


| Ltr | Dimensions | | | | Notes |
|-----------|------------|-------|-------------|-------|-------|
| | Inch | | Millimeters | | |
| | Min | Max | Min | Max | |
| BD | 0.115 | 0.180 | 2.92 | 4.57 | 3, 4 |
| BL | 0.130 | 0.300 | 3.30 | 7.62 | 4 |
| LD | 0.036 | 0.042 | 0.92 | 1.07 | |
| LL | 0.900 | 1.300 | 22.86 | 33.02 | |

NOTES:

1. Dimensions are in inches.
2. Millimeter equivalents are given for general information only.
3. The BL dimension shall include the entire body including slugs and sections of the lead over which the diameter is uncontrolled. This uncontrolled area is defined as the zone between the edge of the diode body and extending .050 inch (1.27 mm) onto the leads.
4. Dimension BD shall be measured at the largest diameter.
5. In accordance with ASME Y14.5M, diameters are equivalent to Φ x symbology.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[JANTXV1N5552](#) [JANTXV1N5551](#) [JAN1N5552](#) [JAN1N5553](#) [JAN1N5550](#) [1N5551](#) [1N5552](#) [JAN1N5551](#)
[JANTX1N5551](#) [JANTX1N5553](#) [JANTX1N5552](#) [JANTX1N5554](#) [JANTX1N5550](#) [1N5554](#) [1N5553](#) [1N5550](#)
[1N5552/TR](#) [JAN1N5554/TR](#) [JANS1N5552/TR](#) [JANS1N5554/TR](#) [JAN1N5553/TR](#) [JANTX1N5554/TR](#) [JAN1N5551/TR](#)
[JANTXV1N5554/TR](#) [JANTX1N5550/TR](#) [JANTX1N5551/TR](#) [JANTXV1N5550/TR](#) [JANTX1N5552/TR](#)
[JANS1N5551/TR](#) [JAN1N5552/TR](#) [JANTXV1N5552/TR](#) [JANTX1N5553/TR](#) [JANS1N5553/TR](#) [JANTXV1N5553/TR](#)
[JANTXV1N5551/TR](#) [JAN1N5550/TR](#) [1N5551/TR](#) [1N5553/TR](#) [1N5554/TR](#) [1N5550/TR](#) [1N5552e3](#) [1N5550e3](#)
[1N5552e3/TR](#) [JANS1N5552](#) [JANTXV1N5553](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А