# Precision SMD TCXO/VCTCXO




5.0 x 3.2 x 2.0mm

**AST3TQ53**

ESD Sensitive

RoHS/RoHS II Compliant

**Moisture Sensitivity Level (MSL) – 3**

## FEATURES:

- Standard available frequencies: 10.00, 12.80, 16.384, 19.20, 19.44, 20.00, 24.576, 25.00, 26.00, 30.72, 40.00 MHz
- LVCMOS Output or Clippled Sine Wave output
- Frequency stabilities to include ±50ppb, ±100ppb and ±280ppb over -40ºC to +85ºC operating temperature range
- Excellent Phase Noise, Harmonics and Spurious content
- Typical rms jitter of 400fs @ 40MHz carrier & 1.0ps @ 10MHz carrier over 12kHz to 20MHz BW

## APPLICATIONS:

- COTS Military Radios & other Communication Hardware
- WiMax,
- LTE, BTS
- CATV, LAN, LMDS
- GPS Tracking with Hold-Over accuracy
- Test & Measurement Equipment
- Point-to-Point communication networks

## STANDARD SPECIFICATIONS:

### Maximum Rating

| Parameters | Rating |
|---|---|
| Storage Temperature Range | -55 to +125°C |
| Supply Voltage | -0.5 to 6V |
| Control Voltage | 0 to 3V |
| ESD, HBM/CDM/MM | 4kV/2kV/200V |

### Key Electrical Specifications

| Parameters | Minimum | Typical | Maximum | Units | Notes |
|---|---|---|---|---|---|
| Frequency Range | 10 | | 40 | MHz | |
| Standard Frequencies | 10.00, 12.80, 16.384, 19.20, 19.44, 20.00, 24.576, 25.00, 26.00, 30.72, 40.00 | | | MHz | |
| Initial Frequency Tolerance (@+25°C) at shipping | | | ±0.5 | ppm | Relative to carrier |
| **Frequency Stability Options (Ref. to Frequency @+25°C)** | | | | | |
| -40°C to +85°C | | | ±50 | ppb | Option "5" |
| -40°C to +85°C | | | ±100 | ppb | Option "1" |
| -40°C to +85°C | | | ±280 | ppb | Option "2" |
| Frequency Stability vs. Supply Voltage Change (Vdd±5%) | | | ±100 | ppb | |
| Frequency Stability vs. Load Change (Load±5%) | | | ±200 | ppb | |
| Aging (first year @+25°C) | | | ±1.0 | ppm | |
| Aging (20 years @+25°C) | | ±3.0 | ±4.6 | ppm | |
| Supply Voltage (Vdd) | +3.135 | +3.3 | +3.465 | V | |
| Supply Current (Icc) | | | 6.0 | mA | No load |
| **Control Port ( *Applicable for VCTCXO only*)** | | | | | |
| Control Voltage Range (Vc) | +0.5 | +1.5 | +2.5 | V | |
| Center Control Voltage (Vc) | | +1.5 | | V | To be with-in ±500 ppb of Fc @ 25°C (at shipping) |
| Frequency Tuning Range | ±5 | ±7 | <±13 | ppm | |
| Tuning Slope | | Positive | | | |
| Linearity | | | ±1 | % | |
| Port Impedance | 100 | | | kΩ | |



2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 04.02.15**
Ph. 949.546.8000 | Fax. 949.546.8001
Visit www.abracon.com for Terms and Conditions of Sale

# Precision SMD TCXO/VCTCXO

AST3TQ53

ESD Sensitive

RoHS/RoHS II Compliant




5.0 x 3.2 x 2.0mm

## STANDARD SPECIFICATIONS:

**(Continued)**

| Parameters | Minimum | Typical | Maximum | Unites | Notes |
|---|---|---|---|---|---|
| Phase Noise (10MHz carrier frequency @25℃): | | | -95 | dBc/Hz | Offset @10Hz |
| | | | -120 | | Offset @100Hz |
| | | | -140 | | Offset @1kHz |
| | | | -145 | | Offset @10kHz |
| | | | -150 | | Offset @100kHz |
| RMS Jitter (@12kHz~5MHz BW) | 0.4 | | 1.3 | ps | Carrier Dependent |
| **Clipped Sine Wave** | | | | | |
| Output Level | 0.8 | | | Vp-p | |
| Output Load | | 10kΩ//10pF | | | |
| **LVCMOS Output (Square Wave)** | | | | | |
| $V_{OH}$ | 2.4 | | | V | Output Load=15pF |
| $V_{OL}$ | | | 0.4 | V | Output Load=15pF |
| Output Load | | | 15 | pF | |
| Duty Cycle | 45 | | 55 | % | @( $V_{OH}$ - $V_{OL}$)/2 |
| Rise/Fall Time | | | 6 | ns | Output Load=15pF |

## PART IDENTIFICATION:

AST3TQ53 - ☐ - ☐☐☐☐☐☐ MHz - ☐ - ☐ - ☐

| Pullability |
|---|
| T = TCXO |
| V = VCTCXO |

| Frequency in MHz |
|---|
| Please specify the frequency in MHz. e.g. 19.200MHz |

| Freq. Stability over Operating Temp. |
|---|
| 5: ±50ppb |
| 1: ±100ppb |
| 2: ±280ppb |

| Output Type |
|---|
| C: LVCMOS |
| SW: Clipped Sine Wave |

| Packaging |
|---|
| Blank: Bulk |
| T5: 500pcs/reel |
| T2: 2000pcs/reel |

# Precision SMD TCXO/VCTCXO

AST3TQ53

ESD Sensitive

RoHS/RoHS II Compliant




5.0 x 3.2 x 2.0mm

## TYPICAL FREQUENCY STABILITY VS. TEMPERATURE

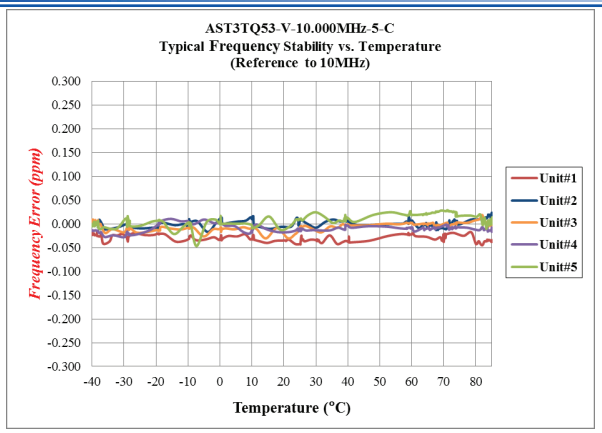


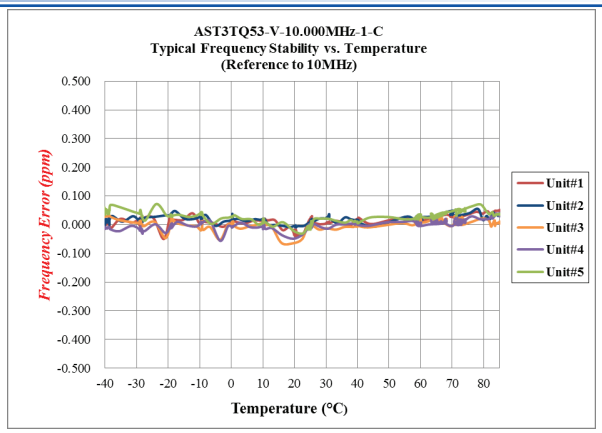


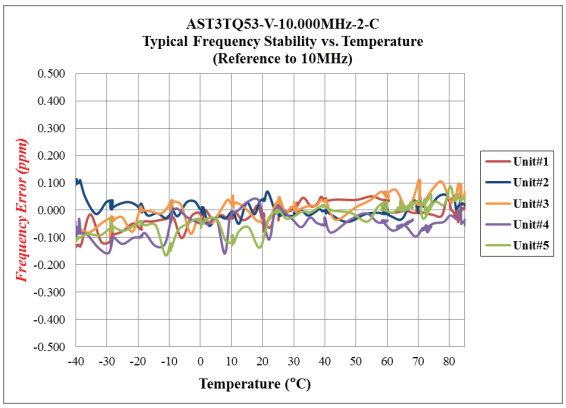


## TYPICAL SHORT TERM STABILITY

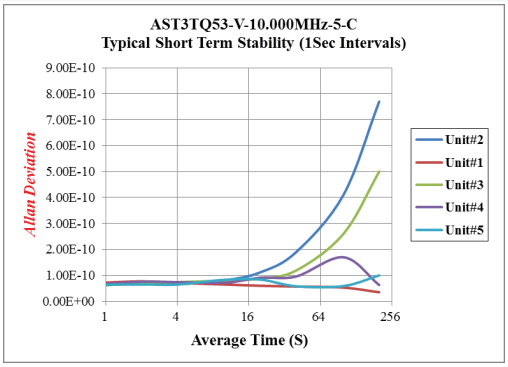


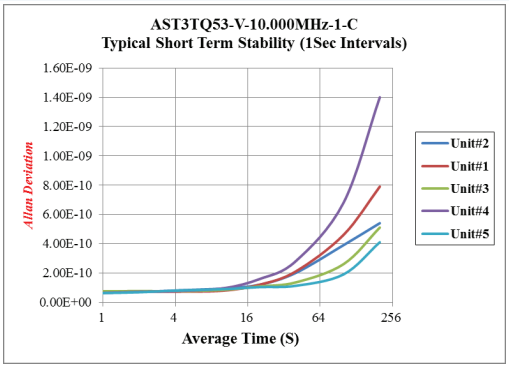


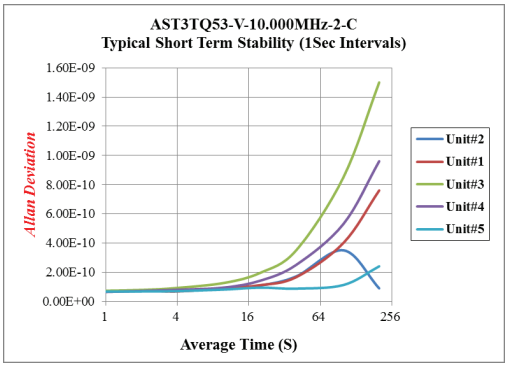

# Precision SMD TCXO/VCTCXO

AST3TQ53

ESD Sensitive

RoHS/RoHS II Compliant




5.0 x 3.2 x 2.0mm

## TYPICAL FREQUENCY PULL VS. CONTROL VOLTAGE

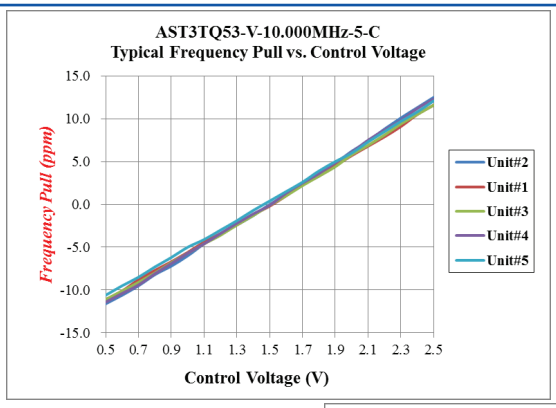


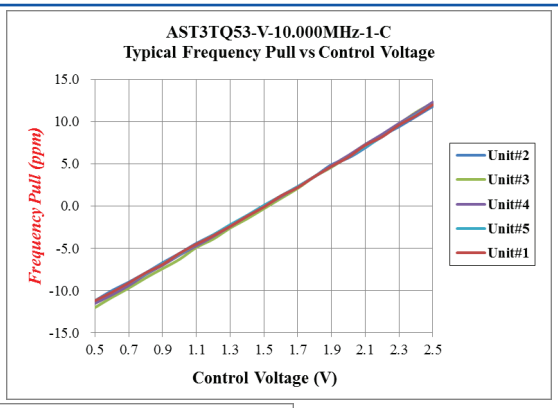


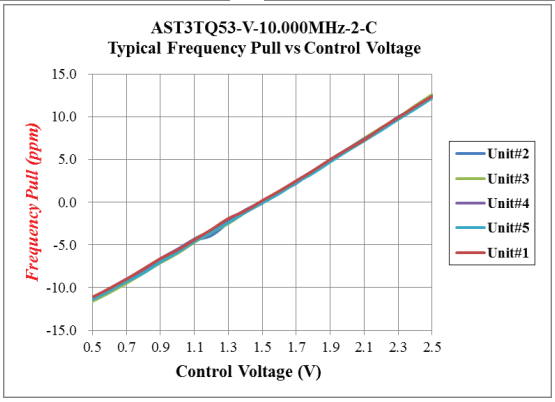


## TYPICAL PHASE NOISE

**10.00 MHz Carrier**

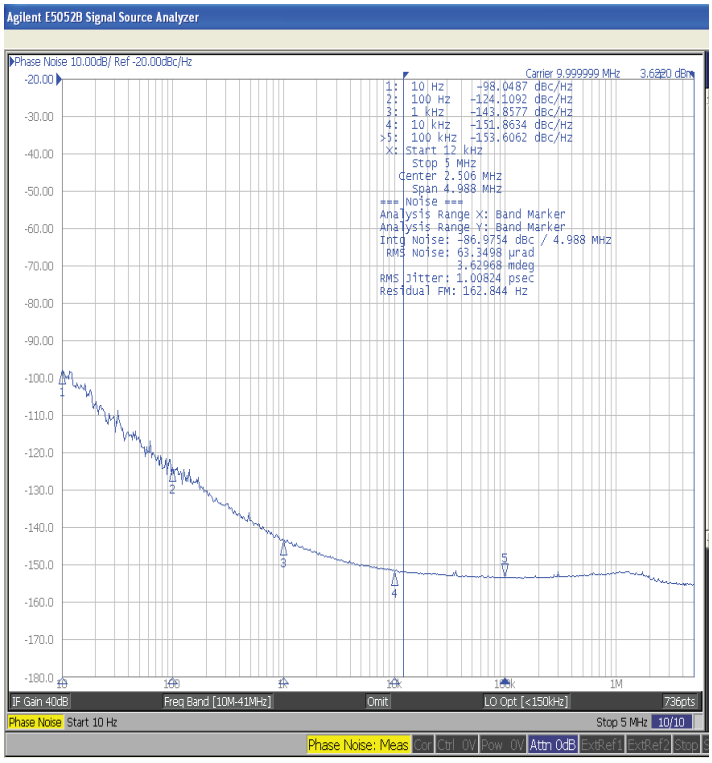

# Precision SMD TCXO/VCTCXO

AST3TQ53

ESD Sensitive

RoHS/RoHS II Compliant




5.0 x 3.2 x 2.0mm

## TYPICAL AGING:

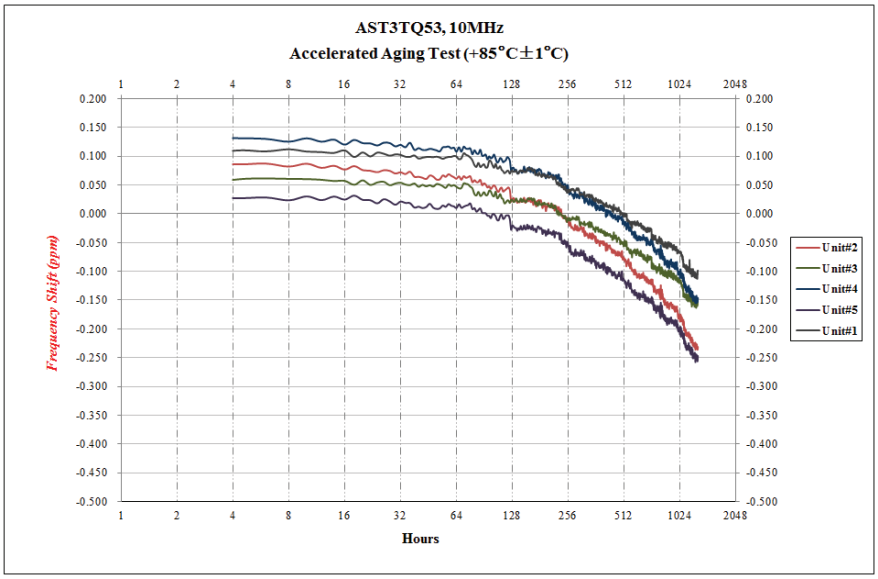


| Aging Test Conditions | |
|---|---|
| Series | AST3TQ53 |
| Frequency | 10MHz |
| Acquisition Mode | Cycle |
| Acquisition Time | 1129 hours |
| Test Temperature | +85°C ± 1°C |
| Number of Samples | 5pcs |

| Aging Data | | | |
|---|---|---|---|
| No. | Aging Time (hrs) | Aging/Day (ppm) | Projected Aging/year (ppm) |
| #1 | 1129 | -0.0039 | -0.3896 |
| #2 | 1129 | -0.0059 | -0.5925 |
| #3 | 1129 | -0.0042 | -0.4202 |
| #4 | 1129 | -0.0056 | -0.5555 |
| #5 | 1129 | -0.0055 | -0.5492 |

## OUTLINE DIMENSION:

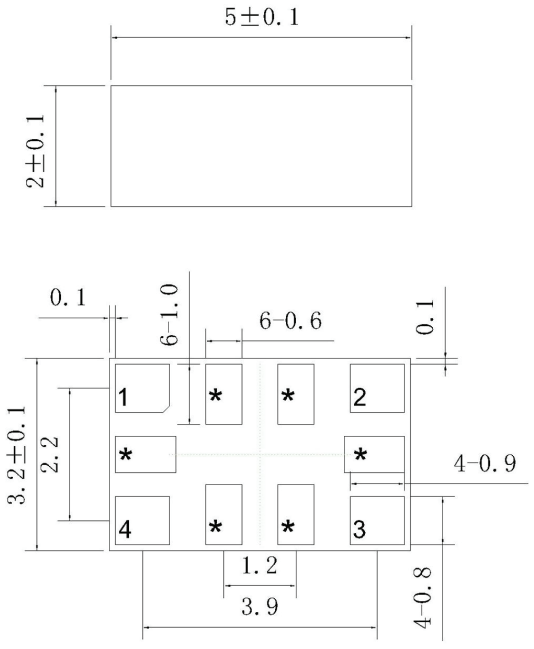


Recommended Land Pattern

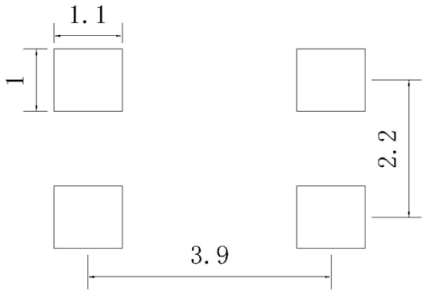


| Pin | Function |
|---|---|
| 1 | NC *(for TCXO)*<br>Vc (*for VCTCXO*) |
| 2 | GND |
| 3 | Output |
| 4 | Vdd |
| * | For factory test only |

**Dimensions: mm**

# Precision SMD TCXO/VCTCXO

AST3TQ53

ESD Sensitive

RoHS/RoHS II Compliant




5.0 x 3.2 x 2.0mm

## REFLOW PROFILE:

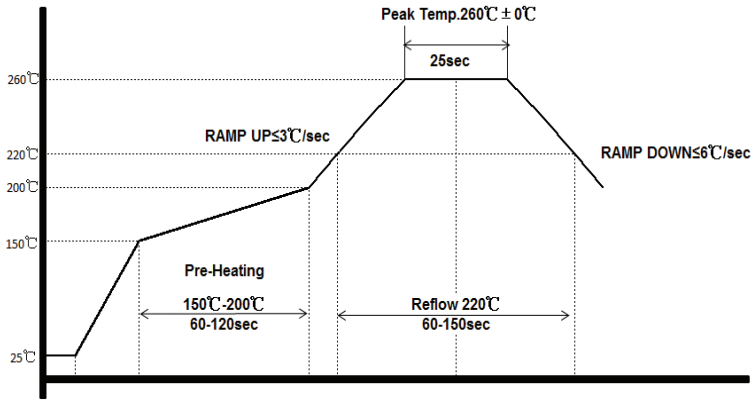


## TAPE & REEL:

**T5: 500pcs/reel; T2: 2000pcs/reel**

**MSL-3 packaging applies to MOQ=25 units (cut tape), T5 & T2.**

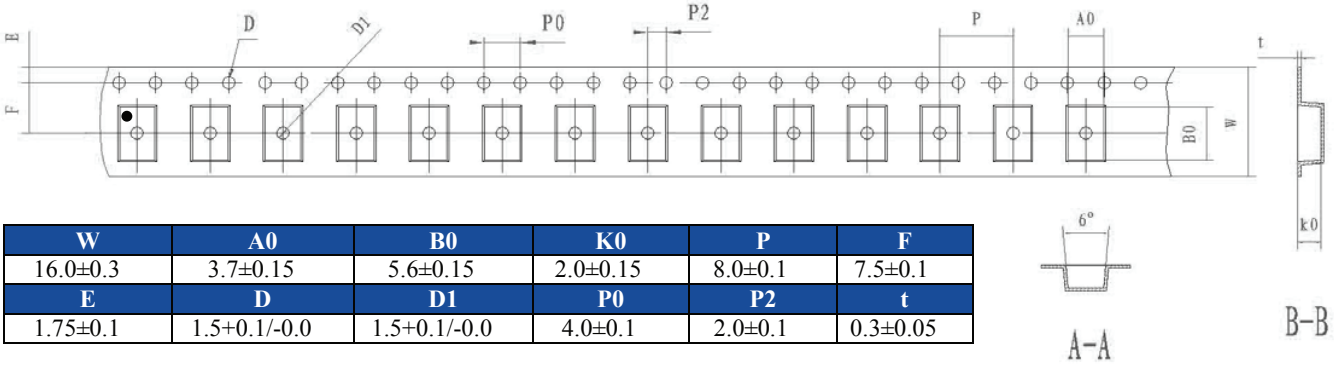


| W | A0 | B0 | K0 | P | F |
|---|---|---|---|---|---|
| 16.0±0.3 | 3.7±0.15 | 5.6±0.15 | 2.0±0.15 | 8.0±0.1 | 7.5±0.1 |
| **E** | **D** | **D1** | **P0** | **P2** | **t** |
| 1.75±0.1 | 1.5+0.1/-0.0 | 1.5+0.1/-0.0 | 4.0±0.1 | 2.0±0.1 | 0.3±0.05 |

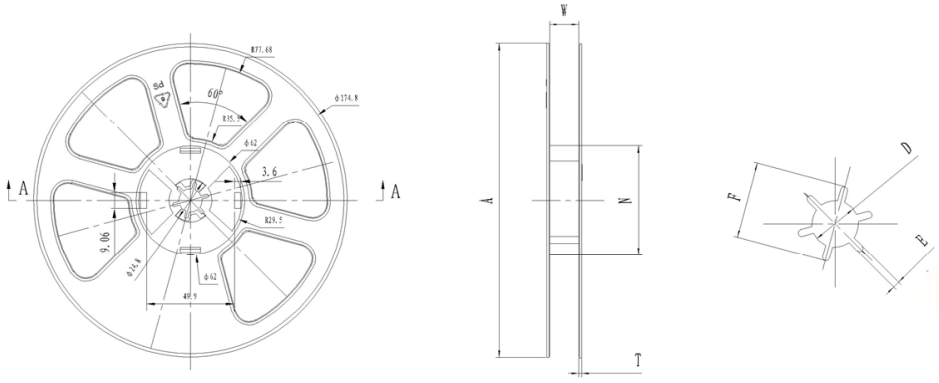


| W | A | N | T | E | F | D |
|---|---|---|---|---|---|---|
| 16.4±0.3 | 178±0.5 | 62±0.4 | 1.8±0.2 | 2.0±0.5 | 21.8±0.8 | 13.5±0.3 |

**Dimensions: mm**

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

# OCEAN CHIPS
## Океан Электроники
## Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

**«FORSTAR»** (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А