

R30A

AC Operated, Light Weight RVDT

SPECIFICATIONS

- ◆ AC operation
- ◆ ± 60 degree angular sensing range
- ◆ Light weight
- ◆ Non-contact electrical design
- ◆ Wide operating temperature range
- ◆ Size 11 servo mount
- ◆ Anodized aluminum housing

The **R30A RVDT** (Rotary Variable Differential Transformer) is an angular position sensor that incorporates a proprietary non-contact design which dramatically improves long term reliability when compared to other traditional rotary devices such as synchros, resolvers and potentiometers. This unique design eliminates assemblies that degrade over time such as slip rings, rotor windings, contact brushes and wipers, without sacrificing accuracy.

High reliability and performance are achieved through the use of a specially shaped rotor and wound coil that together simulates the linear displacement of a Linear Variable Differential Transformer (LVDT). Rotational movement of the rotor shaft results in a linear change in the amplitude of the output signal, directly proportional to the shaft angle change, while the phase of this output signal indicates the direction of displacement from the null point. Non-contact electromagnetic coupling of the rotor provides infinite resolution thus enabling absolute measurements to a fraction of a degree.

AC operation eliminates the need for integrated signal conditioning components, thereby offering the user an extremely wide operating temperature range of -55°C to $+150^{\circ}\text{C}$. Factory calibrated to operate over a ± 30 degree range, the R30A offers a non-linearity of less than $\pm 0.25\%$ of full range. Extended range operation up to a maximum of ± 60 degrees is possible with increased non-linearity. Packaged in a small, size 11 servo mount, aluminum housing with flying lead termination, the R30A is ideal for space restrictive applications.

FEATURES

- ◆ High accuracy
- ◆ Infinite resolution
- ◆ Long term reliability
- ◆ Wide -55° to $+150^{\circ}\text{C}$ operating temp range
- ◆ Rugged anodized aluminum housing
- ◆ Shielded ABEC 3 precision bearings

APPLICATIONS

- ◆ Valve position
- ◆ Machine tool equipment
- ◆ Rotary actuator feedback
- ◆ Dancer arm position
- ◆ Process control

PERFORMANCE SPECIFICATIONS

ELECTRICAL SPECIFICATIONS						
Parameter	@10kHz Input Frequency (recommended)			@2.5kHz Input Frequency		
Angular range, degrees	±30°	±40°	±60°	±30°	±40°	±60°
Non-linearity, % of FR	±0.25%	±1%	±2%	±0.25%	±1%	±2%
Output at range ends (*)	87mV/V	116mV/V	174mV/V	69 mV/V	92 mV/V	138 mV/V
Sensitivity	2.9 mV/V/degree			2.3 mV/V/degree		
Temp coefficient of sensitivity	0.02%/°F [0.036%/°C], 20 to +160°F [-7 to +71°C]			Not specified		
Input / Output impedances	370Ω / 1300Ω			135Ω / 600Ω		
Phase shift	+3°			+35°		
Input voltage and frequency	3 VRMS @ 2.5 to 10 kHz (10kHz recommended)					
Null voltage	0.5% of FRO, maximum					
ENVIRONMENTAL AND MECHANICAL SPECIFICATIONS						
Operating temperature	-67°F to +300°F [-55°C to 150°C]					
Mechanical angular range	360 degrees (no stops)					
Bearings	Shielded ABEC 3 precision					
Shaft diameter	3/16 inch [4.76 mm]					
Housing material	Aluminum, anodized					
Mounting	Size 11 servo mount per BU-ORD					
Moment of inertia	0.53 x 10 ⁻⁶ inch.lb-force.second ² [0.61 x 10 ⁻⁶ Kg-force.cm.second ²]					
Maximum torque, unbalance	0.004 inch.ounce-force [0.3 gram-force.cm]					
Maximum torque, friction	0.015 inch.ounce-force [1.1 gram-force.cm]					
Shaft load capability	10 lb [4.5Kg] Axial; 8 lb [3.6 Kg] Radial					
Electrical connection	6 lead wires, AWG 28, PTFE insulation, 12 inches [30cm] long					
Weight	1.3 oz [36 Grams]					
IEC 60529 rating	IP60					

Notes:


All values are nominal unless otherwise noted

(*): Unit for output at range ends is millivolt per volt of excitation (input voltage)

FR (Full Range) is the angular range, end to end; 2xA° for ±A° angular range

FRO (Full Range Output): Algebraic difference in outputs measured at the ends of the range

DIMENSIONS

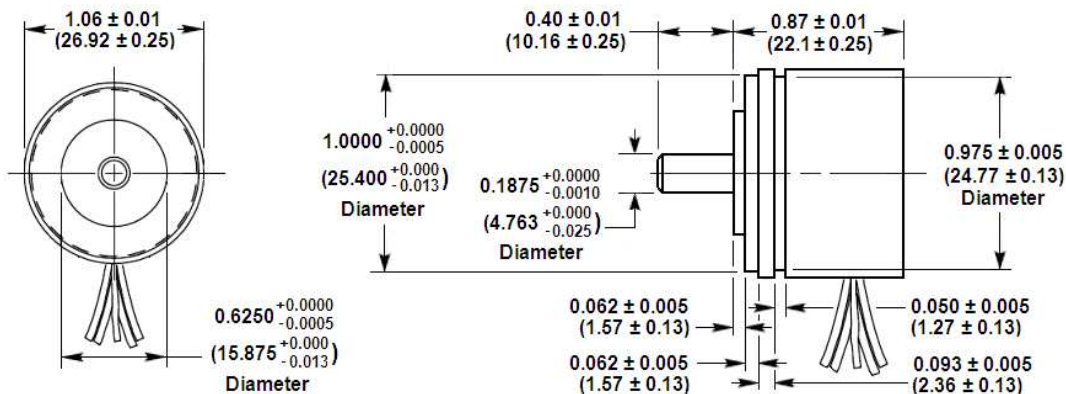


Dimensions are in inch (mm)

R30A

AC Operated, Light Weight RVDT

WIRING INFORMATION

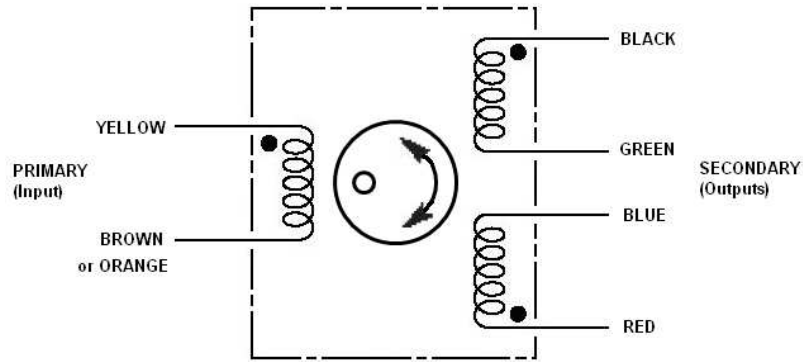

Connect Green to Blue for differential output

ORDERING INFORMATION

Description	Model	Part Number
RVDT $\pm 30^\circ$, 10KHz calibration (standard)	R30A	02560231-000
OPTIONS		
RVDT $\pm 40^\circ$, 10KHz calibration		02560231-140
RVDT $\pm 60^\circ$, 10KHz calibration		02560231-160
RVDT with 2.5KHz calibration		02560231-2XX
ACCESSORIES		
R-FLEX multipurpose coupling kit		66530072-000

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity Company
Phone +1-800-522-6752
Email: customercare.hmpt@te.com

EUROPE

MEAS Deutschland GmbH(Europe)
a TE Connectivity Company
Phone: +49-800-440-5100
Email: customercare.dtmd@te.com

ASIA

Measurement Specialties (China), Ltd.,
a TE Connectivity Company
Phone: +86-0400-820-6015
Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Accustar, American Sensor Technologies, AST, ATEXIS, DEUTSCH, IdentiCal, TruBlue, KPSI, Krystal Bond, Microfused, UltraStable, Measurement Specialties, MEAS, Schaevitz, TE Connectivity, TE, and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and company names mentioned herein may be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А