


## SOT-227 Power Module Single Switch - Power MOSFET, 420 A


**SOT-227**
**FEATURES**

- $I_D > 420$  A,  $T_C = 25$  °C
- TrenchFET® power MOSFET
- Low input capacitance ( $C_{iss}$ )
- Reduced switching and conduction losses
- Ultra low gate charge ( $Q_g$ )
- Avalanche energy rated ( $U_{IS}$ )
- UL approved file E78996 
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)


**RoHS  
COMPLIANT**

PRIMARY CHARACTERISTICS	
$V_{DSS}$	100 V
$R_{DS(on)}$	1.3 mΩ
$I_D$ <sup>(1)</sup>	330 A at 90 °C
Type	Modules - MOSFET
Package	SOT-227

ABSOLUTE MAXIMUM RATINGS ( $T_C = 25$ °C unless otherwise specified)				
PARAMETER	SYMBOL	TEST CONDITIONS	MAX.	UNITS
<b>MOSFET</b>				
Drain to source voltage	$V_{DSS}$		100	V
Continuous drain current, $V_{GS}$ at 10 V	$I_D$ <sup>(1)</sup>	$T_C = 25$ °C	435	A
		$T_C = 90$ °C	330	
Pulsed drain current	$I_{DM}$ <sup>(2)</sup>		1130	
Power dissipation	$P_D$	$T_C = 25$ °C	652	W
Gate to source voltage	$V_{GS}$		± 20	V
Single pulse avalanche energy	$E_{AS}$	$T_C = 25$ °C, L = 10 mH, $V_{GS} = 10$ V	11 500	mJ
Single pulse avalanche current	$I_{AS}$	$T_C = 25$ °C, L = 10 mH, $V_{GS} = 10$ V	48	A
<b>MODULE</b>				
Insulation voltage (RMS)	$V_{ISOL}$	any terminal to case, t = 1 min	2500	V
Operating junction temperature range	$T_J$		-55 to +175	°C


**Notes**

- (1) Maximum continuous current admitted 100 A to do not overcome the maximum temperature of terminals  
 (2) Limited at maximum junction temperature



THERMAL - MECHANICAL SPECIFICATIONS						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Junction and storage temperature range	$T_J, T_{Stg}$		-55	-	175	°C
Junction to case	MOSFET $R_{thJC}$		-	-	0.23	°C/W
Case to heat sink	Module $R_{thCS}$	Flat, greased surface	-	0.1	-	
Weight			-	30	-	g
Mounting torque		Torque to terminal	-	-	1.1 (9.7)	Nm (lbf.in)
		Torque to heatsink	-	-	1.8 (15.9)	Nm (lbf.in)
Case style			SOT-227			

ELECTRICAL CHARACTERISTICS ( $T_J = 25\text{ }^\circ\text{C}$ unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Drain to source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0\text{ V}, I_D = 750\text{ }\mu\text{A}$	100	-	-	V
Static drain to source on-resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 200\text{ A}$	-	1.3	2.15	mΩ
Gate threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 750\text{ }\mu\text{A}$	2.2	2.9	3.8	V
Forward transconductance	$g_{fs}$	$V_{DS} = 20\text{ V}, I_D = 20\text{ A}, V_{GS} = 10\text{ V}$	-	94	-	S
Drain to source leakage current	$I_{DSS}$	$V_{DS} = 100\text{ V}, V_{GS} = 0\text{ V}$	-	0.6	4	μA
		$V_{DS} = 100\text{ V}, V_{GS} = 0\text{ V}, T_J = 125\text{ }^\circ\text{C}$	-	32	-	
Gate to source leakage	$I_{GSS}$	$V_{GS} = \pm 20\text{ V}$	-	-	± 350	nA
Total gate charge	$Q_g$	$I_D = 200\text{ A}$ $V_{DS} = 50\text{ V}$ $V_{GS} = 10\text{ V}$	-	375	-	nC
Gate to source charge	$Q_{gs}$		-	84	-	
Gate to drain ("Miller") charge	$Q_{gd}$		-	138	-	
Turn-on delay time	$t_{d(on)}$	$V_{DD} = 50\text{ V}$ $I_D = 100\text{ A}$ $R_g = 1.2\text{ }\Omega$ $V_{GS} = 10\text{ V}$	-	45	-	ns
Rise time	$t_r$		-	275	-	
Turn-off delay time	$t_{d(off)}$		-	152	-	
Fall time	$t_f$		-	172	-	
Input capacitance	$C_{iss}$	$V_{GS} = 0\text{ V}$ $V_{DS} = 25\text{ V}$ $f = 1\text{ MHz}$	-	17.3	-	nF
Output capacitance	$C_{oss}$		-	9.2	-	
Reverse transfer capacitance	$C_{rss}$		-	0.9	-	

SOURCE-DRAIN RATINGS AND CHARACTERISTICS ( $T_J = 25\text{ }^\circ\text{C}$ unless otherwise specified)						
PARAMETER	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNITS
Continuous source current (body diode)	$I_S$	MOSFET symbol showing the integral reverse p-n junction diode 	-	-	435	A
Pulsed source current (body diode)	$I_{SM}$		-	-	1130	
Diode forward voltage	$V_{SD}$	$I_S = 200\text{ A}, V_{GS} = 0\text{ V}$	-	0.91	1.5	V
Reverse recovery time	$t_{rr}$	$T_J = 25\text{ }^\circ\text{C}, I_F = I_S = 50\text{ A},$ $dI/dt = 100\text{ A}/\mu\text{s}, V_R = 50\text{ V}$	-	171	-	ns
Reverse recovery charge	$Q_{rr}$		-	740	-	nC
Reverse recovery current	$I_{RM}$		-	8.7	-	A

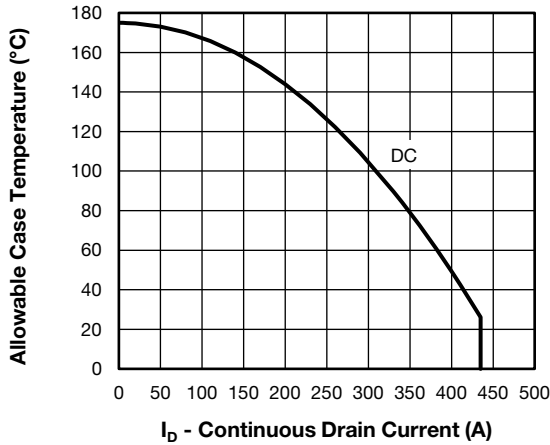


Fig. 1 - Maximum Continuous Drain Current vs. Case Temperature

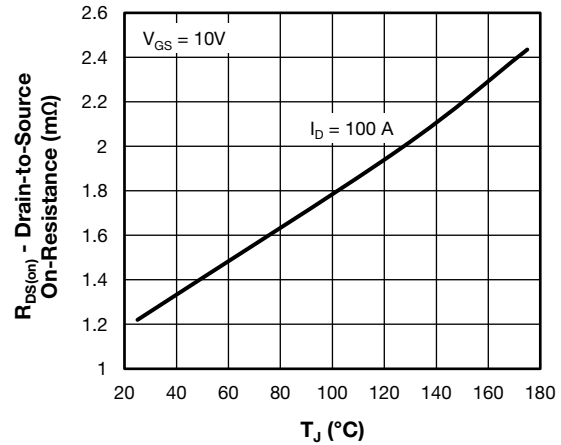


Fig. 4 - Typical Drain-to-Source On-Resistance vs. Temperature

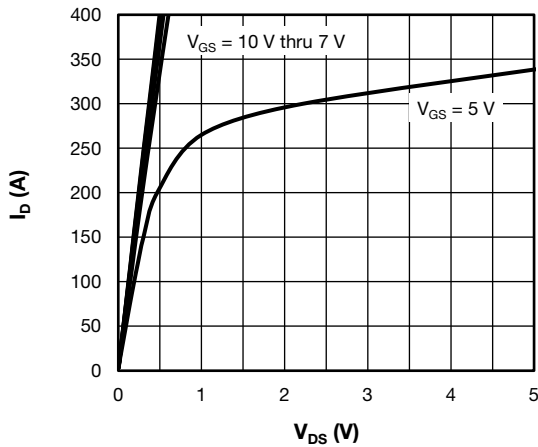


Fig. 2 - Typical Drain to Source Current Output Characteristics at  $T_J = 25\text{ }^\circ\text{C}$

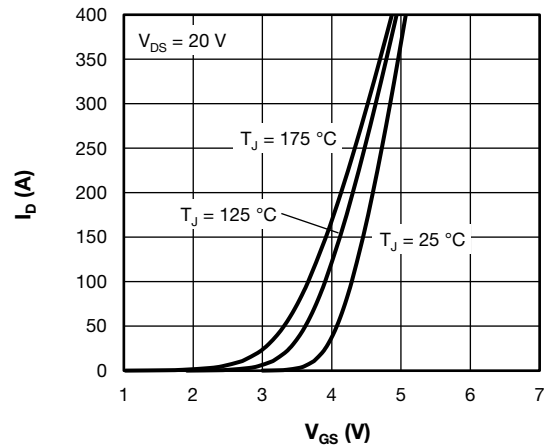


Fig. 5 - Typical Transfer Characteristics

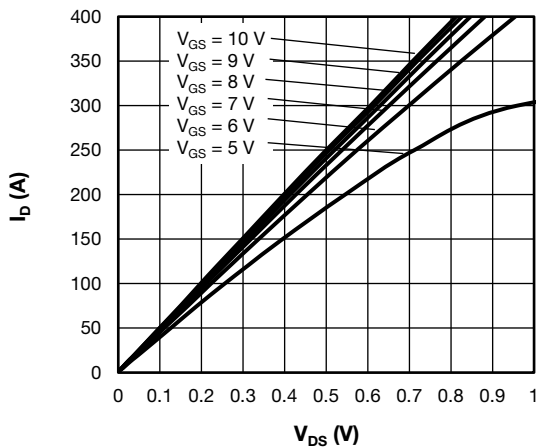


Fig. 3 - Typical Drain to Source Current Output Characteristics at  $T_J = 125\text{ }^\circ\text{C}$

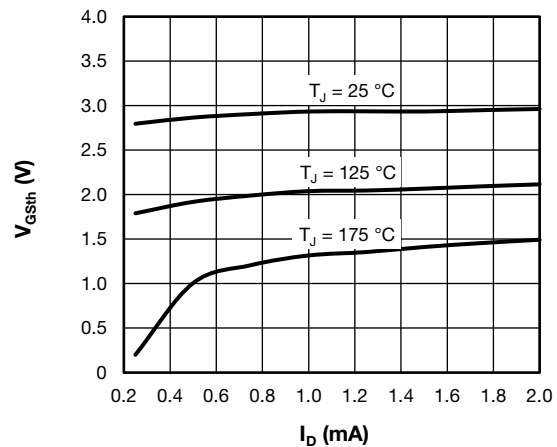


Fig. 6 - Typical Gate Threshold Voltage Characteristics

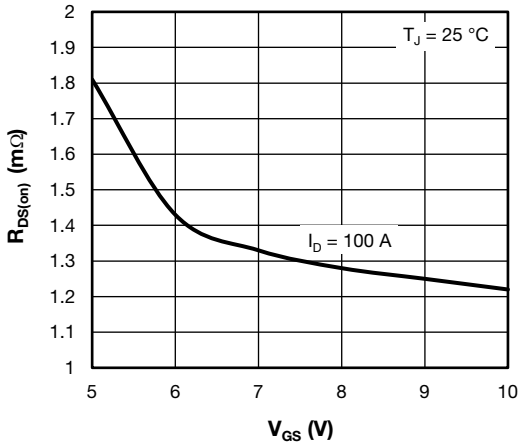


Fig. 7 - Typical Drain-State Resistance vs. Gate-to-Source Voltage

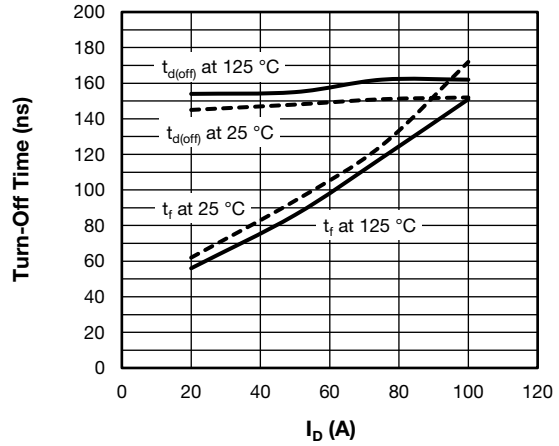


Fig. 10 - Typical Turn off Switching Time vs.  $I_D$   
 $V_{DD} = 50 \text{ V}$ ,  $R_g = 1.2 \text{ } \Omega$ ,  $V_{GS} = \pm 10 \text{ V}$ ,  $L = 500 \text{ } \mu\text{H}$

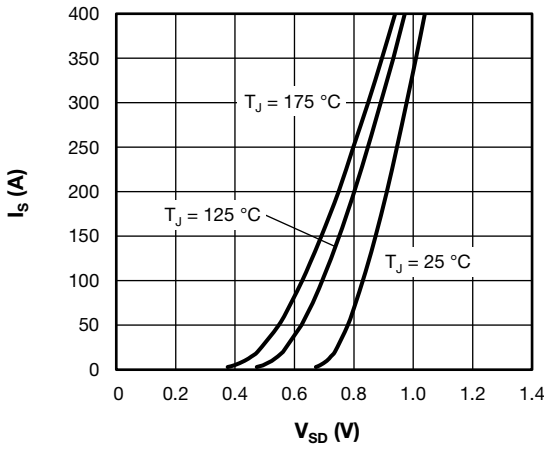


Fig. 8 - Typical Body Diode Source-to-Drain Current Characteristics

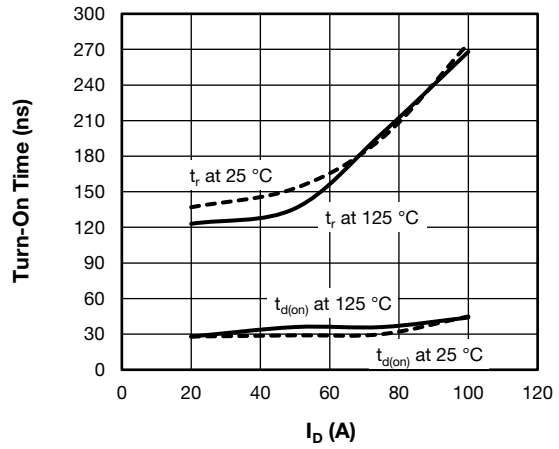


Fig. 11 - Typical Turn-on Switching Time vs.  $I_D$   
 $V_{DD} = 50 \text{ V}$ ,  $R_g = 1.2 \text{ } \Omega$ ,  $V_{GS} = \pm 10 \text{ V}$ ,  $L = 500 \text{ } \mu\text{H}$

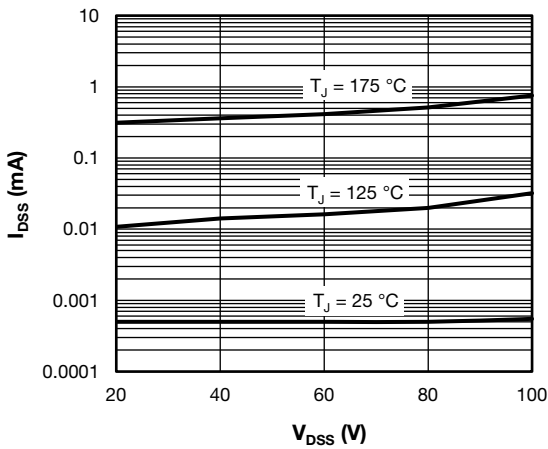


Fig. 9 - Typical Zero Gate Voltage Drain Current

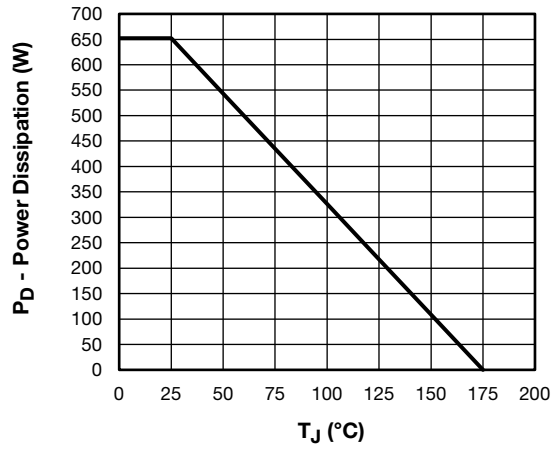


Fig. 12 - Power Dissipation Curve

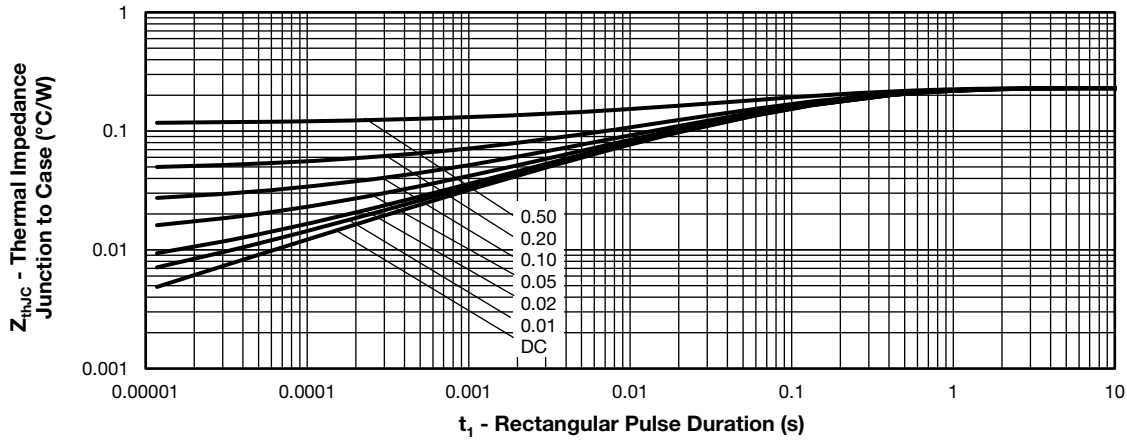


Fig. 13 - Maximum Thermal Impedance Junction-to-Case Characteristics

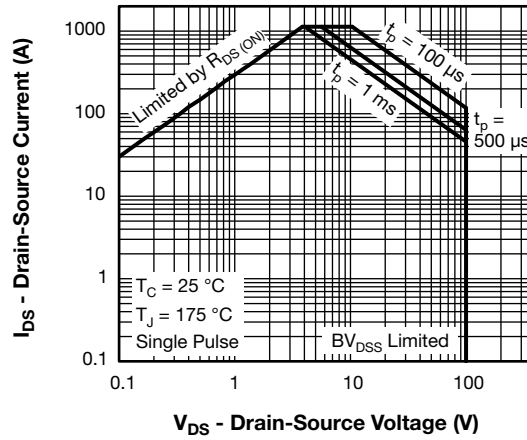


Fig. 14 - Safe Operating Area

**ORDERING INFORMATION TABLE**

Device code	<b>VS-</b>	<b>F</b>	<b>C</b>	<b>420</b>	<b>S</b>	<b>A</b>	<b>10</b>
	①	②	③	④	⑤	⑥	⑦

- 1** - Vishay Semiconductors product
- 2** - MOSFET module
- 3** - MOSFET die generation
- 4** - Current rating (420 = 420 A)
- 5** - Circuit configuration (S = single switch)
- 6** - Package indicator (SOT-227 standard insulated base)
- 7** - Voltage rating (10 = 100 V)

Quantity per tube is 10, M4 screw and washer included


CIRCUIT CONFIGURATION		
CIRCUIT	CIRCUIT CONFIGURATION CODE	CIRCUIT DRAWING
Single switch	S	

LINKS TO RELATED DOCUMENTS	
Dimensions	<a href="http://www.vishay.com/doc?95423">www.vishay.com/doc?95423</a>
Packaging information	<a href="http://www.vishay.com/doc?95425">www.vishay.com/doc?95425</a>



### SOT-227 Generation II

**DIMENSIONS** in millimeters (inches)

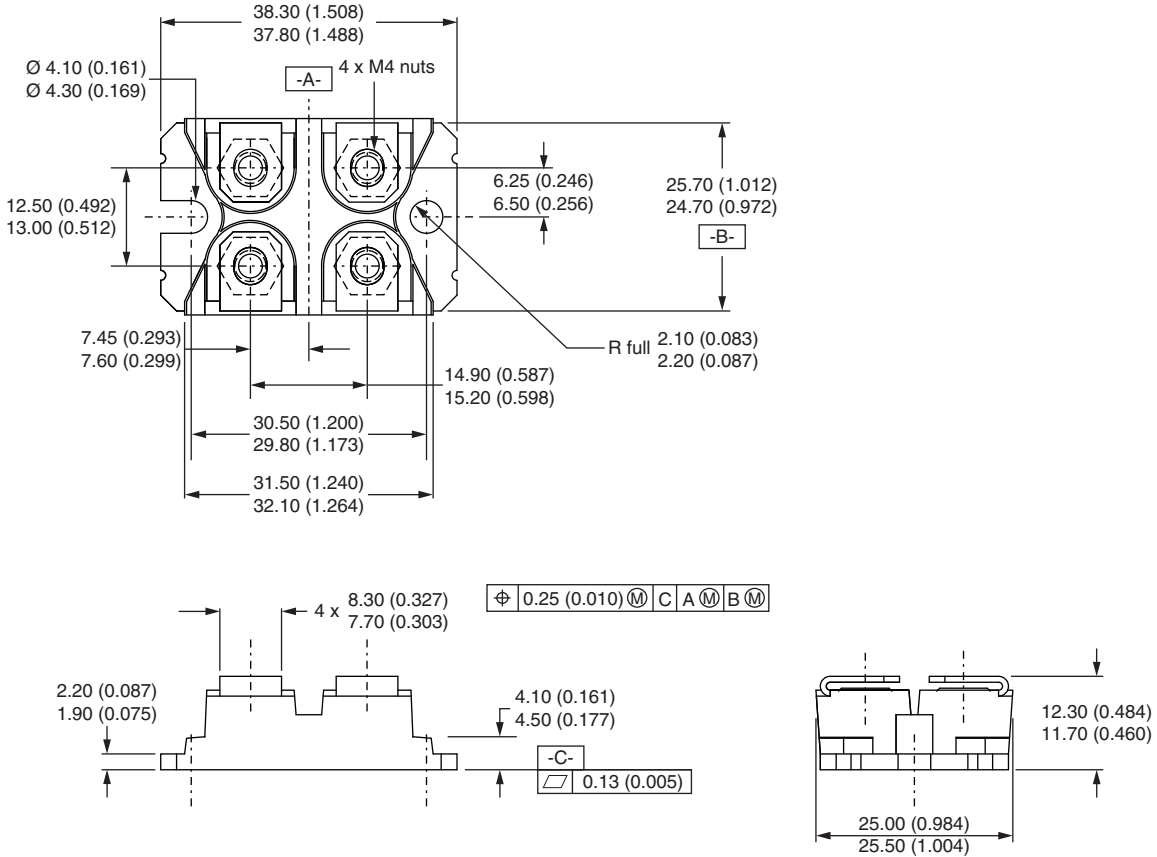

**Note**

- Controlling dimension: millimeter



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А