General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 28V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 28V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 500 megohms minimum @ 500V DC
Dielectric Strength: 500V AC minimum for 1 minute minimum
Mechanical Life: 100,000 operations minimum for On-None-On & On-Off-On
50,000 operations minimum for other circuits
50,000 operations minimum for locking lever models
Electrical Life: 50,000 operations minimum
Nominal Operating Force: Toggles A, A1, E & K with Long Paddle: 1.47N (momentary); 1.18N (maintained)
Toggles J & H & K with Short Paddle: 2.72N (momentary); 1.84N (maintained)
Toggle L: 0.59N
Contact Timing: Nonshorting (break-before-make)
Angle of Throw: 26°

Materials & Finishes

Toggle: Nickel plated brass
Bushing: Carbon blended polyamide; nickel plated zinc alloy for locking levers & threaded bushing
Gasket: Nitrile butadiene rubber
Case Housing: Glass fiber reinforced polyamide
Support Bracket: Tin plated phosphor bronze
Movable Contact: Phosphor bronze with gold plating
Stationary Contacts: Copper alloy with gold plating
Terminals: Copper alloy with gold plating

Environmental Data

Operating Temperature Range: –30°C through +85°C (–22°F through +185°F)
Humidity: 90 ~ 95% humidity for 96 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s^2) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

Installation

Mounting Torque: .30 ~ .45Nm (2.65 ~ 3.98 lb•in) for A1 actuator with threaded bushing only

PCB Processing

Soldering: Wave Soldering Recommended: See Profile A in Supplement section.
Manual Soldering: See Profile A in Supplement section.
Cleaning: Automated cleaning. See Cleaning specifications in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 available
The B Series toggles have not been tested for UL recognition or CSA certification.
These switches are designed for use in a low-voltage, low-current, logic-level circuit.
When used as intended in a logic-level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Subminiature size saves space on PC boards.

Specifically developed for logic-level applications.

Antistatic superstructure, consisting of the carbon impregnated bushing and the support bracket, prevents static discharge to the contacts. Static electricity from an operator's touch travels from actuator through the bushing and bracket to the PC board.

Locking lever mechanism offered as a toggle option.

Optional threaded, 6mm diameter bushing for panel seal mounting meets IP65 of IEC60529 specifications (similar to NEMA 4 and 13).

Totally sealed body construction prevents contact contamination and allows time- and money-saving soldering and cleaning. Epoxy sealed terminals lock out flux and other contaminants.

Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smoother, positive detent actuation, increased contact stability and unparalleled logic-level reliability. (Additional STC details in Terms & Acronyms; see Supplement section.)

.100" x .100" (2.54mm x 2.54mm) terminal spacing conforms to standard PC board grid spacing.

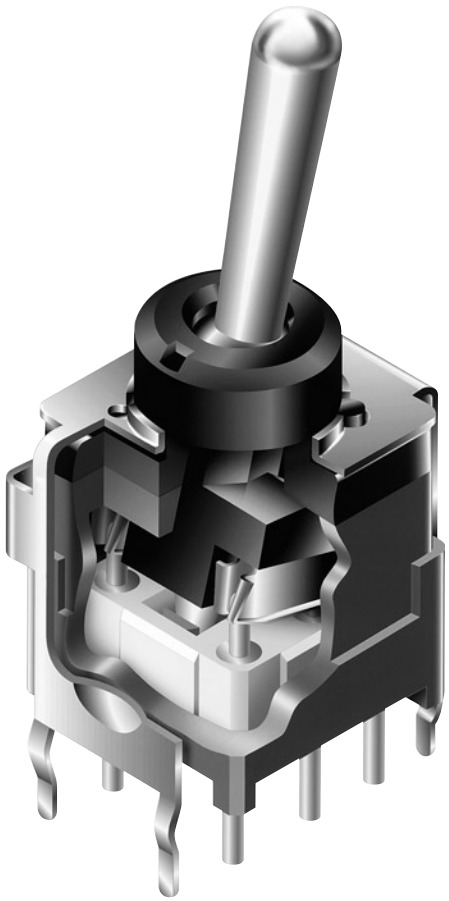

Actual Size

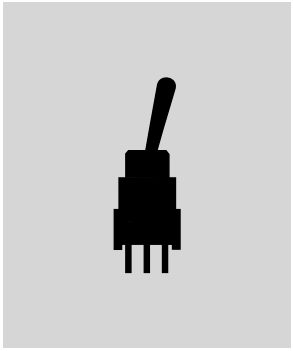

TYPICAL SWITCH ORDERING EXAMPLE

B 1 2 A B — ☐ ☐

Poles

1	SPDT
2	DPDT

Toggles

A	.394" (10.0mm) Bat
A1	.315" (8.0mm) Bat with Panel Seal Threaded Bushing (Straight PC only)
J	.248" (6.3mm) Bat
E	.394" (10.0mm) Flatted
H	.248" (6.3mm) Flatted
L	Locking Lever (with Circuits 2 & 3 only)

Optional Caps

G	.394" (10.0mm) Bat Lever Cap
J	.248" (6.3mm) Bat Lever Cap

Circuits

2	ON	NONE	ON
3	ON	OFF	ON
5	ON	NONE	(ON)
*R	(ON)	NONE	ON
8	(ON)	OFF	(ON)
9	ON	OFF	(ON)
*S	(ON)	OFF	ON

( ) = Momentary

* Reverse circuits R & S available with right angle & vertical only

PC Terminals

P	Straight
*B	Straight with Bracket
*H	Right Angle with Bracket
*V	Vertical with Bracket

* Bracketed models are ESD protected

Cap Colors / Paddle Colors

Cap Colors		Paddle Colors
A	Black	A
B	White	B
C	Red	C
---	Yellow	E
---	Green	F
---	Blue	G
---	Gray	H

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

B12AB

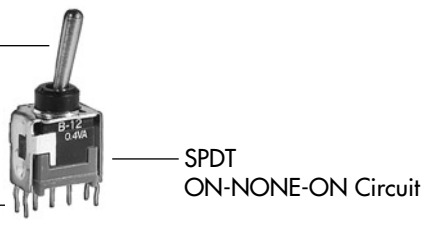

POLES & CIRCUITS

Pole	Model	Toggle Position ( ) = Momentary			Connected Terminals			Throw & Schematics
		Up	Center	Down	Up	Center	Down	
SP	**B12**	ON	NONE	ON	2-3	OPEN	2-1	SPDT
	B13	ON	OFF	ON				
	B15	ON	NONE	(ON)				
	B1R	(ON)	NONE	ON				
	B18	(ON)	OFF	(ON)				
	B19	ON	OFF	(ON)				
	B1S	(ON)	OFF	ON				
DP	**B22**	ON	NONE	ON	2-3 5-6	OPEN	2-1 5-4	DPDT
	B23	ON	OFF	ON				
	B25	ON	NONE	(ON)				
	B2R	(ON)	NONE	ON				
	B28	(ON)	OFF	(ON)				
	B29	ON	OFF	(ON)				
	B2S	(ON)	OFF	ON				

Note: Terminal numbers are not actually on the switch.





TOGGLES

Standard Material & Finish: Brass with Bright Nickel

A .394" (10.0mm) Bat



A1 .315" (8.0mm) Bat with Panel Seal Threaded Bushing



J .248" (6.3mm) Bat



E .394" (10.0mm) Flatted



H .248" (6.3mm) Flatted



L Locking Lever



PC TERMINALS

Use of a support bracket is recommended to increase PCB mounting strength and stability.

P **Straight**



B **Straight with Bracket**



H **Right Angle with Bracket**



V **Vertical with Bracket**



OPTIONAL CAPS

G **AT4003**
.394" (10.0mm) Bat Lever Cap

Material: PVC
Colors Available:
A, B, C



J **AT4064**
.248" (6.3mm) Bat Lever Cap

Material: PVC
Colors Available:
A, B, C



Color Codes:

A Black **B** White **C** Red **E** Yellow **F** Green **G** Blue **H** Gray

TYPICAL SWITCH DIMENSIONS

Single Pole — Straight PC

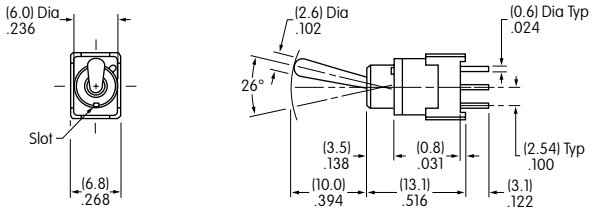

B12AP

Double Pole — Straight PC

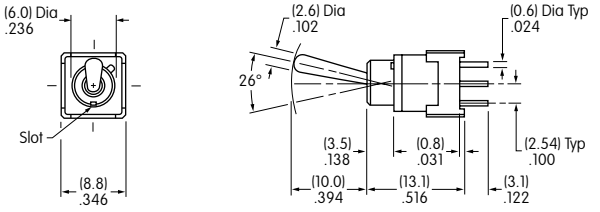

B22AP

Single Pole — Straight PC • Bracket

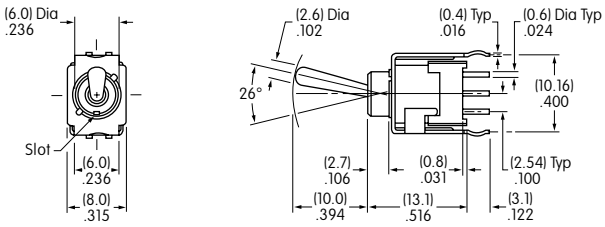

B12AB

Double Pole — Straight PC • Bracket

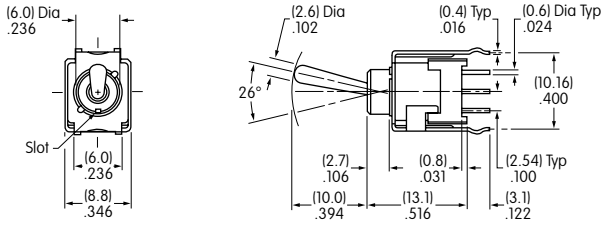

B22AB

Single Pole — Right Angle PC

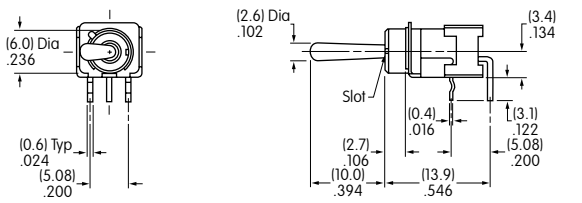

B12AH

TYPICAL SWITCH DIMENSIONS

Right Angle PC — Double Pole

B22AH

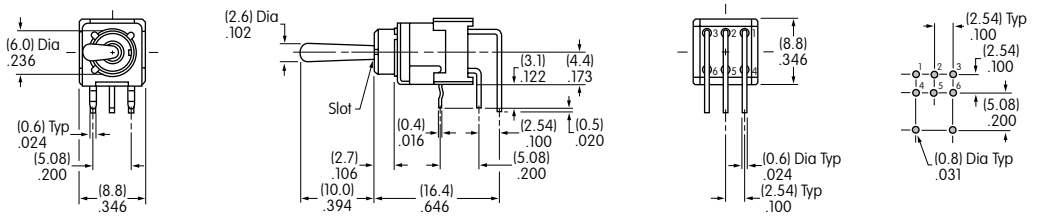

Vertical PC — Single Pole

B12AV

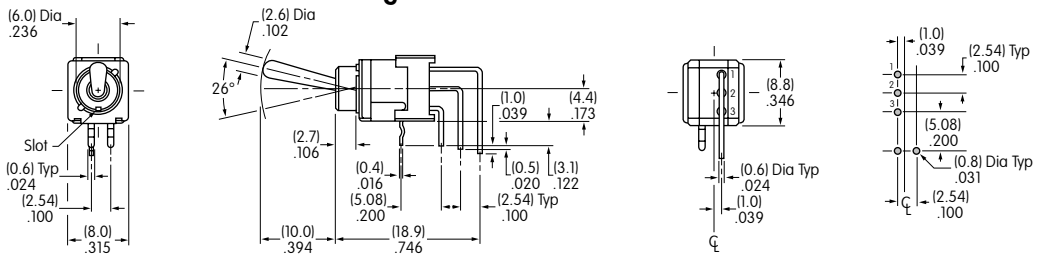

Vertical PC — Double Pole

B22AV

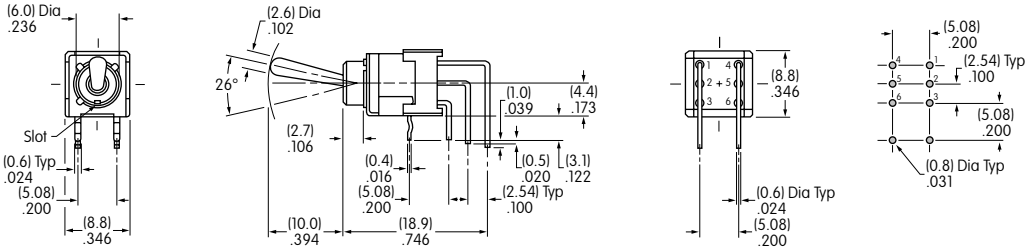

Locking Lever • Straight PC • Bracket — Single Pole

B12LB

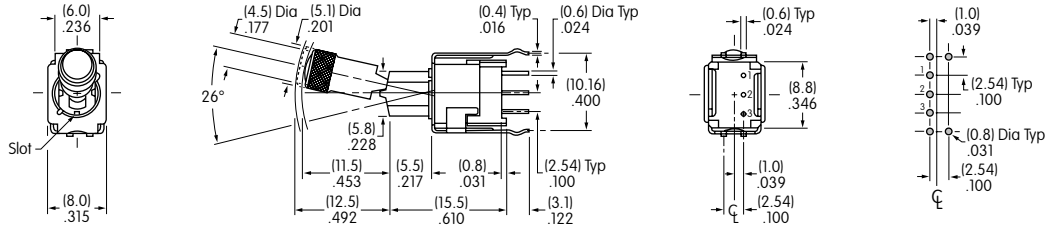

Locking Lever • Straight PC • Bracket — Double Pole

B22LB

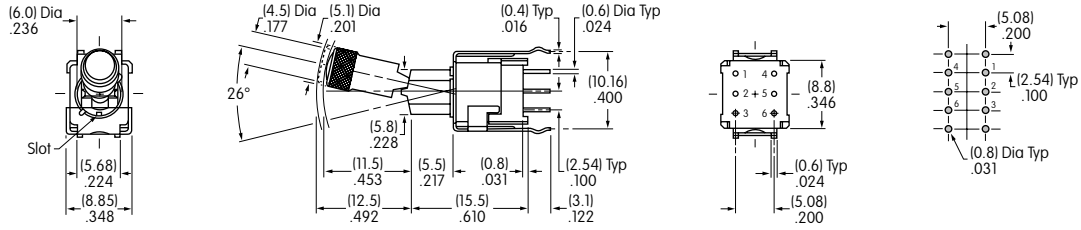

TYPICAL SWITCH DIMENSIONS

Panel Seal • Single Pole

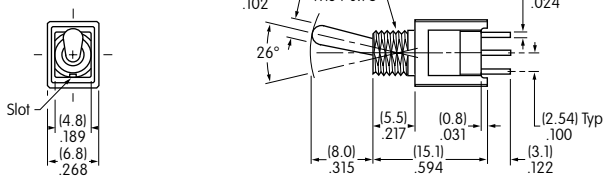

Threaded Bushing • Straight PC



B12A1P

Panel Seal • Double Pole

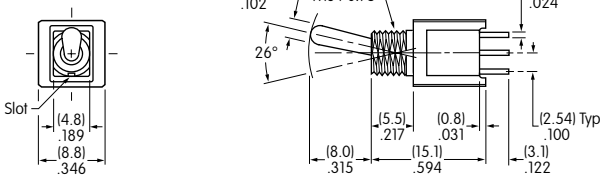

Threaded Bushing • Straight PC



B22A1P

STANDARD HARDWARE & PANEL CUTOUT

AT513M
Metric Hex Nut

Material:
Brass,
Nickel plated



AT063
Gasket

Material:
Nitrile butadiene rubber





Maximum Panel Thickness with Standard Hardware: .087" (2.2mm)

OCEAN CHIPS
Океан Электроники
Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».

AVIC JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).

FORSTAR®

Телефон: 8 (812) 309-75-97 (многоканальный)
Факс: 8 (812) 320-03-32
Электронная почта: ocean@oceanchips.ru
Web: http://oceanchips.ru/
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А