

K-No.: 25104

100 A Current Sensor Module

 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic isolation
 between the primary circuit (high power) and
 the secondary circuit (electronic circuit)

Date: 18.05.2009

Customer: Standard Type

Customer Part No.:
Page 1 **of** 3

Description

- Closed loop (compensation)
Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

Characteristics

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design

Applications

Mainly used for stationary operation in industrial applications:

- AC variabel speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptable Power Supplies (UPS)

Electrical Data – Ratings

I_{PN}	Primary rated current, r.m.s	100	A
R_M	Load resistance	0 ... 200	Ω
I_{SN}	Output rated current, r.m.s	100	mA
K_N	Turns ratio	1 : 1000	

Accuracy – Dynamic performance data (with DRV401 @ $V_C = 5V \pm 5\%$)

		min.	typ	max.	Unit
$I_{P,max}$	Max. measuring range @ $R_M = 1,563 \Omega$	± 160			A
$X(T)$	Measuring accuracy @ $I_{PN}, T_A = -40... +85^\circ C$			0.5	%
ϵ_L	Linearity			0.1	%
$I_0(T)$	Offset current @ $I_P=0, T_A = -40... +85^\circ C$			0.01	mA
I_{0H}	Hysteresis		0.03	0.1	mA
t_r	Response time		0.04	0.1	μs
$\Delta t(I_{p,max})$	Delay time at $di/dt = 100 A/\mu s$		1		μs
f	Frequency range	DC...100			kHz

General Data

		min.	typ.	max.	Unit
T_A	Ambient temperature	-40		+85	$^\circ C$
T_S	Storage temperature	-40		+85	$^\circ C$
m	Mass		32		g
R_S	Secondary coil resistance @ $T_A=85^\circ C$			24	Ω
C_k	Coupling capacity		10		pF
	Mechanical Stress according to M3209/3 Settings: 10 – 2000 Hz, 1 min/Decade, 2 hours			20g	
	Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 – 4 to inner hole) Reinforced insulation, Insulation material group 1, Pollution degree 2, Overvoltage category 3				
S_{clear}	clearance (component without solder pad)	12			mm
S_{creep}	creepage (component without solder pad)	14			mm
V_{sys}	System voltage overvoltage category 3	RMS		600	V
V_{work}	Working voltage (table 7 acc. to EN61800-5-1)	RMS		1400	V
U_{PD}	Rated discharge voltage	peak value		1508	V

Type Testing according to EN 61800-5-1 (Pin 1 – 4 to inner hole)

V_W	HV transient test according to M3064 (1,2 μs / 50 μs -wave form)			8	kV
V_d	High voltage test acc. to M3014 (RMS)		(5 s)	3.6	kV
V_e	Partial discharge voltage test acc. to M3024 (RMS) with V_{vor} (RMS)			1600	V
				2000	V

Datum	Name	Index	Änderung
18.05.09	Le	81	Mechanical outline: gluing not applicable. AA-592 Inspection M3014: write error changed.

Hrsg.: KB-E editor	Bearb.: Le designer		KB-PM IA: .KRe. check	freig.: prs. released
-----------------------	------------------------	--	--------------------------	--------------------------

K-No.: 25104

100 A Current Sensor Module
 For the electronic measurement of currents:
 DC, AC, pulsed, mixed ..., with a galvanic Isolation
 between the primary circuit (high power) and
 the secondary circuit (electronic circuit)

Date: 18.05.2009

Customer: Standard Type


Customer Part No.:

Page 2 of 3


Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Connections:

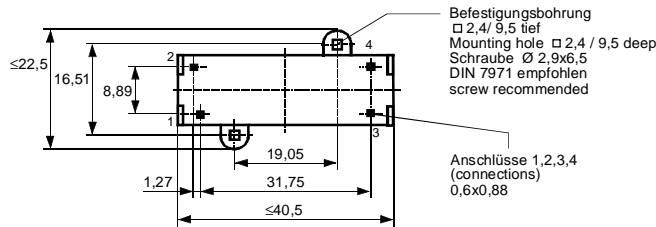


1..4: 0,6x0,88 mm

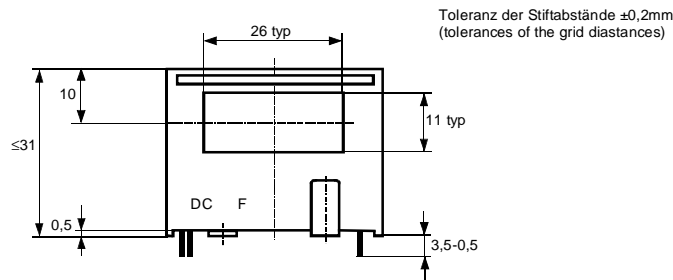


Marking:

VAC
 4645X060
 F DC



DC=Date Code
 F=Factory

Schematic diagram

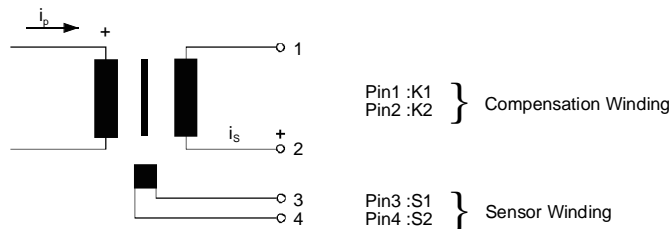

Inspection (Measurements after temperature balance of the samples at room temperature.)

K_N (N1/N2)	(V)	M3011/6c:	Turns ratio ($I_p=100A, 40...80$ Hz)	$=1 : 1000 \pm 0.5$	%
I_0		M3226:	Offset current	< 0.1	mA
$\Delta\Phi$ (K1-K2)	(V)	M3090:	Magnetic Flux compensation core	23.7...27	nVs
$\Delta\Phi$ (S1-S2)	(V)	M3090:	Magnetic Flux sensor	20...35	nVs
R_S (K1-K2)	(V)	M3011/5:	Winding resistance compensation coil	15...18.5	Ω
R (S1-S2)	(V)	M3011/5:	Winding resistance magnetic probe coil	2.5...3.5	Ω
V_d	(V)	M3014:	Testing voltage, rms, 1s (Pin 1 – 4 to inner hole)	1.8	kV
V_e	(AQL1/S4)	M3024:	Partial discharge voltage (RMS) with V_{vor} (RMS)	1600 2000	V V

Applicable documents

Current direction: A positive output current appears at point I_s , by primary current in direction of the arrow.
 Temperature of the primary conductor should not exceed 110°C
 Housing and bobbin material: UL-listed. Flammability class UL 94V-0.
 Enclosures according to IEC 60529: IP50.

Additional data available on request.
 This specification is no declaration of warranty acc. BGB §443.

Hrsg.: KB-E editor	Bearb.: Le designer		KB-PM IA: .KRe. check	freig.: prs. released
-----------------------	------------------------	--	--------------------------	--------------------------

K-No.: 25104	100 A Current Sensor Module For the electronic measurement of currents: DC, AC, pulsed, mixed ..., with a galvanic Isolation between the primary circuit (high power) and the secondary circuit (electronic circuit)	Date: 18.05.2009
--------------	---	------------------

Customer: Standard Type	Cutomers Part No.:	Page 3 of 3
-------------------------	--------------------	-------------

Explanation of several of the terms used in the tablets (in alphabetical order)

I_{0H} :	Zero variation of I_0 after overloading with a DC of tenfold the rated value ($R_M = R_{MN}$)
I_{0t} :	Long term drift of I_0 after 100 temperature cycles in the range -40 bis 85 °C.
t_r :	Response time (describe the dynamic performance for the specified measurement range), measured as delay time at $I_P = 0,9 \cdot I_{Pmax}$ between a rectangular current and the output current.
$\Delta t (I_{Pmax})$:	Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between I_{Pmax} and the output current i_a with a primary current rise of $di_1/dt = 100 A/\mu s$.
U_{PD}	Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage V_e $U_{PD} = \sqrt{2} \cdot V_e / 1,5$
V_{vor}	Defined voltage is the RMS valve of a sinusoidal voltage with peak value of $1,875 \cdot U_{PD}$ required for partial discharge test in IEC 61800-5-1 $V_{vor} = 1,875 \cdot U_{PD} / \sqrt{2}$
V_{sys}	System voltage RMS value of rated voltage according to IEC 61800-5-1
V_{work}	Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation
$X_{ges}(I_{PN})$:	The sum of all possible errors over the temperature range by measuring a current I_{PN} : $X_{ges} = 100 \cdot \left \frac{I_S(I_{PN})}{K_N \cdot I_{PN}} - 1 \right \%$
X:	Permissible measurement error in the final inspection at RT, defined by $X = 100 \cdot \left \frac{I_{SB}}{I_{SN}} - 1 \right \%$ <p>where I_{SB} is the output DC value of an input DC current of the same magnitude as the (positive) rated current ($I_0 = 0$)</p>
X_{Ti} :	Temperature drift of the rated value orientated output term. I_{SN} (cf. Notes on F_i) in a specified temperature range, obtained by: $X_{Ti} = 100 \cdot \left \frac{I_{SB}(T_{A2}) - I_{SB}(T_{A1})}{I_{SN}} \right \%$
ϵ_L :	Linearity fault defined by $e_L = 100 \cdot \left \frac{I_P}{I_{PN}} - \frac{I_{Sx}}{I_{SN}} \right \%$ <p>Where I_P is any input DC and I_{Sx} the corresponding output term. I_{SN}: see notes of F_i ($I_0 = 0$).</p>

This "Additional information" is no declaration of warranty according BGB §443.

Hrsg.: KB-E editor	Bearb.: Le designer		KB-PM IA: .KRe. check	freig.: prs. released
-----------------------	------------------------	--	--------------------------	--------------------------

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А