


Thick Film Resistor/Capacitor Networks, Single-In-Line, Conformal Coated SIP



FEATURES

- 10K ECL terminators, circuits E and M. 100K ECL terminators, circuit A. Line terminator, circuit T
- 4 to 18 pins available
- X7R and C0G capacitors available
- Low cross talk
- Custom design capability
- "B" 0.250" (6.35 mm), "C" 0.350" (8.89 mm) and "E" 0.325" (8.26 mm) maximum seated height available, dependent on schematic
- Compliant to RoHS directive 2002/95/EC
- Halogen-free according to IEC 61249-2-21 definition

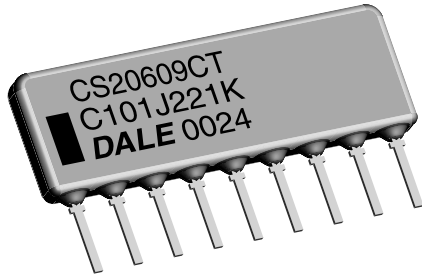

RoHS*
COMPLIANT
HALOGEN
FREE

STANDARD ELECTRICAL SPECIFICATIONS

| VISHAY DALE MODEL | PROFILE | SCHEMATIC | RESISTOR CHARACTERISTICS | | | | | CAPACITOR CHARACTERISTICS | |
|-------------------|---------|-----------|---|---------------------|--------------------|--|--|----------------------------|--------------------|
| | | | POWER RATING ELEMENT $P_{70^\circ\text{C}}$ W | RES. RANGE Ω | RES. TOL. $\pm \%$ | TEMP. COEFF. $\pm \text{ppm}/^\circ\text{C}$ | TCR TRACKING $\pm \text{ppm}/^\circ\text{C}$ | CAP. RANGE | CAP. TOL. $\pm \%$ |
| CS206 | B | E, M | 0.125 | 10 to 1M | 2, 5 | 200 | 100 | 0.01 μF | 10, 20 |
| CS206 | C | T | 0.125 | 10 to 1M | 2, 5 | 200 | 100 | 33 pF to 0.1 μF | 10, 20 |
| CS206 | E | A | 0.125 | 10 to 1M | 2, 5 | 200 | 100 | 0.01 μF | 10, 20 |

TECHNICAL SPECIFICATIONS

| PARAMETER | UNIT | CS206 |
|--|------------------|--------------------------------|
| Operating Voltage (at + 25 °C) | V_{AC} | 50 maximum |
| Dissipation Factor (maximum) | % | COG = 0.15; X7R = 2.5 |
| Insulation Resistance (at + 25 °C/rated voltage) | $M\Omega$ | 100 000 |
| Dielectric Test | V | 2.5 x rated voltage |
| Operating Temperature Range | $^\circ\text{C}$ | - 55 to + 125 $^\circ\text{C}$ |

Capacitor Temperature Coefficient:

C0G maximum 0.15 %, X7R maximum 2.5 %


Package Power Rating (maximum at 70 °C):

- 8 pins = 0.80 W
- 9 pins = 0.90 W
- 10 pins = 1.00 W

EIA Characteristics:


C0G and X7R (C0G capacitors may be substituted for X7R capacitors)

SCHEMATICS in inches (millimeters)

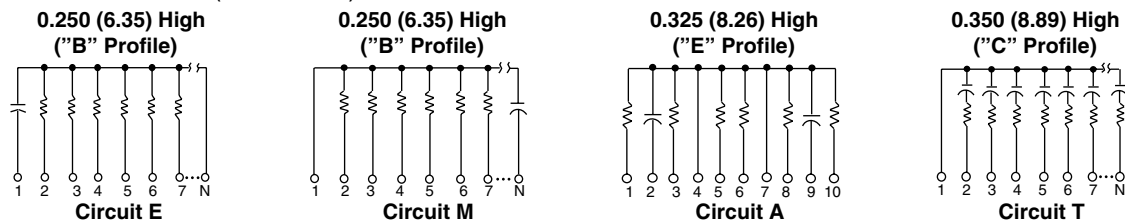

GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: 20608EC103G471KP (preferred part numbering format)




| GLOBAL MODEL | PIN COUNT | PACKAGE/SCHEMATIC | CHARACTERISTIC | RESISTANCE VALUE | RES. TOLERANCE | CAPACITANCE VALUE | CAP. TOLERANCE | PACKAGING | SPECIAL |
|--------------|---|---|-----------------------------------|--|---|--|---|--|---|
| 206 = CS206 | 04 to 18 pin available 04 = 4 Pin 08 = 8 Pin 18 = 18 Pin | E = BE M = BM A = EA T = CT S = Special | C = C0G X = X7R S = Special | 2 digit significant figure, followed by a multiplier 100 = 10 Ω 333 = 33 k Ω 105 = 1 M Ω | G = $\pm 2 \%$ J = $\pm 5 \%$ S = Special | (in pF) 2 digit significant figure, followed by a multiplier 330 = 33 pF 392 = 3900 pF 104 = 0.1 μF | K = $\pm 10 \%$ M = $\pm 20 \%$ S = Special | E = Lead (Pb)-free, bulk P = Tin/lead, bulk | Blank = Standard (Dash Number) (Up to 2 digits) |

Historical Part Number example: CS20608BEC103G471KP03 (will continue to be accepted)


| CS206 | 08 | B | E | C | 103 | G | 471 | K | P03 |
|------------------|-----------|----------------|-----------|----------------|------------------|----------------------|-------------------|-----------------------|-----------|
| HISTORICAL MODEL | PIN COUNT | PACKAGE HEIGHT | SCHEMATIC | CHARACTERISTIC | RESISTANCE VALUE | RESISTANCE TOLERANCE | CAPACITANCE VALUE | CAPACITANCE TOLERANCE | PACKAGING |

* Pb containing terminations are not RoHS compliant, exemptions may apply

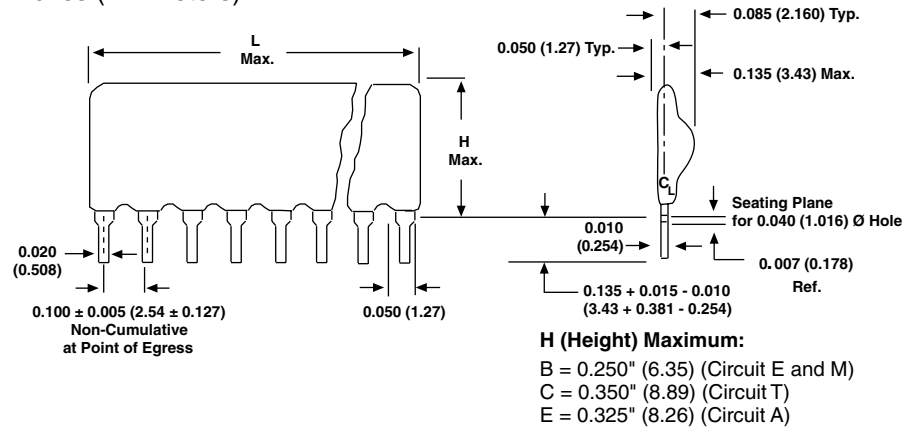DIMENSIONS in inches (millimeters)


Pin #1 is extreme left-hand terminal on side with marking.

| NUMBER OF PINS | L MAXIMUM | NUMBER OF PINS | L MAXIMUM | NUMBER OF PINS | L MAXIMUM | NUMBER OF PINS | L MAXIMUM | NUMBER OF PINS | L MAXIMUM |
|----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|----------------|---------------|
| 4 pin | 0.400 (10.16) | 7 pin | 0.700 (17.78) | 10 pin | 1.000 (25.40) | 13 pin | 1.300 (33.02) | 16 pin | 1.600 (40.64) |
| 5 pin | 0.500 (12.70) | 8 pin | 0.800 (20.32) | 11 pin | 1.100 (27.94) | 14 pin | 1.400 (35.56) | 17 pin | 1.700 (43.18) |
| 6 pin | 0.600 (15.24) | 9 pin | 0.900 (22.86) | 12 pin | 1.200 (30.48) | 15 pin | 1.500 (38.10) | 18 pin | 1.800 (45.72) |

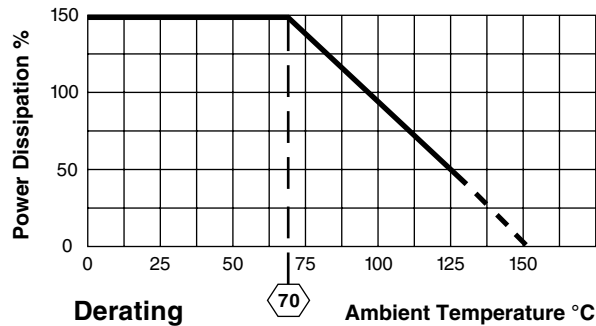
TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| Flammability | UL 94 V-0 |
| Lead Material | Phosphorus-bronze, solder plated |
| Body Material | Epoxy coated |
| Solderability | Per MIL-STD-202, method 208E |
| Part Marking | Pin #1 identification, part number (abbreviated as space allows), DALE or D, date code |
| Moisture Resistance | Meets requirements of MIL-STD-202, method 106 |

PERFORMANCE

| TEST | CONDITION | MAX. ΔR (Typical Test Lots) |
|------------------------------|---|------------------------------|
| Thermal Shock | Subject to 5 cycles from - 65 °C to + 125 °C | ± 0.5 % ΔR |
| Short Time Overload | 2.5 x rated working voltage for 5 s at + 25 °C | ± 0.25 % ΔR |
| Moisture Resistance | Cycle from + 25 °C to + 65 °C to + 25 °C over 8 h at 90 % to 98 % relative humidity, with 10 % of rated power applied, for 20 cycles. Stop cycling after an even number of cycles and stabilize networks at high humidity for 1 h to 4 h. Condition networks at - 10 °C for 3 h, then return to temperature cycling. On completion of cycling condition networks at + 25 °C at 50 % R.H. for 22 h to 24 h | ± 0.5 % ΔR |
| Resistance to Soldering Heat | Immerse pins in melted solder to the lead standoffs at + 350 °C for 3 s max. | ± 0.25 % ΔR |
| Mechanical Shock | 18 shocks of 100 g's and 6 ms | ± 0.25 % ΔR |
| Vibration | 12 cycles varied logarithmically from 10 Hz to 2000 Hz to 10 Hz over 20 min | ± 0.25 % ΔR |
| Load Life | 1000 h at + 70 °C, rated power applied 1.5 h "ON", 0.5 h "OFF" | ± 1.0 % ΔR |
| Resistance to Solvents | Immerse and scrub samples with isopropyl alcohol, trichlorethylene and Freon TMC | Marking remains legible |
| Solderability | Immerse leads in 60/40 tin-lead solder using R flux at + 245 °C for 5 s maximum | Minimum 95 % solder coverage |
| Terminal Strength | Withstand 2.2 kg pull 1 min | ± 0.25 % ΔR |
| Case Insulation Resistance | 100 V applied between case and terminals tied together | IR = 10 000 MΩ minimum |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Material Category Policy

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.

Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.

Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А