

A General Specifications

Electrical Capacity (Resistive Load)

Logic Level: 0.4VA maximum @ 48V AC/DC maximum
(Applicable Range 0.1mA ~ 0.1A @ 20mV ~ 48V)
Note: Find additional explanation of operating range in Supplement section.

Other Ratings

Contact Resistance: 50 milliohms maximum
Insulation Resistance: 1,000 megohms minimum @ 500V DC
Dielectric Strength: 1,000V AC minimum between contacts for 1 minute minimum;
1,500V AC minimum between contacts & case for 1 minute minimum
Mechanical Life: 100,000 operations minimum for bat lever models
50,000 operations minimum for locking lever models
Electrical Life: 50,000 operations minimum
Contact Timing: Nonshorting (break-before-make)
Angle of Throw: 24°

Materials & Finishes

Toggle/Lever: Brass with chrome plating
Bushing: Brass with nickel plating
Support Bracket: Straight PC: phosphor bronze with tin plating; right angle & vertical: brass with tin plating
Housing: Polybutylene terephthalate (PBT) (UL94V-0)
Base: 1- and 2-pole GFR polyamide (UL94V-0); 4-pole liquid crystal polymer (LCP) (UL94V-0)
Movable Contacts: Phosphor bronze with gold plating
Stationary Contacts: Brass with gold plating
Terminals: Brass with gold plating

Environmental Data

Operating Temp Range: -10°C through +70°C (+14°F through +158°F)
Humidity: 90 ~ 95% humidity for 240 hours @ 40°C (104°F)
Vibration: 10 ~ 55Hz with peak-to-peak amplitude of 1.5mm traversing the frequency range & returning in 1 minute; 3 right angled directions for 2 hours
Shock: 50G (490m/s²) acceleration (tested in 6 right angled directions, with 5 shocks in each direction)

PCB Processing

Soldering: Wave Soldering recommended. See Profile A in Supplement section.
Manual Soldering: 1- & 2-pole: 3 seconds maximum @ 350°C maximum;
4-pole: 4 seconds maximum @ 410°C maximum
Cleaning: Hand clean locally using alcohol based solution.
See Cleaning specifications in Supplement section.

Standards & Certifications

Flammability Standards: UL94V-0 rated housing & base
The D2 Series toggles have not been tested for UL recognition or CSA certification.
These switches are designed for use in a low-current, logic level circuit.
When used as intended in a logic level circuit, the results do not produce hazardous energy.

Distinctive Characteristics

Base of heat resistant resin meets UL94V-0 flammability rating.


Maximized voltage capability of 48V allows use in medium source applications and increases operating life.

Award-winning STC contact mechanism with benefits unavailable in conventional mechanisms: smoother positive detent actuation, increased contact stability, and unparalleled reliability. (Additional STC details under Terms and Acronyms in the Supplement section.)


Round .031" (0.8mm) diameter PC terminals for easy PCB assembly.

Terminal spacing conforms to standard .100" (2.54mm) PC board grid spacing.

Molded-in terminals prevent entry of flux, solvents, and other contaminants.

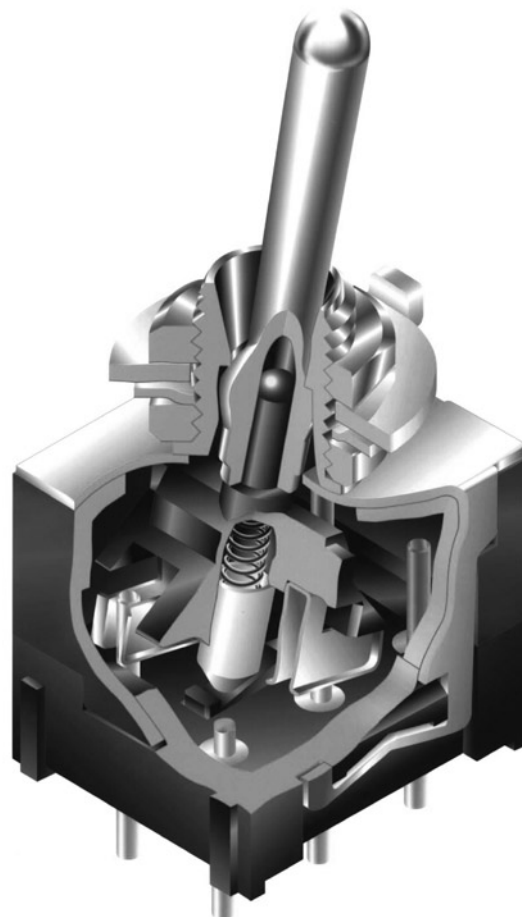

Actual Size

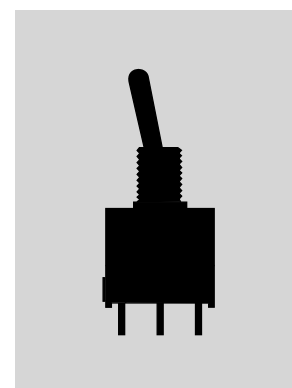

A	Toggles
	Rockers
	Pushbuttons
	Illuminated PB
	Programmable
	Keylocks
	Rotaries
	Slides
	Tactiles
	Tilt
	Touch
	Indicators
	Accessories
	Supplement

TYPICAL SWITCH ORDERING EXAMPLE

D220

1

2

P

Poles

1	SPDT
2	DPDT
*4	4PDT

* Combines with ON-NONE-ON circuit only & not available with Right Angle

Actuators

No Code	.413" (10.5mm) Bat Lever
L	.200" (5.1mm) Diameter Locking Lever

Circuits

2	ON	NONE	ON
3	ON	OFF	ON
5	ON	NONE	(ON)
8	(ON)	OFF	(ON)
9	ON	OFF	(ON)

() = Momentary

PC Terminals

P	Straight
B	Straight with Bracket
H	Right Angle w/Bracket
V	Vertical with Bracket

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

D22012P




.413" (10.5mm)
Bat Lever



SPDT
ON-NONE-ON Circuit

Straight PC Terminals

POLES & CIRCUITS

Pole	Model	Toggle Position () = Momentary			Connected Terminals			Throw & Schematics
		Down 	Center 	Up 	Down 	Center 	Up 	
SP	D22012	ON	NONE	ON				SPDT 
	D22013	ON	OFF	ON				
	D22015	ON	NONE	(ON)	2-3	OPEN	2-1	
	D22018	(ON)	OFF	(ON)				
	D22019	ON	OFF	(ON)				
DP	D22022	ON	NONE	ON				DPDT 
	D22023	ON	OFF	ON				
	D22025	ON	NONE	(ON)	2-3 5-6	OPEN	2-1 5-4	
	D22028	(ON)	OFF	(ON)				
	D22029	ON	OFF	(ON)				
4P	D22042	ON	NONE	ON	2-3 5-6 8-9 11-12	OPEN	2-1 5-4 8-7 11-10	4PDT 


Note: Terminal numbers are not actually on the switch.

ACTUATORS

No Code

**.413" (10.5mm)
Bat Lever**


Material:
Chrome over brass



L

**.413" (5.1mm) Diameter
Locking Lever**

Material:
Chrome over brass



PC TERMINALS

P

Straight




B

**Straight with
Bracket**




H

**Right Angle
with Bracket**



V

**Vertical
with Bracket**




OPTIONAL CAPS & CAP COLORS

**AT415
Bat Lever Cap**

Material:
Polyethylene


Colors Available:
A B C E F G



**AT444 Bat Lever
Conical Cap**

Material:
Polyethylene


Colors Available:
A B C E F G



**AT427 Cap Supplied
with Locking Lever**

Material:
Anodized
Aluminum

Colors Available:
A C G



Colors Codes: A Black B White C Red E Yellow F Green G Blue







TYPICAL SWITCH DIMENSIONS

Straight PC • Single Pole



D22012P

D22012LP

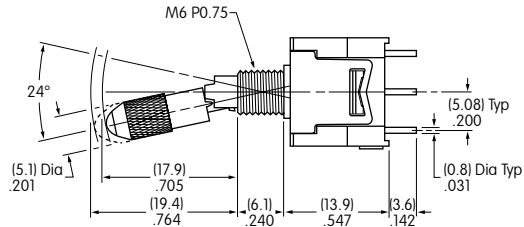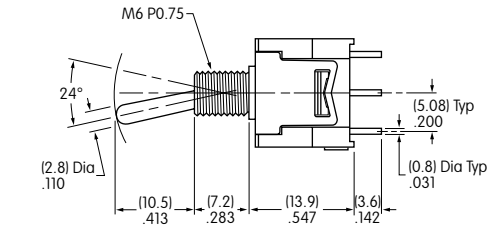







Actuator in Down Position

Straight PC • Double Pole




D22022P

D22022LP

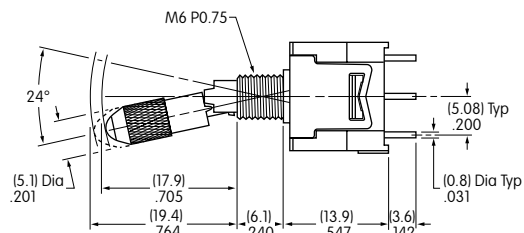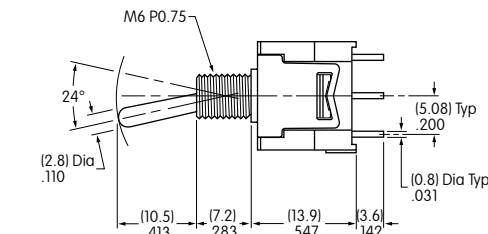







Actuator in Down Position

Straight PC • Four Pole



D22042P




D22042LP

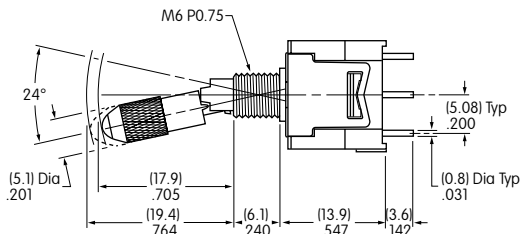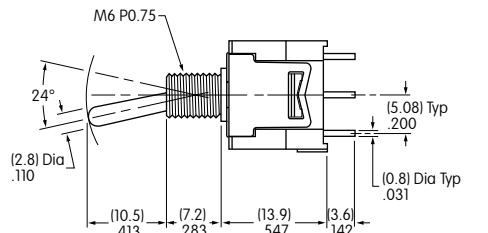


Actuator in Down Position

TYPICAL SWITCH DIMENSIONS

A Toggles


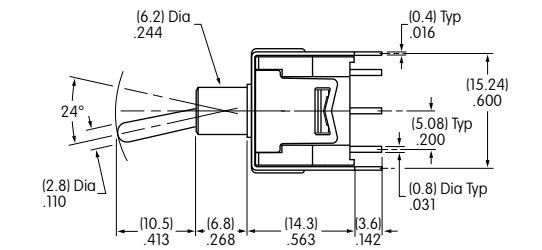



**Straight PC • Bracket
Single Pole**




D22012B

D22012LB

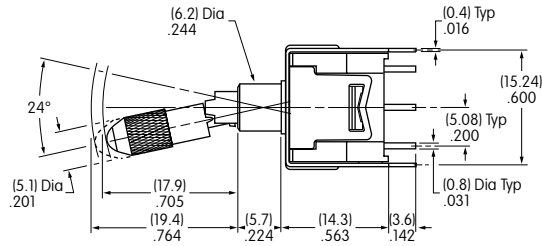







Actuator in Down Position

**Straight PC • Bracket
Double Pole**




D22022B

D22022LB

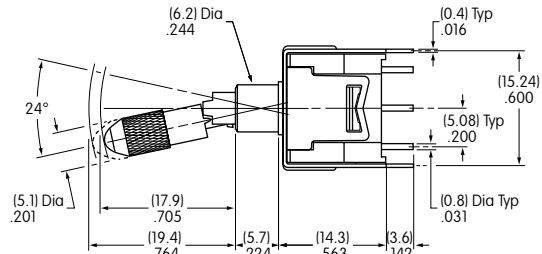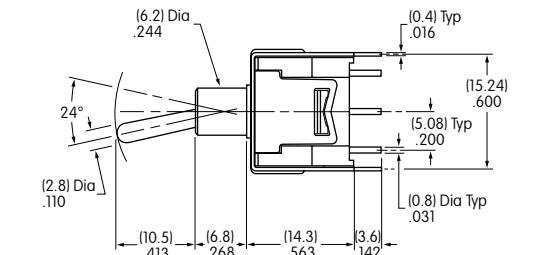







Actuator in Down Position

**Straight PC • Bracket
Four Pole**



D22042B

D22042LB

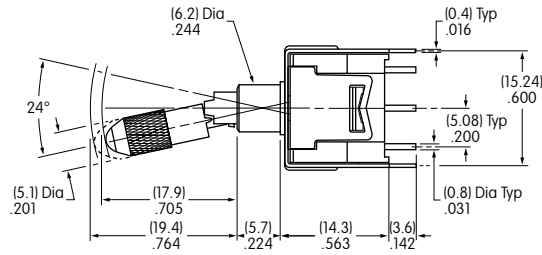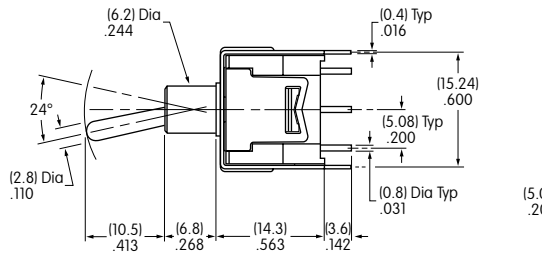

Actuator in Down Position

Rockers

Pushbuttons

Programmable PB

Illuminated PB

Keylocks

Rotaries

Slides

Tactiles

Tilt

Touch


Indicators

Accessories




Supplement

TYPICAL SWITCH DIMENSIONS




Right Angle PC • Single Pole



D22012H

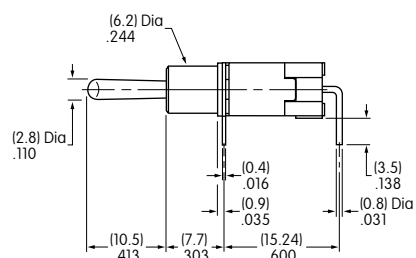


D22012LH


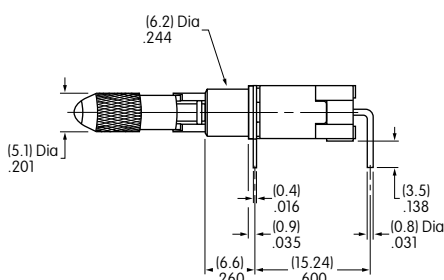



Actuator in Down Position




Right Angle PC • Double Pole



D22022H

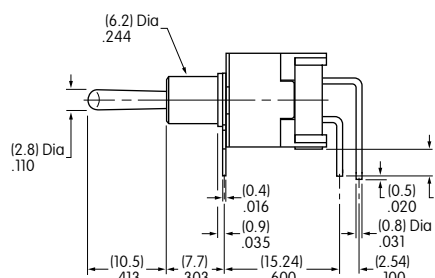




D22022LH

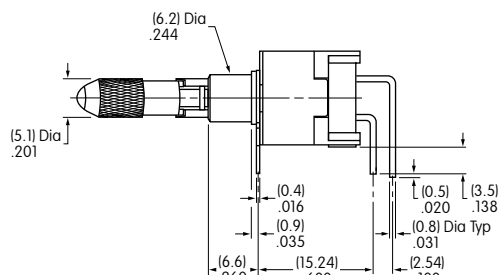




Actuator in Down Position

TYPICAL SWITCH DIMENSIONS

Vertical PC • Single Pole

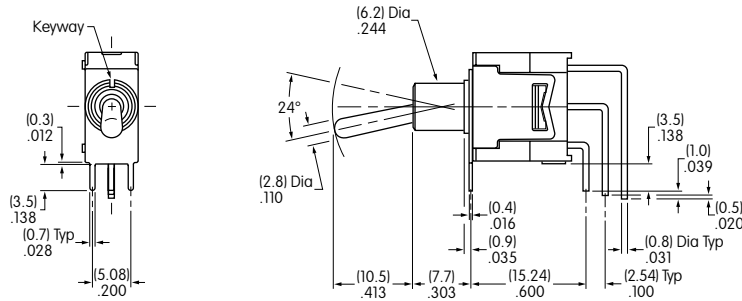




D22012V

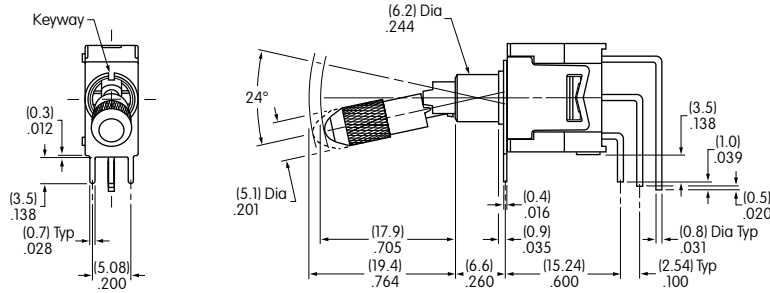




Actuator in Down Position

D22012LV

Vertical PC • Double Pole

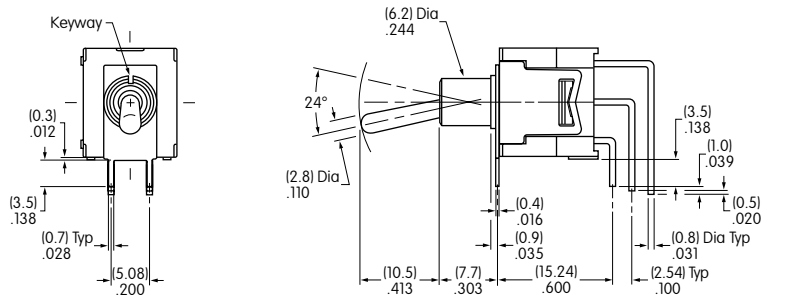

D22022V

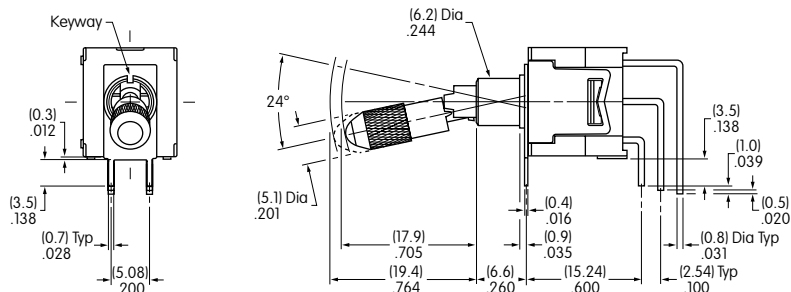


Actuator in Down Position



D22022LV

TYPICAL SWITCH DIMENSIONS


Vertical PC • Four Pole



D22042V

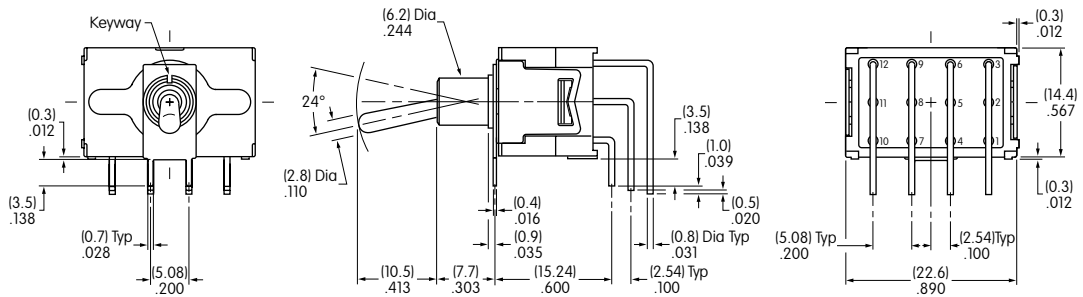

D22042LV

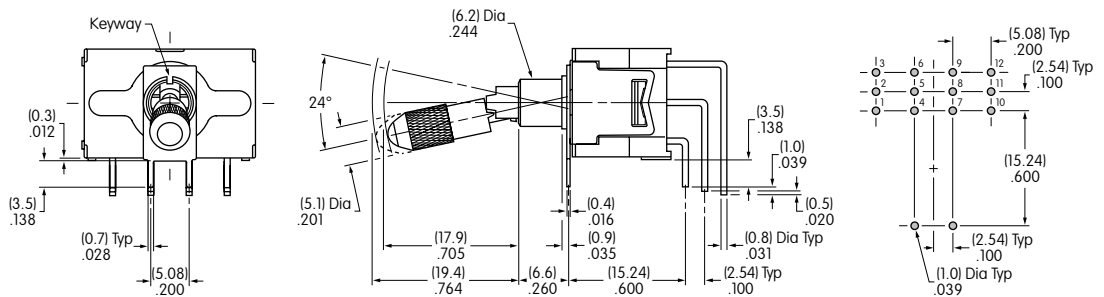



Actuator in Down Position

STANDARD HARDWARE

AT513M

Hex Nut



Brass with nickel plating
2 supplied



AT507M

Locking Ring


Steel with zinc/chromate
1 supplied



AT509

Lockwasher

Steel with zinc/chromate
1 supplied




OPTIONAL

AT501M

Knurled Face Nut

Brass with chrome plating




PANEL CUTOUTS & MAXIMUM PANEL THICKNESS

With Standard Hardware

.087" (2.2mm) for
Standard Lever

.051" (1.3mm) for
Locking Lever



Without Bottom Hex Nut


.154" (3.9mm) for
Standard Lever

.110" (2.8mm) for
Locking Lever

Without Locking Ring

.118" (3.0mm) for
Standard Lever

.083" (2.1mm) for
Locking Lever



Without Locking Ring & Bottom Hex Nut

.185" (4.7mm) for
Standard Lever

.142" (3.6mm) for
Locking Lever

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

NKK Switches:

[D22012B](#) [D22029B](#) [D22029H](#) [D22029LB](#) [D22029LH](#) [D22029LP](#) [D22029LV](#) [D22029V](#) [D22042B](#) [D22042LB](#)
[D22042LP](#) [D22042LV](#) [D22042P](#) [D22042V](#) [D22012LP](#) [D22013B](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А