

## V4 83170 Low force 831704 Part number made to order



- Nominal ratings 0.1 A to 10 A / 250 VAC
- Minimum rating 1 mA / 4 VDC
- Operating temperature up to +125 °C
- Conforming to standards EN 61058 and UL 1054
- Choice of actuators with 2 possible fixing positions

### Part numbers

|                      | Type             | Function       | Connections               |
|----------------------|------------------|----------------|---------------------------|
| <b>MADE TO ORDER</b> | Low force 831704 | I (changeover) | X1S - X2 - X2S - X3 - X3S |

### Specifications

#### Electrical characteristics

|                              |   |
|------------------------------|---|
| Rating nominal / 250 VAC (A) | 5 |
| Rating thermal / 250 VAC (A) | 6 |

#### Mechanical characteristics

|                                     |                     |
|-------------------------------------|---------------------|
| Maximum operating force (N)         | 0,6                 |
| Min. Release force (N)              | 0,1                 |
| Maximum total travel force (N)      | 1                   |
| Max. permitted overtravel force (N) | 10                  |
| Maximum rest position (mm)          | 9,2                 |
| Operating position (mm)             | 8,4 <sup>+0,3</sup> |
| Max. differential travel mm         | 0,15                |
| Min. overtravel (mm)                | 0,5                 |
| Ambient operating temperature (°C)  | -20 → +125          |
| Mechanical life (operations)        | 3.10 <sup>7</sup>   |
| Contact gap (mm)                    | 0,4                 |
| Weight (g)                          | 1,7                 |

### Additional specifications

#### Components

##### Material

- Case : polyester UL 94 VO
- Button : Glass-filled polyamide
- Contacts : AgNi, gold-plated AgNi (dual-current)
- Terminals : cupro-nickel (except W7A5 in brass)


##### Levers

- Flat : stainless steel
- Roller : stainless steel, polyamide roller

##### Approvals

NF - UL - cUL


### Principles



### Dimensions (mm)

#### Product

83170

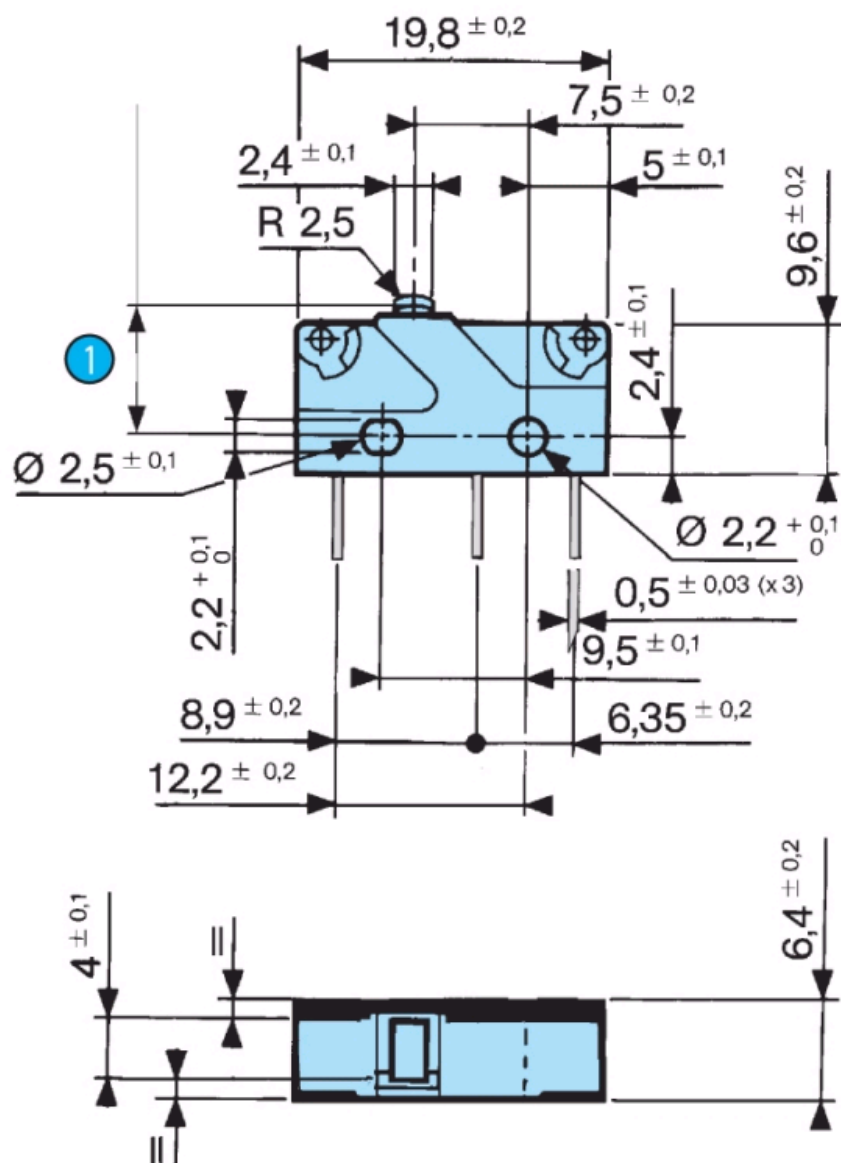


| N° | Legend   |
|----|----------|
| 1  | OL = 7.6 |

#### Dimensions (mm)

#### Product


83170 Symmetrical version

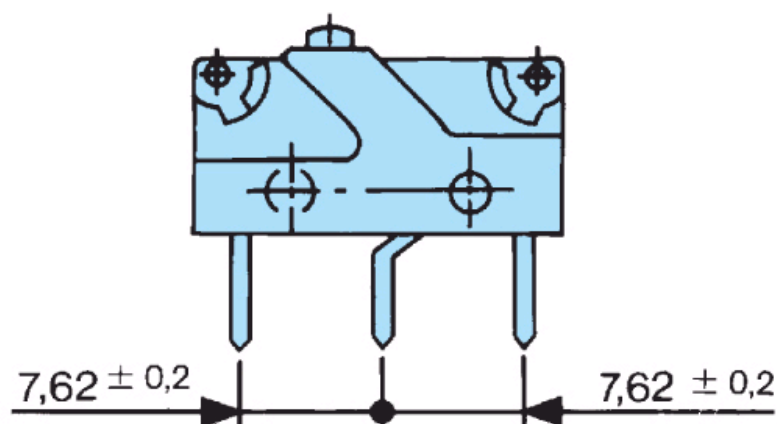

## Dimensions (mm)

## Connections


W2

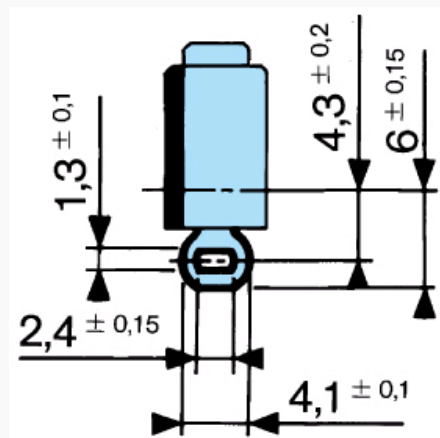

## Dimensions (mm)

## Connections


W7A5

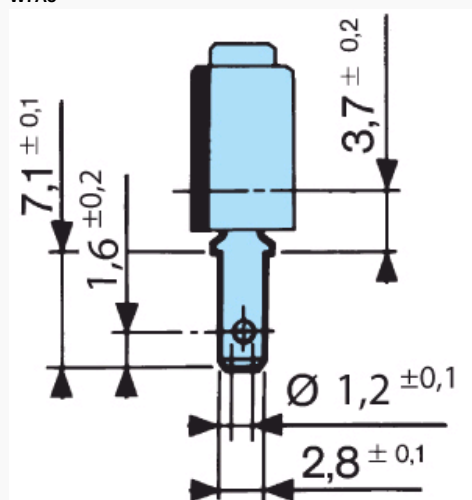

## Dimensions (mm)


## Connections

X1 - X1S

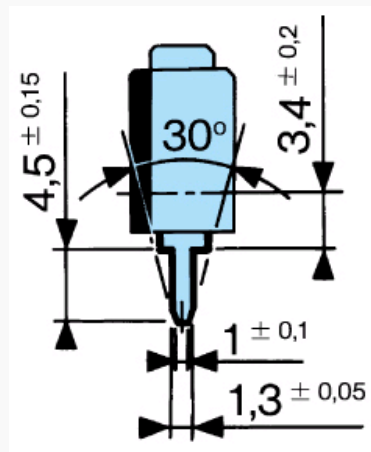


## Dimensions (mm)

## Connections

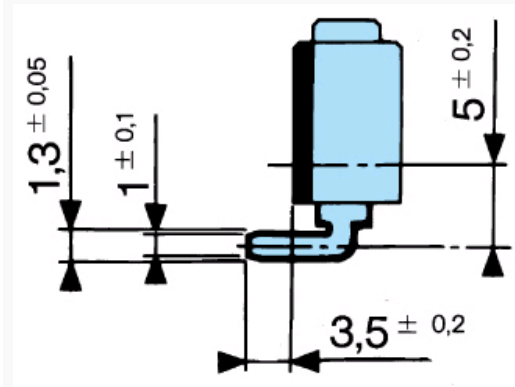

Dimensions (mm)


Connections

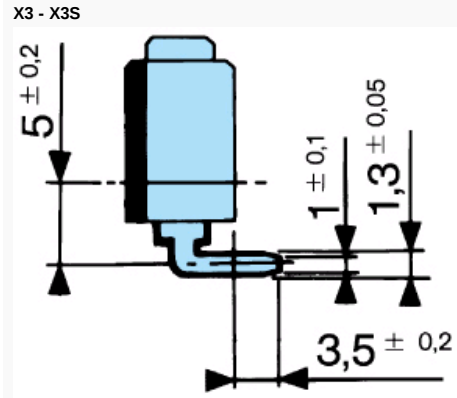

Dimensions (mm)

Drilling

Printed circuit board mounting  
Asymmetrical X1 - X2 - X3

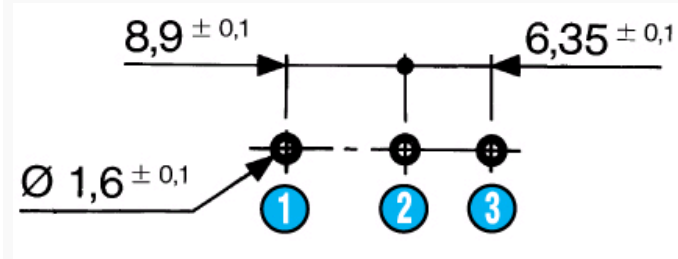


| N° | Legend |
|----|--------|
| 1  | 1.C    |
| 2  | 4.NO   |
| 3  | 2.NC   |

Dimensions (mm)

Drilling

Printed circuit board mounting  
Symmetrical X1S - X2S - X3S

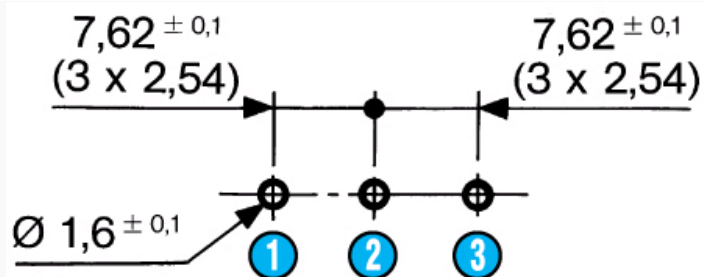


| N° | Legend |
|----|--------|
| 1  | 1.C    |
| 2  | 4.NO   |
| 3  | 2.NC   |

#### Dimensions (mm)

##### Drilling


Mounting on a printed circuit board with fixing pins  
Asymmetrical

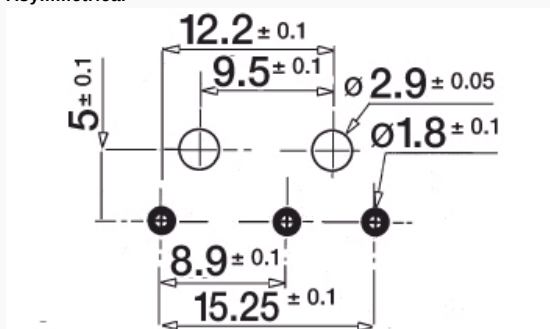

#### Dimensions (mm)


##### Drilling

Mounting on a printed circuit board with fixing pins  
Symmetrical

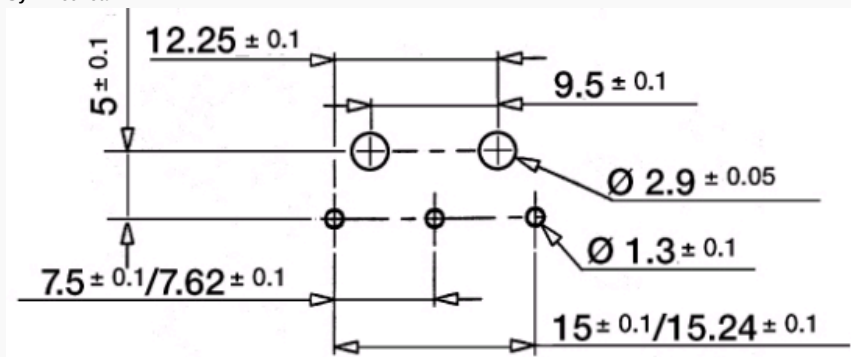

#### Dimensions (mm)

##### Actuator mounting positions

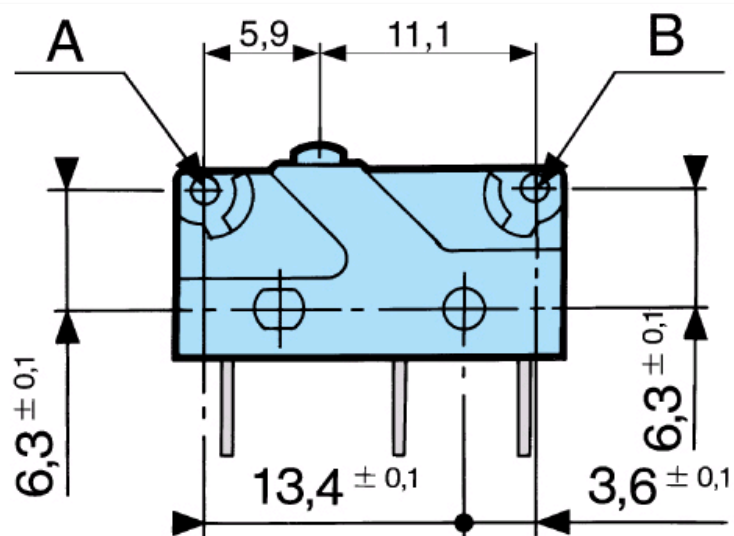


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

#### Dimensions (mm)

##### Actuators

170A

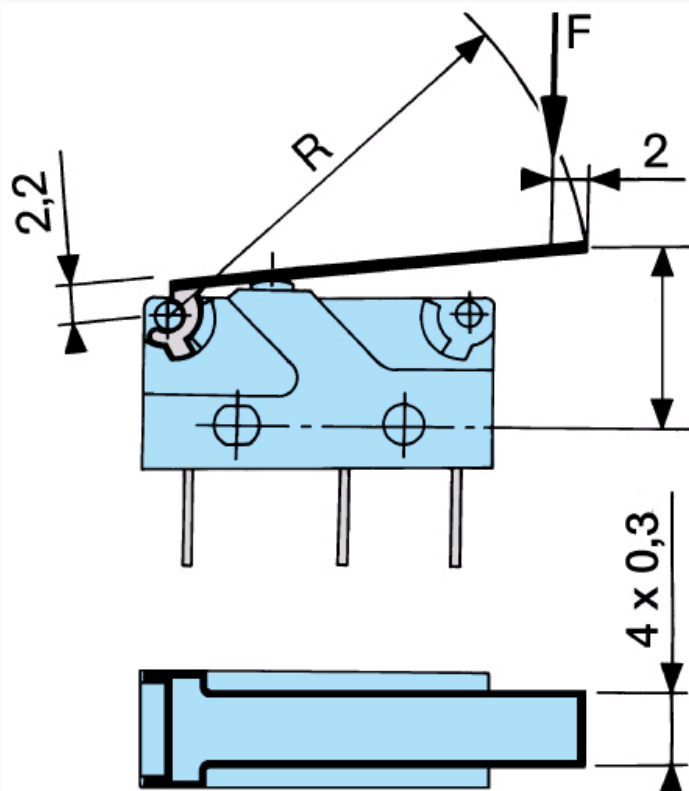


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

#### Dimensions (mm)

##### Actuators

170E

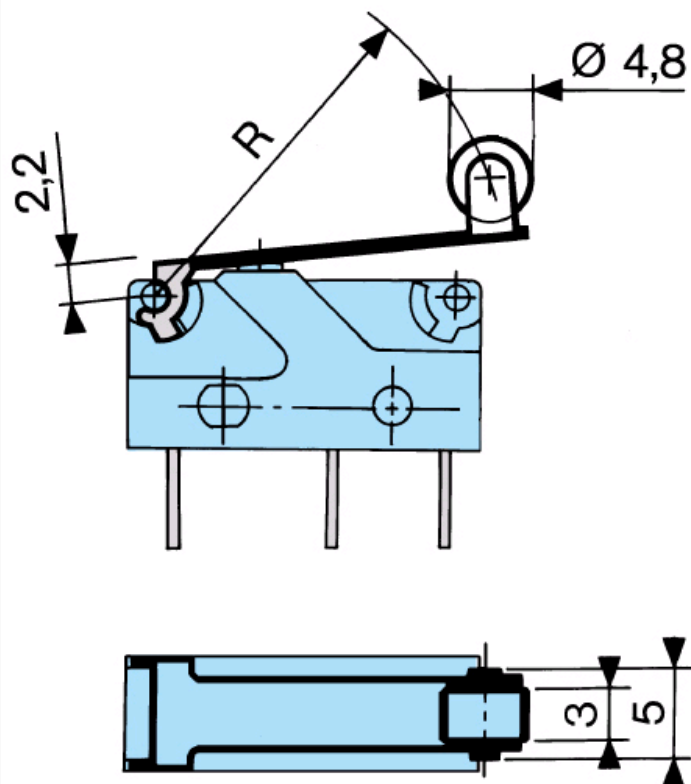


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

#### Dimensions (mm)

#### Actuators

170F

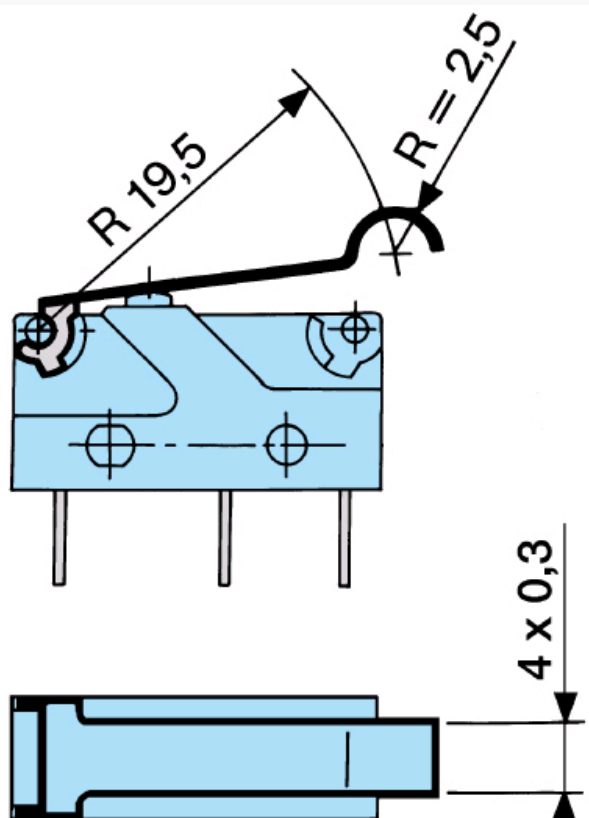


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

Dimensions (mm)

Mounting accessories

Fixing pins

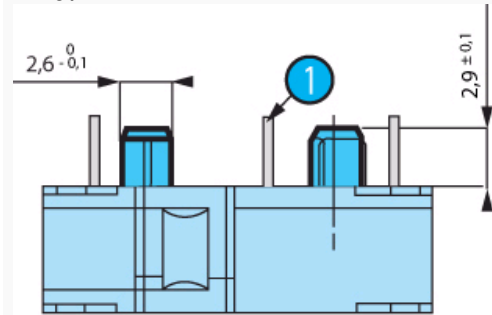


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

| N° | Legend                   |
|----|--------------------------|
| 1  | Output on unit side : X2 |

Dimensions (mm)

Mounting accessories

Fixing pins

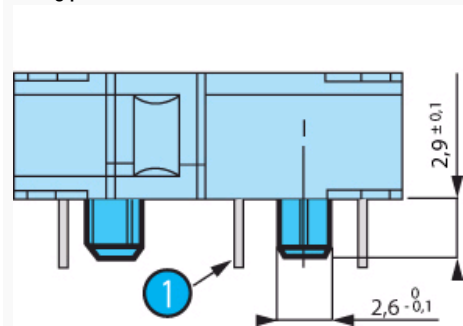


Fixing position Except where otherwise indicated, levers are supplied unmounted. For factory mounting, specify fixing position A or B. To calculate force : divide the switch force by the coefficient in the table. To calculate travel : multiply the switch travel by the same coefficient.

| N° | Legend                    |
|----|---------------------------|
| 1  | Output on cover side : X3 |

Curves

Operating curve for type 831704

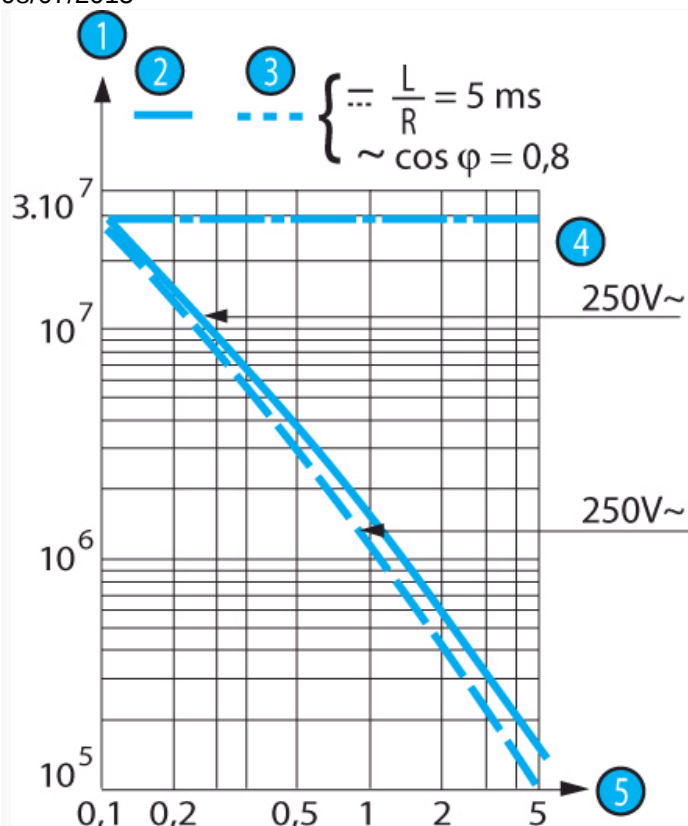

| N° | Legend                |
|----|-----------------------|
| ①  | Number of cycles      |
| ②  | Resistive circuit     |
| ③  | Inductive circuit     |
| ④  | Mechanical life limit |
| ⑤  | Current in Amps       |

## Connections

### Actuators and fixing positions

| Part numbers for standard actuators  |  | 79253327                                                                            | 79253326                                                                            | 79253328                                                                            | 79218454                                                                            | 79253329                                                                            |                      |                      |                      |                      |                      |
|--------------------------------------|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| Actuators                            |  | Flat 170A R18.3                                                                     | Flat 170A R24                                                                       | Flat 170A R41                                                                       | Roller 170E R20                                                                     | Dummy roller 170F                                                                   |                      |                      |                      |                      |                      |
|                                      |  |  |  |  |  |  |                      |                      |                      |                      |                      |
| Fixing positions                     |  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                      |                      |                      |                      |                      |
| Coefficient                          |  | A B                                                                                 | A B                                                                                 | A B                                                                                 | A B                                                                                 | A B                                                                                 |                      |                      |                      |                      |                      |
| Tripping point                       |  | 3 1.5                                                                               | 4 2                                                                                 | 7 3.5                                                                               | 3 1.5                                                                               | 3 1.5                                                                               |                      |                      |                      |                      |                      |
|                                      |  | 10 <sup>+1.4</sup>                                                                  | 9.2 <sup>+0.9</sup>                                                                 | 10.7 <sup>+1.7</sup>                                                                | 9.6 <sup>+1</sup>                                                                   | 12.7 <sup>+1.8</sup>                                                                | 10.6 <sup>+1.4</sup> | 15.5 <sup>+1.4</sup> | 14.5 <sup>+0.9</sup> | 12.9 <sup>+1.3</sup> | 11.9 <sup>+0.1</sup> |
| Levers                               |  | Screw 170D                                                                          | Transverse roller 170EL                                                             |                                                                                     |                                                                                     |                                                                                     |                      |                      |                      |                      |                      |
|                                      |  |  |  |                                                                                     |                                                                                     |                                                                                     |                      |                      |                      |                      |                      |
| Characteristics available on request |  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                                                                                     |                      |                      |                      |                      |                      |

## Other information

### Mounting - Operation

See basic technical concepts

## Product adaptations



- Special levers
- Special connections

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А