




# RF3404D

## 433.92 MHz SAW Filter



**SM3838-8 Case**  
3.8 x 3.8

- Ideal Front-End Filter for European Wireless Receivers
- Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)<sup>10</sup>



The RF3404D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 433.92 MHz receivers. Receiver designs using this filter include superhet with 10.7 MHz or 500 kHz IF, direct conversion and superregen. Typical applications of these receivers are wireless remote-control and security devices operating in Europe under ETSI I-ETS 300 220.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. RFM's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

### Electrical Characteristics

| Characteristic  | Sym                                   | Notes   | Minimum          | Typical   | Maximum | Units                   |
|---|---------------------------------------|---------|------------------|-----------|---------|-------------------------|
| Center Frequency at 25°C Absolute Frequency                 | $f_c$                                 | 1, 2, 3 |                  | 433.92    |         | MHz                     |
| Insertion Loss  | $IL_{MIN}$                            | 1, 3    |                  | 1.6       | 2.5     | dB                      |
| Passband Ripple (Relative to $IL_{MIN}$ ) $F_c \pm 200$ kHz |                                       | 1, 3    |                  | 1.2       | 1.8     | dB                      |
| 3 dB Bandwidth  | $BW_3$                                | 1, 3    | 500              | 600       | 800     | kHz                     |
| Rejection Attenuation: (relative to $IL_{min}$ )            |                                       | 1, 3    |                  |           |         | dB                      |
| 10 - 414 MHz  |                                       |         | 50               | 55        |         |                         |
| 414 - 424 MHz   |                                       |         | 45               | 50        |         |                         |
| 424 - 431 MHz   |                                       |         | 30               | 34        |         |                         |
| 431 - 432 MHz   |                                       |         | 18               | 22        |         |                         |
| 432 - 433 MHz   |                                       |         | 12               | 17        |         |                         |
| 434.92 - 442 MHz  |                                       |         | 11               | 14        |         |                         |
| 442 - 550 MHz   |                                       | 35      | 38               |           |         |                         |
| 550 - 1000 MHz  |                                       | 50      | 55               |           |         |                         |
| Temperature Freq. Temp. Coefficient                         | FTC                                   |         |                  | 0.032     |         | ppm/<br>°C <sup>2</sup> |
| Frequency Aging Absolute Value during the First Year        | $ fA $                                | 5       |                  | $\leq 10$ |         | ppm/yr                  |
| Impedance @ $f_c$   | Input $Z_{IN} = R_{IN}    C_{IN}$     | 1       | 2853Ω // 1.66pf  |           |         |                         |
|   | Output $Z_{OUT} = R_{OUT}    C_{OUT}$ |         | 2411Ω // 1.73pf  |           |         |                         |
| Lid Symbolization (Y=year WW=week S=shift)                  | 539 // YWWS                           |         |                  |           |         |                         |
| Standard Reel Quantity                                      | Reel Size 7 Inch                      | 9       | 500 Pieces/Reel  |           |         |                         |
|   | Reel Size 13 Inch                     |         | 3000 Pieces/Reel |           |         |                         |



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**

#### Notes:

1. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with  $VSWR \leq 1.2:1$ . The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
2. The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
3. Where noted specifications apply over the entire specified operating temperature range of -40°C to +90°C.
4. The turnover temperature,  $T_o$ , is the temperature of maximum (or turnover) frequency,  $f_o$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_o - T_c)^2]$ .
5. Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
6. The design, manufacturing process, and specifications of this device are subject to change.
7. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
8. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
9. Tape and Reel Standard Per ANSI / EIA 481.
10. This product complies with Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.

## Absolute Maximum Ratings

| Characteristic                                     | Value       | Units |
|--|-------------|-------|
| Input Power Level                                  | 10          | dBm   |
| DC Voltage   | 12          | VDC   |
| Storage Temperature                                | -40 to +125 | °C    |
| Operable Temperature Range                         | -40 to +125 | °C    |
| Soldering Temperature (10 seconds / 5 cycles max.) | 260         | °C    |

## Electrical Characteristics

| Characteristic   | Sym  | Notes                 | Minimum | Typical                             | Maximum | Units               |
|--|--|-----------------------|---------|-------------------------------------|---------|---------------------|
| Center Frequency at 25°C Absolute Frequency                | $f_c$  | 1, 2, 3               |         | 433.92                              |         | MHz                 |
| Insertion Loss   | $IL_{MIN}$   | 1, 3                  |         | 2.3                                 | 3.0     | dB                  |
| Passband Ripple (Relative to $IL_{MIN}$ ) $F_c \pm 200kHz$ |  | 1, 3                  |         | 1.2                                 | 2.0     | dB                  |
| 3 dB Bandwidth   | $BW_3$   | 1, 3                  | 500     | 600                                 | 800     | kHz                 |
| Rejection Attenuation: (relative to $IL_{min}$ )           |  |                       |         |                                     |         |                     |
| 10 - 414 MHz   |  | 1, 3                  | 50      | 53                                  |         | dB                  |
| 414 - 424 MHz  |  |                       | 45      | 50                                  |         |                     |
| 424 - 431 MHz  |  |                       | 30      | 34                                  |         |                     |
| 431 - 432 MHz  |  |                       | 18      | 22                                  |         |                     |
| 432 - 433 MHz  |  |                       | 12      | 14                                  |         |                     |
| 434.92 - 442 MHz   |  |                       | 11      | 14                                  |         |                     |
| 442 - 550 MHz  |  |                       | 35      | 37                                  |         |                     |
| 550 - 1000 MHz   |  |                       | 50      | 55                                  |         |                     |
| Temperature Freq. Temp. Coefficient                        | FTC  |                       |         | 0.032                               |         | ppm/°C <sup>2</sup> |
| Frequency Aging Absolute Value during the First Year       | fA   | 5                     |         | ≤10                                 |         | ppm/yr              |
| Impedance @ $f_c$  | Input $Z_{IN} = R_{IN}    C_{IN}$<br>Output $Z_{OUT} = R_{OUT}    C_{OUT}$ | $Z_{IN}$<br>$Z_{OUT}$ | 1       | 2853Ω // 1.66pf<br>2411Ω // 1.73pf  |         |                     |
| Lid Symbolization (Y=year WW=week S=shift)                 |  |                       |         | 539 // YWWS                         |         |                     |
| Standard Reel Quantity                                     | Reel Size 7 Inch<br>Reel Size 13 Inch                                      |                       | 9       | 500 Pieces/Reel<br>3000 Pieces/Reel |         |                     |



**CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.**


Notes:

- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with  $V_{SWR} \leq 1.2:1$ . The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency,  $f_c$ . Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
- The frequency  $f_c$  is defined as the midpoint between the 3dB frequencies.
- Where noted specifications apply over the entire specified operating temperature range of -40°C to +125°C.
- The turnover temperature,  $T_o$ , is the temperature of maximum (or turnover) frequency,  $f_o$ . The nominal frequency at any case temperature,  $T_c$ , may be calculated from:  $f = f_o [1 - FTC (T_o - T_c)^2]$ .
- Frequency aging is the change in  $f_c$  with time and is specified at +65°C or less. Aging may exceed the specification for prolonged temperatures above +65°C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years.
- The design, manufacturing process, and specifications of this device are subject to change.
- One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- Tape and Reel Standard Per ANSI / EIA 481.
- This product complies with Directive 2002/95/EC of the European Parliament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous substances in electrical and electronic equipment.


PRIMARY

Electrical Connections

| Pin | Connection    |
|-----|---------------|
| 1   | Input         |
| 2   | Input Ground  |
| 3   | Ground        |
| 4   | Case Ground   |
| 5   | Output        |
| 6   | Output Ground |
| 7   | Ground        |
| 8   | Case Ground   |

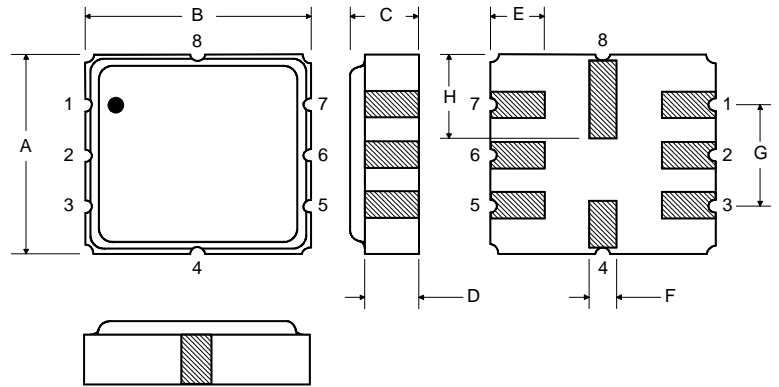

Matching Circuit to 50Ω

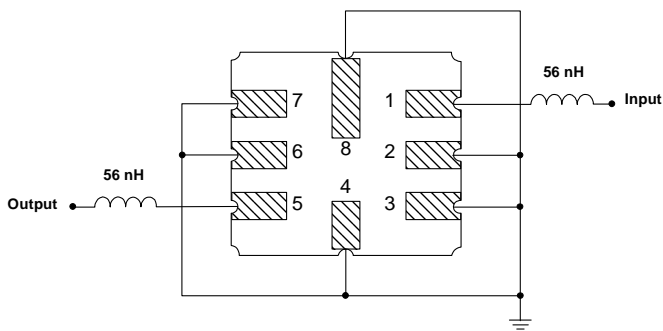

Case Dimensions


| Dimension | mm   |      |      | Inches |       |       |
|-----------|------|------|------|--------|-------|-------|
|           | Min  | Nom  | Max  | Min    | Nom   | Max   |
| A         | 3.6  | 3.8  | 4.0  | 0.14   | 0.15  | 0.16  |
| B         | 3.6  | 3.8  | 4.0  | 0.14   | 0.15  | 0.16  |
| C         | 1.00 | 1.20 | 1.40 | 0.04   | 0.05  | 0.055 |
| D         | 0.95 | 1.10 | 1.25 | 0.033  | 0.043 | 0.05  |
| E         | 0.90 | 1.0  | 1.10 | 0.035  | 0.04  | 0.043 |
| F         | 0.50 | 0.6  | 0.70 | 0.020  | 0.024 | 0.028 |
| G         | 2.39 | 2.54 | 2.69 | 0.090  | 0.100 | 0.110 |
| H         | 1.40 | 1.75 | 2.05 | 0.055  | 0.069 | 0.080 |

OPTIONAL


Electrical Connections

| Pin | Connection    |
|-----|---------------|
| 1   | Input Ground  |
| 2   | Input         |
| 3   | Ground        |
| 4   | Case Ground   |
| 5   | Output Ground |
| 6   | Output        |
| 7   | Ground        |
| 8   | Case Ground   |


Matching Circuit to 50Ω

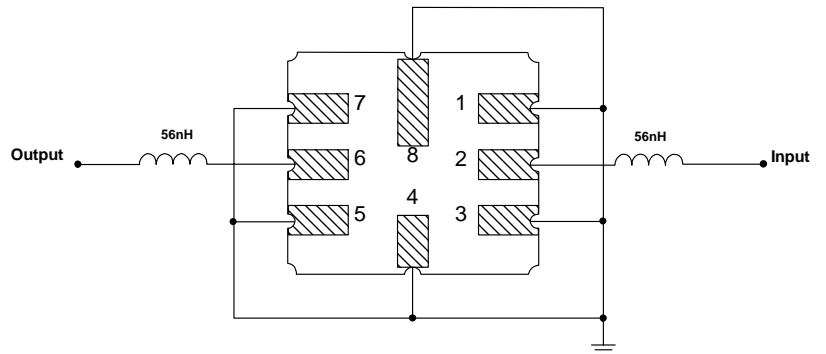

1 Aug 2007 14:03:00

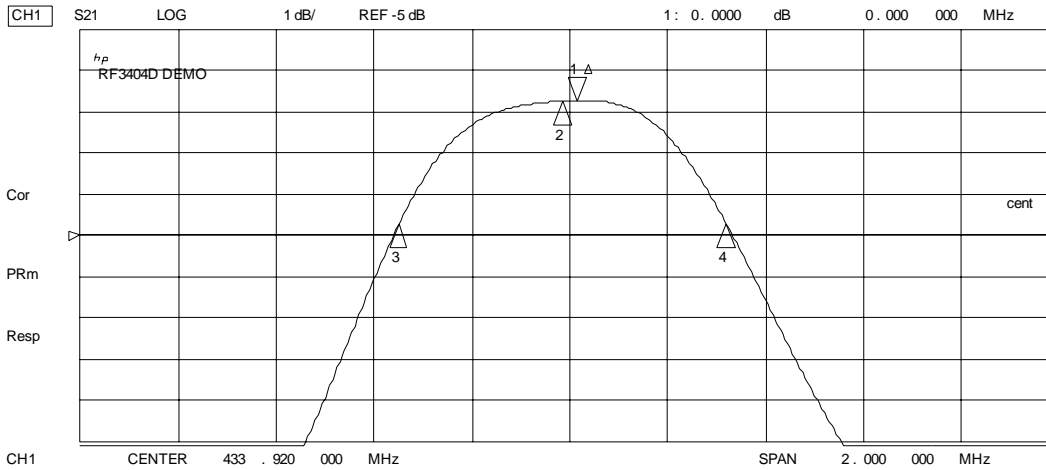

CH1 Markers  
Max Δ REF=1  
BW: .669068 MHz  
cent : 433.905059 MHz  
Q: 648.52  
1 loss : -1.7269 dB

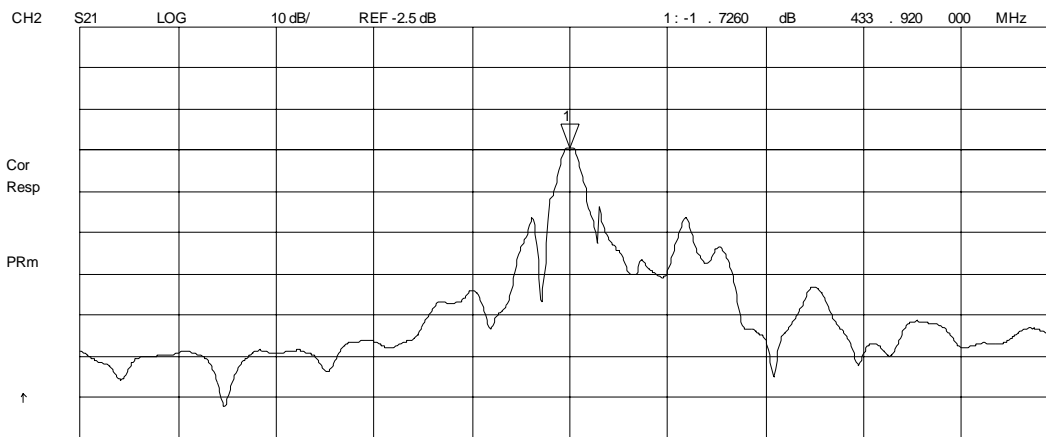

Max

1 Aug 2007 14:03:18

CH1 S11 1U FS  
RF3404D DEMO


1: 53.467  $\Omega$  -8.286  $\Omega$  44.585 pF 433.920 000 MHz

Cor

PRm

Full

↑

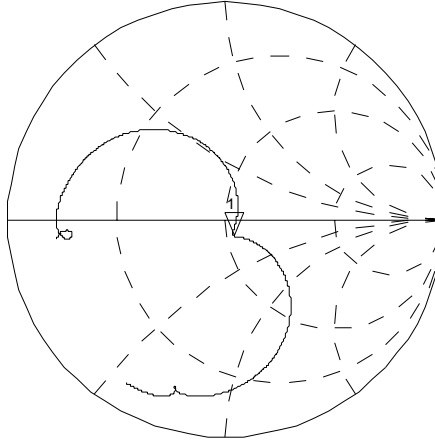


CH2 S22 1U FS

1: 52.436  $\Omega$  5.0352  $\Omega$  1.8468 nH 433.920 000 MHz

Cor  
Full

PRm

↑

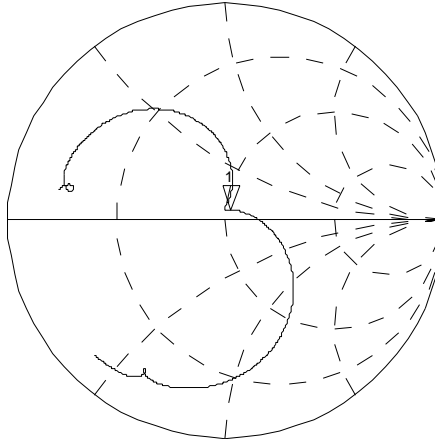

CENTER 433.920 000 MHz

SPAN 2.000 000 MHz

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А