



NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED



THIS PAGE INTENTIONALLY LEFT BLANK



MICROWAVE CORPORATION

v02.0813



HMC740ST89E


InGaP HBT ACTIVE BIAS MMIC AMPLIFIER, 0.05 – 3 GHz

Typical Applications

The HMC740ST89E is ideal for:

- Cellular/3G & WiMAX/4G
- Fixed Wireless & WLAN
- CATV, Cable Modem & DBS
- Microwave Radio & Test Equipment
- IF & RF Applications

Functional Diagram

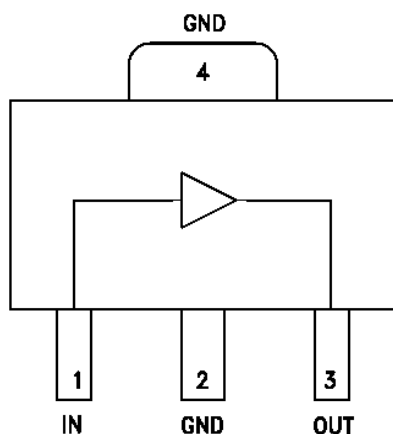

Features

- P1dB Output Power: +18 dBm
- Gain: 15 dB
- Output IP3: +40 dBm
- Cascadable 50 Ohm I/Os
- Single Supply: +5V
- Industry Standard SOT89 Package
- Robust 1000V ESD, Class 1C
- Stable Current Over Temperature
- Active Bias Network

General Description

The HMC740ST89E is an InGaP Heterojunction Bipolar Transistor (HBT) Gain Block MMIC SMT amplifier covering 0.05 to 3 GHz. Packaged in an industry standard SOT89, the amplifier can be used as a cascadable 50 Ohm RF or IF gain stage as well as a PA or LO driver with up to +18 dBm output power. The HMC740ST89E offers 15 dB of gain with a +40 dBm output IP3 at 100 MHz, and can operate directly from a +5V supply. The HMC740ST89E exhibits excellent gain and output power stability over temperature, while requiring a minimal number of external bias components.

Electrical Specifications, $V_{cc} = 5V$, $T_A = +25^\circ C$

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range		0.05 - 1			0.05 - 3		GHz
Gain	12	15		11	15		dB
Gain Flatness		± 0.1			± 0.7		dB
Gain Variation over Temperature		0.003	0.006		0.003	0.006	dB/ $^\circ C$
Input Return Loss		18			15		dB
Output Return Loss		18			18		dB
Reverse Isolation		20			21		dB
Output Power for 1 dB Compression (P1dB)	15.5	18		14.5	17		dBm
Output Third Order Intercept (IP3) (Pout= 0 dBm per tone, 1 MHz spacing)		38			32		dBm
Noise Figure		3.5			3.5		dB
Supply Current (Icq)		88			88		mA

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at www.hittite.com

Application Support: Phone: 978-250-3343 or apps@hittite.com


InGaP HBT ACTIVE BIAS MMIC AMPLIFIER, 0.05 – 3 GHz

IF Band Performance


Gain & Return Loss

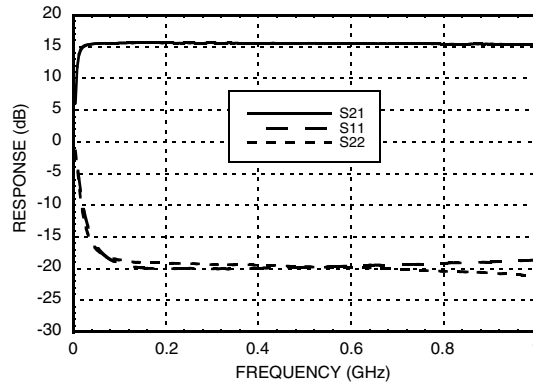


Gain vs. Temperature

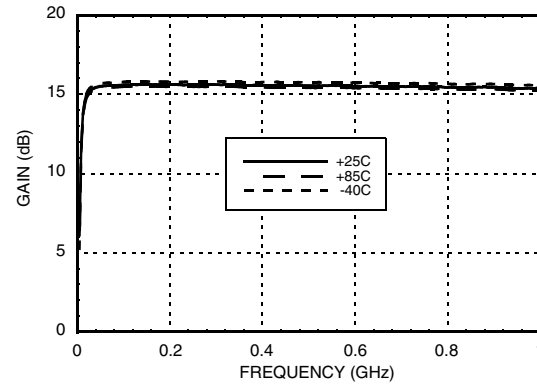


Noise Figure vs. Temperature

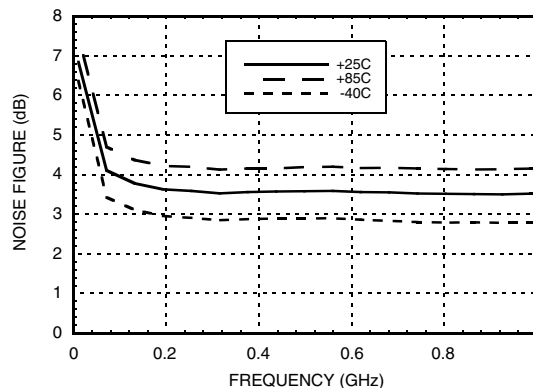


Output IP3 vs. Temperature

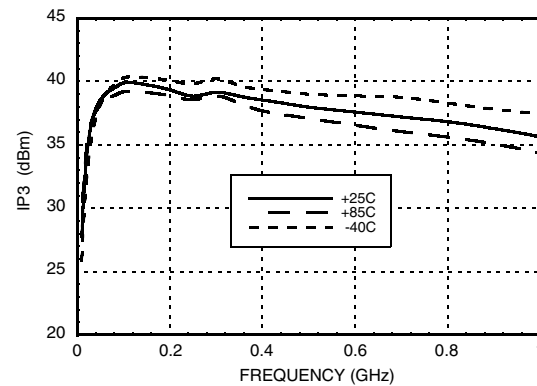

Output IP3 vs. Vcc

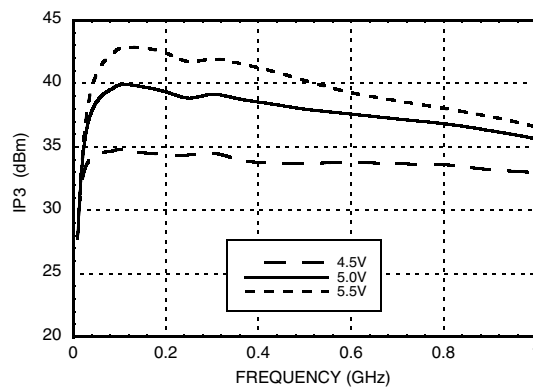

Output IP3 vs. Output Power

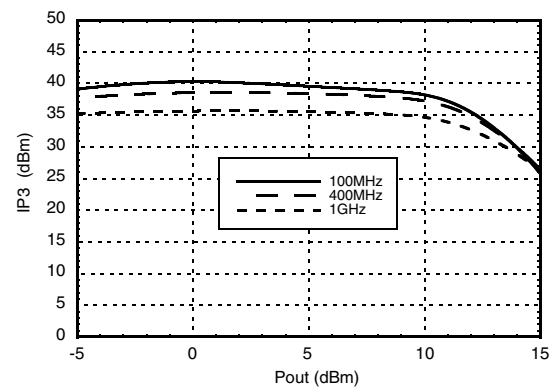



MICROWAVE CORPORATION v02.0813




HMC740ST89E


InGaP HBT ACTIVE BIAS MMIC AMPLIFIER, 0.05 – 3 GHz

Broadband Performance


Gain & Return Loss

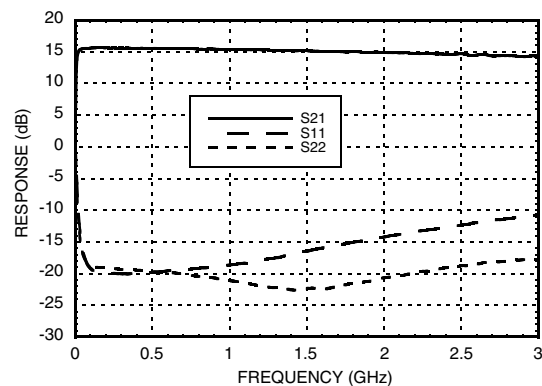


Gain vs. Temperature

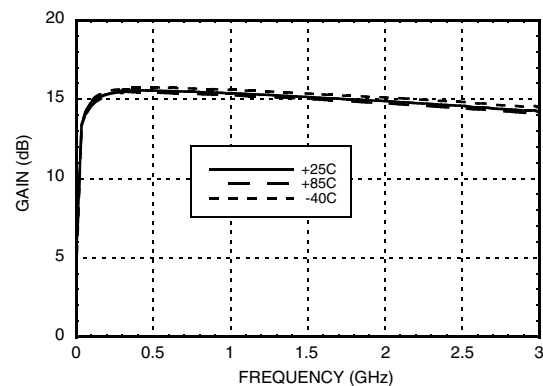


Gain vs. Vcc

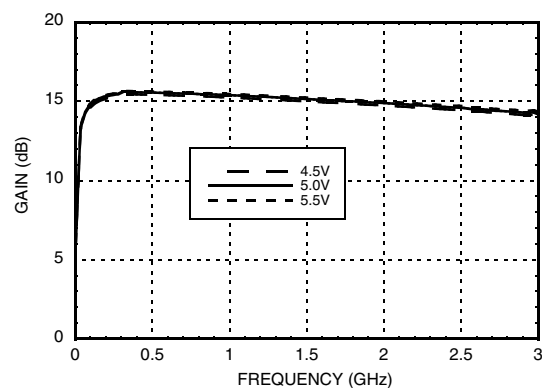


Input Return Loss vs. Temperature

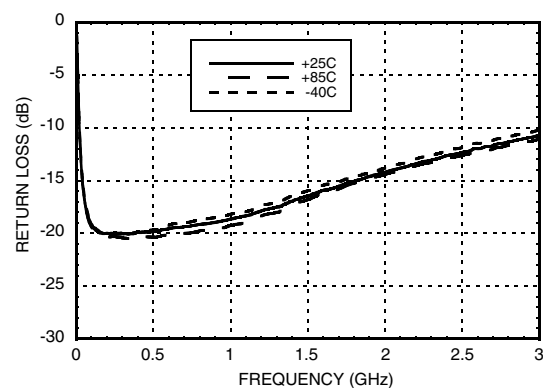

Output Return Loss vs. Temperature

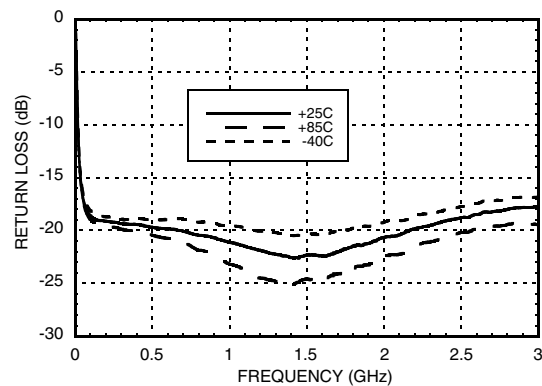


Input Return Loss vs. Vcc

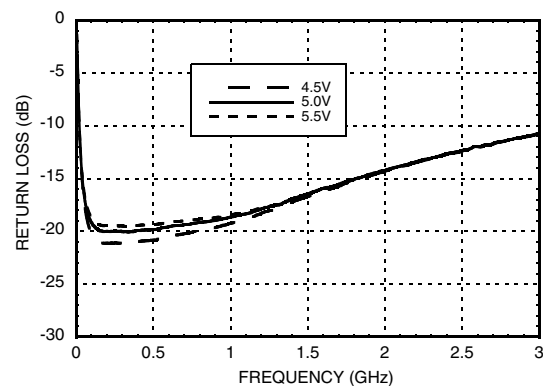


InGaP HBT ACTIVE BIAS MMIC AMPLIFIER, 0.05 – 3 GHz


Output Return Loss vs. Vcc

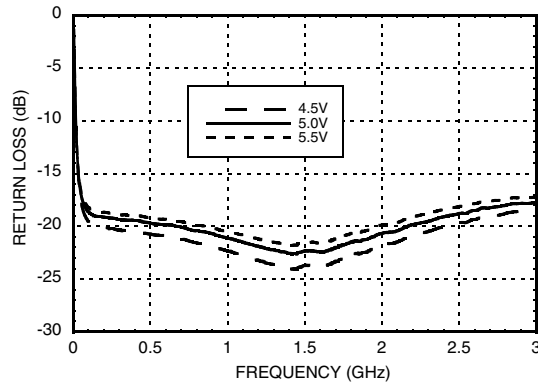


Noise Figure vs. Temperature

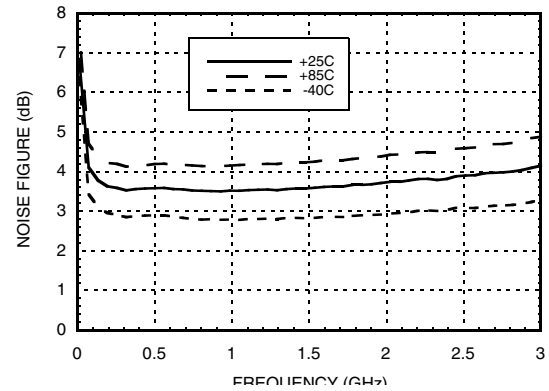


Noise Figure vs. Vcc

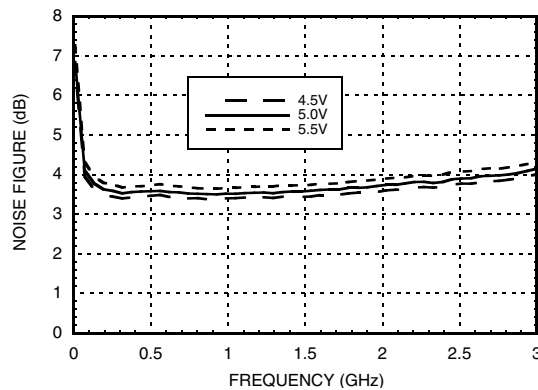


Reverse Isolation vs. Temperature

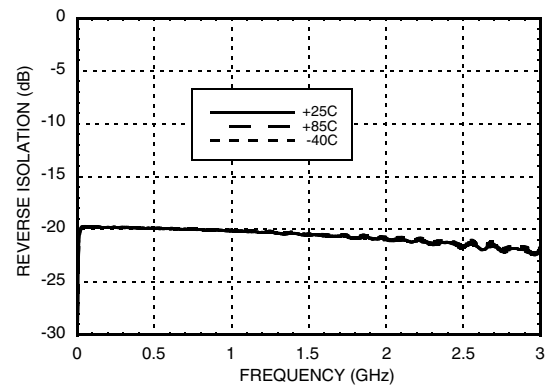

Reverse Isolation vs. Vcc

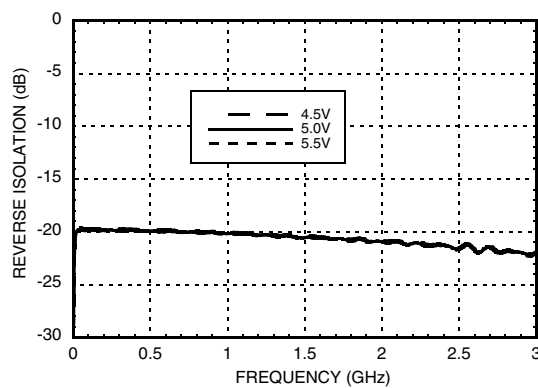







Output IP3 vs. Temperature

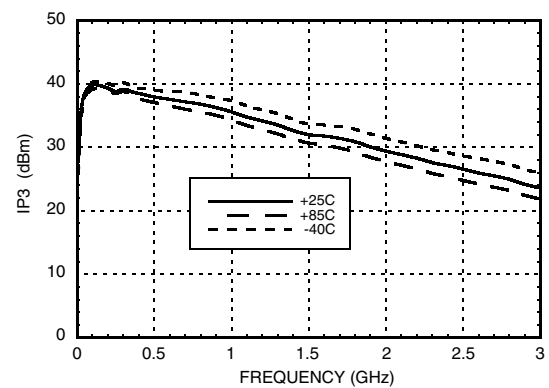



MICROWAVE CORPORATION

v02.0813

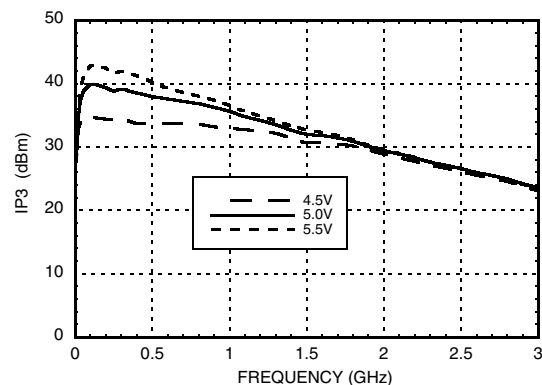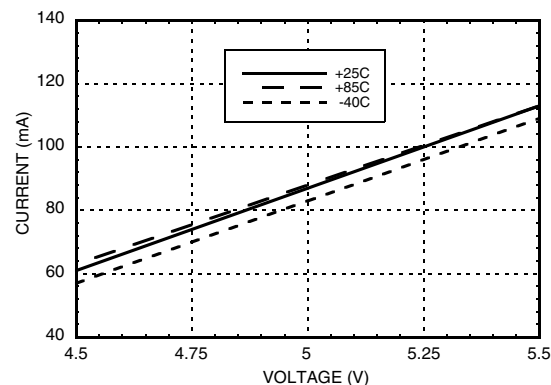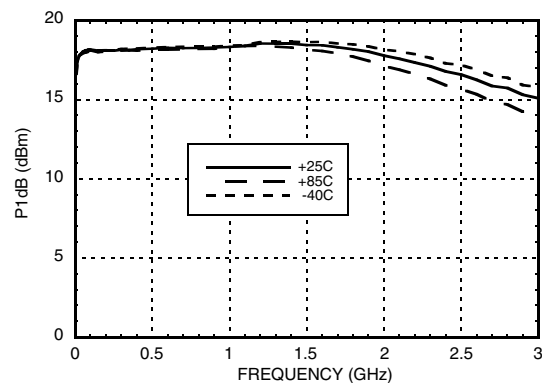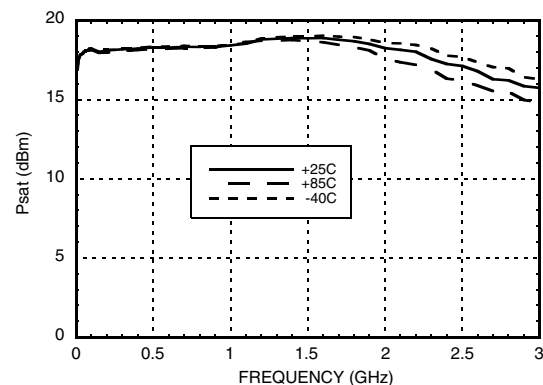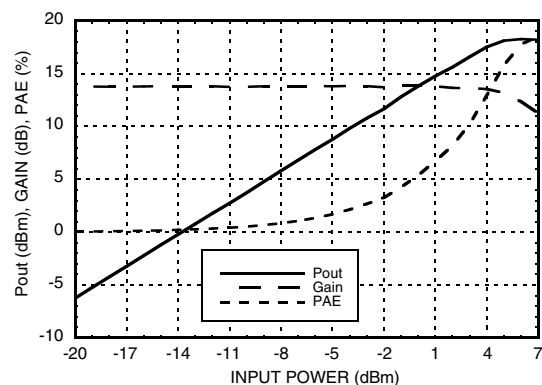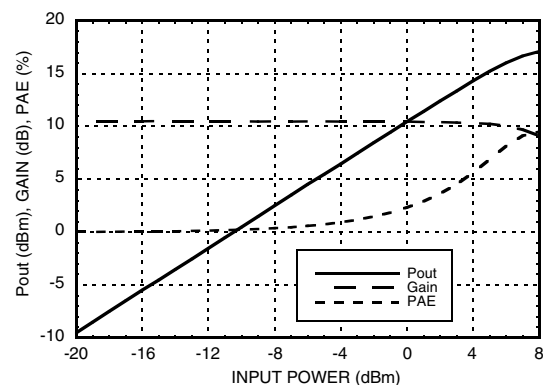**HMC740ST89E****InGaP HBT ACTIVE BIAS
MMIC AMPLIFIER, 0.05 – 3 GHz****Output IP3 vs. Vcc****Current vs. Temperature****P1dB vs. Temperature****Psat vs. Temperature****Power Compression @ 500 MHz****Power Compression @ 2 GHz**



***InGaP HBT ACTIVE BIAS
MMIC AMPLIFIER, 0.05 – 3 GHz***

8

Collector Bias Voltage (Vcc)	+5.5 Vdc
RF Input Power (RFIN)	+15 dBm
Junction Temperature	150 °C
Continuous P _{diss} (T = 85 °C) (derate 10.23 mW/°C above 85 °C)	0.66 W
Thermal Resistance (junction to lead)	97.78 °C/W
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C
ESD Sensitivity (HMB)	Class 1C



Technical drawing of a rectangular component with dimensions and labels. The drawing includes a top view and a side view.

Top View Dimensions:

- Overall width: $.072 \left[\begin{smallmatrix} 1.83 \\ 1.63 \end{smallmatrix} \right]$
- Overall height: $.164 \left[\begin{smallmatrix} 4.17 \\ 3.86 \end{smallmatrix} \right]$
- Top flange width: $.102 \left[\begin{smallmatrix} 2.59 \\ 2.29 \end{smallmatrix} \right]$
- Top flange height: $.047 \left[\begin{smallmatrix} 1.19 \\ 0.74 \end{smallmatrix} \right]$
- Bottom flange width: $.047 \left[\begin{smallmatrix} 1.19 \\ 0.74 \end{smallmatrix} \right]$
- Bottom flange height: $.029 \left[\begin{smallmatrix} 0.74 \\ 0.56 \end{smallmatrix} \right]$
- Central area width: $.121 \left[\begin{smallmatrix} 3.07 \\ 2.92 \end{smallmatrix} \right]$
- Central area height: $.102 \left[\begin{smallmatrix} 2.59 \\ 2.29 \end{smallmatrix} \right]$
- Side flange width: $.022 \left[\begin{smallmatrix} 0.56 \\ 0.43 \end{smallmatrix} \right]$
- Side flange height: $.017 \left[\begin{smallmatrix} 0.43 \\ 0.36 \end{smallmatrix} \right]$
- Bottom flange width (left): $.062 \left[\begin{smallmatrix} 1.57 \\ 1.42 \end{smallmatrix} \right]$
- Bottom flange width (right): $.062 \left[\begin{smallmatrix} 1.57 \\ 1.42 \end{smallmatrix} \right]$

Labels:

- PART NUMBER:** H740
- LOT NUMBER:** XXXX
- Feature 1:** 1
- Feature 2:** 2
- Feature 3:** 3
- Feature 4:** 4
- Feature 5:** 5
- Feature 6:** 6
- Feature 7:** 7
- Feature 8:** 8
- Feature 9:** 9
- Feature 10:** 10
- Feature 11:** 11
- Feature 12:** 12
- Feature 13:** 13
- Feature 14:** 14
- Feature 15:** 15
- Feature 16:** 16
- Feature 17:** 17
- Feature 18:** 18
- Feature 19:** 19
- Feature 20:** 20
- Feature 21:** 21
- Feature 22:** 22
- Feature 23:** 23
- Feature 24:** 24
- Feature 25:** 25
- Feature 26:** 26
- Feature 27:** 27
- Feature 28:** 28
- Feature 29:** 29
- Feature 30:** 30
- Feature 31:** 31
- Feature 32:** 32
- Feature 33:** 33
- Feature 34:** 34
- Feature 35:** 35
- Feature 36:** 36
- Feature 37:** 37
- Feature 38:** 38
- Feature 39:** 39
- Feature 40:** 40
- Feature 41:** 41
- Feature 42:** 42
- Feature 43:** 43
- Feature 44:** 44
- Feature 45:** 45
- Feature 46:** 46
- Feature 47:** 47
- Feature 48:** 48
- Feature 49:** 49
- Feature 50:** 50
- Feature 51:** 51
- Feature 52:** 52
- Feature 53:** 53
- Feature 54:** 54
- Feature 55:** 55
- Feature 56:** 56
- Feature 57:** 57
- Feature 58:** 58
- Feature 59:** 59
- Feature 60:** 60
- Feature 61:** 61
- Feature 62:** 62
- Feature 63:** 63
- Feature 64:** 64
- Feature 65:** 65
- Feature 66:** 66
- Feature 67:** 67
- Feature 68:** 68
- Feature 69:** 69
- Feature 70:** 70
- Feature 71:** 71
- Feature 72:** 72
- Feature 73:** 73
- Feature 74:** 74
- Feature 75:** 75
- Feature 76:** 76
- Feature 77:** 77
- Feature 78:** 78
- Feature 79:** 79
- Feature 80:** 80
- Feature 81:** 81
- Feature 82:** 82
- Feature 83:** 83
- Feature 84:** 84
- Feature 85:** 85
- Feature 86:** 86
- Feature 87:** 87
- Feature 88:** 88
- Feature 89:** 89
- Feature 90:** 90
- Feature 91:** 91
- Feature 92:** 92
- Feature 93:** 93
- Feature 94:** 94
- Feature 95:** 95
- Feature 96:** 96
- Feature 97:** 97
- Feature 98:** 98
- Feature 99:** 99
- Feature 100:** 100
- Feature 101:** 101
- Feature 102:** 102
- Feature 103:** 103
- Feature 104:** 104
- Feature 105:** 105
- Feature 106:** 106
- Feature 107:** 107
- Feature 108:** 108
- Feature 109:** 109
- Feature 110:** 110
- Feature 111:** 111
- Feature 112:** 112
- Feature 113:** 113
- Feature 114:** 114
- Feature 115:** 115
- Feature 116:** 116
- Feature 117:** 117
- Feature 118:** 118
- Feature 119:** 119
- Feature 120:** 120
- Feature 121:** 121
- Feature 122:** 122
- Feature 123:** 123
- Feature 124:** 124
- Feature 125:** 125
- Feature 126:** 126
- Feature 127:** 127
- Feature 128:** 128
- Feature 129:** 129
- Feature 130:** 130
- Feature 131:** 131
- Feature 132:** 132
- Feature 133:** 133
- Feature 134:** 134
- Feature 135:** 135
- Feature 136:** 136
- Feature 137:** 137
- Feature 138:** 138
- Feature 139:** 139
- Feature 140:** 140
- Feature 141:** 141
- Feature 142:** 142
- Feature 143:** 143
- Feature 144:** 144
- Feature 145:** 145
- Feature 146:** 146
- Feature 147:** 147
- Feature 148:** 148
- Feature 149:** 149
- Feature 150:** 150
- Feature 151:** 151
- Feature 152:** 152
- Feature 153:** 153
- Feature 154:** 154
- Feature 155:** 155
- Feature 156:** 156
- Feature 157:** 157
- Feature 158:** 158
- Feature 159:** 159
- Feature 160:** 160
- Feature 161:** 161
- Feature 162:** 162
- Feature 163:** 163
- Feature 164:** 164
- Feature 165:** 165
- Feature 166:** 166
- Feature 167:** 167
- Feature 168:** 168
- Feature 169:** 169
- Feature 170:** 170
- Feature 171:** 171
- Feature 172:** 172
- Feature 173:** 173
- Feature 174:** 174
- Feature 175:** 175
- Feature 176:** 176
- Feature 177:** 177
- Feature 178:** 178
- Feature 179:** 179
- Feature 180:** 180
- Feature 181:** 181
- Feature 182:** 182



1. PACKAGE BODY MATERIAL:
MOLDING COMPOUND MP-180S OR EQUIVALENT.
2. LEAD MATERIAL: Cu w/ Ag SPOT PLATING.
3. LEAD PLATING: 100% MATTE TIN.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS]
5. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
6. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
7. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking ^[1]
HMC740ST89E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 ^[2]	<u>H740</u> XXXX

[2] Max peak reflow temperature of 260 °C



MICROWAVE CORPORATION v02.0813




HMC740ST89E

**InGaP HBT ACTIVE BIAS
MMIC AMPLIFIER, 0.05 – 3 GHz**


Pin Descriptions

Pin Number	Function	Description	Interface Schematic
1	IN	This pin is DC coupled. An off chip DC blocking capacitor is required.	
3	OUT	RF output and DC Bias (Vcc) for the output stage.	
2, 4	GND	These pins and package bottom must be connected to RF/DC ground.	

Application Circuit

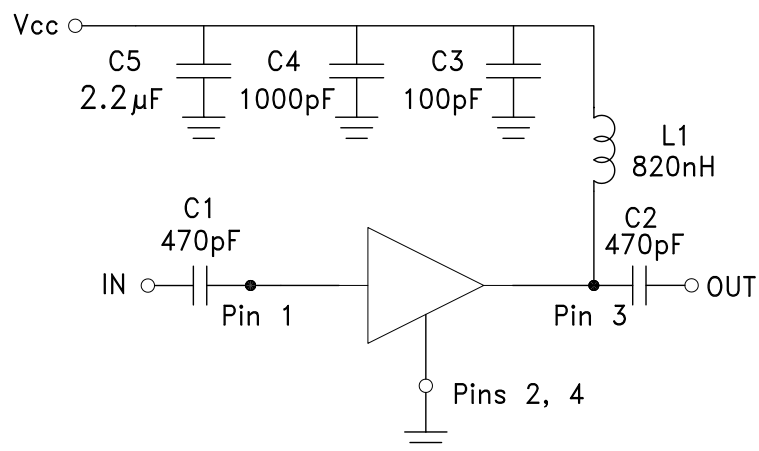

Evaluation PCB

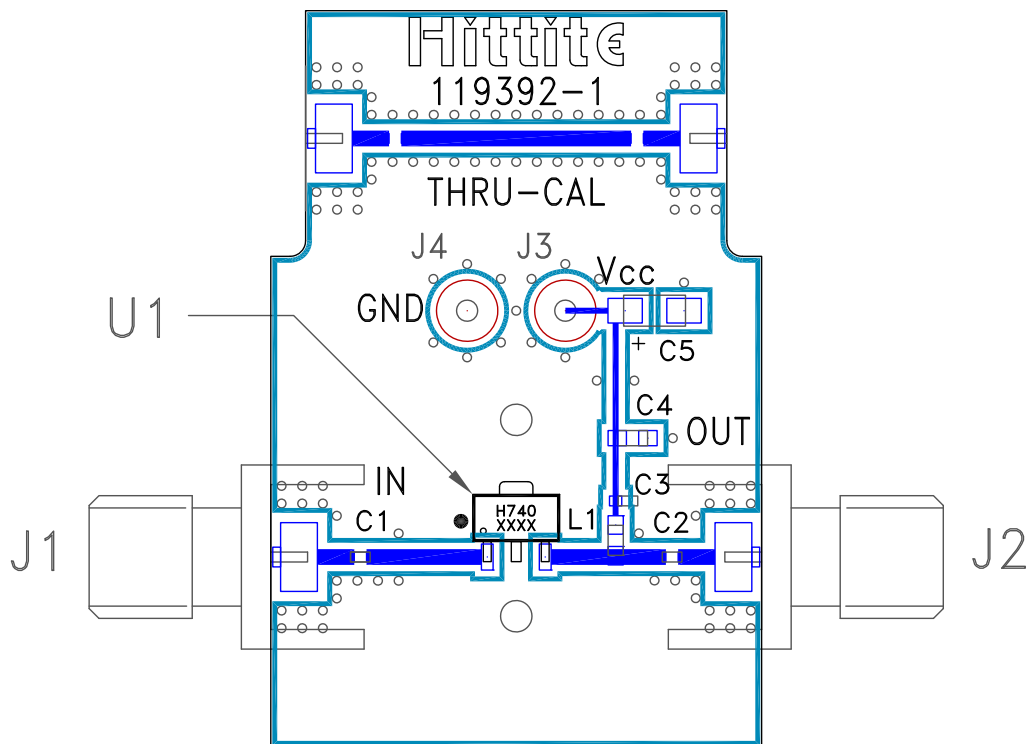

List of Materials for Evaluation PCB 124390 ^[1]

Item	Description
J1, J2	PCB Mount SMA Connector
J3, J4	DC Pin
C1, C2	470 pF Capacitor, 0402 Pkg.
C3	100 pF Capacitor, 0402 Pkg.
C4	1000 pF Capacitor, 0603 Pkg.
C5	2.2 μ F Capacitor Tantalum
L1	820 nH Inductor, 0603 Pkg.
U1	HMC740ST89E
PCB [2]	119392 Evaluation PCB

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: FR4

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and package bottom should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Hittite upon request.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А