

# COMPACT POWER RELAY

## 1 POLE - 25A (For Automotive Applications)

### FTR-G1 Series

#### ■ FEATURES

- Compact for high density packaging
  - High contact capacity with proven contact material (min. 100,000 operations, 14V, 25A)
  - Coil power savings (640mW nominal achieved with state-of-the-art magnetic analysis/design)
  - Ease of PCB layout (all terminals on perimeter, coil and contact terminals separated)
  - Lower noise (57dB average at 5cm)
  - RoHS compliant
- Please see page 5 for more information



#### ■ APPLICATIONS

- Power window
- Door lock
- Tilt steering
- Sunroof
- Power seat
- Wiper/IWW
- Retractable antenna

#### ■ PARTNUMBER INFORMATION

[Example]     FTR-G1    C    N    010    W1  
                   (a)    (b)    (c)    (d)    (e)

(a)	Relay type	FTR-G1: FTR-G1 Series
(b)	Contact configuration	C     : 1 form C
(c)	Contact gap	N     : 0.25mm
(d)	Coil rated voltage	010   : 9...12VDC Coil rating table at page 3
(e)	Contact material	W1    : Silver-tin oxide indium

Actual marking does not carry the type name: "FTR"

E.g.: Ordering code: FTR-G1CN010W1     Actual marking: G1CN010W1

# FTR-G1 SERIES

## ■ SPECIFICATION

Item	FTR-G1		
Contact Data	Configuration	1 form C	
	Material	Silver-tin oxide indium (AgSnO <sub>2</sub> )	
	Contact voltage drop	Max. 100mV at 1A, 6VDC (after stabilization)	
	Contact rating	25A at 14VDC (locked motor load)	
	Max. carrying current * <sup>1</sup>	25A/1 hour (25 °C, 100% rated coil voltage)	
	Max. switching voltage	16VDC (reference)	
	Max. switching current	35A (reference)	
	Min. switching load * <sup>2</sup>	1A, 6VDC	
Life	Mechanical	Min. 1 x 10 <sup>6</sup> operations	
	Electrical	* Min. 100 x 10 <sup>3</sup> operations, 14VDC, 25A inrush power window motor (1 operation: 1 forward and 1 reverse) * Min. 100 x 10 <sup>3</sup> operations 14VDC, 20A inrush door locked motor	
Coil Data	Rated power	640mW	
	Operate power	237mW	
	Operating temperature range	-40 °C to +85 °C (no frost)	
Timing Data	Operate (at nominal voltage)	Max. 10 ms (without bounce)	
	Release (at nominal voltage)	Max. 5 ms (without bounce, no diode)	
Insulation	Resistance (initial)	Min. 100MΩ at 500VDC	
	Dielectric withstanding voltage	Open contacts	500VAC , 1 min.
		Between coil and contacts	500VAC, 1 min.
Other	Vibration resistance	Misoperation	10 to 55Hz double amplitude 1.5mm
	Shock	Misoperation	100m/s <sup>2</sup> minimum (10G)
		Endurance	1,000m/s <sup>2</sup> minimum (100G)
	Weight		Approximately 3.5 g
Sealing		Plastic sealed cat III	

\* 1 Need to consider the heat to PCB when max. current is more than 10A

\* 2 Minimum switching loads mentioned above are reference values. Please perform the confirmation test with actual load before production since reference values may vary according to switching frequencies, environmental conditions and expected reliability levels.

# FTR-G1 SERIES

## ■ COIL RATING


Coil Code	Rated Coil Voltage (VDC)	Coil Resistance +/- 10% (Ohm)	Must Operate Voltage (VDC) *	Must Release Voltage (VDC) *	Coil Power at Nominal Voltage (W)
009	9	126	5.4	0.75	0.64
			6.8 (at 85 °C)		
010	10	160	6.5	0.8	
			8.2 (at 85 °C)		
012	12	225	7.3	1	
			9.2 (at 85 °C)		

Note: All values in the table are valid for 20°C and zero contact current, unless otherwise indicated.


\* Specified operate values are valid for pulse wave voltage.

## ■ REFERENCE DATA


Operate/release voltage distribution

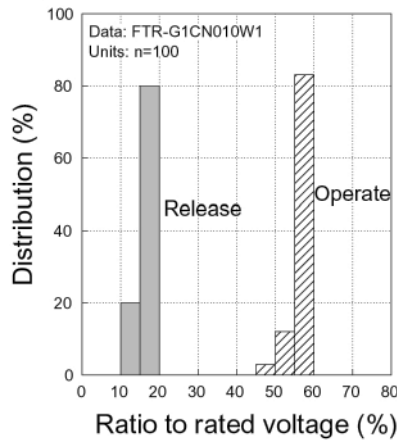


Contact resistance distribution

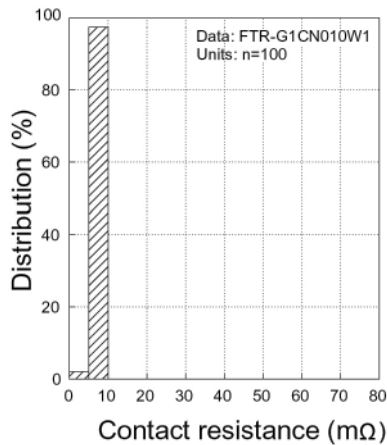


Contact current

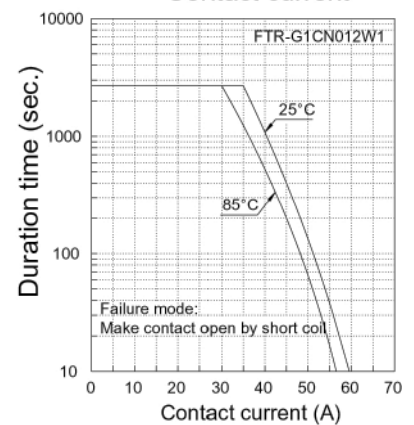


Ambient temperature vs voltage

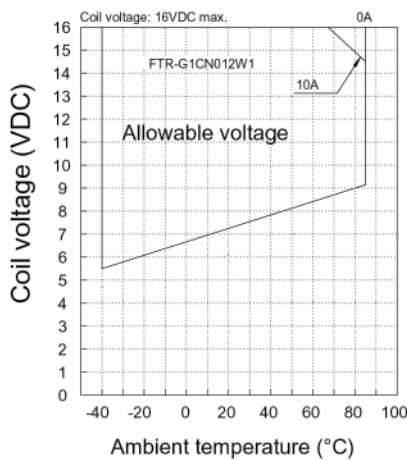



Coil temperature rise

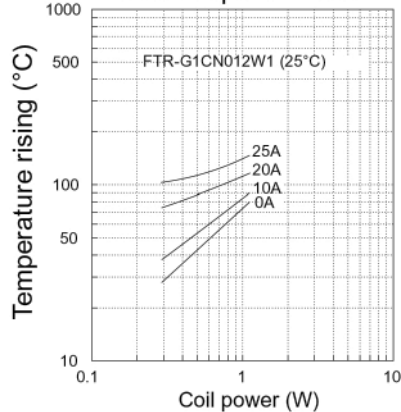



Coil temperature rise

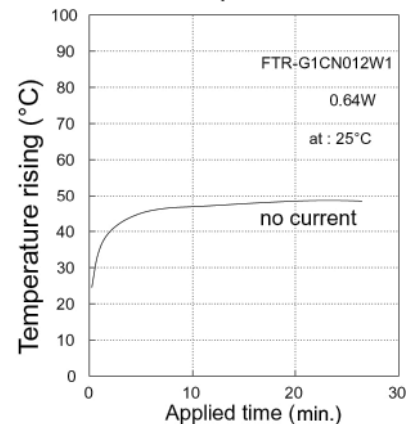


# FTR-G1 SERIES

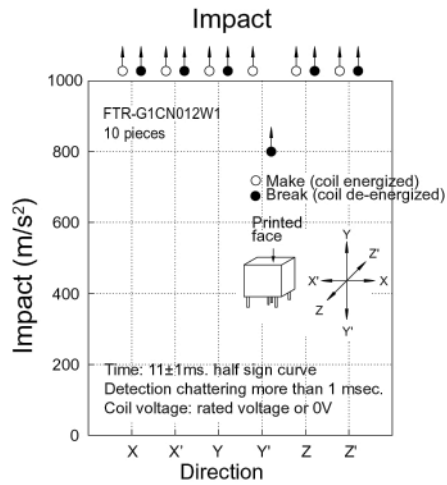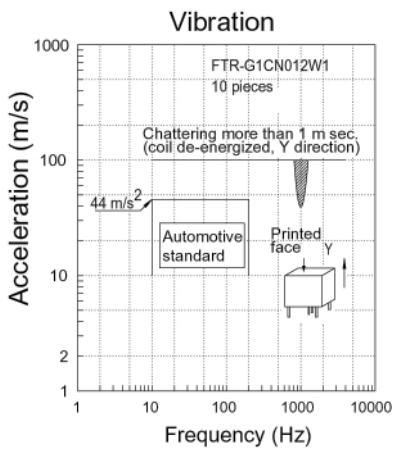


## ■ DIMENSIONS

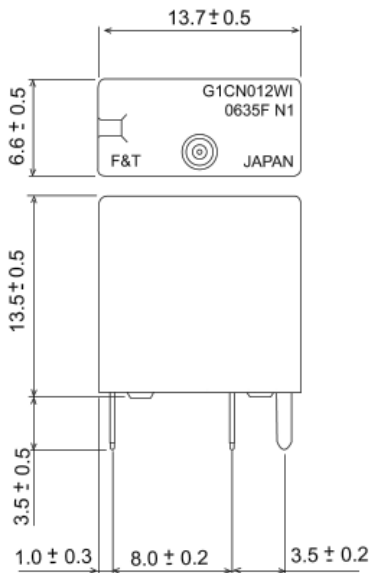


- Mounting hole layout (bottom view)

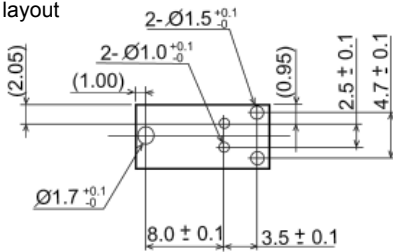


- Schematics



- Marking (example)

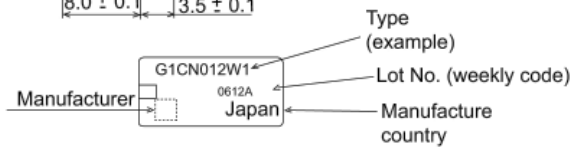

- Tube

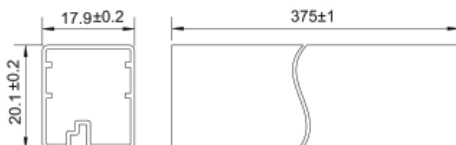

Unit: mm

## RoHS Compliance and Lead Free Information

### 1. General Information

- All automotive relays produced by Fujitsu Components are compliant with RoHS directive 2002/95EC including amendments.
- Cadmium as used in electrical contacts is exempted from the RoHS directives on October 21st, 2005. (Amendment to Directive 2002/95/EC)
- All our automotive relays are lead-free.
- Lead free solder plating on relay terminals is Sn-3.0Ag-0.5Cu, unless otherwise specified. This material has been verified to be compatible with PbSn assembly process.

### 2. Recommended Lead Free Solder Profile

- Recommended solder Sn-3.0Ag-0.5Cu.

**Flow Solder condition:**

Pre-heating: maximum 120°C  
Soldering: dip within 5 sec. at  
260°C solder bath

**Solder by Soldering Iron:**

Soldering Iron  
Temperature: maximum 360°C  
Duration: maximum 3 sec.

**We highly recommend that you confirm your actual solder conditions**

### 3. Moisture Sensitivity

- Moisture Sensitivity Level standard is not applicable to through hole mounted electromechanical relays, unless otherwise indicated.

### 4. Tin Whiskers

- Dipped SnAgCu solder is known as presenting a low risk to tin whisker development. No considerable length whisker was found by our in house test.

## Fujitsu Components International Headquarter Offices

### Japan

Fujitsu Component Limited  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626  
Email: [promothq@ft.ed.fujitsu.com](mailto:promothq@ft.ed.fujitsu.com)  
Web: [www.fcl.fujitsu.com](http://www.fcl.fujitsu.com)

### North and South America

Fujitsu Components America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970  
Email: [components@us.fujitsu.com](mailto:components@us.fujitsu.com)  
Web: <http://us.fujitsu.com/components>

### Europe

Fujitsu Components Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950  
Email: [info@fceu.fujitsu.com](mailto:info@fceu.fujitsu.com)  
Web: [emea.fujitsu.com/components/](http://emea.fujitsu.com/components/)

### Asia Pacific

Fujitsu Components Asia Ltd.  
102E Pasir Panjang Road  
#01-01 CitiLink Warehouse Complex  
Singapore 118529  
Tel: (65) 6375-8560  
Fax: (65) 6273-3021  
Email: [fcal@fcal.fujitsu.com](mailto:fcal@fcal.fujitsu.com)  
Web: <http://www.fujitsu.com/sg/services/micro/components/>

©2011 Fujitsu Components Europe B.V. All rights reserved. All trademarks or registered trademarks are the property of their respective owners.

The contents, data and information in this datasheet are provided by Fujitsu Component Ltd. as a service only to its user and only for general information purposes.

The use of the contents, data and information provided in this datasheet is at the users' own risk.

Fujitsu has assembled this datasheet with care and will endeavor to keep the contents, data and information correct, accurate, comprehensive, complete and up to date.

Fujitsu Components Europe B.V. and affiliated companies do however not accept any responsibility or liability on their behalf, nor on behalf of its employees, for any loss or damage, direct, indirect or consequential, with respect to this datasheet, its contents, data, and information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof.

Nor do Fujitsu Components Europe B.V. and affiliated companies accept on their behalf, nor on behalf of its employees, any responsibility or liability for any representation or warrant of any kind, express or implied, including warranties of any kind for merchantability or fitness for particular use, with respect to these datasheets, its contents, data, information and related graphics and the correctness, reliability, accuracy, comprehensiveness, usefulness, availability and completeness thereof. Rev. January 11, 2011

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А