

10119189 - X0C - XXXLF

LEAD-FREE DESIGNATION
ONLY WITH APPLICABLE
PLATING CODES

6-COLUMN
DIFFERENTIAL
SIGNAL

LETTER	PERFORMANCE-BASED PLATING (SEE NOTE 2)	
	TARGET APPLICATION	LEAD-FREE (LF)
B	TELCORDIA CO	NO
C	TELCORDIA UE	NO
D	TELCORDIA CO	YES
E	TELCORDIA UE	YES


NUMBER	GUIDE PIN STYLE, HEIGHT	
0	STANDARD GUIDE PIN MACHINED, 31.6mm	
4	STANDARD GUIDE PIN MACHINED, 25.7mm	

NUMBER	CONTACT MATING WIPE LENGTH		COMPLIANT PIN DRILL SIZE
	SIGNAL	GROUND	
1	2	4	Ø0.55 [0.0217"]
2	3	4	Ø0.55 [0.0217"]
3	2	4	Ø0.45 [0.0177"]
4	3	4	Ø0.45 [0.0177"]
5	2	3	Ø0.55 [0.0217"]
6	3	3	Ø0.55 [0.0217"]
7	2	3	Ø0.45 [0.0177"]
8	3	3	Ø0.45 [0.0177"]

TABLE 1: OPTIONAL PCB HOLE SIZE (SEE NOTE 11)		
	GROUNDED	UNGROUNDED
FINISHED	Ø2.35-2.55	Ø2.35-2.55
PAD	Ø5.50	N/A
PLATED	YES	NO
DRILL (mm/in)	2.58/.1015	2.44/.096

TABLE 2: OPTIONAL SCREW TYPE (SEE NOTE 10)		
SCREW P/N	DESCRIPTION	BOARD THICKNESS
10091790-002LF	#2.56 X .375" PHILIPS PANHEAD W/SQ CONICAL WASHER	1.60 - 5.00
10091790-003LF	#2.56 X .500" PHILIPS PANHEAD W/SQ CONICAL WASHER	5.00 - 10.00

MODULE DESCRIPTION	LETTER DESIGNATION REPRESENTED IN DASH NUMBER										BASE MODULE
LEFT POLARIZING GUIDANCE MODULE (SEE SHEET 3)	J	A	B	C	D	E	F	G	H		
RIGHT POLARIZING GUIDANCE MODULE (SEE SHEET 4)	Y	P	Q	R	S	T	U	V	W		
OPEN MODULE (TWO WALL) (SEE SHEET 2)	0 (ZERO)										
LEFT WALL MODULE (SEE SHEET 5)	L										
RIGHT WALL MODULE (SEE SHEET 6)	M										
FOUR WALL MODULE (SEE SHEET 7)	1 (ONE)										


spec ref	-	dr	Roger Ng	2011/11/22			size	A2	scale	4:1	
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Sandar Soe	2014/10/02			ecn no	ELX-S-18843-1			
ASME Y14.5		chr	-	-							
appr					Chen-Hong Tan	2014/12/10	product family		XCEDE	rel level	Released
surface 	linear	0.X	±0.2		title	MODULE ASSEMBLY	dwg no	10119189	rev	B	
		0.XX	±0.10								
		0.XXX	±0.050								
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw		sheet 1 of 8		

PDS: Rev :B


STATUS:Released

Printed: Dec 10, 2014


OPEN (2- WALL) MODULE

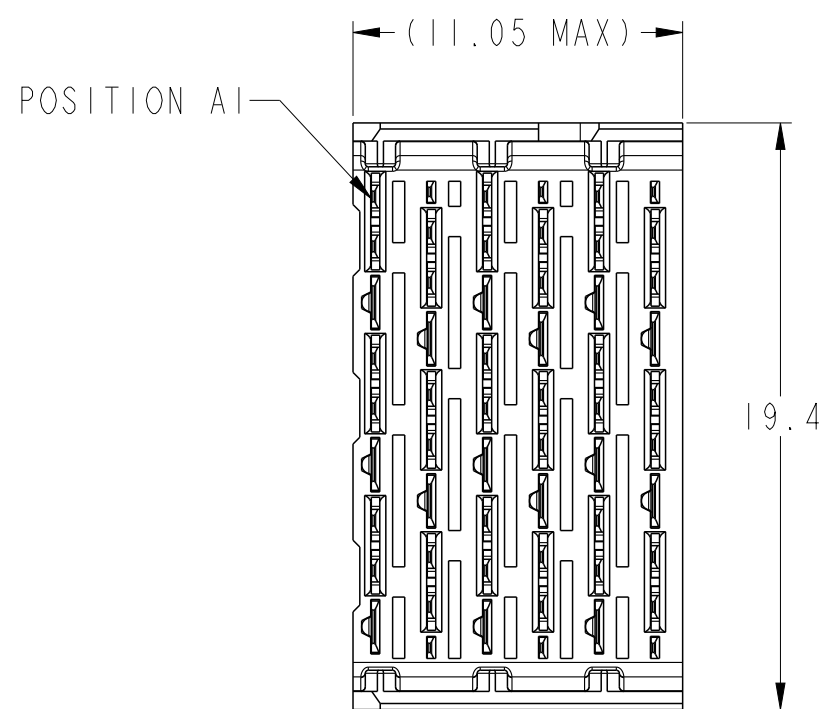


SEE NOTE 8

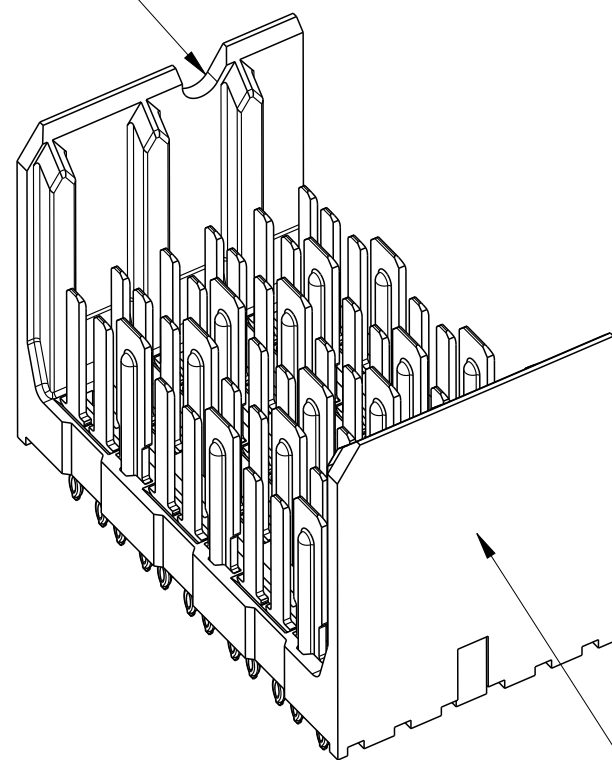



SEE NOTE 5

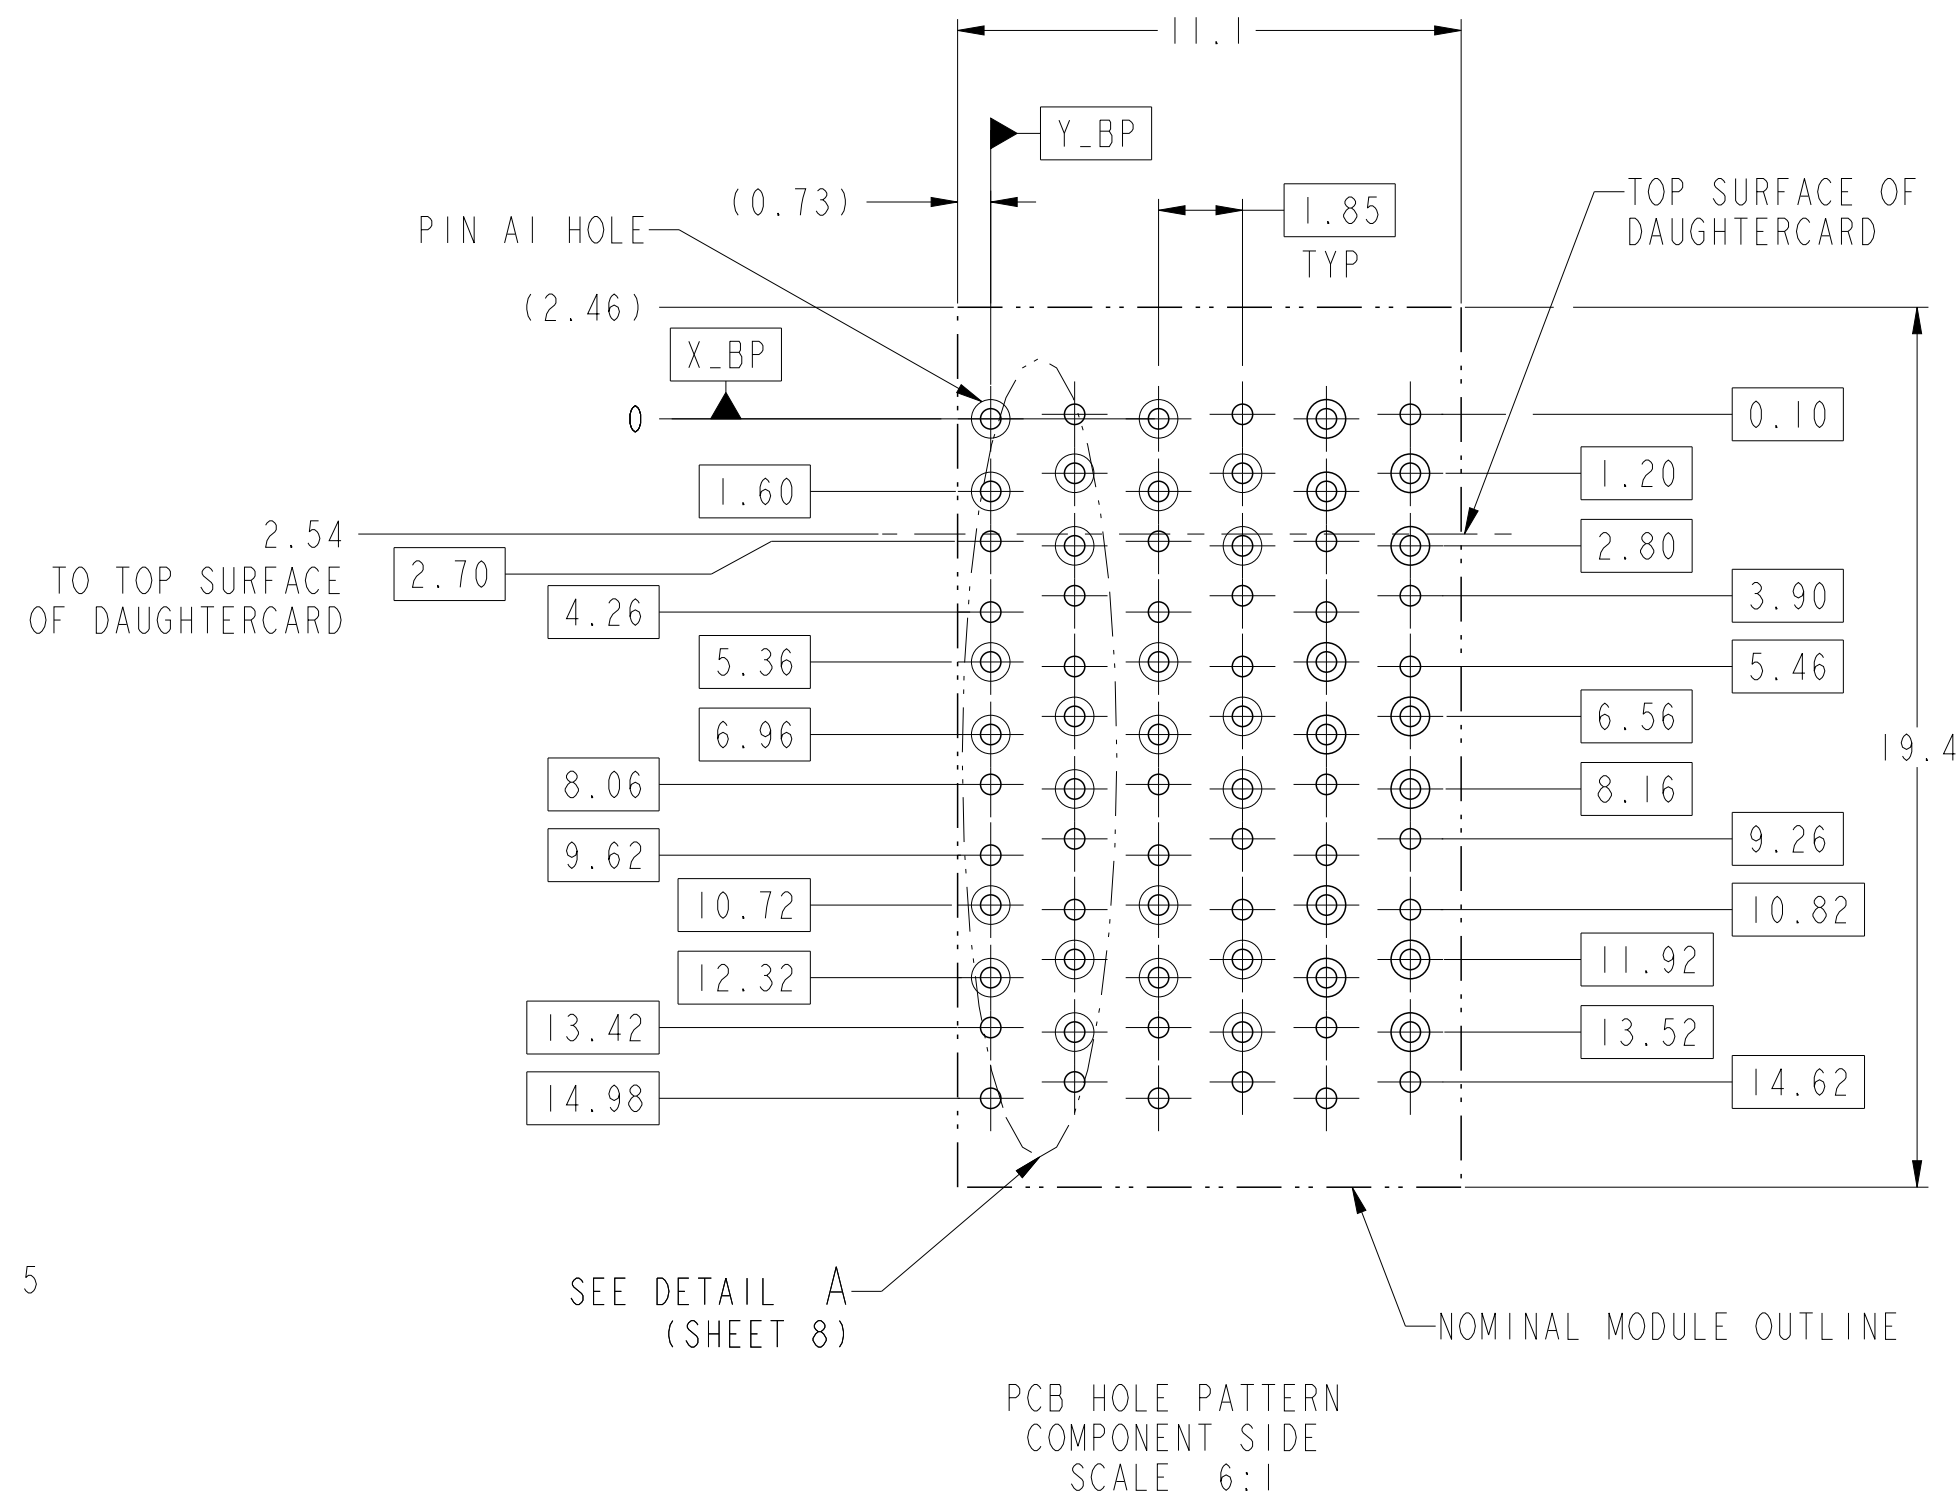

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

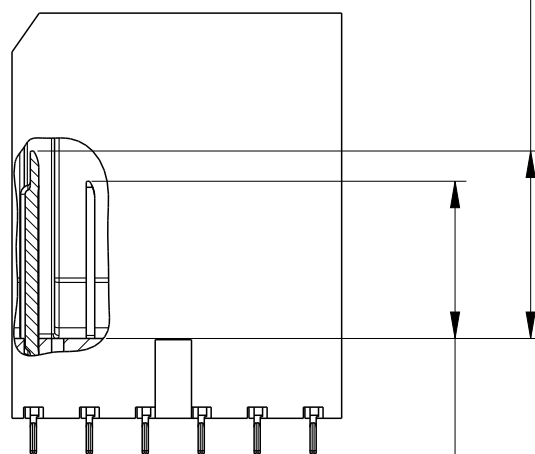

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

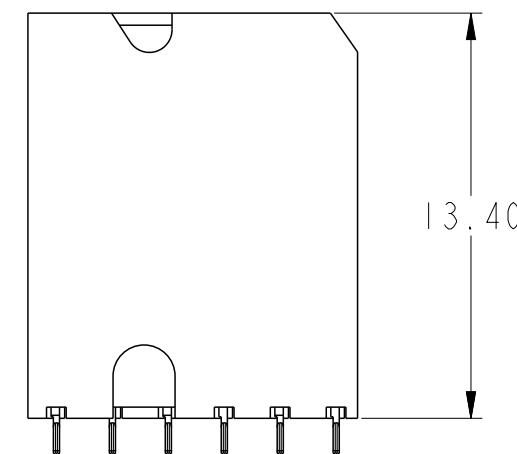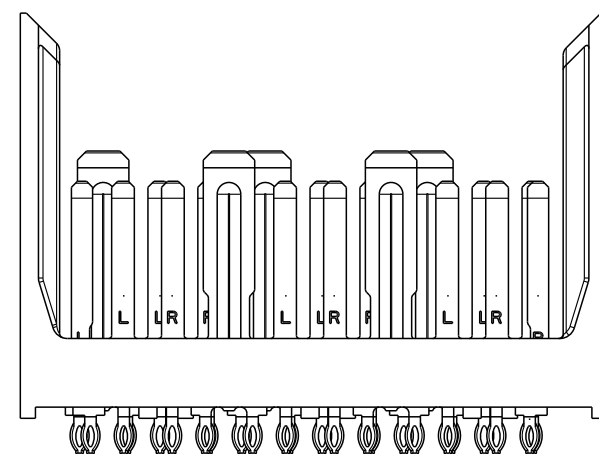

TAIL LENGTH
SEE NOTE 12





spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 2 of 8		

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

LEFT POLARIZING/GUIDE MODULE

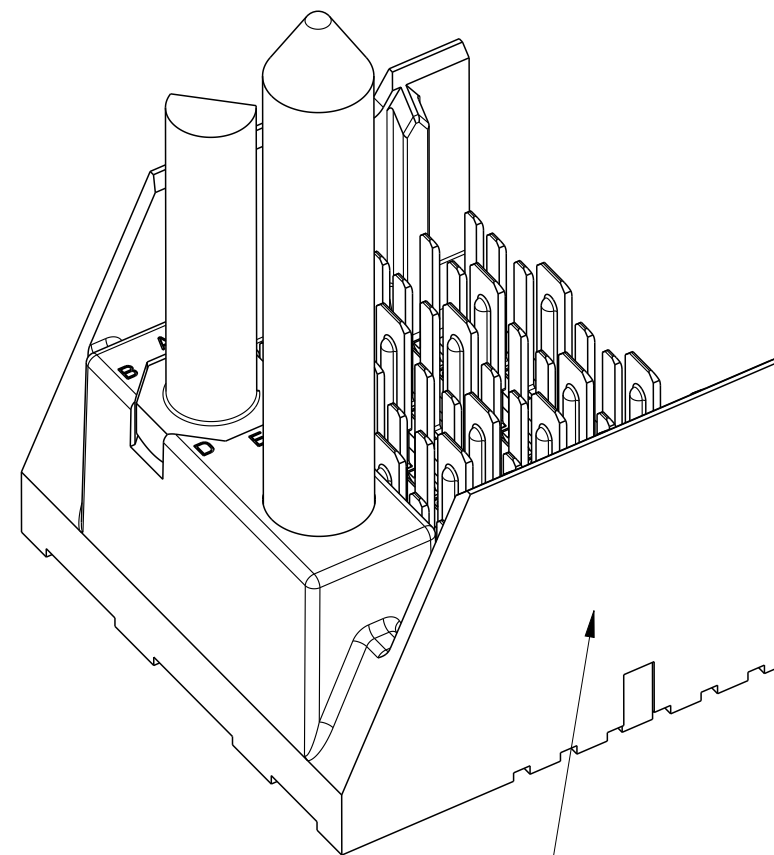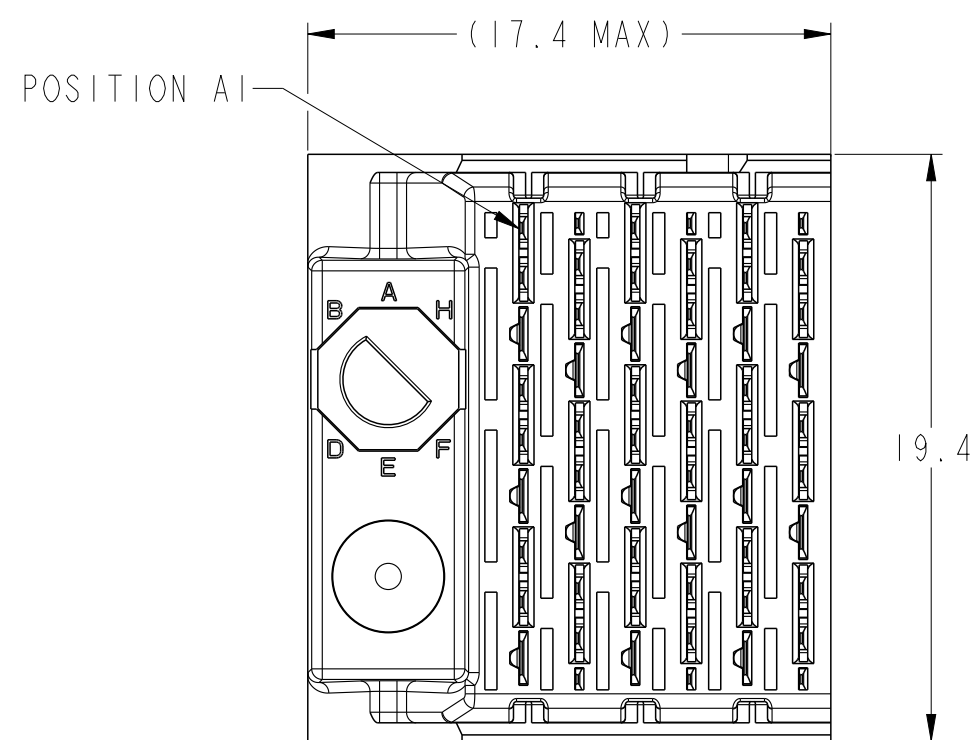

SEE NOTE 5



2.54
TO TOP SURFACE
OF DAUGHTERCARD

SEE NOTE 11 & TABLE 1

SEE DETAIL A
(SHEET 8)

PCB HOLE PATTERN
COMPONENT SIDE
SCALE 6:1

NOMINAL MODULE OUTLINE

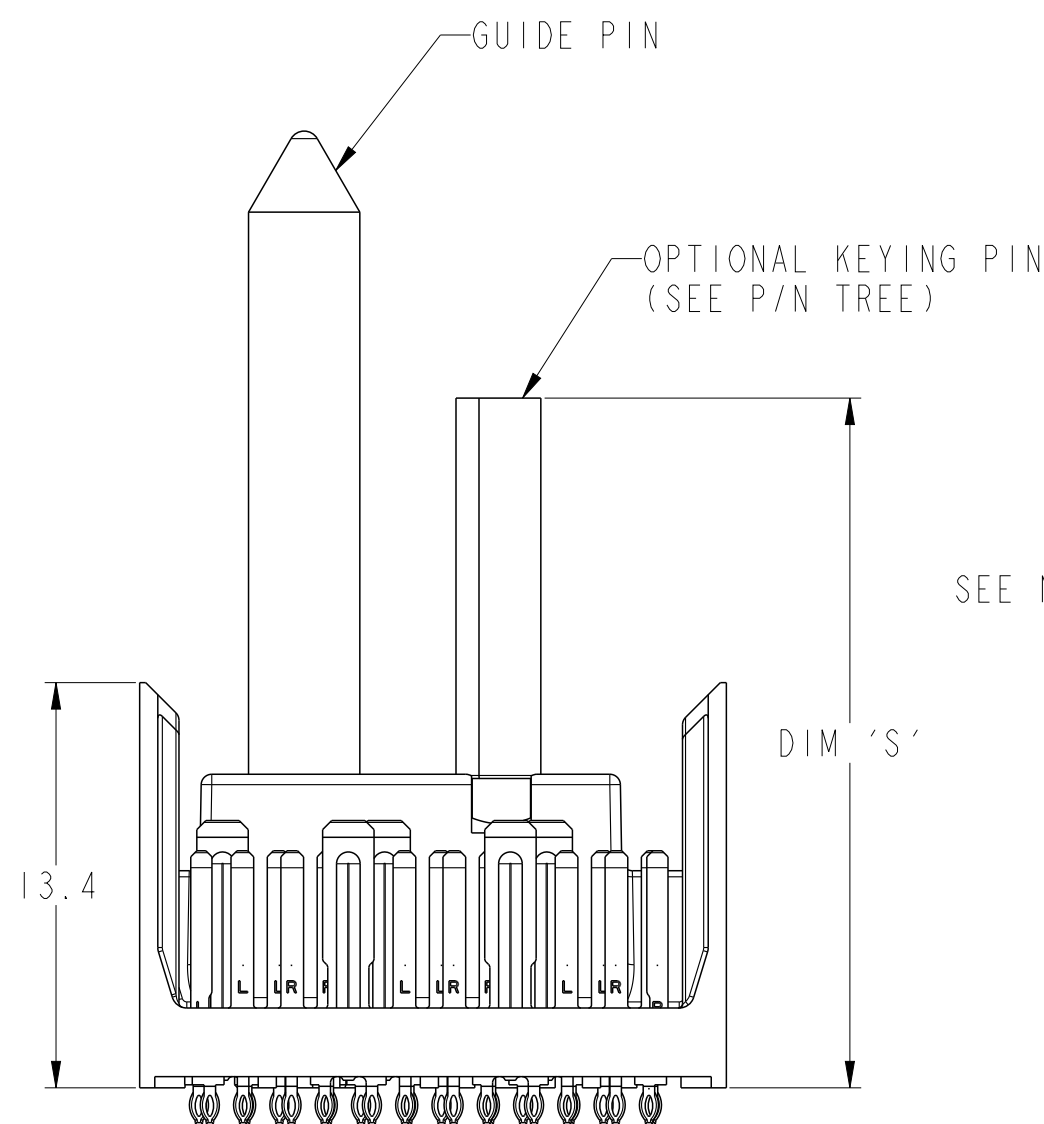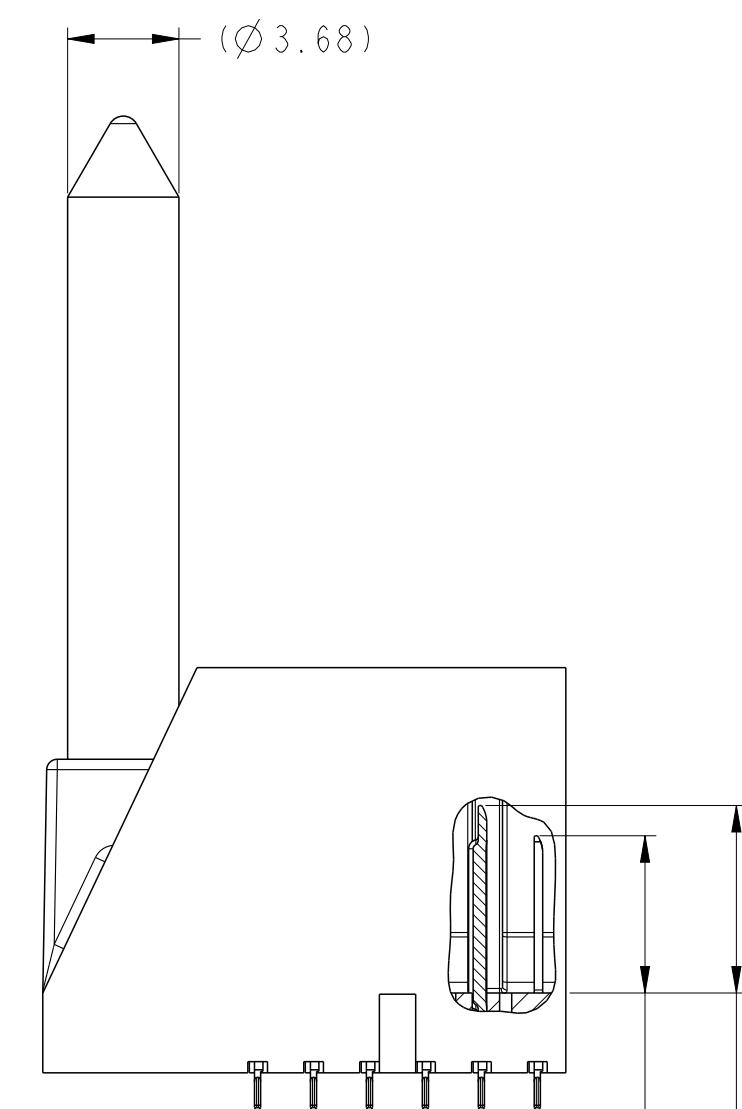


SEE NOTE 8

DIM 'R'

TAIL LENGTH
SEE NOTE 12

ASSEMBLY BASE CONFIGURATION END DASH NO.	GUIDE PIN	POLARIZING KEY
	DIM 'R'	DIM 'S'
-X0X	31.6mm	22.8mm
-X4X	25.7mm	20.0mm







spec ref		-		dr		Roger Ng		2011/11/22		projection				MM		size		A2		scale		4:1							
tolerance std		-		eng		Sandar Soe		2014/10/02						ecn no		ELX-S-18843-1													
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-						rel level		Released													
surface		linear		appr		Chen-Hong Tan		2014/12/10		product family		XCEDE		rel level		10119189		rev		B									
ASME Y14.5		angular		0°		±2°		0.X		±0.2		0.XX		±0.10		0.XXX		±0.050		www.fci.com		cat. no.		-		Product - Customer Drw		sheet 3 of 8	

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

RIGHT POLARIZING/GUIDE MODULE

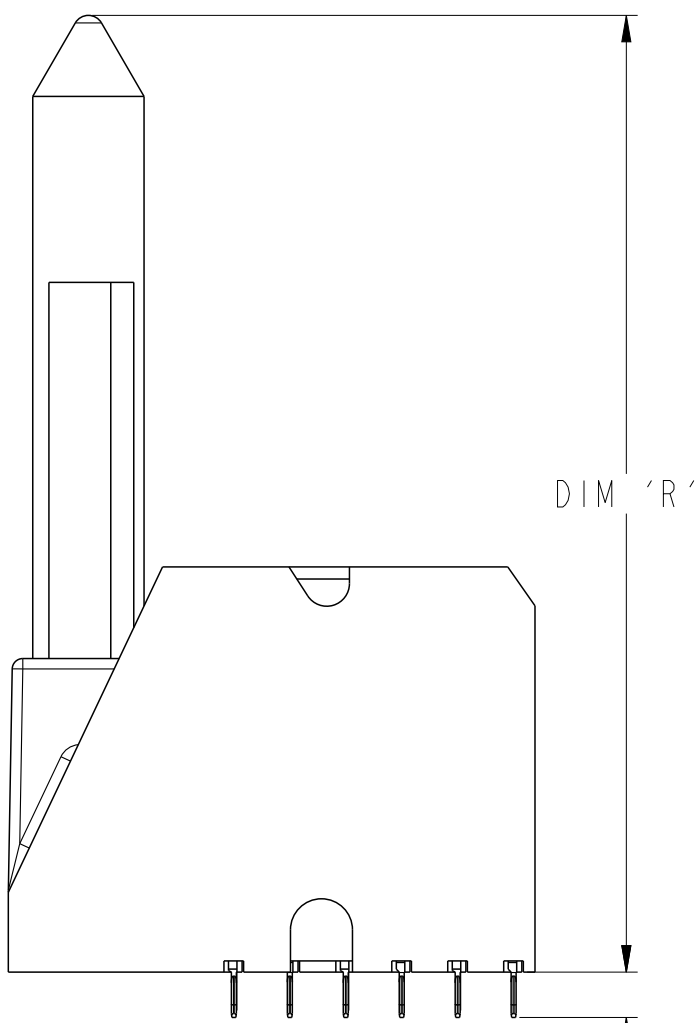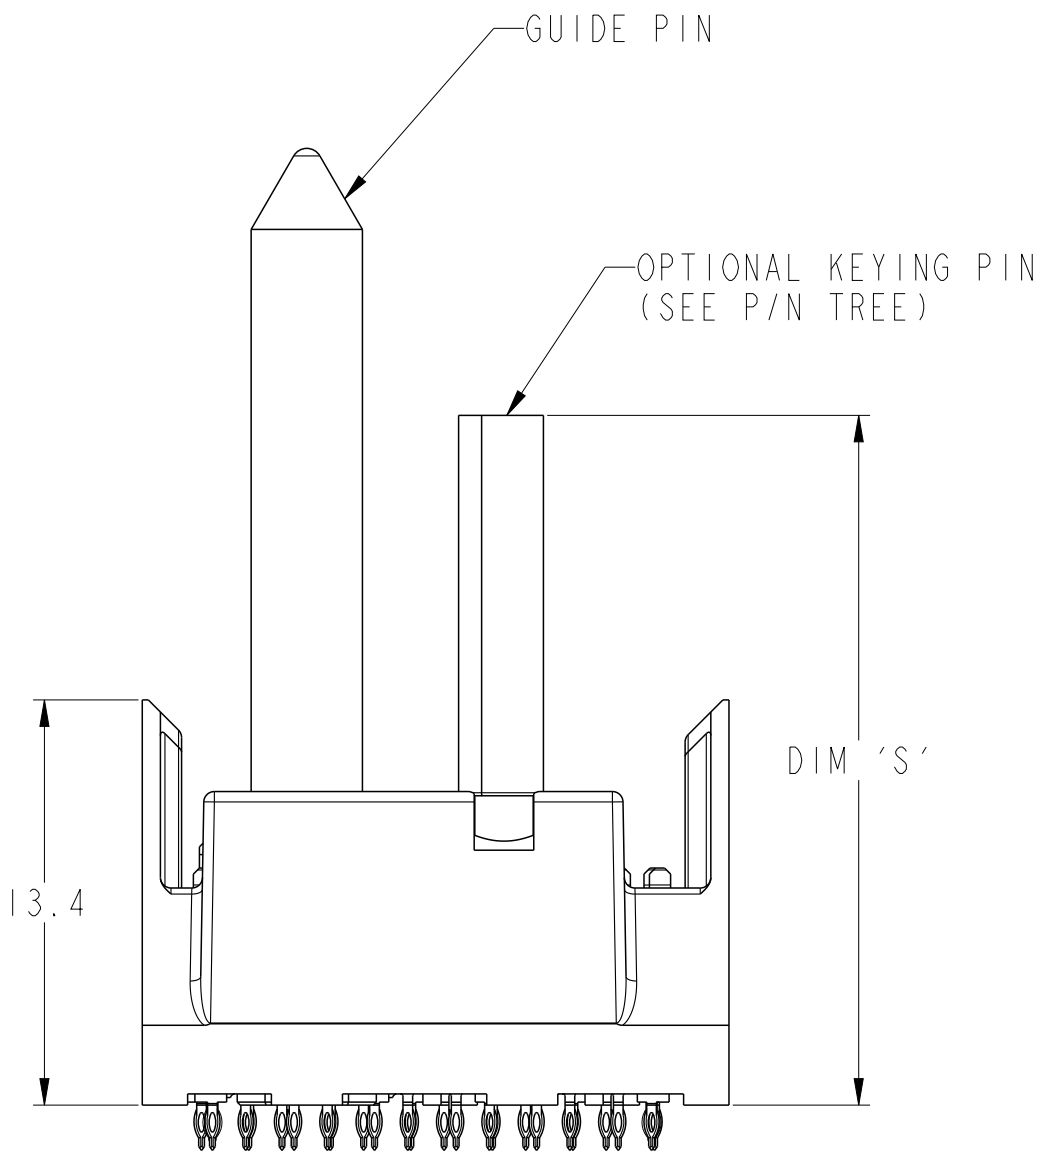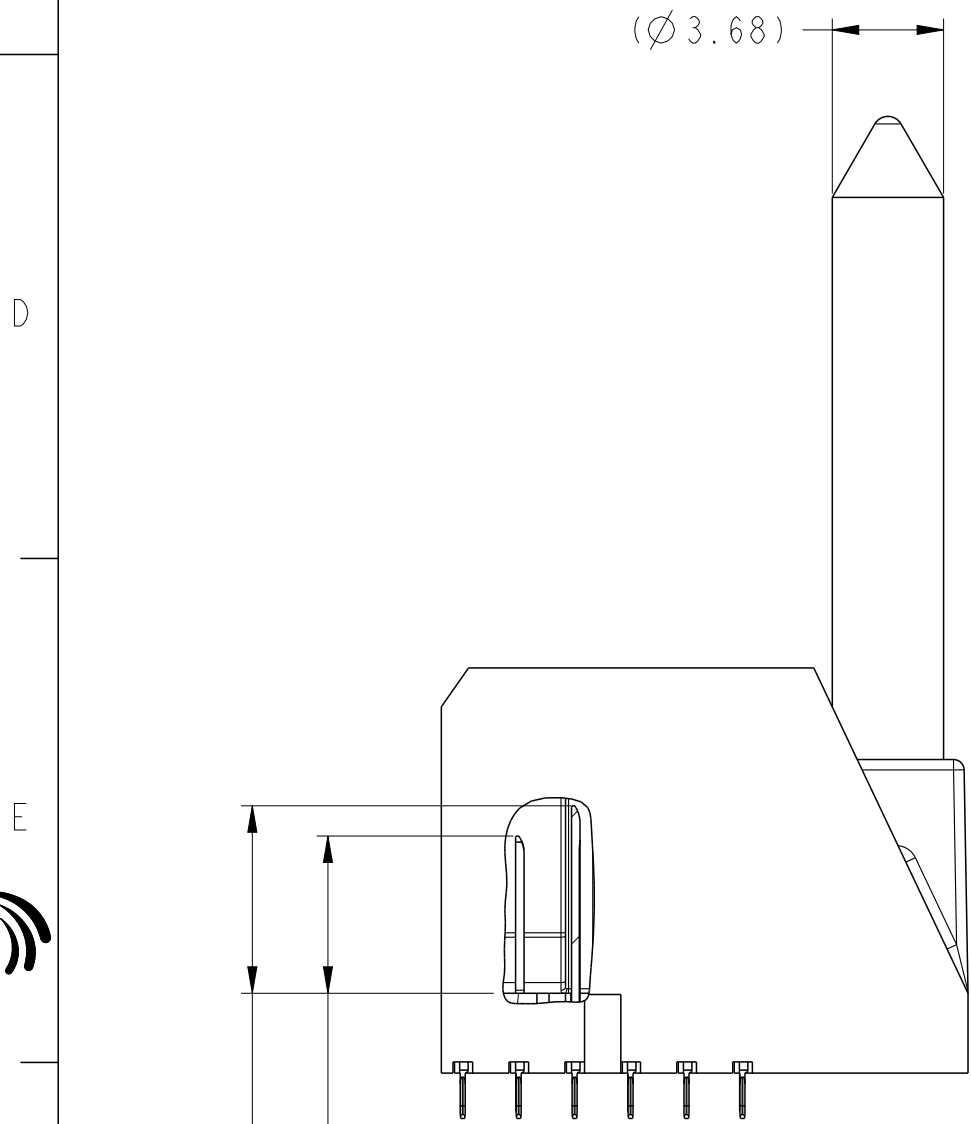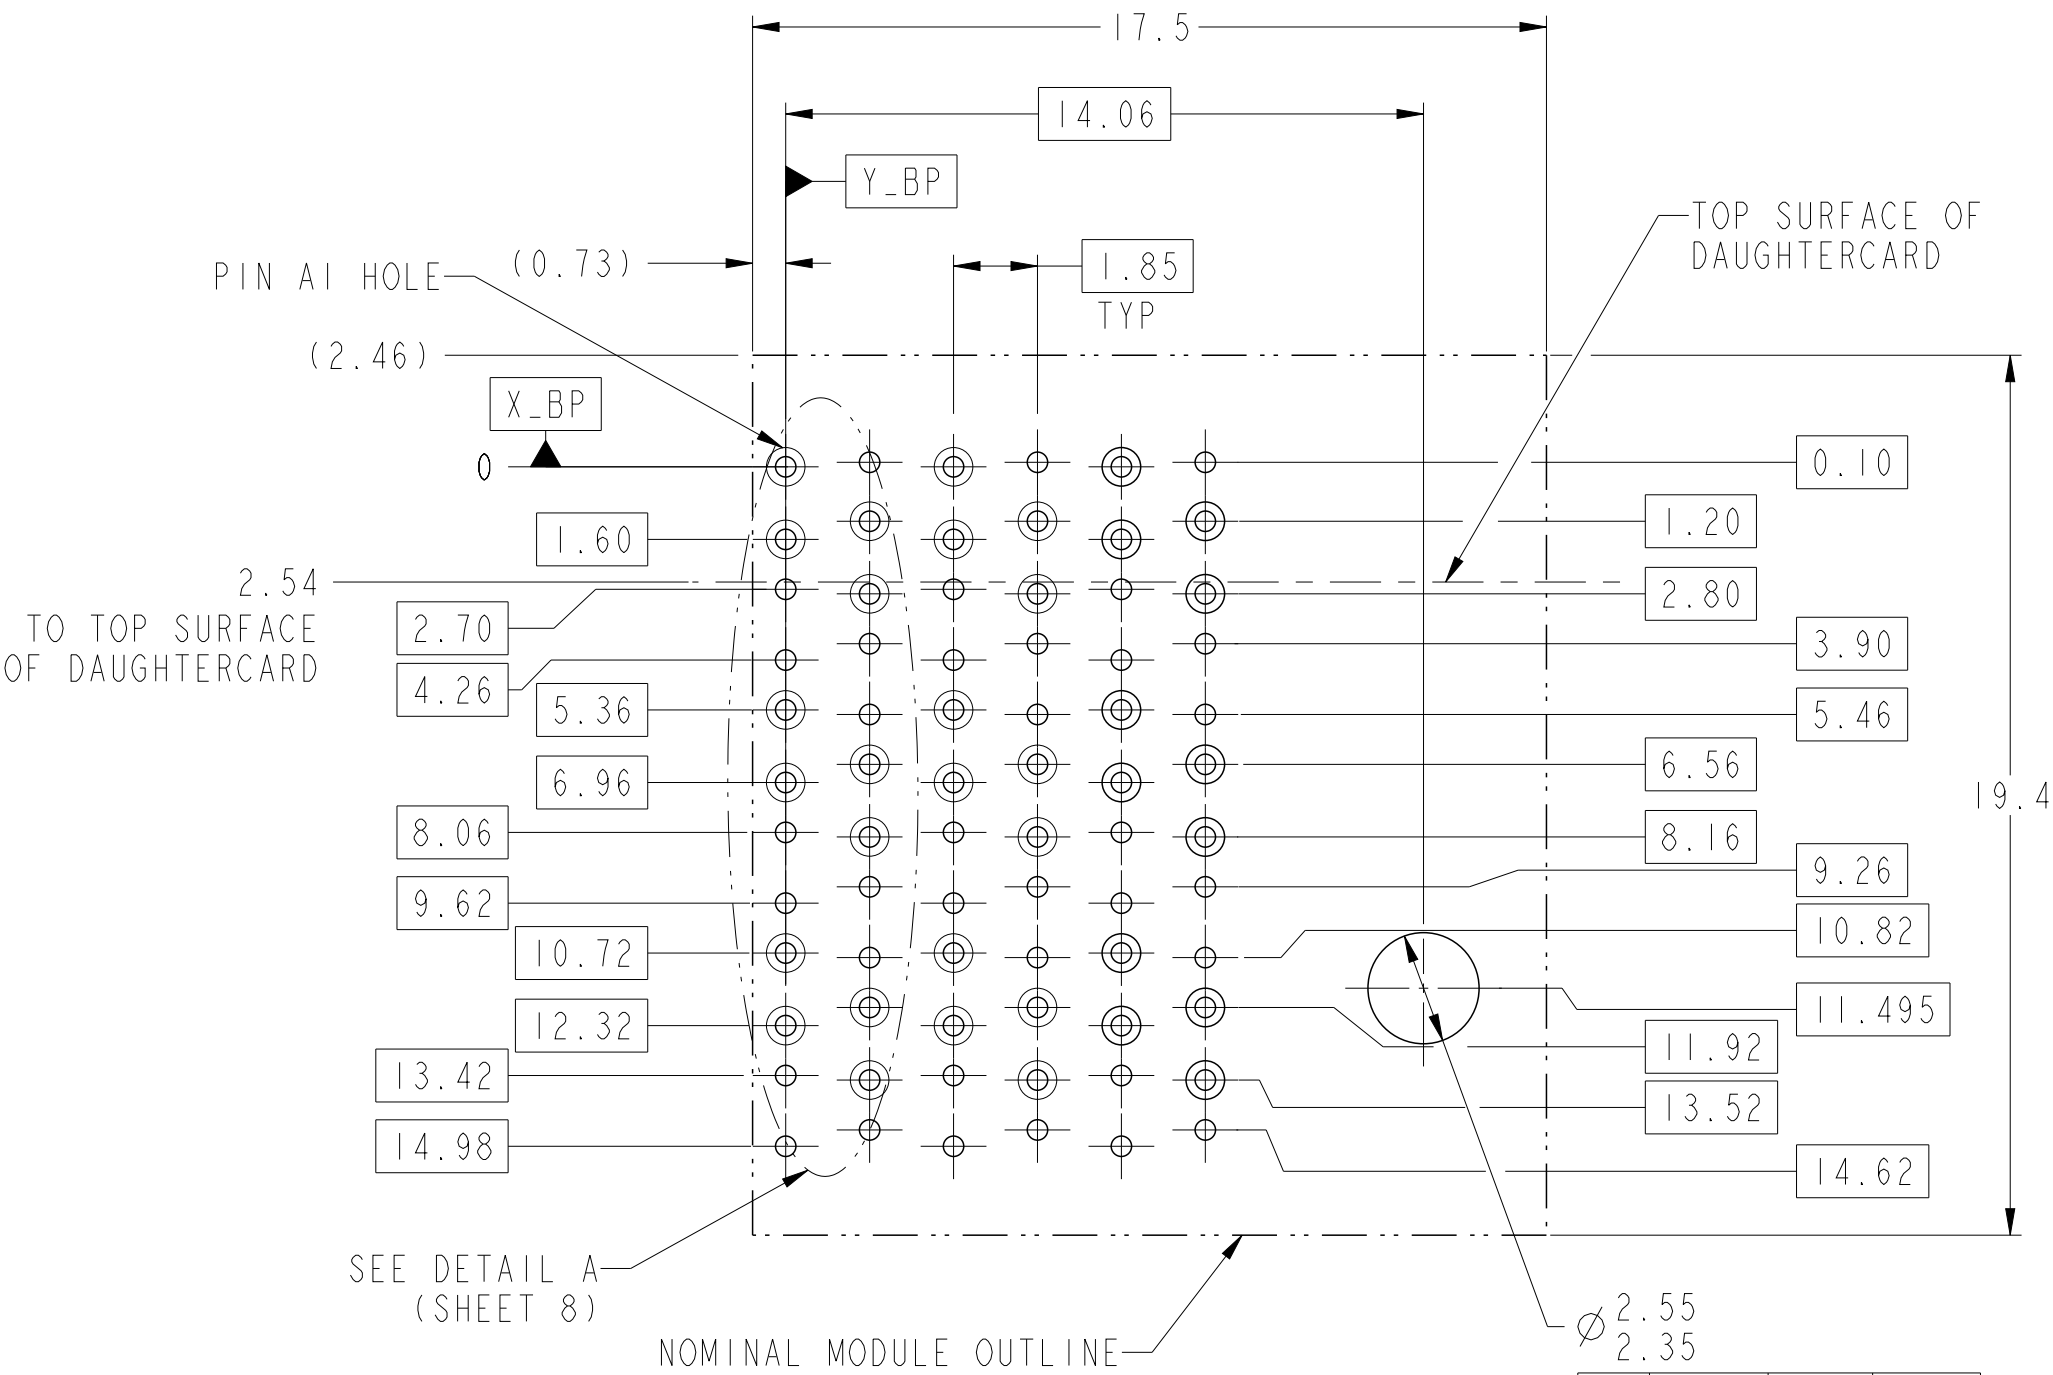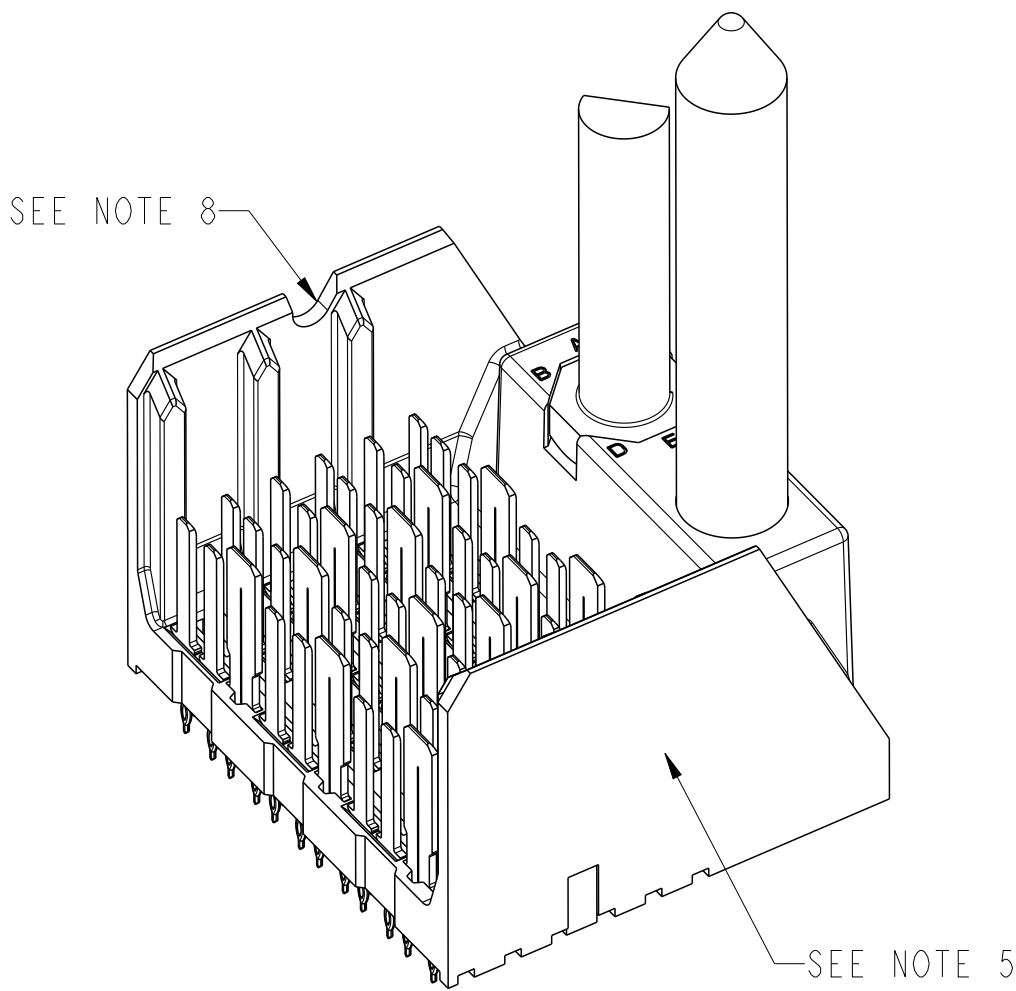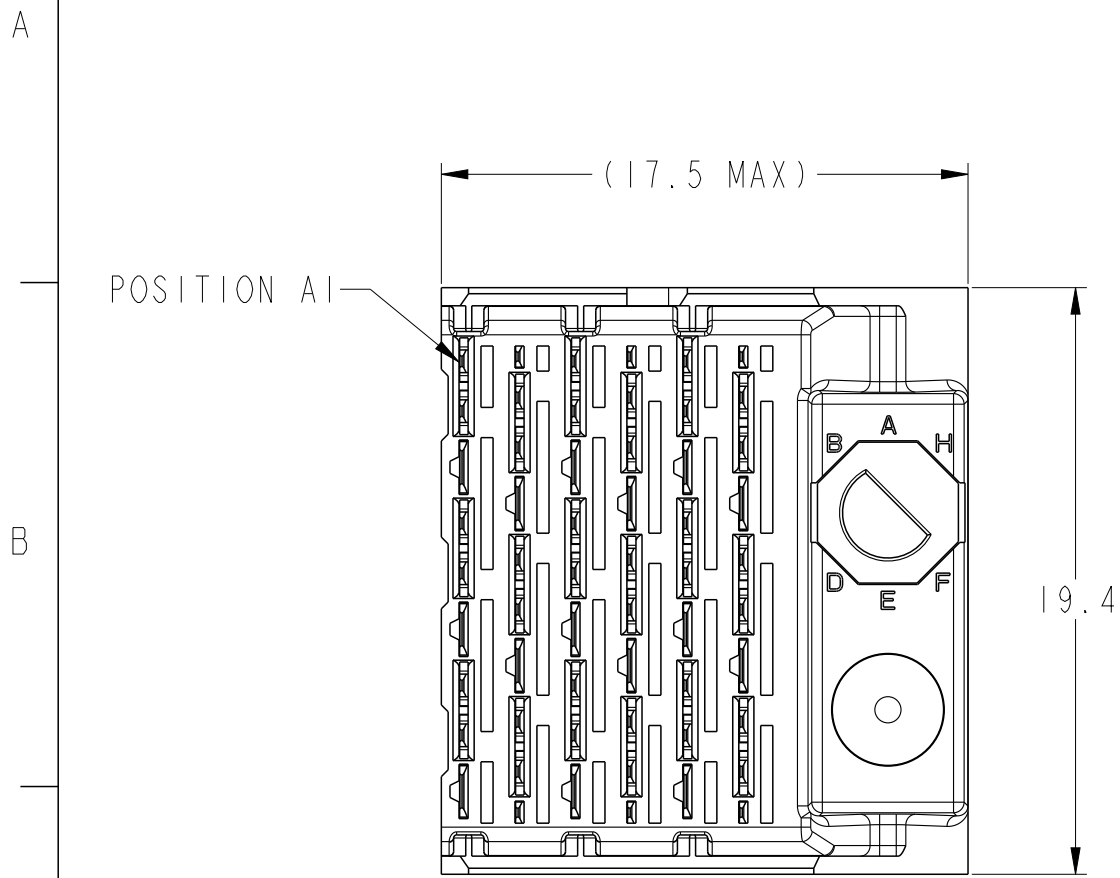

ASSEMBLY BASE CONFIGURATION END DASH NO.	GUIDE PIN	POLARIZING KEY
	DIM 'R'	DIM 'S'
-X0X	31.6mm	22.8mm
-X4X	25.7mm	20.0mm

TAIL LENGTH
SEE NOTE 12




spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecn no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 4 of 8		

PDS: Rev :B



STATUS:Released

Printed: Dec 10, 2014

LEFT WALL MODULE


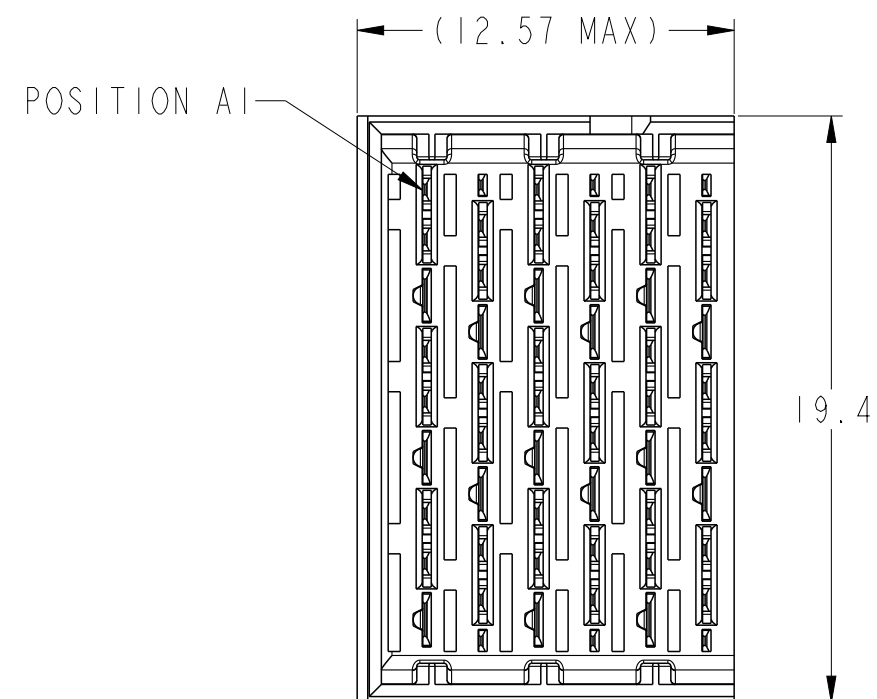



SEE NOTE 8

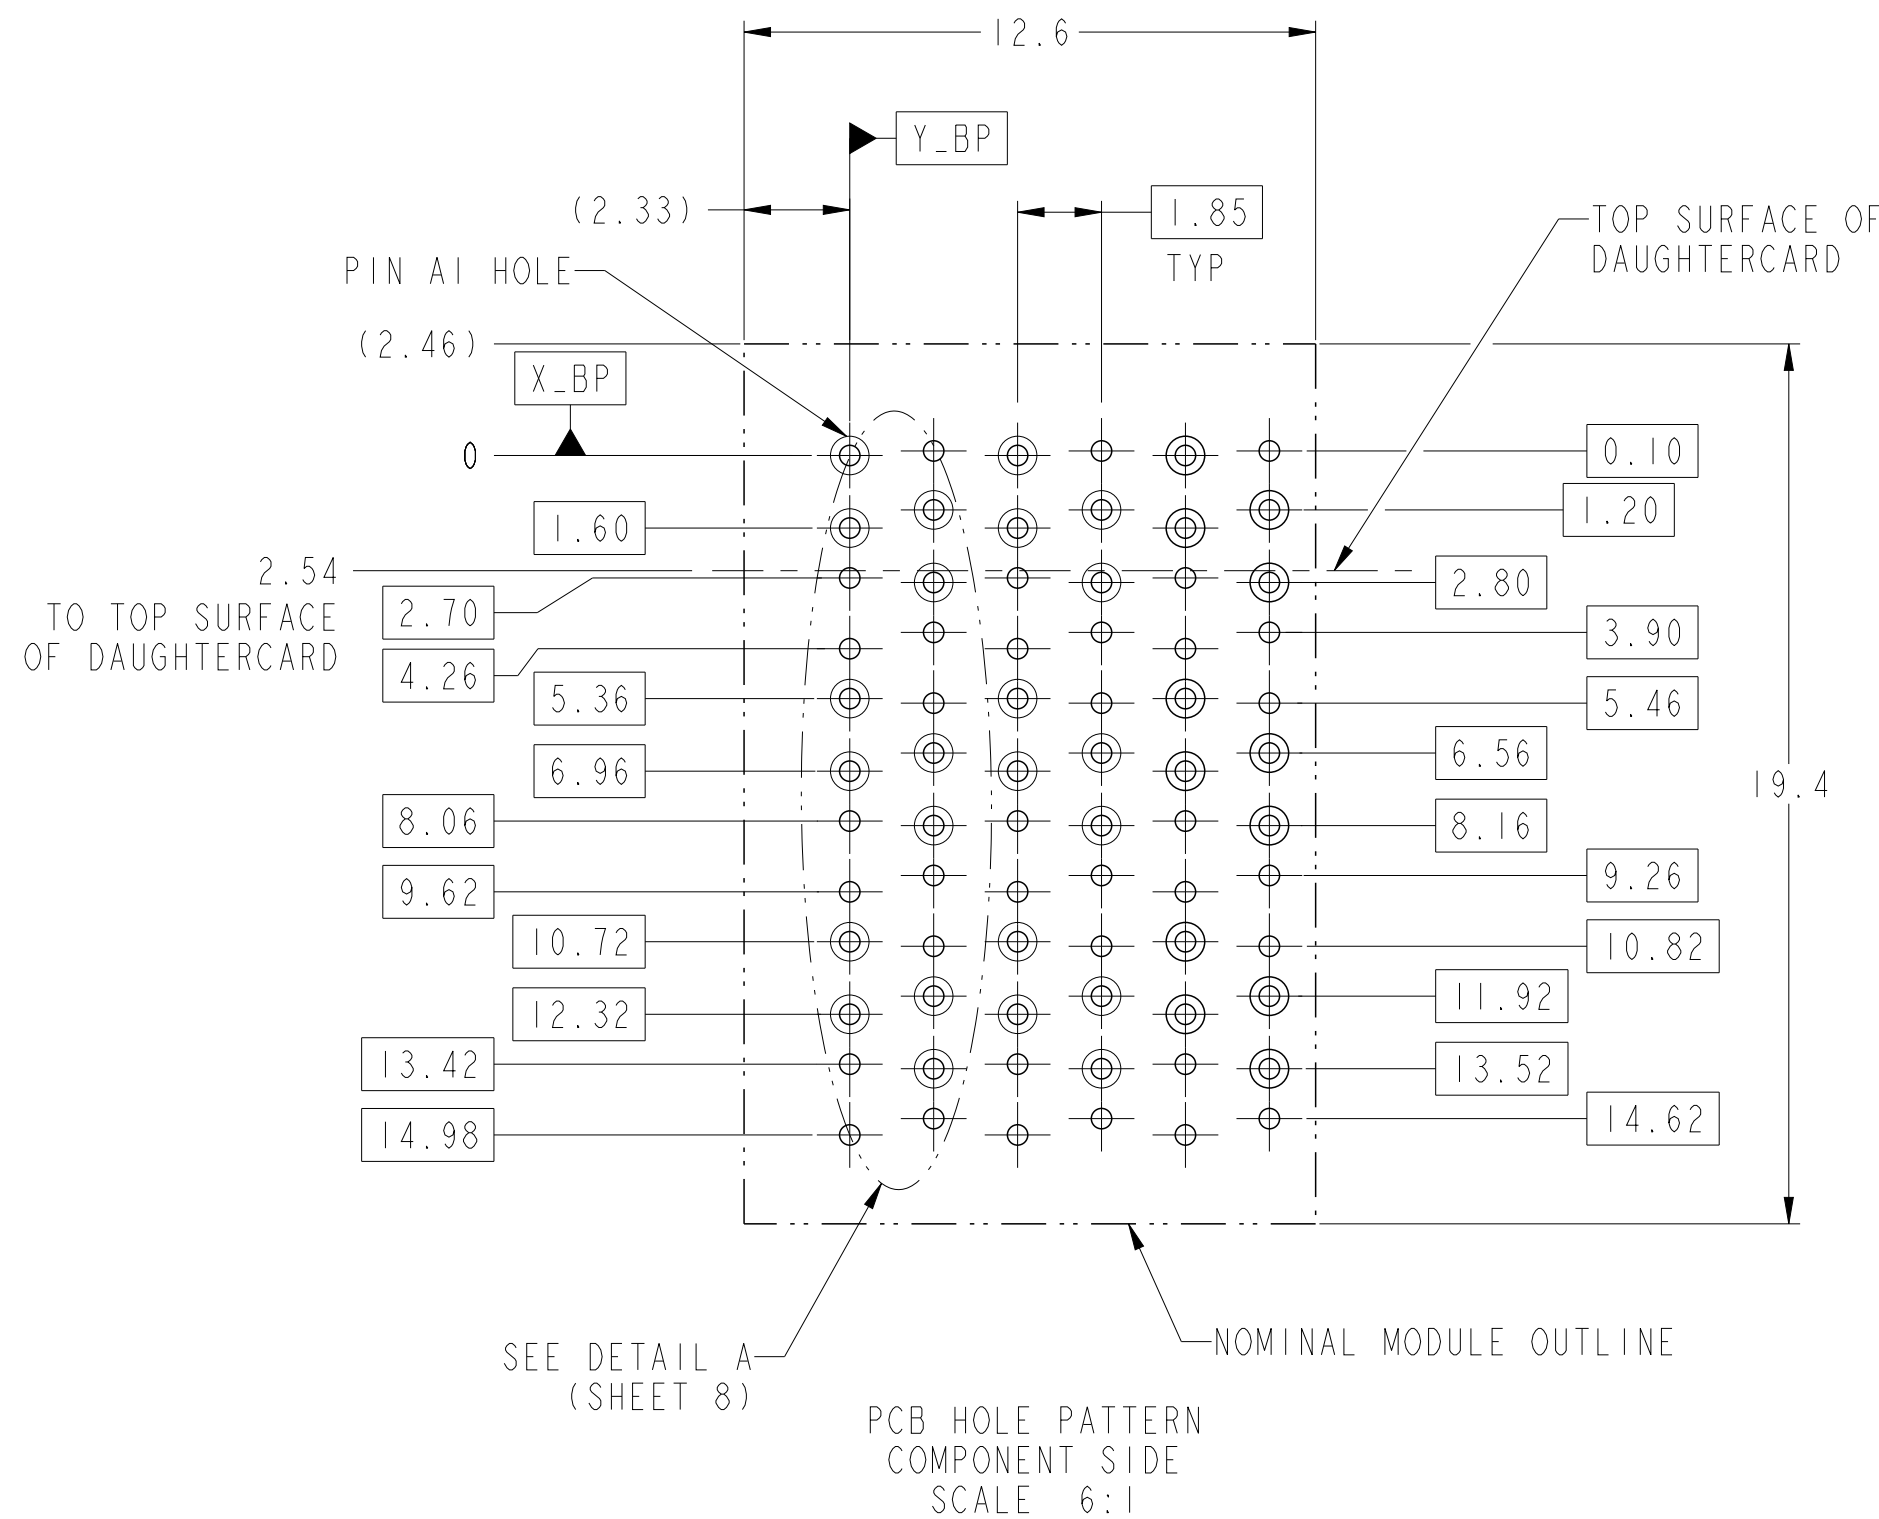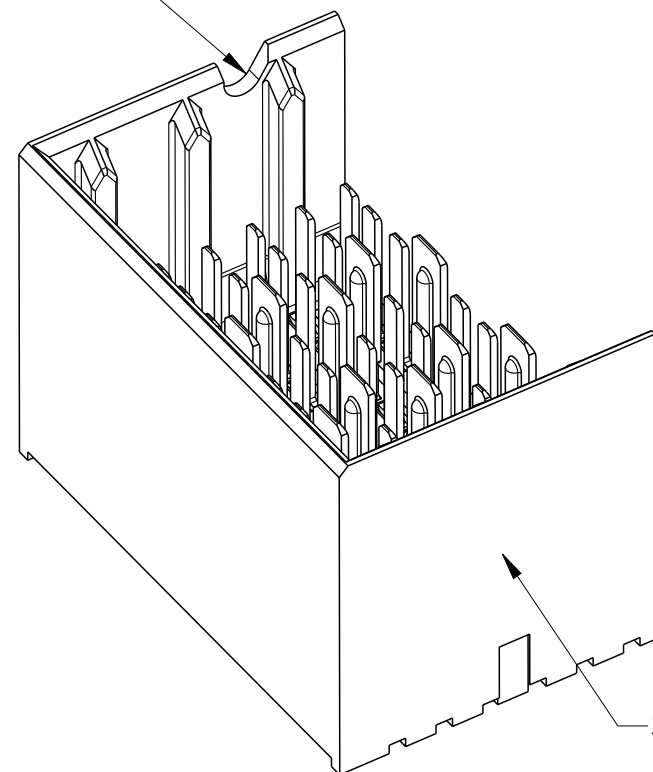

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

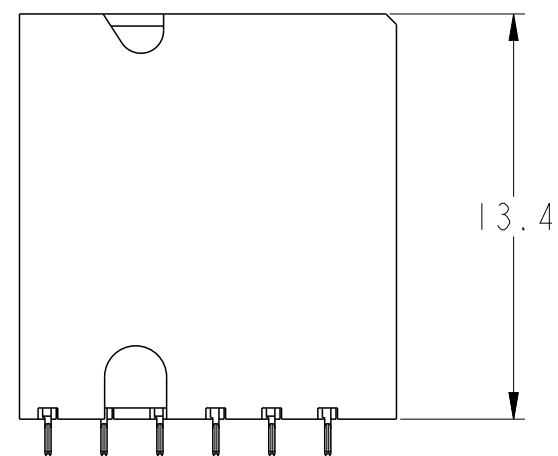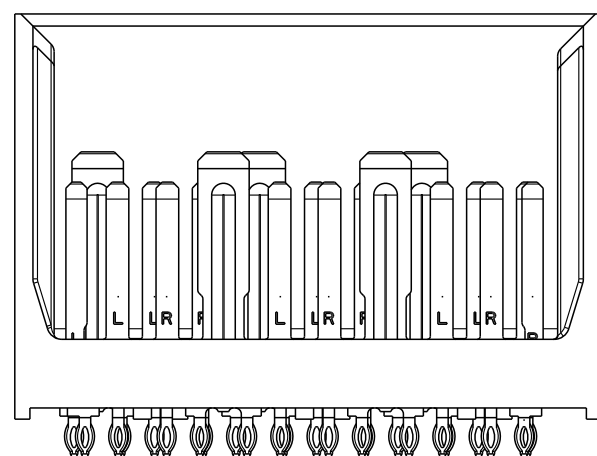





spec ref		-		dr	Roger Ng	2011/11/22	projection			size	scale	
tolerance std		-		eng	Sandar Soe	2014/10/02				A2	4:1	
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-				ecn no	ELX-S-18843-1	
				appr	Chen-Hong Tan	2014/12/10				rel level		
							product family		XCEDE		Released	
surface		linear	0.X	±0.2		title	MODULE ASSEMBLY VERTICAL HEADER, 6 COLUMN, 3 PAIR			dwg no	10119189	rev
			0.XX	±0.10								
			0.XXX	±0.050								
	angular	0°	±2°									
ASME Y14.5				www.fci.com	cat. no.	-	Product - Customer Drw			sheet 5 of 8		B

PDS: Rev :B

STATUS:Released



Printed: Dec 10, 2014

RIGHT WALL MODULE

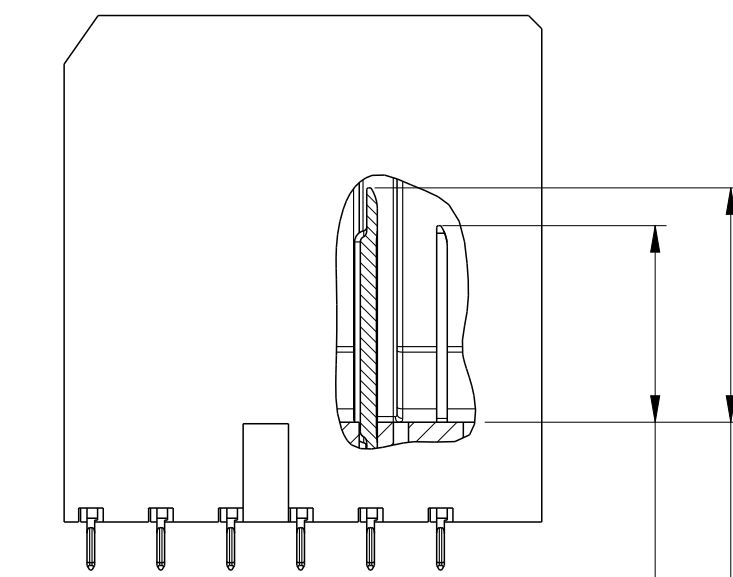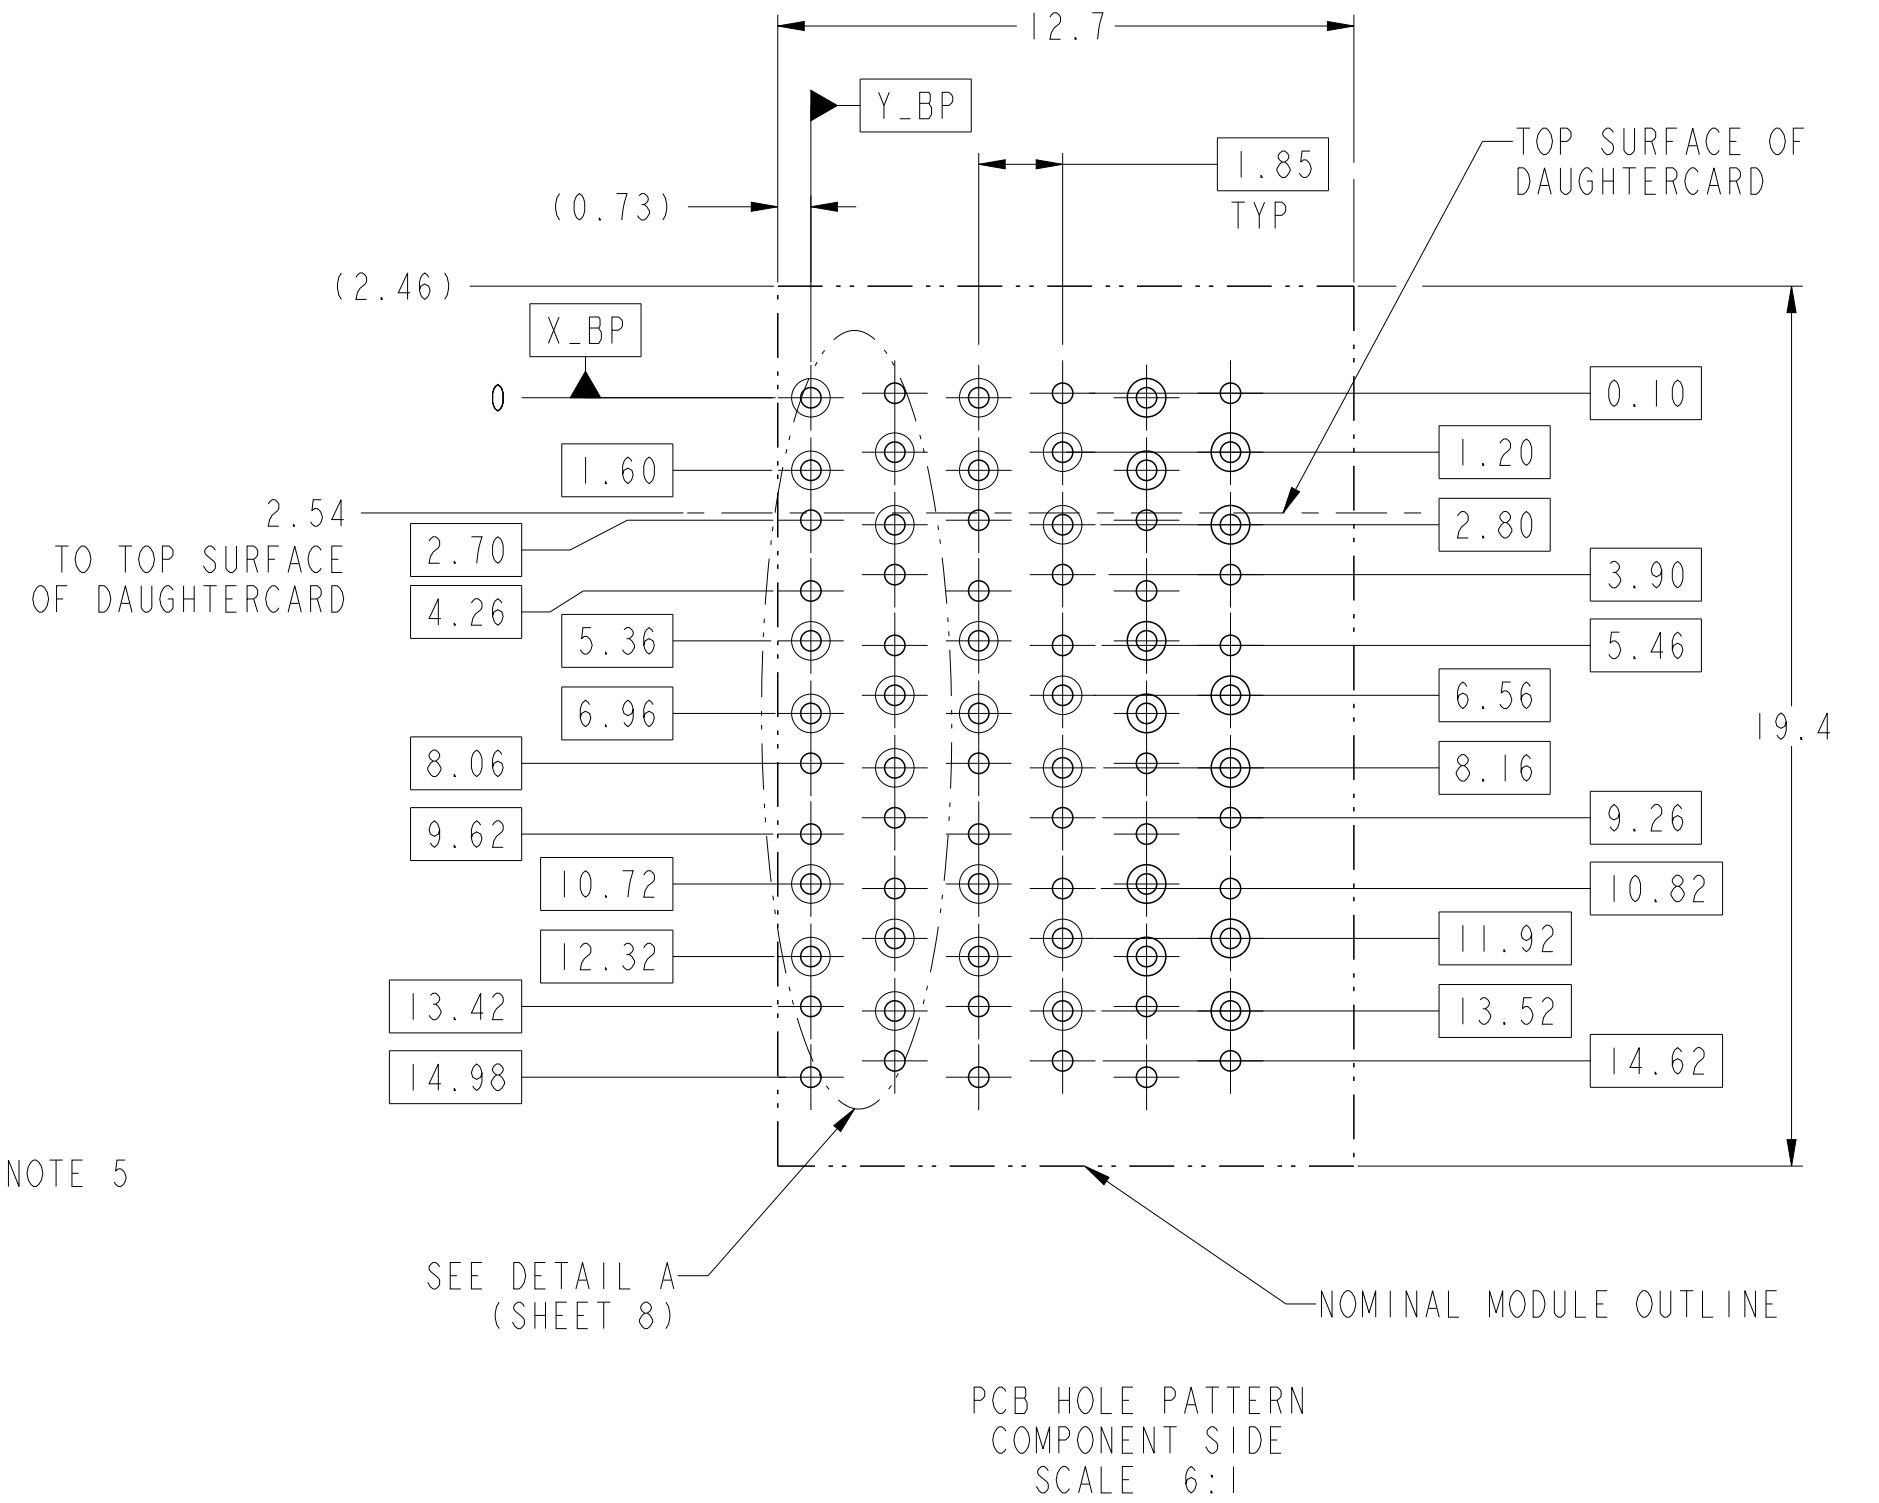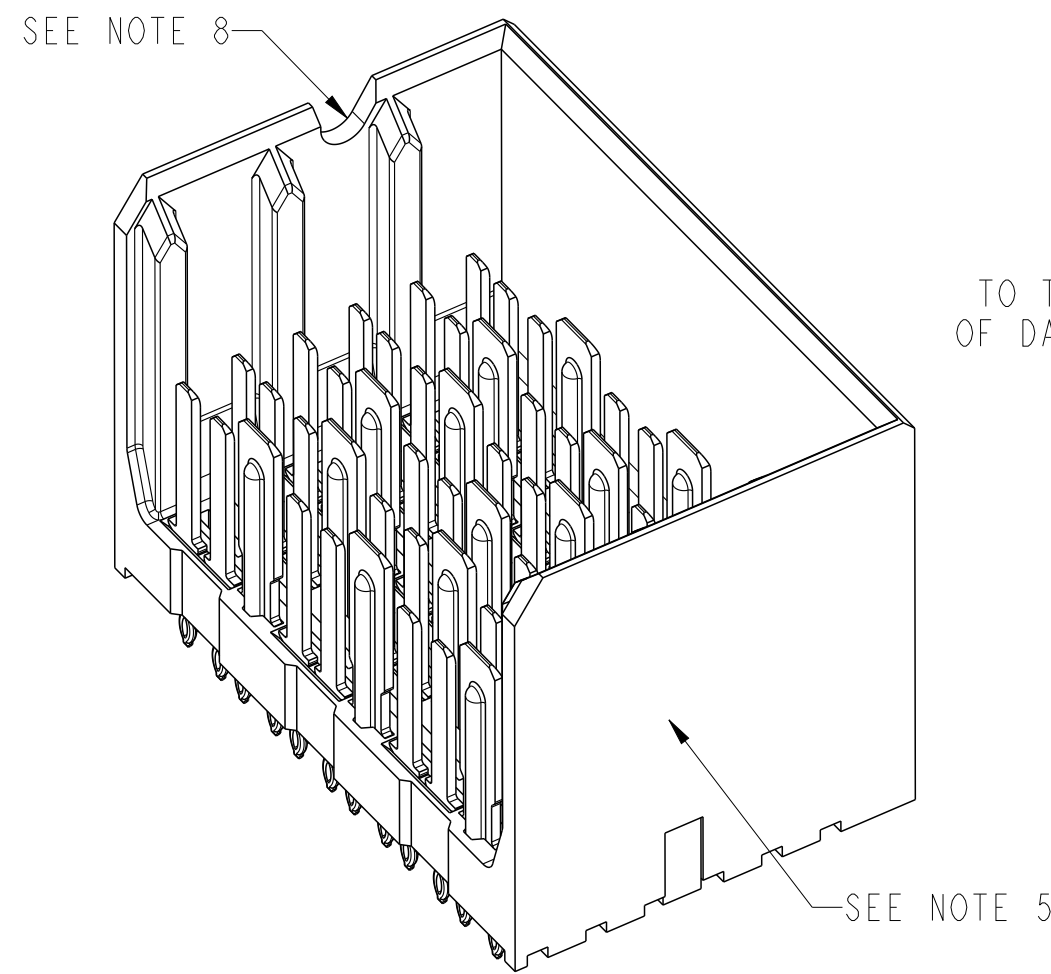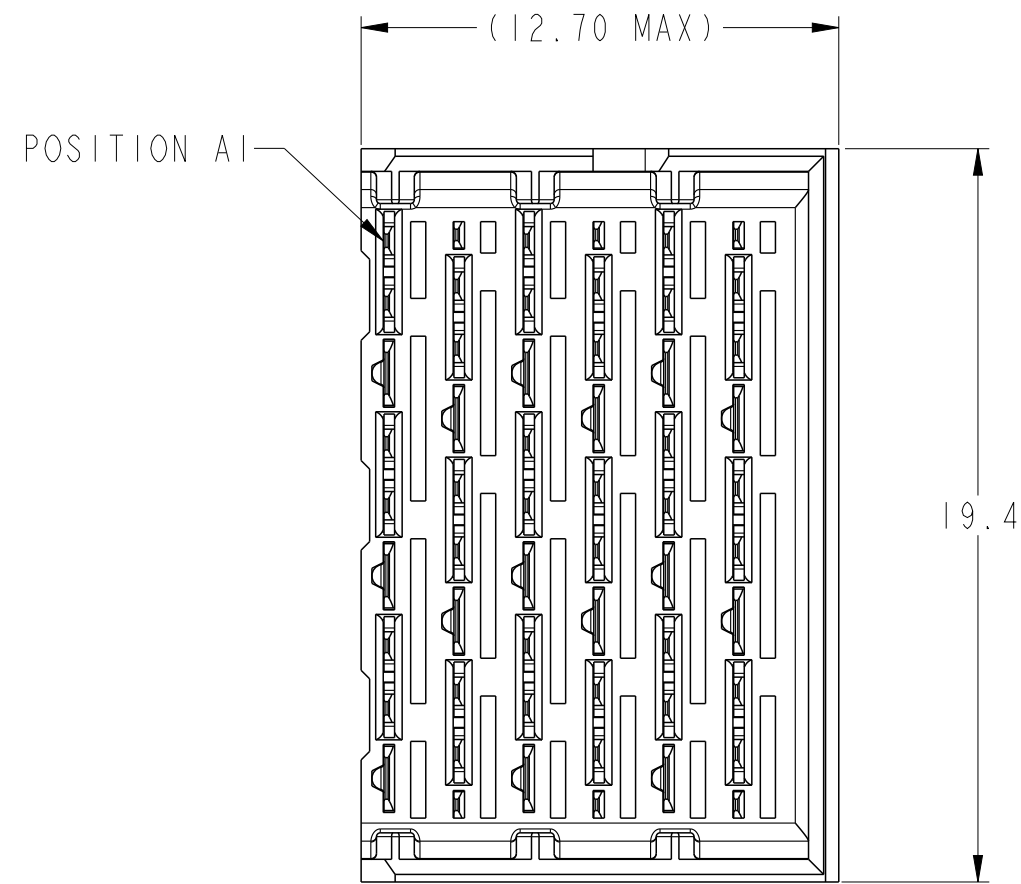

5.2 (3MM SMALL END GROUNDS)
5.2 (3MM WIPE SIGNALS)
4.2 (2MM WIPE SIGNALS)
SEE P/N TREE

6.2 (4MM WIPE WIDE GROUNDS)
5.2 (3MM WIPE WIDE GROUNDS)

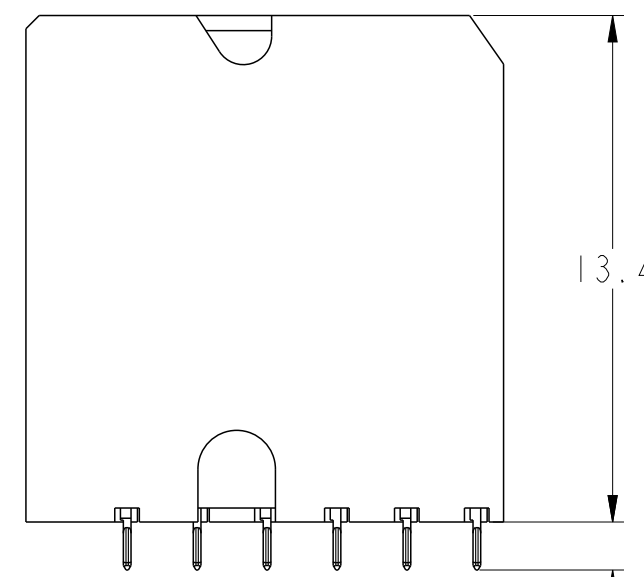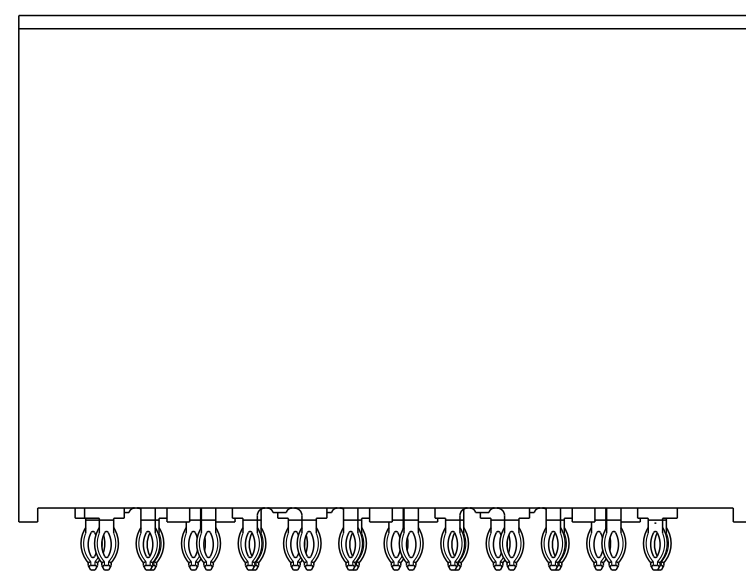

TAIL LENGTH
SEE NOTE 12







spec ref		-		dr		Roger Ng		2011/11/22		projection		size		scale			
tolerance std		-		eng		Sandar Soe		2014/10/02				A2		4:1			
ASME Y14.5		TOLERANCES UNLESS OTHERWISE SPECIFIED		chr		-		-				ecn no		ELX-S-18843-1			
				appr		Chen-Hong Tan		2014/12/10		product family		XCEDE		rel level			
														Released			
surface		✓		linear				title		MODULE ASSEMBLY		dwg no		10119189		rev	
ASME Y14.5				angular		0°		±2°									

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

FOUR WALL MODULE

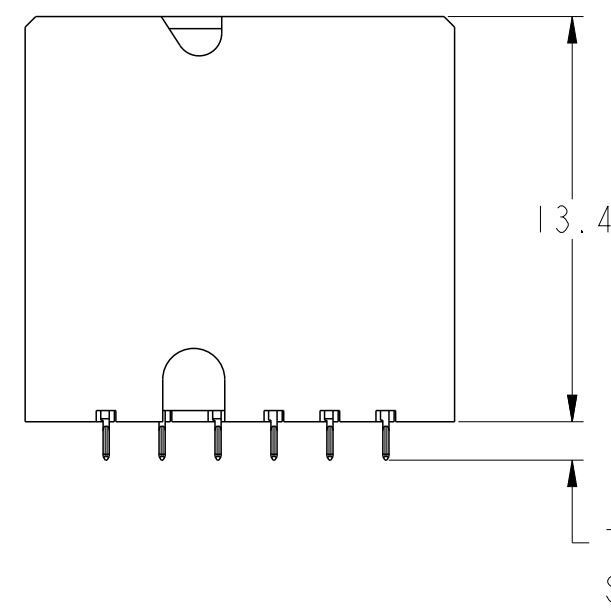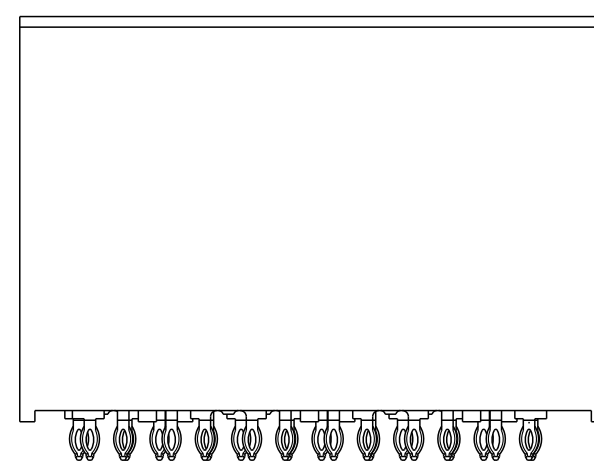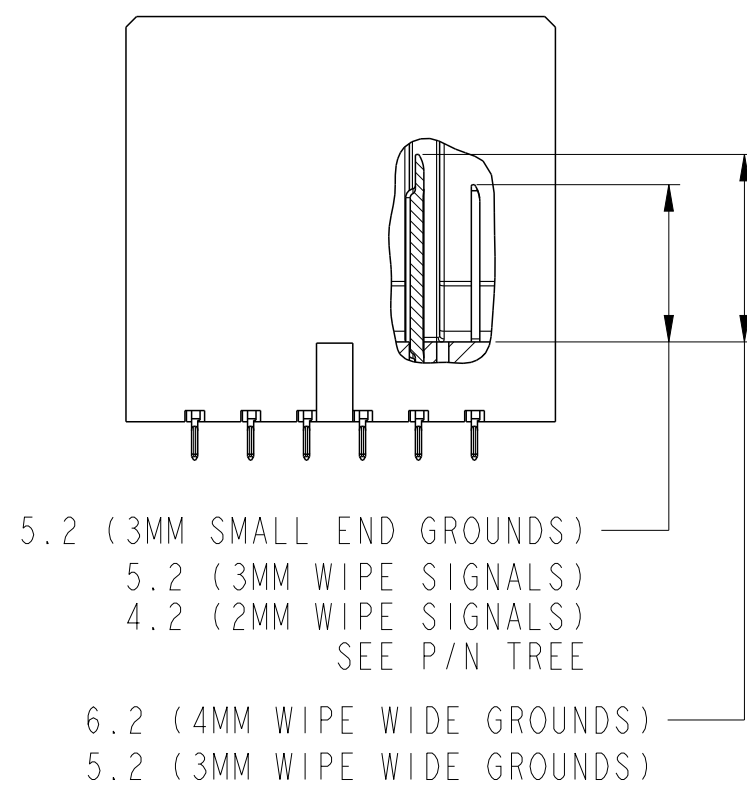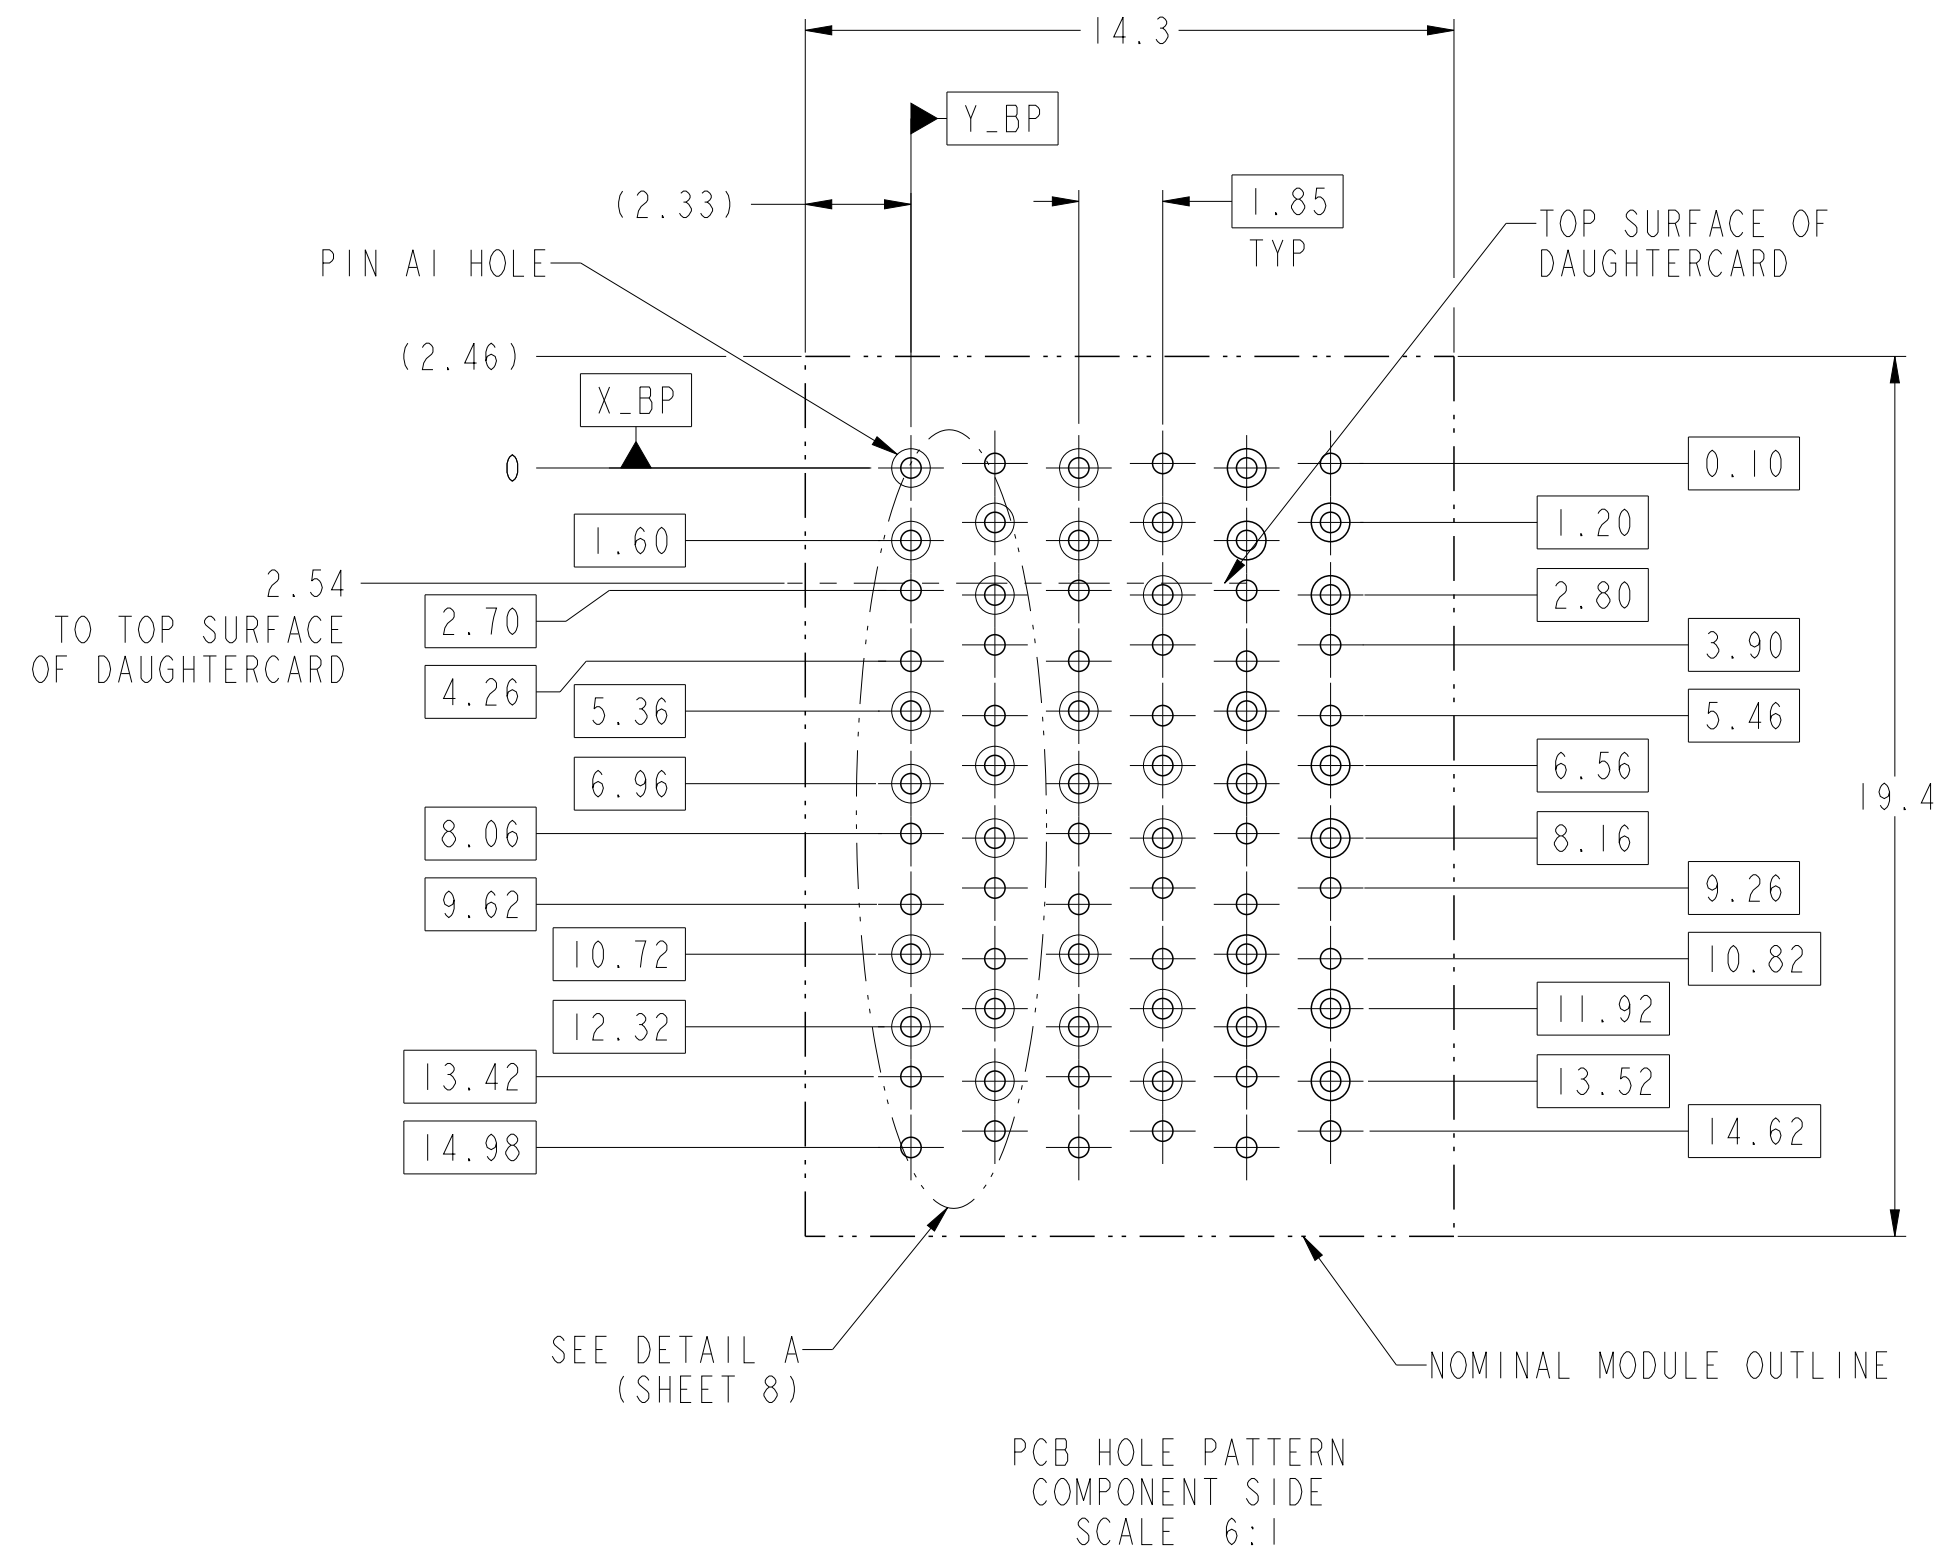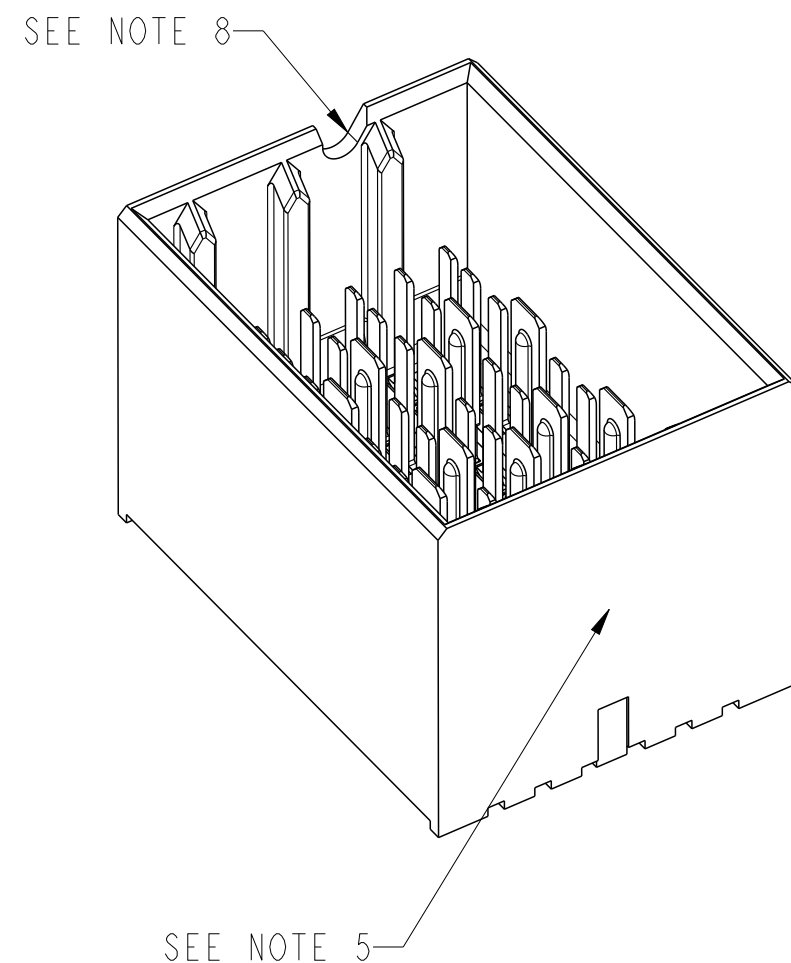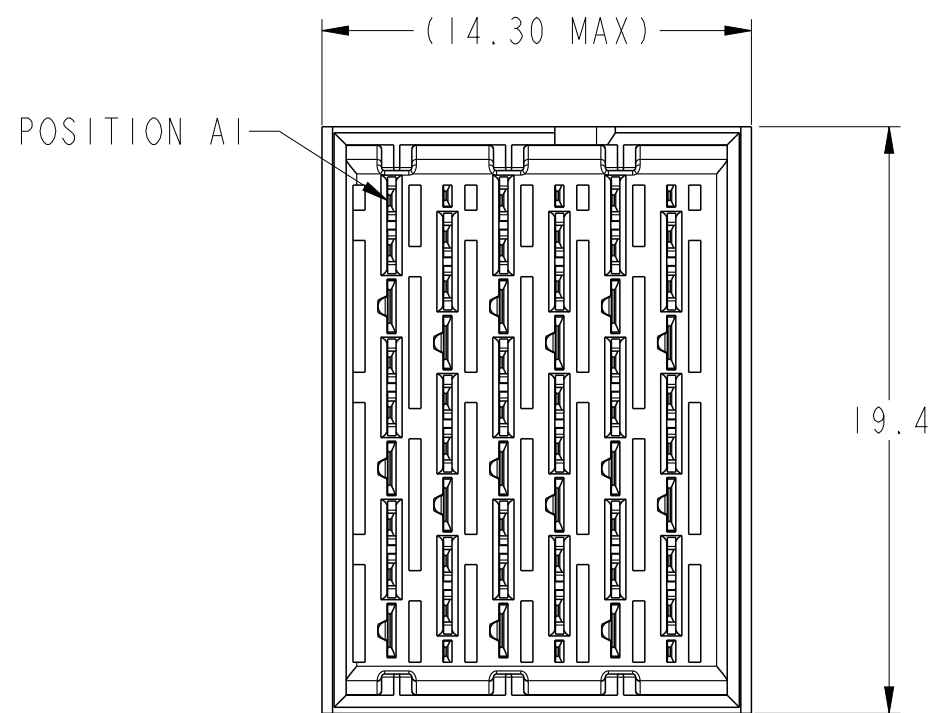

spec ref	-	dr	Roger Ng	2011/11/22	projection	MM	size	A2	scale	4:1
tolerance std	-	eng	Sandar Soe	2014/10/02	chr	-	ecm no	ELX-S-18843-1	rel level	Released
ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED	appr	Chen-Hong Tan	2014/12/10	product family	XCEDE	rel level	Released	rev	B
surface	linear	0.X	±0.2	0.XX	±0.10	0.XXX	±0.050	angular	0°	±2°
ASME Y14.5	www.fci.com	cat. no.	-	Product - Customer Drw	sheet 7 of 8					

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

NOTES:

1. CONNECTOR MATERIALS
SHROUD: HIGH-TEMP THERMOPLASTIC, GRAY, UL94V-0
CONTACTS: HIGH PERFORMANCE COPPER ALLOY
2. CONTACT PLATING:

SEPARABLE INTERFACE: PERFORMANCE-BASED PLATING, QUALIFIED TO MEET THE REQUIREMENTS OF FCI PRODUCT SPECIFICATION GS-12 588, INCLUDING THE TELCORDIA GR-1217-CORE (NOVEMBER 1995) CENTRAL OFFICE (CO) OR UNCONTROLLED ENVIRONMENT (UE) TEST SEQUENCE AS NOTED IN P/N TREE.

PRESS-FIT TAILS: TIN OVER NICKEL (LF), OR TIN-LEAD ALLOY OVER NICKEL (NON-LF). SEE P/N TREE.
3. PRODUCT SPECIFICATION: GS-12-588
4. APPLCATION SPECIFICATION: GS-20-121
5. PRODUCT MARKING (PART NUMBER AND LOT CODE) ON THESE SURFACES.
6. HOUSING MUST WITHSAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 40 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR-PHASE REFLOW OVEN.
7. PACKAGING MEETS GS-14-920 LEAD-FREE LABELING SPECIFICATION.
8. NOTCH INDICATES "ROW A" SIDE OF CONNECTOR.
9. SEE APPLICATION SPECIFICATION FOR ROUTING GUIDELINES, ADDITIONAL PTH GUIDELINES, MATED DIMENSIONS, GUIDE PN SELECTION, ETC.
10. SCREW IS OPTIONAL AND ENGAGES WITH BOTTOM OF GUIDE-PIN FROM BENEATH THE PCB FOR ADDITIONAL GUIDE-PIN SUPPORT.
11. OPTINAL HOLE LOCATION FOR GROUNDED PIN OR ADDITIONAL GUIDE-PIN SUPPORT. SEE TABLE 1 ON SHEET 1 FOR ADDITIONAL DETAILS.
- B

12. TAIL LENGTH=1.3mm FOR Ø0.55[0.0217"]COMPLIANT PIN DRILL
TAIL LENGTH=1.5mm FOR Ø0.45[0.0177"]COMPLIANT PIN DRILL
13. A



B

 SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE THAT HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION.

TABLE 3: PTH AND PAD SIZES WITH REFERENCE TO COMPLIANT PIN DRILL

COMPLIANT PIN DRILL	PTH	PAD
Ø0.55 [0.0217"]	Ø0.45±0.05	Ø0.85
Ø0.45 [0.0177"]	Ø0.36±0.05	Ø0.75

REFER TO TABLE 3 FOR PTH, DRILL & PAD SIZES

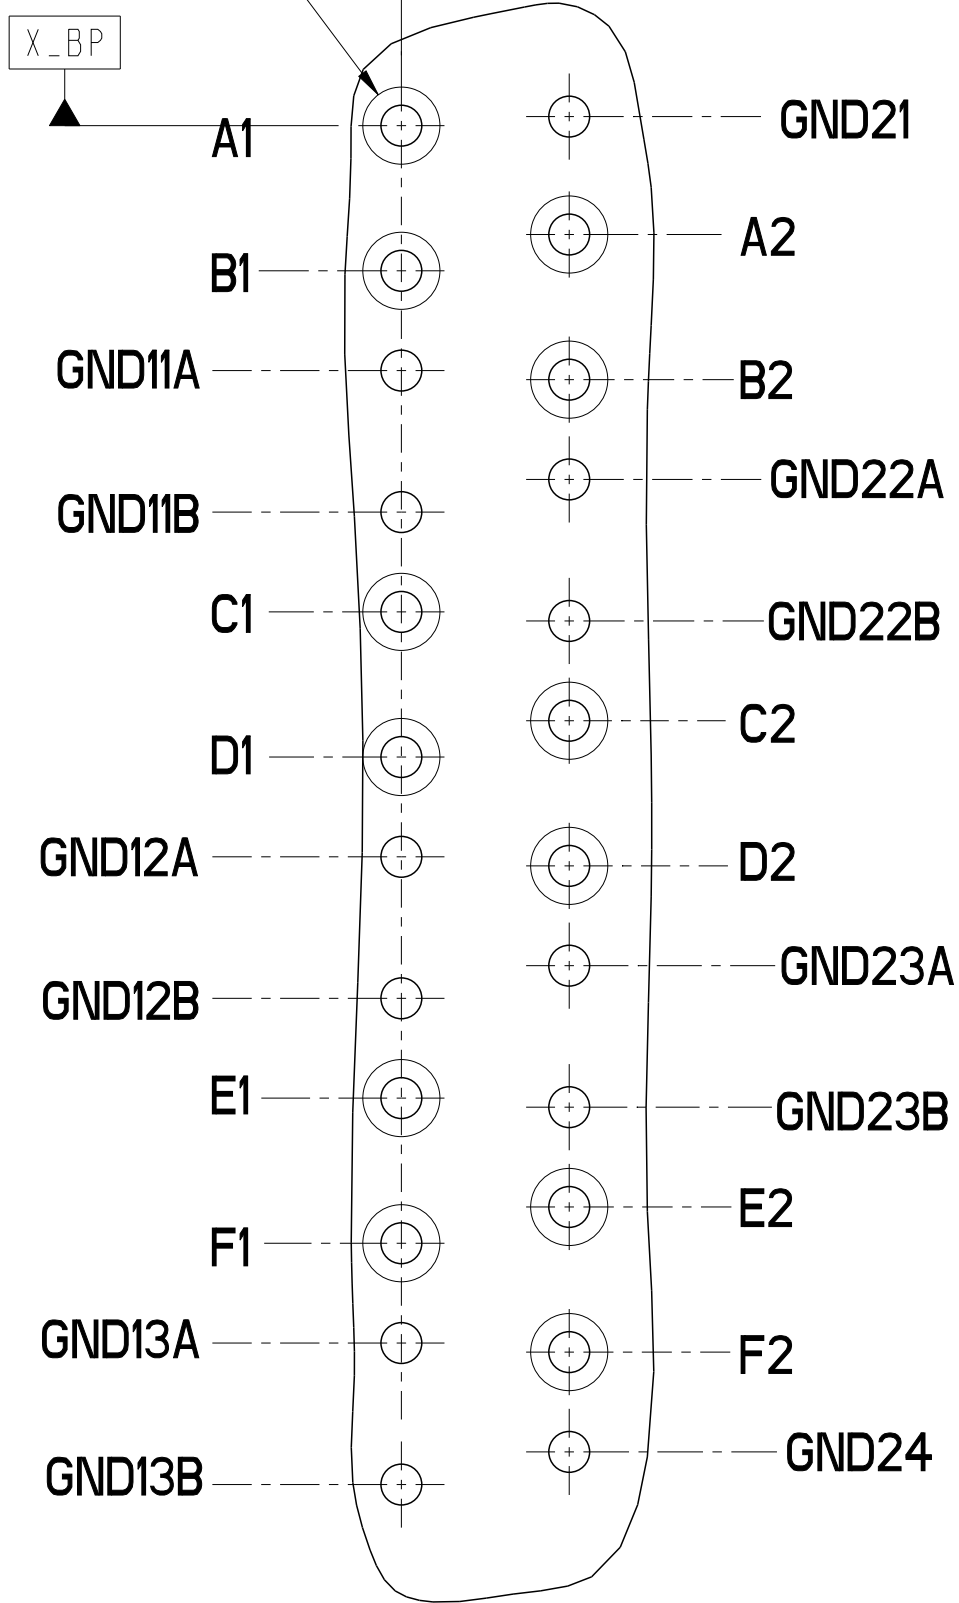

DETAIL A
SCALE 12:1

spec ref -		dr Roger Ng		2011/11/22		projection		MM		size A2		scale 4:1					
tolerance std -		eng Sandar Soe		2014/10/02						ecn no ELX-S-18843-1		Released					
ASME Y14.5		chr -		2014/12/10													
		appr Chen-Hong Tan															
						product family				XCEDE				rel level			
surface ✓		linear		0.X ±0.2						MODULE ASSEMBLY				dwg no 10119189		rev B	
		0.XX ±0.10															
		0.XXX ±0.050															
ASME Y14.5		angular 0° ±2°		www.fci.com		cat. no. -		Product - Customer Drw				sheet 8 of 8					

PDS: Rev :B

STATUS:Released

Printed: Dec 10, 2014

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А