


Features

- Epitaxial Planar Die Construction
- Built-In Biasing Resistors
- Lead Free By Design/RoHS Compliant (Note 2)
- "Green" Device (Note 3 and 4)


Mechanical Data

- Case: SOT-563
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Matte Tin annealed over Alloy 42 leadframe. Solderable per MIL-STD-202, Method 208
- Terminal Connections: See Diagram
- Weight: 0.005 grams (approximate)

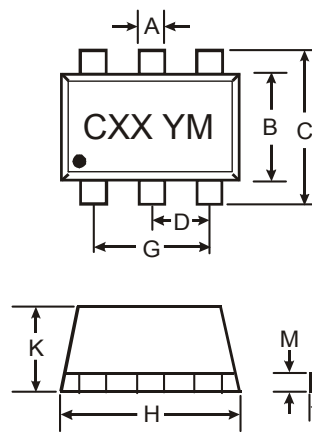

| SOT-563 | | | |
|----------------------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.25 |
| B | 1.10 | 1.25 | 1.20 |
| C | 1.55 | 1.70 | 1.60 |
| D | 0.50 | | |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| K | 0.56 | 0.60 | 0.60 |
| L | 0.15 | 0.25 | 0.20 |
| M | 0.10 | 0.18 | 0.11 |
| All Dimensions in mm | | | |

| P/N | R1 | R2 | MARKING |
|----------|---------------|---------------|---------|
| DCX124EH | 22K Ω | 22K Ω | C17 |
| DCX144EH | 47K Ω | 47K Ω | C20 |
| DCX143EH | 4.7K Ω | 4.7K Ω | C08 |
| DCX114YH | 10K Ω | 47K Ω | C14 |
| DCX123JH | 2.2K Ω | 47K Ω | C06 |
| DCX114EH | 10K Ω | 10K Ω | C13 |
| DCX143TH | 4.7K Ω | — | C07 |
| DCX114TH | 10K Ω | — | C12 |

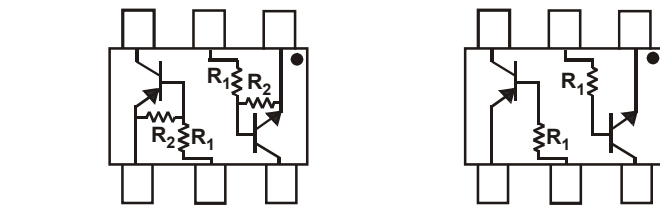

R₁, R₂

R₁ Only

SCHEMATIC DIAGRAM, TOP VIEW

Maximum Ratings NPN Section

@T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---|-----------------------------------|--|------|
| Supply Voltage | V _{CC} | 50 | V |
| Input Voltage | V _{IN} | DCX124EH: -10 to +40 DCX144EH: -10 to +40 DCX143EH: -10 to +30 DCX114YH: -6 to +40 DCX123JH: -5 to +12 DCX114EH: -10 to +40 DCX143TH: -5V max DCX114TH: -5V max | V |
| Output Current | I _O | DCX124EH: 30 DCX144EH: 30 DCX143EH: 100 DCX114YH: 70 DCX123JH: 100 DCX114EH: 50 DCX143TH: 100 DCX114TH: 100 | mA |
| Output Current | I _C (Max) | 100 | mA |
| Power Dissipation | P _d | 150 | mW |
| Thermal Resistance, Junction to Ambient Air | R _{θJA} | 833 | °C/W |
| Operating and Storage Temperature Range | T _J , T _{STG} | -55 to +150 | °C |

- Notes:
1. Mounted on FR4 Board with recommended pad layout at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. No purposefully added lead.
 3. Diodes Inc.'s "Green" policy can be found on our website at http://www.diodes.com/products/lead_free/index.php.
 4. Product manufactured with Date Code UO (week 40, 2007) and newer are built with Green Molding Compound. Product manufactured prior to Date Code UO are built with Non-Green Molding Compound and may contain Halogens or Sb2O3 Fire Retardants.

Maximum Ratings PNP Section @T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|---|-----------------------------------|--|------|
| Supply Voltage | V _{CC} | 50 | V |
| Input Voltage | V _{IN} | +10 to -40 +10 to -40 +10 to -30 +6 to -40 +5 to -12 +10 to -40 +5V max +5V max | V |
| Output Current | I _O | -30 -30 -100 -70 -100 -50 -100 -100 | mA |
| Output Current | I _C (Max) | -100 | mA |
| Power Dissipation (Total) | P _d | 150 | mW |
| Operating and Storage Temperature Range | T _j , T _{STG} | -55 to +150 | °C |

Electrical Characteristics NPN Section @T_A = 25°C unless otherwise specified

| Characteristic (DDC143TH & DDC114TH only) | Symbol | Min | Typ | Max | Unit | Test Condition | |
|---|----------------------|----------|-----|-----|------|---|---|
| Collector-Base Breakdown Voltage | BV _{CBO} | 50 | — | — | V | I _C = 50μA | |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | 50 | — | — | V | I _C = 1mA | |
| Emitter-Base Breakdown Voltage | BV _{EBO} | 5 | — | — | V | I _E = 50μA | |
| Collector Cutoff Current | I _{CBO} | — | — | 0.5 | μA | V _{CB} = 50V | |
| Emitter Cutoff Current | I _{EBO} | — | — | 0.5 | μA | V _{EB} = 4V | |
| Collector-Emitter Saturation Voltage | V _{CE(sat)} | — | — | 0.3 | V | I _O /I _B = 2.5mA / 0.25mA DCX143TH I _O /I _B = 1mA / 0.1mA DCX114TH | |
| DC Current Transfer Ratio | h _{FE} | 100 | 250 | 600 | — | I _C = 1mA, V _{CE} = 5V | |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = 10V, I _E = -5mA, f = 100MHz | |
| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition | |
| Input Voltage | V _{I(off)} | DCX124EH | 0.5 | 1.1 | — | V | V _{CC} = 5V, I _O = 100μA |
| | | DCX144EH | 0.5 | 1.1 | — | | |
| DCX143EH | | 0.5 | 1.1 | — | | | |
| DCX114YH | | 0.3 | — | — | | | |
| DCX123JH | | 0.5 | — | — | | | |
| DCX114EH | | 0.5 | 1.1 | — | | | |
| Input Voltage | V _{I(on)} | DCX124EH | — | 1.9 | 3.0 | V | V _O = 0.3V, I _O = 5mA |
| | | DCX144EH | — | 1.9 | 3.0 | | |
| | | DCX143EH | — | 1.9 | 3.0 | | |
| | | DCX114YH | — | — | 1.4 | | |
| | | DCX123JH | — | — | 1.1 | | |
| | | DCX114EH | — | 1.9 | 3.0 | | |
| Output Voltage | V _{O(on)} | DCX124EH | — | 0.1 | 0.3 | V | I _O /I _I = 10mA / 0.5mA |
| | | DCX144EH | — | 0.1 | 0.3 | | |
| | | DCX143EH | — | 0.1 | 0.3 | | |
| | | DCX114YH | — | — | — | | |
| | | DCX123JH | — | — | — | | |
| | | DCX114EH | — | 0.1 | 0.3 | | |
| Input Current | I _I | DCX124EH | — | — | 0.36 | mA | V _I = 5V |
| | | DCX144EH | — | — | 0.18 | | |
| | | DCX143EH | — | — | 1.8 | | |
| | | DCX114YH | — | — | 0.88 | | |
| | | DCX123JH | — | — | 3.6 | | |
| | | DCX114EH | — | — | 0.88 | | |
| Output Current | I _{O(off)} | — | — | 0.5 | μA | V _{CC} = 50V, V _I = 0V | |
| DC Current Gain | G _I | DCX124EH | 56 | — | — | — | V _O = 5V, I _O = 5mA |
| | | DCX144EH | 68 | — | — | | |
| | | DCX143EH | 20 | — | — | | |
| | | DCX114YH | 68 | — | — | | |
| | | DCX123JH | 80 | — | — | | |
| | | DCX114EH | 30 | — | — | | |

* Transistor - For Reference Only

Electrical Characteristics PNP Section @T_A = 25°C unless otherwise specified

| Characteristic (DCX143TH & DCX114TH only) | Symbol | Min | Typ | Max | Unit | Test Condition |
|---|----------------------|-----|-----|------|------|---|
| Collector-Base Breakdown Voltage | BV _{CBO} | -50 | — | — | V | I _C = -50μA |
| Collector-Emitter Breakdown Voltage | BV _{CEO} | -50 | — | — | V | I _C = -1mA |
| Emitter-Base Breakdown Voltage | BV _{EBO} | -5 | — | — | V | I _E = -50μA |
| Collector Cutoff Current | I _{CBO} | — | — | -0.5 | μA | V _{CB} = -50V |
| Emitter Cutoff Current | I _{EBO} | — | — | -0.5 | μA | V _{EB} = -4V |
| Collector-Emitter Saturation Voltage | V _{CE(sat)} | — | — | -0.3 | V | I _C /I _B = 2.5mA / 0.25mA DCX143TH I _C /I _B = 1mA / 0.1mA DCX114TH |
| DC Current Transfer Ratio | h _{FE} | 100 | 250 | 600 | — | I _C = -1mA, V _{CE} = -5V |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = -10V, I _E = 5mA, f = 100MHz |

| Characteristic | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|--|--|--|--|------|--|
| Input Voltage | DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH | -0.5 -0.5 -0.5 -0.3 -0.5 -0.5 | -1.1 -1.1 -1.1 — — -1.1 | — | V | V _{CC} = -5V, I _O = -100μA |
| | DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH | — | -1.9 -1.9 -1.9 — — -1.9 | -3.0 -3.0 -3.0 -1.4 -1.1 -3.0 | | |
| Output Voltage | DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH | — | -0.1 | -0.3 | V | I _O /I _I = -10mA / -0.5mA I _O /I _I = -10mA / -0.5mA I _O /I _I = -10mA / -0.5mA I _O /I _I = -5mA / -0.25mA I _O /I _I = -5mA / -0.25mA I _O /I _I = -10mA / -0.5mA |
| Input Current | DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH | — | — | -0.36 -0.18 -1.8 -0.88 -3.6 -0.88 | mA | V _I = -5V |
| Output Current | I _{O(off)} | — | — | -0.5 | μA | V _{CC} = 50V, V _I = 0V |
| DC Current Gain | DCX124EH DCX144EH DCX143EH DCX114YH DCX123JH DCX114EH | 56 68 20 68 80 30 | — | — | — | V _O = -5V, I _O = -5mA V _O = -5V, I _O = -5mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -10mA V _O = -5V, I _O = -5mA |
| Gain-Bandwidth Product* | f _T | — | 250 | — | MHz | V _{CE} = -10V, I _E = -5mA, f = 100MHz |

* Transistor - For Reference Only

Typical Curves – DCX143EH NPN Section

NEW PRODUCT

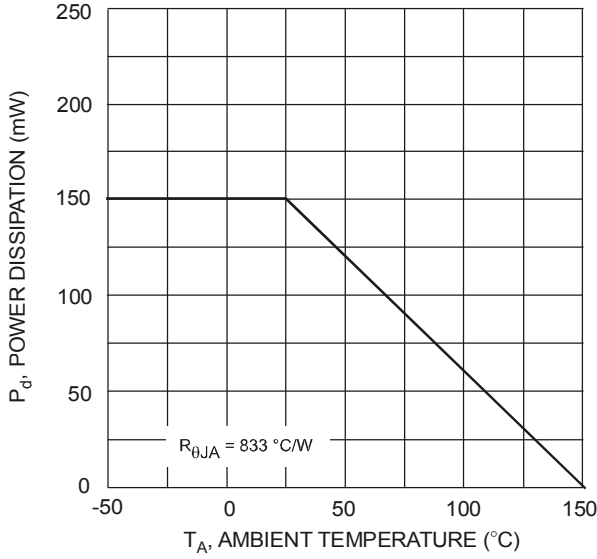


Fig. 1 Derating Curve - Total

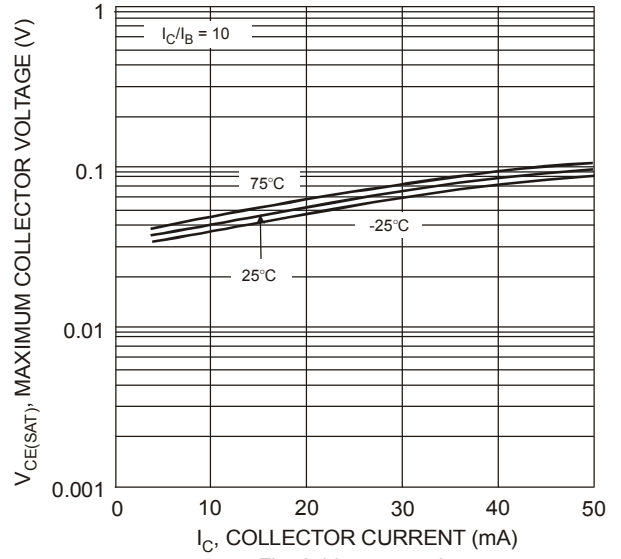


Fig. 2 $V_{CE(SAT)}$ vs. I_C

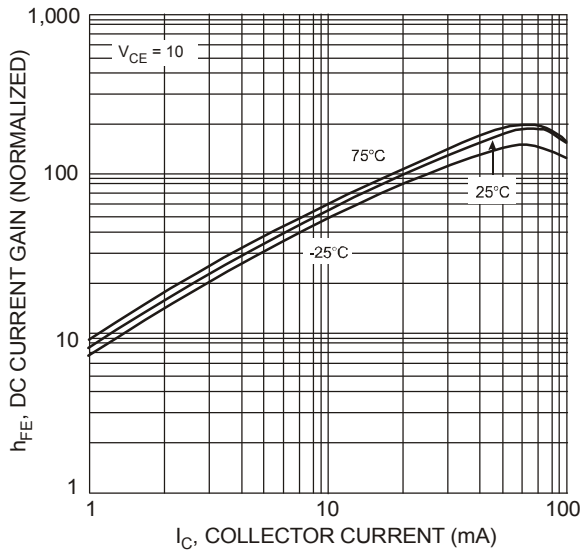


Fig. 3 DC Current Gain

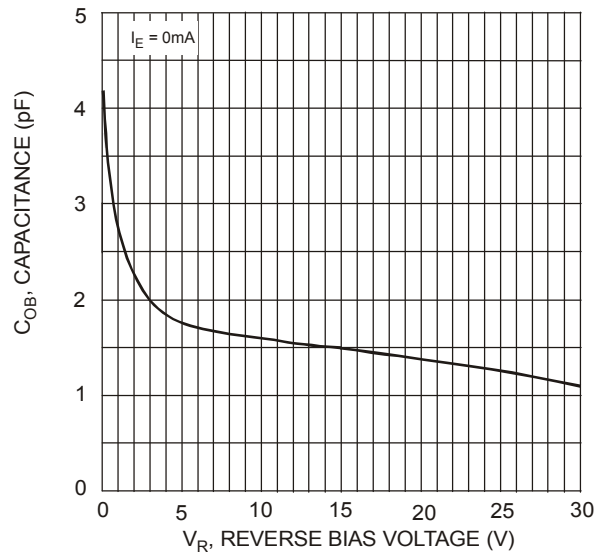


Fig. 4 Output Capacitance

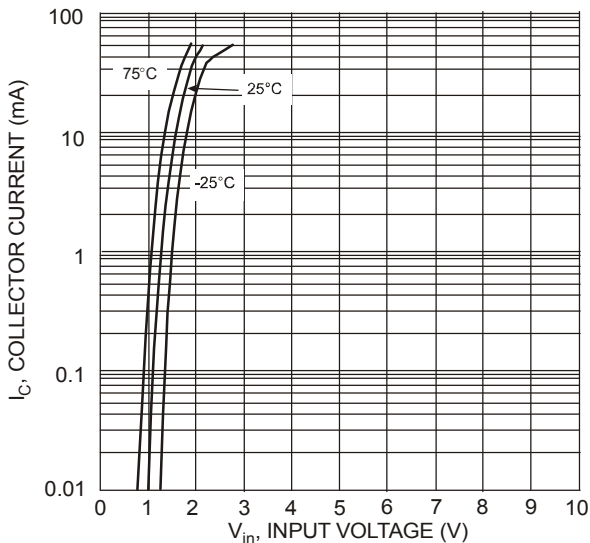


Fig. 5 Collector Current vs. Input Voltage






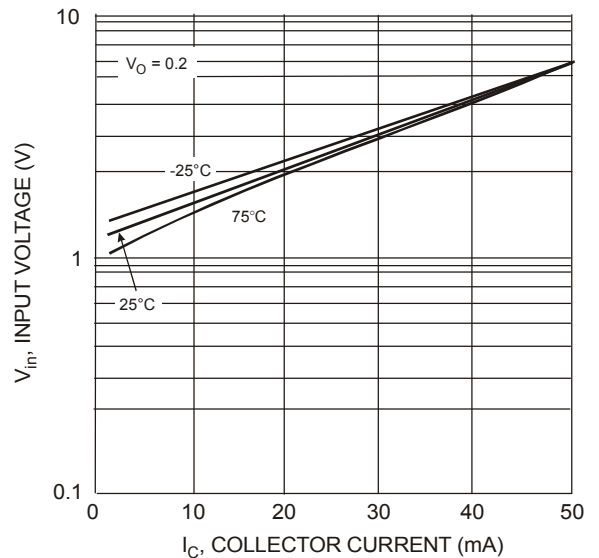


Fig. 6 Input Voltage vs. Collector Current

Typical Curves – DCX143EH PNP Section

NEW PRODUCT

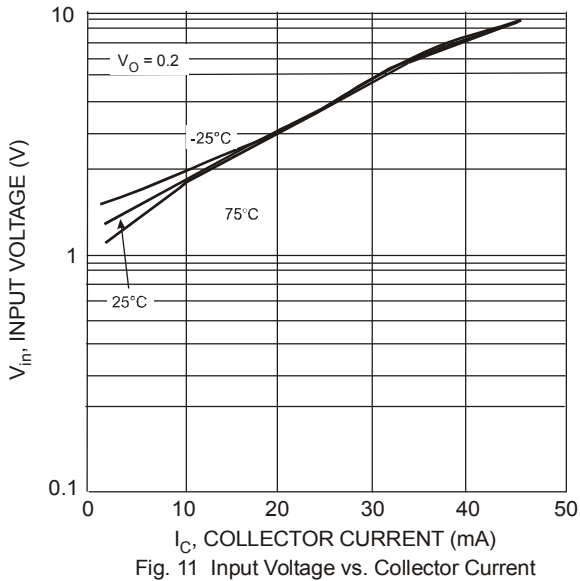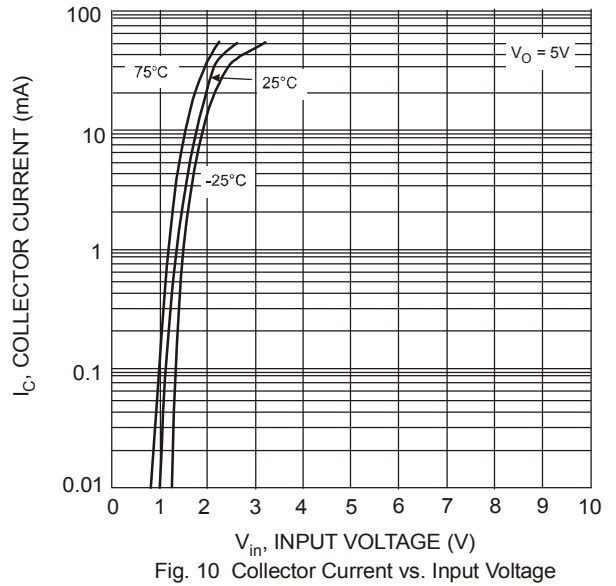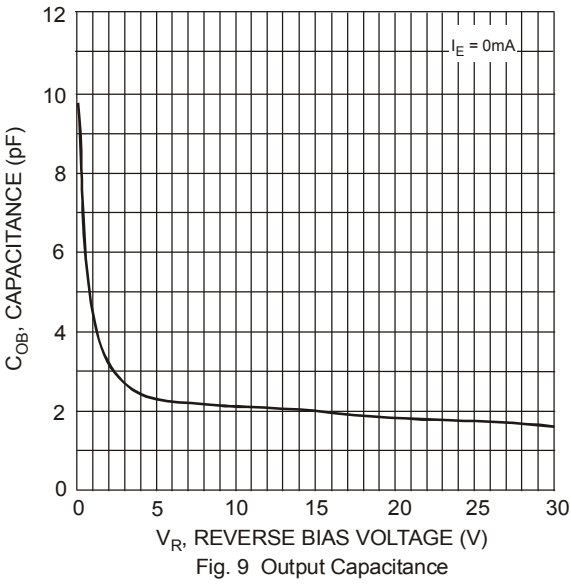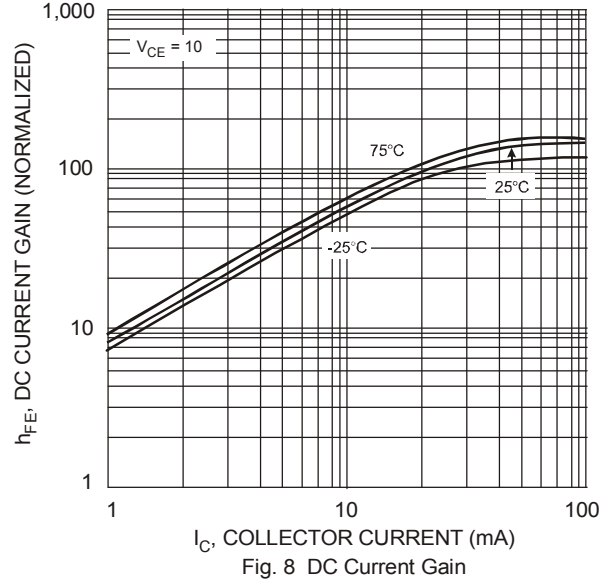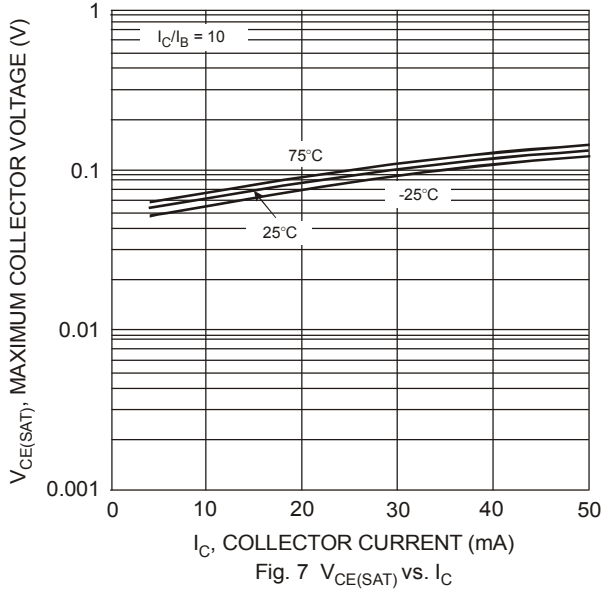


Ordering Information (Note 5)

| Device | Packaging | Shipping |
|------------|-----------|------------------|
| DCX124EH-7 | SOT-563 | 3000/Tape & Reel |
| DCX144EH-7 | SOT-563 | 3000/Tape & Reel |
| DCX143EH-7 | SOT-563 | 3000/Tape & Reel |
| DCX114YH-7 | SOT-563 | 3000/Tape & Reel |
| DCX123JH-7 | SOT-563 | 3000/Tape & Reel |
| DCX114EH-7 | SOT-563 | 3000/Tape & Reel |
| DCX143TH-7 | SOT-563 | 3000/Tape & Reel |
| DCX114TH-7 | SOT-563 | 3000/Tape & Reel |

Notes: 5. For packaging details, go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information



CXX = Product Type Marking Code (See Page 1)
 YM = Date Code Marking
 Y = Year ex: P = 2003
 M = Month ex: 9 = September

Date Code Key

| Year | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 |
|------|------|------|------|------|------|------|------|
| Code | T | U | V | W | X | Y | Z |

| Month | Jan | Feb | Mar | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «**JONHON**», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «**FORSTAR**».



JONHON

«**JONHON**» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А