

## DA9052

### Flexible system PMIC with high-efficiency USB power manager

**DA9052 is a quad buck PMIC with supply domain flexibility to support a wide range of application processors, associated peripherals, and user interface functions. Combining a dual input switched-mode USB compatible charger, full power-path management, four bucks, ten linear regulators, and support for multiple sleep modes: the DA9052 offers an energy-optimised solution suitable for portable handheld, wireless, industrial, and infotainment applications.**

The high-efficiency Li-Ion/Polymer switching charger supports precise current/voltage charging as well as pre-charge and USB modes without processor interaction. During charging, the die temperature is thermally regulated enabling high-capacity batteries to be rapidly charged at currents up to 1.26 A with minimum thermal impact. USB suspend mode operation is supported and, for robustness, the power inputs are protected against over-voltage conditions.

The autonomous power-path controller seamlessly detects and manages energy flow between an AC adaptor, USB cable, and battery while maintaining USB power specification compliance. The internally-generated system power rail supports power scenarios such as instant-on with a fully discharged battery. A reverse-protected backup battery charger is also integrated into the power-path function.

Controlled by a programmable digital power manager, the 14 user-programmable switched/linear regulators can be configured to meet the start-up sequence, voltage, and timing requirements for most applications. The power manager includes supply-rail qualification and system reset management. For optimal processor energy-per-task performance, Dynamic Voltage Scaling (DVS), is available on up to five supply domains. Dialog's patented SmartMirror™ dynamic biasing is implemented on all linear regulators.

An integrated 10-channel general purpose ADC includes support for a touch screen controller with pen down detect, programmable high/low thresholds, an integrated current source for resistive measurements, and system voltage monitoring with a programmable low voltage warning. The ADC has 8-bit resolution in auto mode and 10-bit resolution in manual conversion mode.



VFBGA 7 mm x 7 mm, 0.5 mm pitch package


## Features

- ▶ Switched DC/USB charger with power-path management
- ▶ Four buck converters, 0.5 V to 3.6 V up to 800 mA
- ▶ DVS support
- ▶ Ten programmable LDOs, LDO9 is accurate to 1 %, all other LDOs to 3 %
- ▶ Low-power backup battery charger 1.1 V to 3.1 V, up to 6 mA
- ▶ 32 kHz Real Time Clock (RTC) oscillator
- ▶ 10-channel general purpose ADC with touch screen interface with pen down detect
- ▶ High-voltage white LED driver >24 V / 78 mA boost, three strings
- ▶ Sixteen flexible GPIO pins for enhanced wakeup and peripheral control
- ▶ 2-wire and 4-wire control interfaces
- ▶ System watchdog function
- ▶ -40 °C to +125 °C junction temperature operation

## Typical applications

- ▶ Personal media players
- ▶ Smartphones
- ▶ Personal navigation devices
- ▶ Consumer and in-vehicle infotainment devices
- ▶ IoT devices

## Block diagram

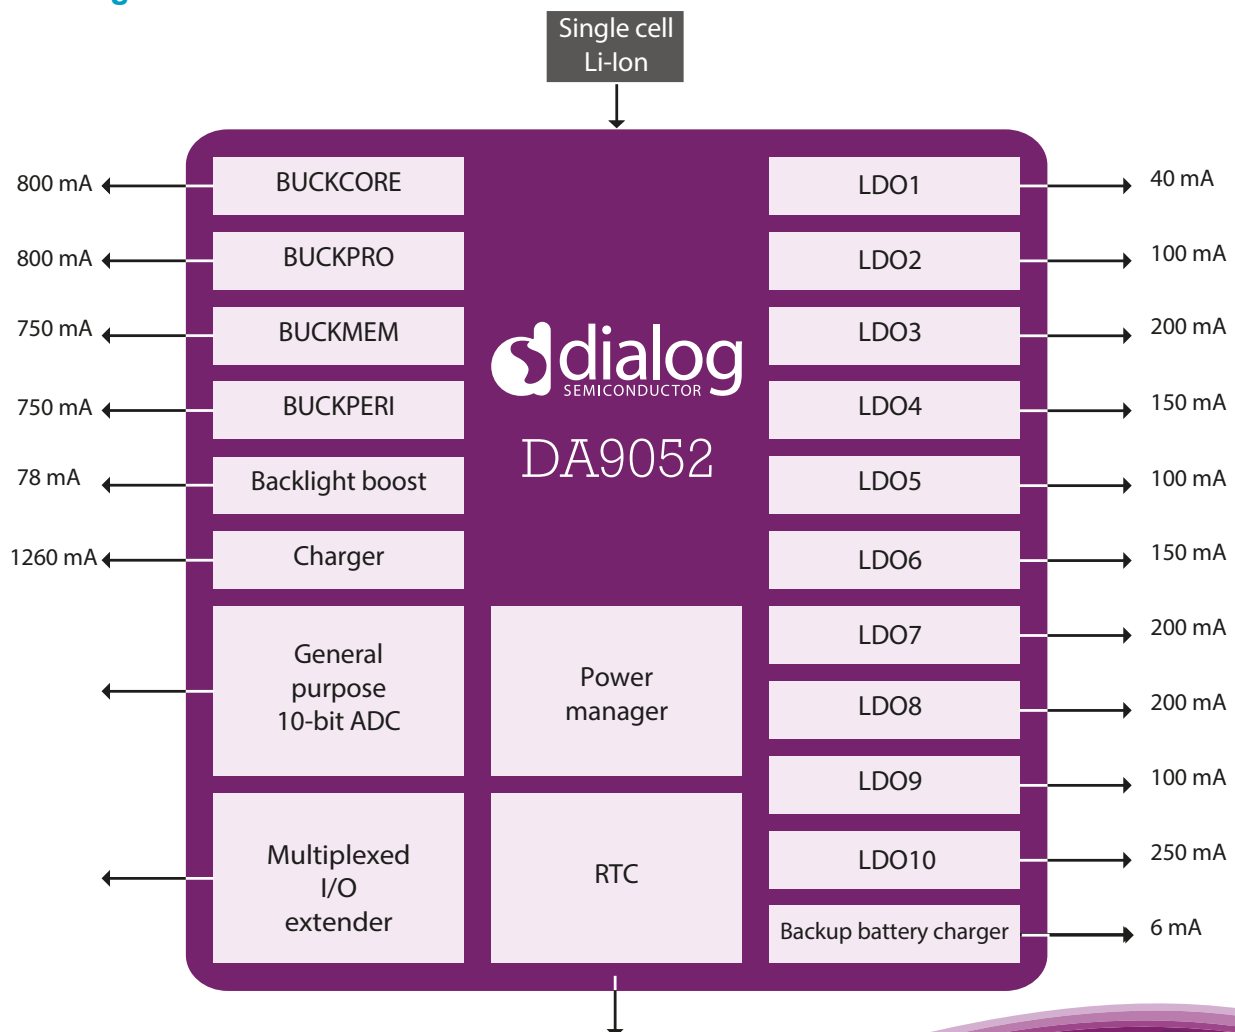

## Generated supply domains

Regulator	Supplied voltage	Supplied max. current	External component	Notes
BUCKCORE	0.5 V to 2.075 V ±3 % accuracy	800 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
BUCKPRO	0.5 V to 2.075 V ±3 % accuracy	800 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
BUCKPERI	1.8 V to 3.6 V ±3 % accuracy	750 mA	2.2 µH to 4.7 µH	2 MHz, 50/100 mV steps
BUCKMEM	0.925 V to 2.5 V ±3 % accuracy	750 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
LDO1	0.6 V to 1.8 V ±3 % accuracy	40 mA	1.0 µF	High PSRR, low noise LDO, 50 mV steps
LDO2	0.6 V to 1.8 V ±3 % accuracy	100 mA	1.0 µF	DVS, digital LDO, 25 mV steps, DVS with controlled slew rate
LDO3	1.725 V to 3.3 V ±3 % accuracy	200 mA	2.2 µF	DVS, digital LDO, 25 mV steps, DVS with controlled slew rate
LDO4	1.725 V to 3.3 V ±3 % accuracy	150 mA	2.2 µF	Digital LDO, 25 mV steps, optional hardware control via GPI
LDO5	1.2 V to 3.6 V ±3 % accuracy	100 mA	1.0 µF	Digital LDO, 50 mV steps, optional hardware control via GPI
LDO6	1.2 V to 3.6 V ±3 % accuracy	150 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO7	1.2 V to 3.6 V ±3 % accuracy	200 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO8	1.2 V to 3.6 V ±3 % accuracy	200 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO9	1.25 V to 3.6 V ±1 % accuracy	100 mA	1.0 µF	High PSRR, low noise, 50 mV steps, optional hardware control via GPI
LDO10	1.2 V to 3.6 V ±3 % accuracy	250 mA	2.2 µF	High PSRR, low noise, 50 mV steps

### Dialog Semiconductor Worldwide Sales Offices - [www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)

email: [info@diasemi.com](mailto:info@diasemi.com)

United Kingdom  
Phone: +44 1793 757700

The Netherlands  
Phone: +31 73 640 88 22

Japan  
Phone: +81 3 5425 4567

Singapore  
Phone: +65 648 499 29

Korea  
Phone: +82 2 3469 8200

Germany  
Phone: +49 7021 805-0

North America  
Phone: +1 408 845 8500

Taiwan  
Phone: +886 281 786 222

Hong Kong  
Phone: +852 3769 5200

China (Shenzhen)  
Phone: +86 755 2981 3669  
China (Shanghai)  
Phone: +86 21 5424 9058

This publication provides outline information only, which unless agreed by Dialog Semiconductor may not be used, applied or reproduced for any purpose, or be regarded as a representation relating to products. Please refer to Dialog standard supply terms on the company website ([www.dialog-semiconductor.com](http://www.dialog-semiconductor.com)).

© Dialog Semiconductor 2015. All rights reserved. DA9052 PB 2v0

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А