





Product Specification

Product Name: T101VB01D01

| |
|-----------------------------|
| Customer |
| |
| Approved by Customer |
| |
| Approved Date: |

| Designed By | Checked by | Approved By | |
|--|---|---|---|
| | | R&D | QA |
|  6.6.30 |  2016.6.30 |  6.30 |  6/30/16 |

CONTENT

| | |
|---|-----------|
| REVISION RECORD | 3 |
| 1 OVERVIEW | 4 |
| 2 FEATURES | 4 |
| 3 GENERAL INFORMATION | 4 |
| 4 MECHANICAL DRAWING | 5 |
| 5 MODULE INTERFACE | 6 |
| 5.1 TFT PIN DESCRIPTION..... | 6 |
| 5.2 BACK-LIGHT UNIT..... | 7 |
| 6 ABSOLUTE MAXIMUM RATING | 8 |
| 6.1 ELECTRICAL ABSOLUTE RATING..... | 8 |
| 7 ELECTRICAL CHARACTERISTICS | 9 |
| 7.1 DC ELECTRICAL CHARACTERISTICS..... | 9 |
| 7.2 AC ELECTRICAL CHARACTERISTICS..... | 11 |
| 8 POWER ON/OFF SEQUENCE | 13 |
| 9 OPTICAL CHARACTERISTICS | 14 |
| 10 PACKAGE SPECIFICATION | 17 |
| 11 ILLUSTRATION OF PRODUCT NAME | 18 |
| 12 PRECAUTIONS FOR OPERATION AND STORAGE | 18 |
| 12.1 PRECAUTIONS FOR OPERATION..... | 19 |
| 12.2 SOLDERING..... | 19 |
| 12.3 PRECAUTIONS FOR STORAGE..... | 19 |
| 12.4 WARRANTY PERIOD..... | 19 |

REVISION RECORD

| REV. | REVISION DESCRIPTION | REV. DATE | REMARK |
|------|-------------------------------------|------------|---------|
| Y01 | Initial Release | 2014-08-29 | |
| Y02 | Update Illustration of Product Name | 2016-06-24 | Page 18 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

1 Overview

The specifications is a transmissive type color active matrix liquid crystal display (LCD) which uses amorphous thin film transistor (TFT) as switching devices. This product is composed of a TFT LCD panel, driver IC, FPC, and a backlight unit.

2 Features


- Panel Size: 10.1 inch
- Number of Pixels /Resolution: 1280×RGB×800
- Interface: LVDS
- RoHS and Halogen-Free Compliance
- Applications: Multimedia application and other hand application

3 General Information


| NO. | ITEM | SPECIFICATION | UNIT |
|-----|---------------|-----------------------------|--------|
| 1 | Dot Matrix | 1280(W)×800(H) | Pixels |
| 2 | Dot Pitch | 0.1695(W)×0.1695 (H) | mm |
| 3 | Active Area | 216.96(W)×135.60(H) | mm |
| 4 | Module Size | 229.46(W)×149.10(H)×4.56(T) | mm |
| 5 | Viewing Angle | 6 O'clock | mm |
| 6 | Module Weight | 190(MAX) | gram |

4 Mechanical Drawing

Front side

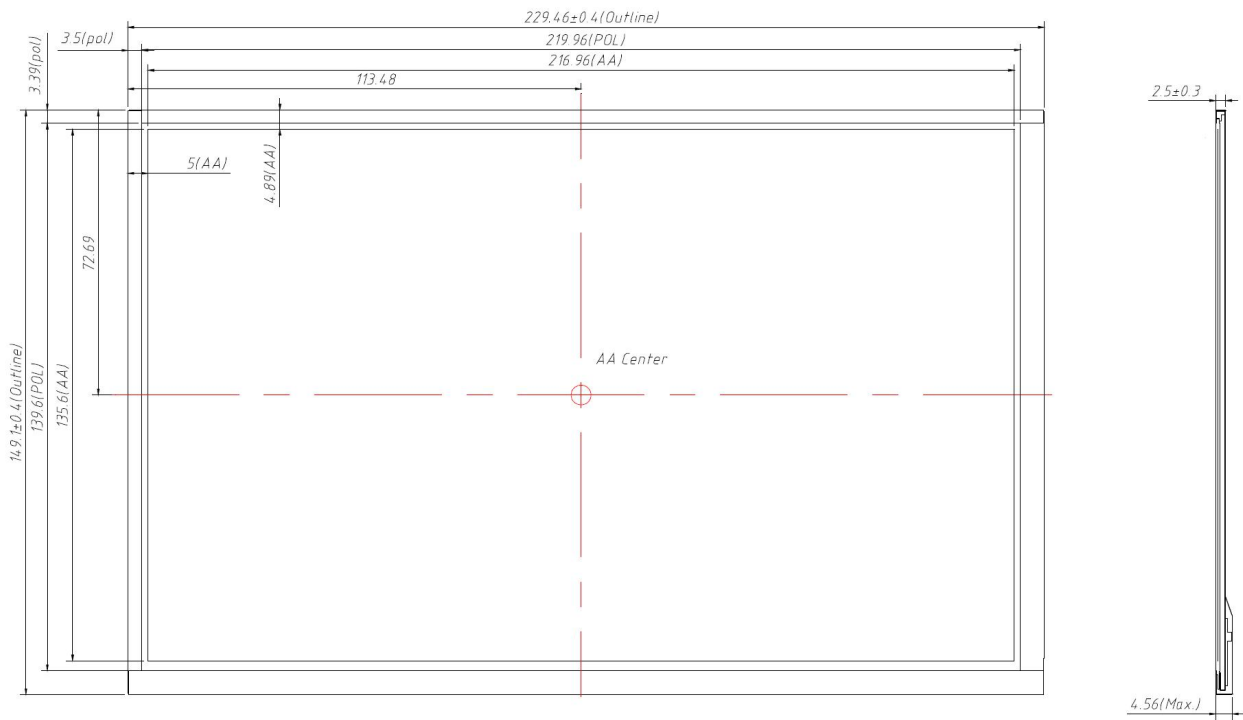

Back side

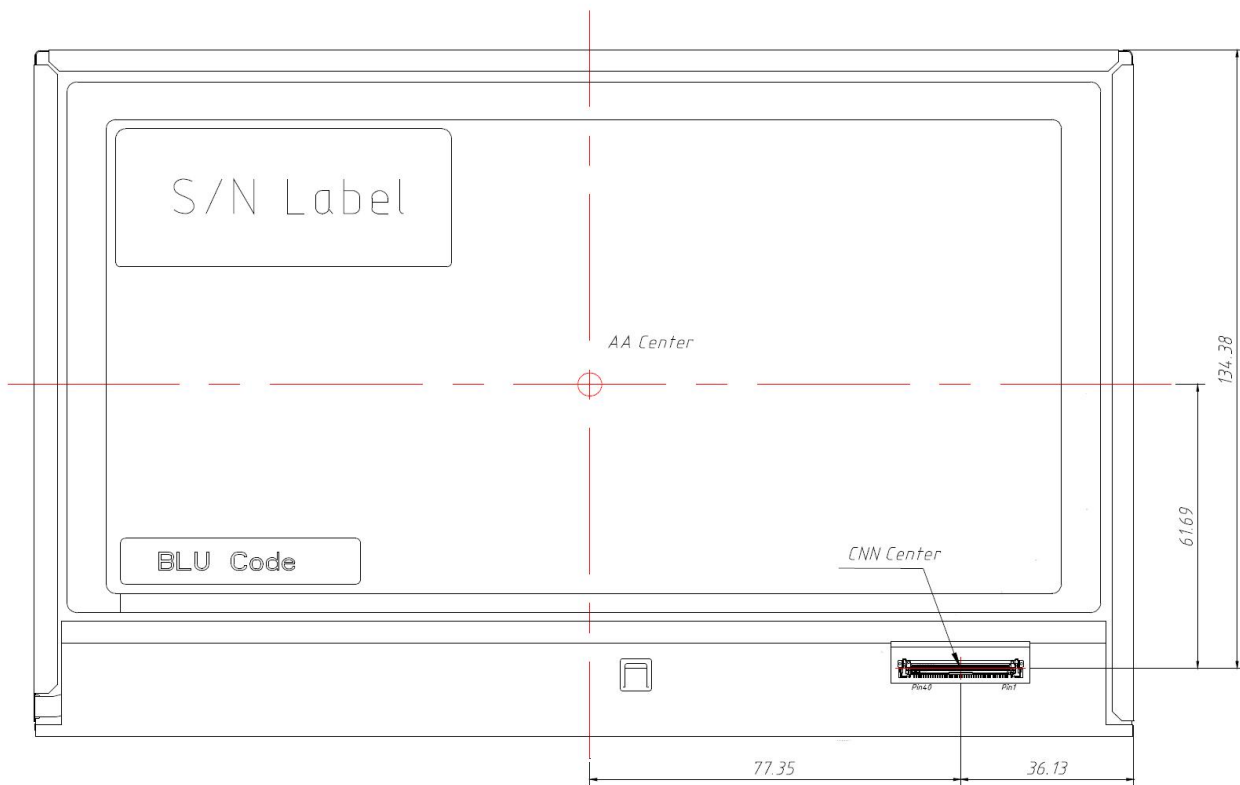

5 Module Interface

5.1 TFT PIN Description

Connector Name / Designation

| Item | Description |
|--------------------------------------|-----------------------------|
| Manufacturer / Type | Starconn / 300E40-0010RA-G3 |
| Mating Receptacle / Type (Reference) | TBD or Compatible |

Signal Pin Assignment

| Pin # | Signal Name | Description | Remarks |
|-------|-------------|--------------------------------|---------|
| 1 | NC | No Connection | - |
| 2 | VDD | Power Supply | - |
| 3 | VDD | Power Supply | - |
| 4 | VDD_EDID | VDD_EDID | - |
| 5 | SCL_EDID | SCL_EDID | - |
| 6 | SDA_EDID | SDA_EDID | - |
| 7 | NC | No Connection | - |
| 8 | LV0N | -LVDS Differential Data Input | - |
| 9 | LV0P | +LVDS Differential Data Input | - |
| 10 | GND | Ground | - |
| 11 | LV1N | -LVDS Differential Data Input | - |
| 12 | LV1P | +LVDS Differential Data Input | - |
| 13 | GND | Ground | - |
| 14 | LV2N | -LVDS Differential Data Input | - |
| 15 | LV2P | +LVDS Differential Data Input | - |
| 16 | GND | Ground | - |
| 17 | LVCLKN | -LVDS Differential Clock Input | - |
| 18 | LVCLKP | +LVDS Differential Clock Input | - |
| 19 | GND | Ground | - |
| 20 | LV3N | -LVDS Differential Data Input | - |
| 21 | LV3P | +LVDS Differential Data Input | - |
| 22 | GND | Ground | - |
| 23 | LED_GND | Ground for LED Driving | - |
| 24 | LED_GND | Ground for LED Driving | - |
| 25 | LED_GND | Ground for LED Driving | - |
| 26 | NC | No Connection | - |

| | | | |
|----|---------|---------------------------------|---|
| 27 | LED_PWM | PWM Input Signal for LED Driver | - |
| 28 | LED_EN | LED Enable Pin | - |
| 29 | NC | Reserved For CABC | - |
| 30 | NC | No Connection | - |
| 31 | LED_VCC | Power Supply for LED Driver | - |
| 32 | LED_VCC | Power Supply for LED Driver | - |
| 33 | LED_VCC | Power Supply for LED Driver | - |
| 34 | NC | No Connection | - |
| 35 | BIST | BIST pin | - |
| 36 | NC | No Connection | - |
| 37 | NC | No Connection | - |
| 38 | NC | No Connection | - |
| 39 | NC | No Connection | - |
| 40 | NC | No Connection | - |

All input signals shall be low or Hi-Z state when VDD is off.

5.2 Back-Light Unit

| Item | Symbol | Min. | Typ. | Max. | Units | Note |
|-----------------------|---------------------|----------|-------|-------|-------|-------------------------------|
| LED Input Voltage | V _{LED} | (6) | (12) | (21) | V | (2) |
| LED Power Consumption | P _{LED} | - | - | (2.5) | W | (2) |
| LED Forward Voltage | V _F | (2.9) | - | (3.2) | V | (2) |
| LED Forward Current | I _F | - | (20) | - | mA | |
| PWM Signal Voltage | V _{PWM_EN} | High | (3.0) | - | (3.6) | |
| | | Low | (0) | - | (0.4) | |
| LED Enable Voltage | V _{LED_EN} | High | (3.0) | - | (3.6) | V |
| | | Low | (0) | - | (0.4) | |
| Input PWM Frequency | FPWM | (1) | - | (2) | KHz | D _{DIM} ≥1% (2) |
| | | (2) | - | (5) | | D _{DIM} ≥2.5% (2) |
| | | (5) | - | (10) | | D _{DIM} ≥5% (2) |
| | | (10) | - | (20) | | D _{DIM} ≥10% (2) |
| LED Life Time | LT | (15,000) | - | - | Hours | (1)(2) |

Note (1): The LED life time define as the estimated time to 50% degradation of initial luminous.

Note (2): Operating temperature 25°C, humidity 55%.

6 Absolute Maximum Rating

6.1 Electrical Absolute Rating

| Item | Symbol | Min. | Max. | Unit | Note |
|---------------------------------|------------------|------|------|------|---------|
| Logic Supply Voltage | V _{DD} | -0.3 | 7 | V | TA=25°C |
| Supply V _{LED} Voltage | V _{LED} | -0.3 | 24 | V | |


Note : The module may be destroyed and not be recovered while the absolute maximum rating values of this product have been exceeded.

| Item | Symbol | Min. | Max. | Unit | Conditions |
|-----------------------|-----------------|------|------|------|-------------|
| Operating Temperature | T _{OP} | -20 | 70 | °C | (1),(2),(3) |
| Operating Humidity | H _{OP} | 10 | 90 | %RH | |
| Storage Temperature | T _{ST} | -30 | 80 | °C | |
| Storage Humidity | H _{ST} | 10 | 90 | %RH | |

Note :

- (1) Maximum Wet-Bulb temperature should be 39 degree C and no condensation.
- (2) When you apply the LCD module for OA system. Please make sure to keep the temperature of LCD module is less than 70°C
- (3)Storage /Operating temperature

Absolute Ratings of Environment of the LCD Module

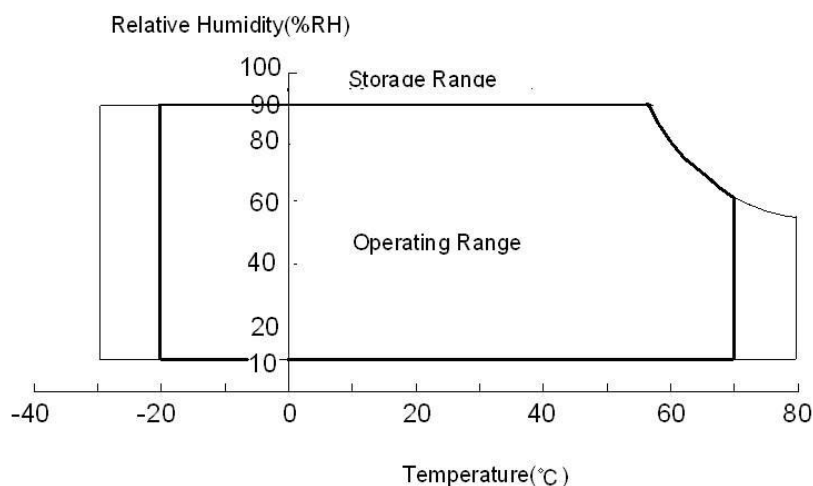


7 Electrical Characteristics

7.1 DC Electrical Characteristics


| Item | Symbol | Min. | Typ. | Max. | Units | Note |
|--|---------------|-------|--------|-------|-------|-------------|
| LCD Drive Voltage (Logic) | VDD | (3.0) | (3.3) | (3.6) | V | (2),(4) |
| VDD Current | White Pattern | IDD | (0.27) | - | A | (3),(4) |
| VDD Power Consumption | White Pattern | PDD | - | (1.0) | W | |
| LED Power Consumption | PLED | - | - | (2.5) | W | |
| Rush Current | Irush | - | - | (1.5) | A | (1),(4),(5) |
| Allowable Logic/LCD Drive Ripple Voltage | VDDrp | - | - | (300) | mV | (4) |

Note (1) Measure Condition

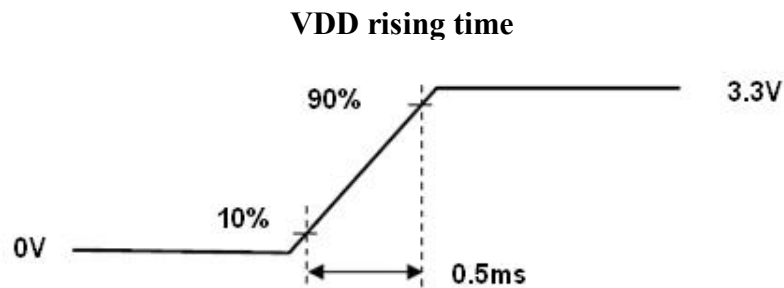

Note (2) VDD Power Dip Condition


If $V_{TH} < VDD \leq V_{min}$, then $t_{dR1} \leq 10ms$; when the voltage return to normal our panel must revive automatically.

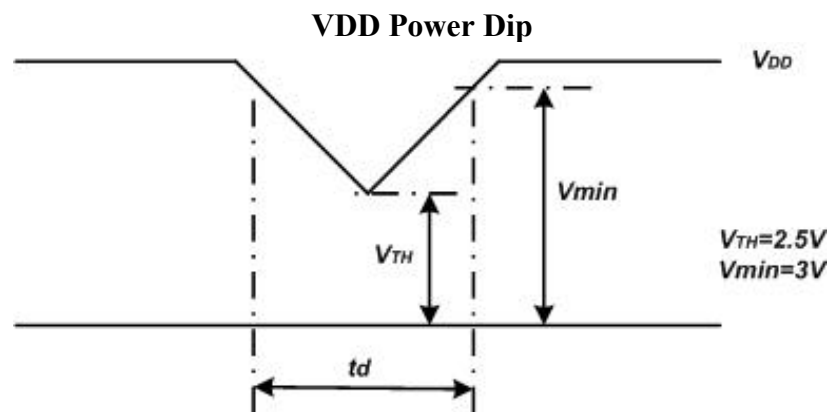

Note (3) Frame Rate=60Hz, VDD=3.3V, DC Current.

Note (4) Operating temperature 25°C, humidity 55%RH.

Note (5) The reference measurement circuit of rush current.

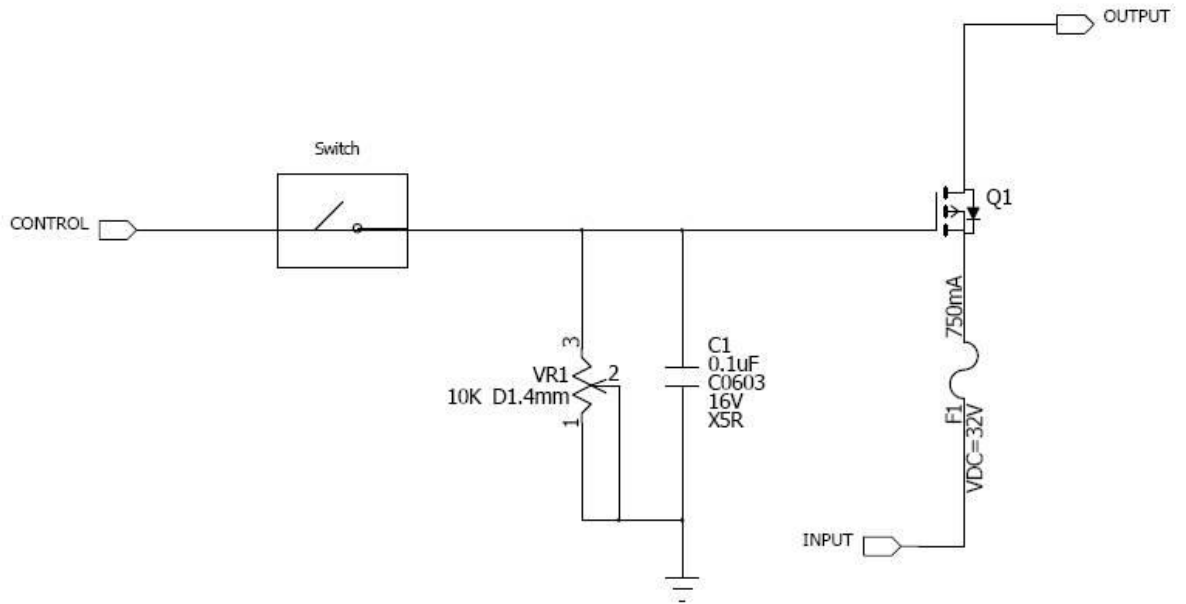

7.2 AC Electrical Characteristics

7.2.1 LVDS Receiver

Signal Electrical Characteristics For LVDS Receiver


LVDS Receiver Electrical Characteristics

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Conditions |
|------------------------------|------------------|-------------|------|-----------------|------|------------------------|
| Differential Input High | Vth | - | - | +100 | mV | V _{CM} =+1.2V |
| Differential Input Low | Vtl | -100 | - | - | mV | V _{CM} =+1.2V |
| Magnitude Differential Input | V _I | 200 | - | 400 | mV | - |
| Common Mode Voltage | V _{CM} | 0.3+(VID/2) | - | VDD-1.2-(VID/2) | V | - |
| Common Mode Voltage | ΔV _{CM} | - | - | 50 | mV | V _{CM} =+1.2V |


Note: (1) Input signals shall be low or Hi- resistance state when VDD is off.

(2) All electrical characteristics for LVDS signal are defined and shall be measured at the interface connector of LCD.

LVDS input characteristics are as follow

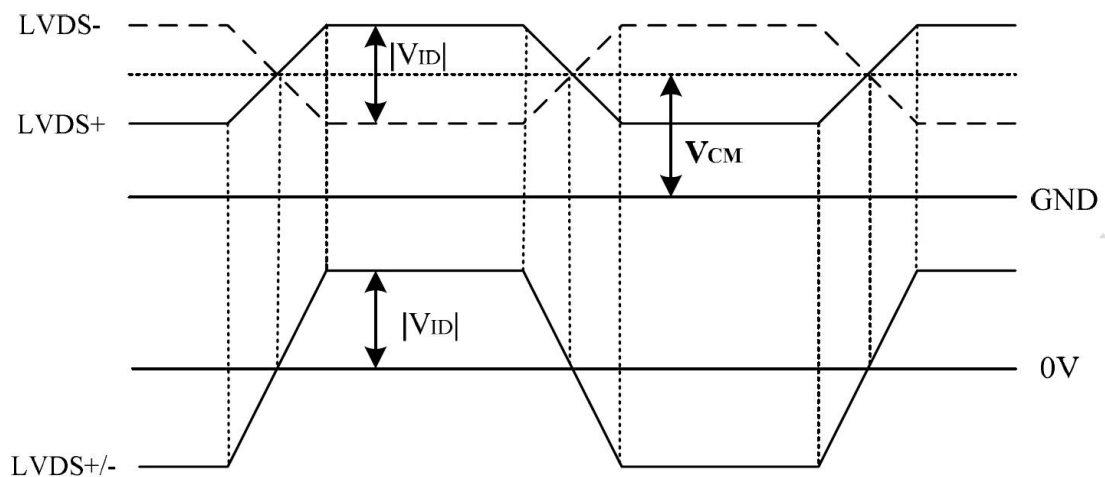

Data Mapping

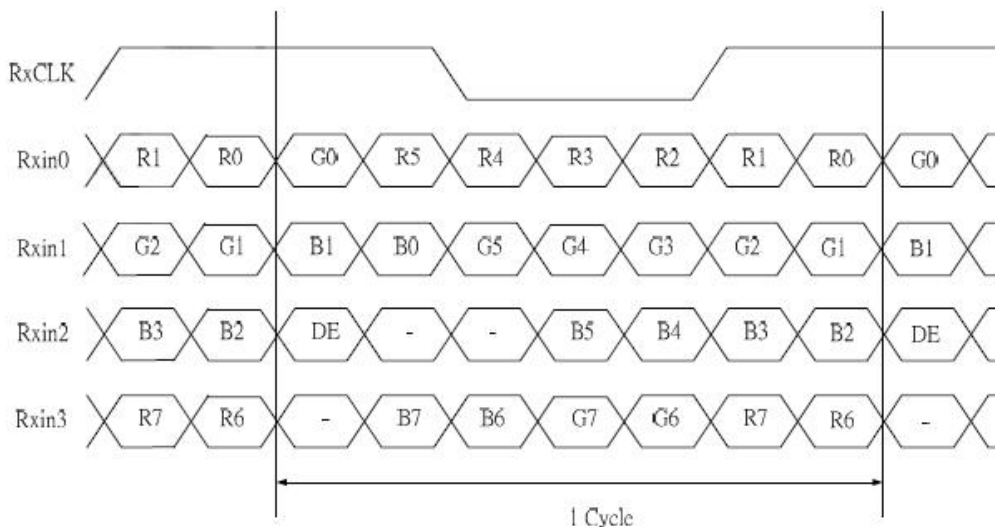


7.2.2 Interface Timings

Interface Timings

| Parameter | Symbol | Unit | Min. | Typ. | Max. |
|--------------------------|--------------------------|-------|--------|--------|--------|
| Frame Rate | -- | Hz | - | 60 | - |
| Frame Period | t_v | line | (815) | (823) | (1023) |
| Vertical Display Time | t_{VD} | line | 800 | | |
| Vertical Blanking Time | $t_{VW}+t_{VBP}+t_{VFP}$ | line | (15) | (23) | (33) |
| 1 Line Scanning Time | t_H | clock | (1410) | (1440) | (1470) |
| Horizontal Display Time | t_{HD} | clock | 1280 | | |
| Horizontal Blanking Time | $t_{HW}+t_{HBP}+t_{HFP}$ | clock | (60) | (160) | (190) |
| Clock Rate | $1/T_c$ | MHz | (68.9) | (71.1) | (73.4) |


Timing Characteristics

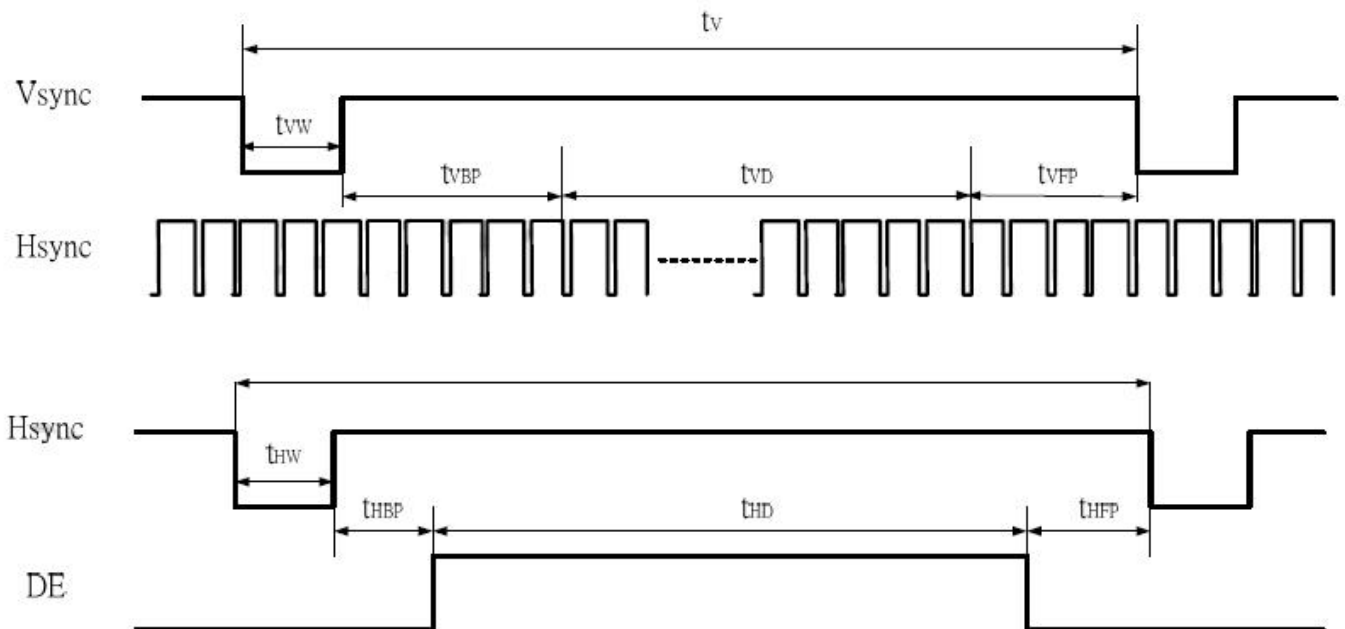

8 Power ON/OFF Sequence

VDD power on/off sequence is as follows. Interface signals are also shown in the chart. Signals from any system shall be Hi- resistance state or low level when VDD is off.

Power Sequence

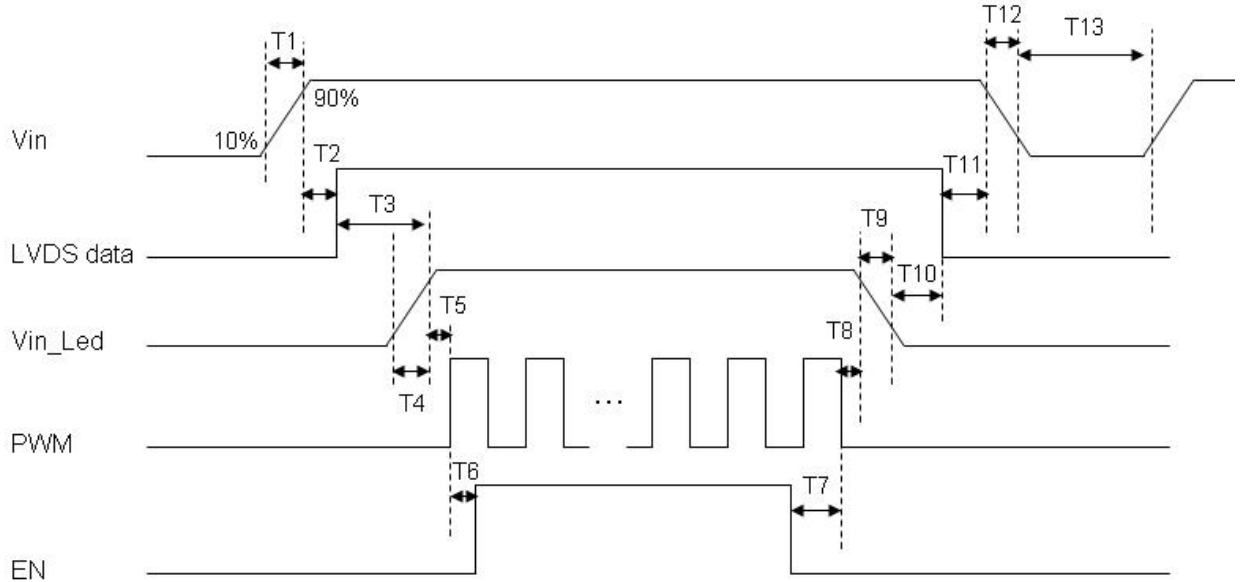

Power Sequencing Requirements

| Parameter | Symbol | Unit | Min | Typ. | Max |
|--|--------|------|-----|------|-----|
| VIN Rise Time | T1 | ms | 0.5 | -- | 10 |
| VIN Good to Signal Valid | T2 | ms | 30 | -- | 90 |
| Signal Valid to Backlight On | T3 | ms | 200 | -- | -- |
| Backlight Power On Time | T4 | ms | 0.5 | -- | -- |
| Backlight VDD Good to System PWM On | T5 | ms | 10 | -- | -- |
| System PWM ON to Backlight Enable ON | T6 | ms | 10 | -- | -- |
| Backlight Enable Off to System PWM Off | T7 | ms | 0 | -- | -- |
| System PWM Off to B/L Power Disable | T8 | ms | 10 | -- | -- |
| Backlight Power Off Time | T9 | ms | 0.5 | 10 | 30 |
| Backlight Off to Signal Disable | T10 | ms | 200 | -- | -- |
| Signal Disable to Power Down | T11 | ms | 0 | -- | 50 |
| VIN Fall Time | T12 | ms | 0.5 | 10 | 30 |
| Power Off | T13 | ms | 500 | -- | -- |

9 Optical characteristics


The optical characteristics are measured under stable conditions as following notes

| Item | Conditions | | Min. | Typ. | Max. | Unit | Note |
|---------------------------------|------------------|---------------------|---------------|---------|---------------|-------------------|--|
| Viewing Angle (CR>10) | Horizontal | Left θ_{x-} | (75) | (85) | - | degree | (1),(2),(3) |
| | | Right θ_{x+} | (75) | (85) | - | | |
| | Vertical | Up θ_{y+} | (75) | (85) | - | | |
| | | Down θ_{y-} | (75) | (85) | - | | |
| Contrast Ratio | Center | | (600) | (800) | - | - | (1),(2),(4) |
| Response Time | Rising + Falling | | - | (25) | (50) | ms | (1),(2),(5) |
| Color Chromaticity (CIE1931) | Red | x | Typ. -0.03 | (0.561) | Typ. +0.03 | - | (1),(2),(3) $\theta_x=\theta_y=0^\circ$ |
| | Red | y | | (0.334) | | - | |
| | Green | x | | (0.341) | | - | |
| | Green | y | | (0.568) | | - | |
| | Blue | x | | (0.161) | | - | |
| | Blue | y | | (0.129) | | - | |
| | White | x | | (0.313) | | - | |
| | White | y | | (0.329) | | - | |
| NTSC | - | | - | (45) | - | % | (1),(2),(3) $\theta_x=\theta_y=0^\circ$ |
| White Luminance | Center | | (300) | (350) | - | cd/m ² | (1),(2),(6) |
| Luminance Uniformity | 9Points | | (70) | (75) | - | % | (1),(2),(6) |

Note (1). Measurement Setup:

The LCD module should be stabilized at given temperature(25°C) for 15 minutes to Avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting backlight for 15 minutes in a windless room.

Measurement Setup

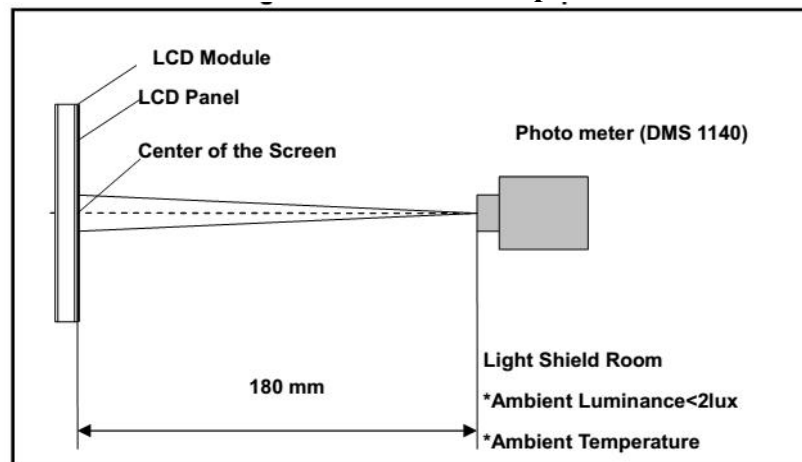


Note (2). The LED input parameter setting as:

V_LED: 12V

PWM_LED: duty 100 %

Note (3). Definition of Viewing Angle

Definition of Viewing Angle

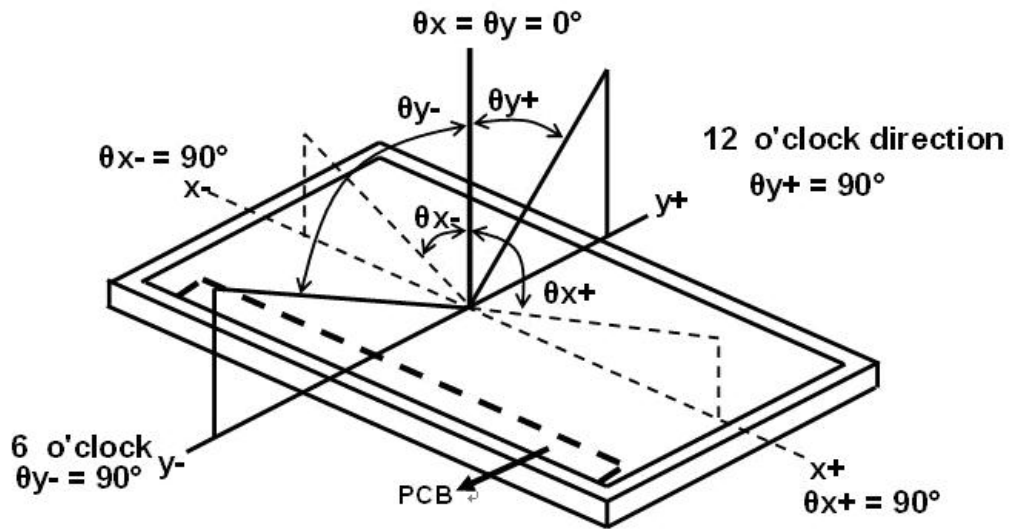

Note (4). Definition Of Contrast Ratio (CR)


The contrast ratio can be calculated by the following expression

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$

L63: Luminance of gray level 255, L0: Luminance of gray level 0

Note (5). Definition Of Response Time (TR, TF)

Definition of Response Time

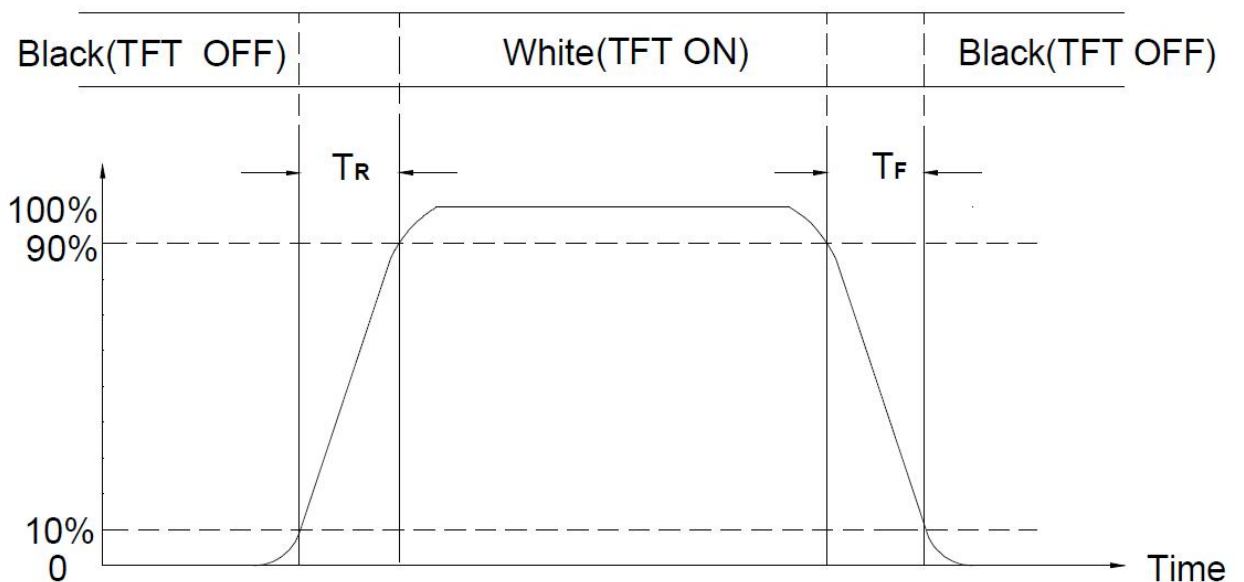


Note (6). Definition Of Luminance White

$$\text{Luminance uniformity} = \frac{\text{Min}(L1, L6, L7, L8, L9, L10, L11, L12, L13)}{\text{Max}(L1, L6, L7, L8, L9, L10, L11, L12, L13)} \times 100\%$$

H—Active area length V—Active area width


Measurement Locations

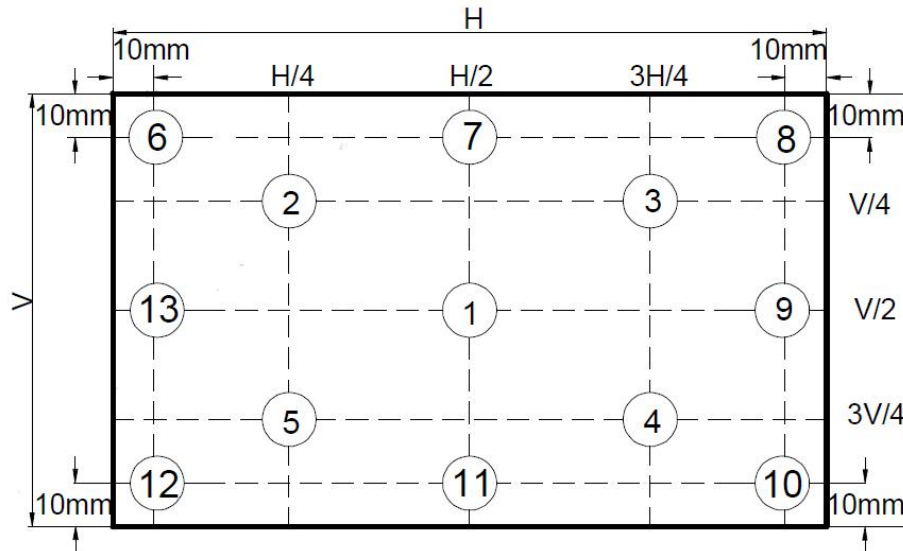

10 Package Specification

TBD

11 Illustration of Product Name

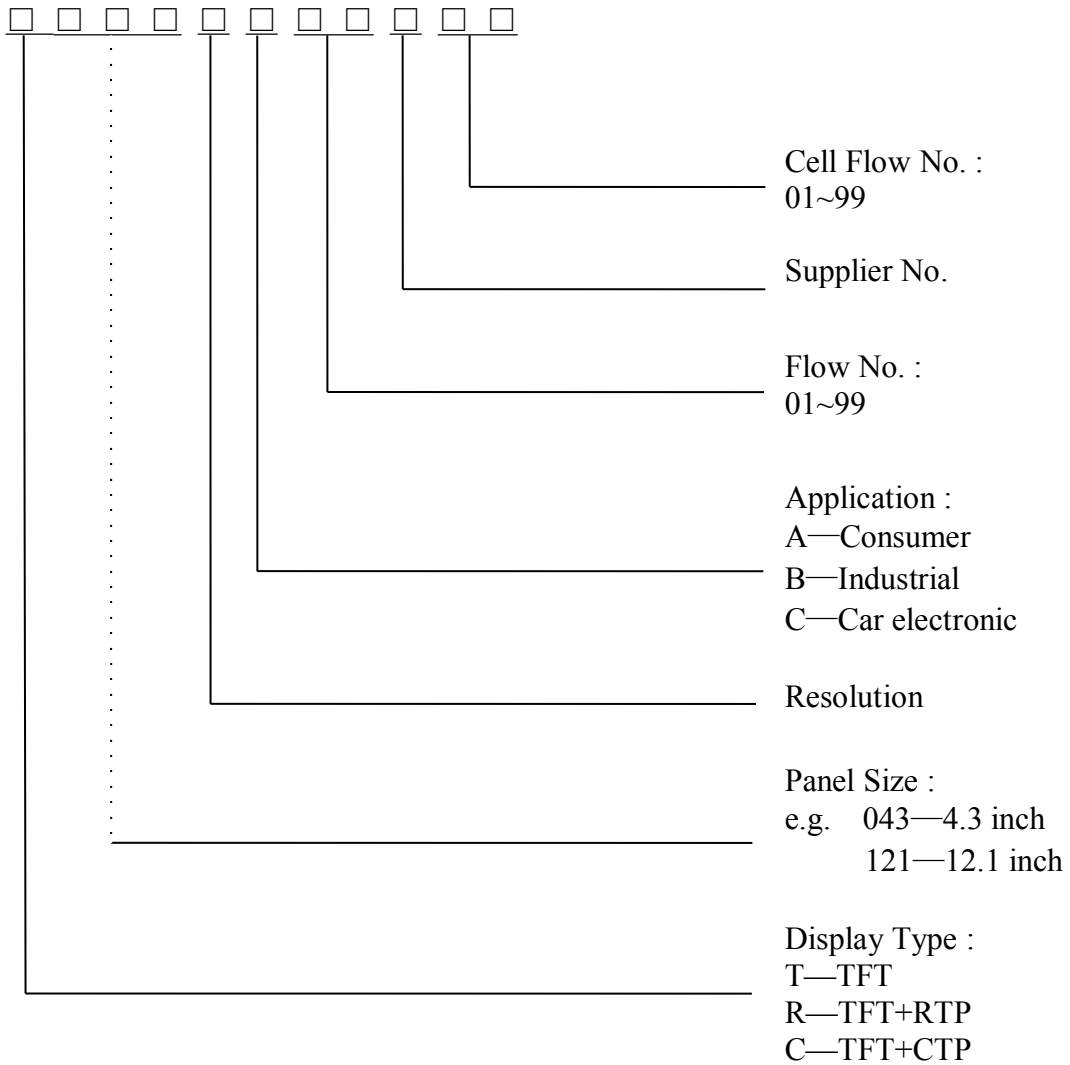

12 Precautions for operation and Storage

12.1 Precautions for Operation

- (1) Since the display panel is made of glass, do not apply any mechanical shock or impact or excessive force to it when installing the module. Any strong mechanical impact due to falling dropping etc. may cause damage (breakage or cracking).
- (2) If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.
- (3) The polarizer on the display surface is made of soft material and is easily scratched. Please take most care when handing. When the display surface is contaminated, please wipe it off gently by using moisten soft cloth with isopropyl alcohol, do not use water, ketone or aromatics. If still not completely clear, moisten cloth with isopropyl alcohol or ethyl alcohol solvents.
- (4) When handling the LCD module, please be sure that the body and the tools are properly grounded. And do not touch I/O pins with bare hands or contaminate I/O pins, it will cause disconnection or defective insulation of terminals.
- (5) Do not attempt to disassemble or process the LCD module.
- (6) The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated. To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.
- (7) Do not put one product on the other .Otherwise, it may cause the product to bescratched and/or change on cosmetic occur (ex. Newton ring).

12.2 Soldering

- (1) Soldering should be performed only on the I/O terminals.
- (2) Use soldering irons with proper grounding and no leakage.
- (3) Iron: no higher than 300°C and 3~4 sec during soldering.

12.3 Precautions for Storage

- (1) Please store LCD module in a dark place. Avoid exposure to sunlight, the light of fluorescent lamp or any ultraviolet ray.
- (2) Keep the environment temperature between 0°C and 40°C and the relative humidity less than 80%.Avoid high temperature and high humidity.
- (3) Keep the LCD modules stored in the room without acid ,alkali and harmful gas.

12.4 Warranty period

Visionox warrants for a period of 12 months from the shipping date when stored or used under normal condition.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А