



FEATURES

- 5 WATTS OUTPUT POWER
- OUTPUT CURRENT UP TO 1000mA
- STANDARD 1.25 X 0.80 X 0.40 INCH
- HIGH EFFICIENCY UP TO 84%
- 2:1 AND 4:1 WIDE INPUT VOLTAGE RANGE
- FIVE-SIDED SHIELD
- FIXED SWITCHING FREQUENCY
- STANDARD 24 PIN DIP PACKAGE & SMD TYPE PACKAGE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

SMD TYPE, M1 TYPE, M2 TYPE

DESCRIPTION

The FKC05 series offer 5 watts of output power from a package in an IC compatible 24pin DIP configuration without derating to 71°C ambient temperature and pin to pin compatible with FKC03 series. FKC05 series have 2:1 wide input voltage of 9-18, 18-36 and 36-75VDC. FKC05-W series have 4:1 ultra wide input voltage of 9-36 and 18-75VDC.

TECHNICAL SPECIFICATION All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power		5 Watts, max.
Voltage accuracy	Full load and nominal Vin	± 1%
Minimum load		0%
Line regulation	LL to HL at Full Load	± 0.2%
Load regulation	No Load to Full Load	Single ± 0.5% Dual ± 1%
Cross regulation(Dual)	Asymmetrical load 25% / 100% FL	± 5%
Ripple and noise	20MHz bandwidth	See table
Temperature coefficient		±0.02% / °C, max.
Transient response recovery time	25% load step change	200µs
Over load protection	% of FL at nominal input	170%, typ.
Short circuit protection		Continuous, automatic recovery
GENERAL SPECIFICATIONS		
Efficiency		See table
Isolation voltage	Input to Output	1600VDC, min.
	Input (Output) to Case DIP	1600VDC, min.
	SMD	1000VDC, min.
Isolation resistance		10 ⁹ ohms, min.
Isolation capacitance		300pF, max.
Switching frequency		300KHz, typ.
Approvals and standard		IEC60950-1, UL60950-1, EN60950-1
Case material		Nickel-coated copper
Base material		Non-conductive black plastic
Potting material		Epoxy (UL94-V0)
Dimensions		1.25 X 0.80 X 0.40 Inch (31.8 X 20.3 X 10.2 mm)
Weight	DIP	16g (0.55oz)
	SMD	18g (0.62oz)
MTBF (Note 1)	BELLCORE TR-NWT-000332	3.165 x 10 ⁶ hrs
	MIL-HDBK-217F	1.631 x 10 ⁶ hrs

INPUT SPECIFICATIONS			
Input voltage range	FKC05	12V nominal input	9 – 18VDC
		24V nominal input	18 – 36VDC
	FKC05-W	48V nominal input	36 – 75VDC
		24V nominal input	9 – 36VDC
		48V nominal input	18 – 75VDC
Input filter			Pi type
Input surge voltage 100mS max		12V input	36VDC
		24V input	50VDC
		48V input	100VDC
Input reflected ripple current	Nominal Vin and full load		20mA-p-p
Start up time	Nominal Vin and constant resistive load	Power up	450mS, max.
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature	Standard	-25°C~+85°C (with derating)	
	M1 (Note 6)	-40°C~+85°C (non-derating)	
	M2 (W series)	-40°C~+85°C (with derating)	
Maximum case temperature	Standard	+100°C	
	M1	+105°C	
Storage temperature range			-55°C ~ +105°C
Thermal impedance	Nature convection		20°C/watt
Thermal shock			MIL-STD-810F
Vibration			MIL-STD-810F
Relative humidity			5% to 95% RH
EMC CHARACTERISTICS			
EMI	EN55022		Class A
ESD	EN61000-4-2	Air Contact ± 8KV ± 6KV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 7)	EN61000-4-4	± 2KV	Perf. Criteria B
Surge (Note 7)	EN61000-4-5	± 1KV	Perf. Criteria B
Conducted immunity	EN61000-4-6	10 Vr.m.s	Perf. Criteria A










Model Number	Input Range	Output Voltage	Output Current		Output (4) Ripple & Noise	Input Current		Eff (4) (%)	Capacitor (5) Load max
			Min. load	Full load		No load (3)	Full load (2)		
FKC05-12S33	9 – 18 VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA	382mA	76	2200μF
FKC05-12S05	9 – 18 VDC	5 VDC	0mA	1000mA	50mVp-p	10mA	563mA	78	1000μF
FKC05-12S12	9 – 18 VDC	12 VDC	0mA	470mA	50mVp-p	10mA	603mA	82	220μF
FKC05-12S15	9 – 18 VDC	15 VDC	0mA	400mA	50mVp-p	10mA	649mA	81	150μF
FKC05-12D05	9 – 18 VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA	563mA	78	± 680μF
FKC05-12D12	9 – 18 VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA	597mA	81	± 100μF
FKC05-12D15	9 – 18 VDC	± 15 VDC	0mA	± 190mA	50mVp-p	15mA	594mA	84	± 68μF
FKC05-24S33 (W)	18 – 36 (9 – 36) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	194mA (191mA)	75 (76)	2200μF
FKC05-24S05 (W)	18 – 36 (9 – 36) VDC	5 VDC	0mA	1000mA	50mVp-p	15mA(10mA)	285mA (278mA)	77 (79)	1000μF
FKC05-24S12 (W)	18 – 36 (9 – 36) VDC	12 VDC	0mA	470mA	50mVp-p	15mA(5mA)	305mA (305mA)	81 (81)	220μF
FKC05-24S15 (W)	18 – 36 (9 – 36) VDC	15 VDC	0mA	400mA	50mVp-p	15mA(10mA)	325mA (312mA)	81 (84)	150μF
FKC05-24D05 (W)	18 – 36 (9 – 36) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	15mA(10mA)	274mA (282mA)	80 (78)	± 680μF
FKC05-24D12 (W)	18 – 36 (9 – 36) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	20mA(10mA)	288mA (295mA)	84 (82)	± 100μF
FKC05-24D15 (W)	18 – 36 (9 – 36) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	20mA(10mA)	308mA (297mA)	81 (84)	± 68μF
FKC05-48S33 (W)	36 – 75 (18 – 75) VDC	3.3 VDC	0mA	1000mA	50mVp-p	10mA(5mA)	98mA (100mA)	74 (73)	2200μF
FKC05-48S05 (W)	36 – 75 (18 – 75) VDC	5 VDC	0mA	1000mA	50mVp-p	10mA(10mA)	143mA (138mA)	77 (79)	1000μF
FKC05-48S12 (W)	36 – 75 (18 – 75) VDC	12 VDC	0mA	470mA	50mVp-p	10mA(10mA)	151mA (155mA)	82 (80)	220μF
FKC05-48S15 (W)	36 – 75 (18 – 75) VDC	15 VDC	0mA	400mA	50mVp-p	10mA(10mA)	162mA (160mA)	81 (82)	150μF
FKC05-48D05 (W)	36 – 75 (18 – 75) VDC	± 5 VDC	0mA	± 500mA	50mVp-p	10mA(10mA)	141mA (145mA)	78 (76)	± 680μF
FKC05-48D12 (W)	36 – 75 (18 – 75) VDC	± 12 VDC	0mA	± 230mA	50mVp-p	5mA(10mA)	147mA (151mA)	82 (80)	± 100μF
FKC05-48D15 (W)	36 – 75 (18 – 75) VDC	± 15 VDC	0mA	± 190mA	50mVp-p	10mA(10mA)	150mA (156mA)	83 (80)	± 68μF

Note

1. BELLCORE TR-NWT-000332. Case 1 : 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment).
2. Maximum value at nominal input voltage and full load of standard type.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. M1 version is more efficient, therefore, it can be operated in a more extensive temperature range than standard and M2 version.
7. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220μF/100V, ESR 48mΩ
8. There is no pin at PIN10 & PIN15 for FKC05-W series.

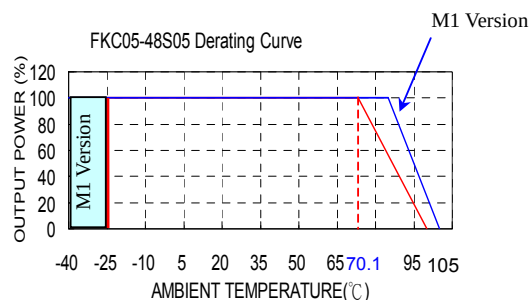

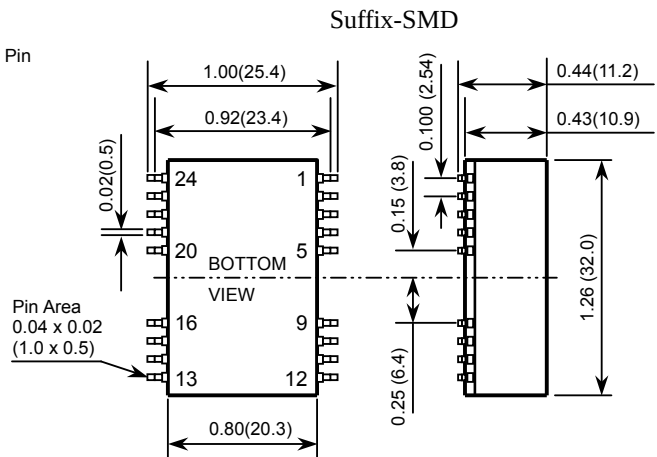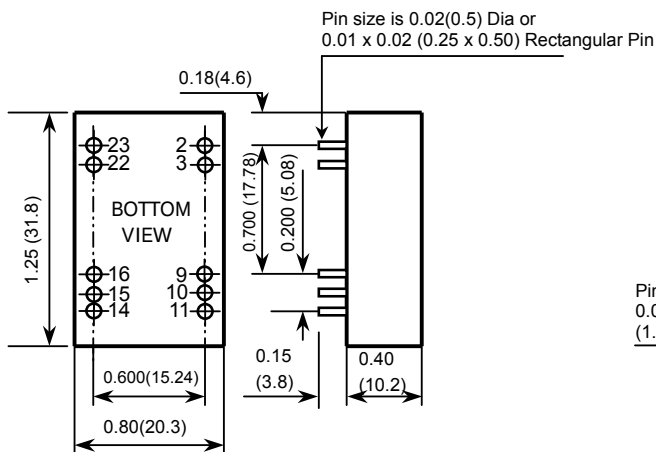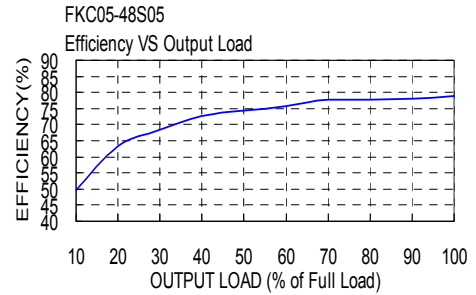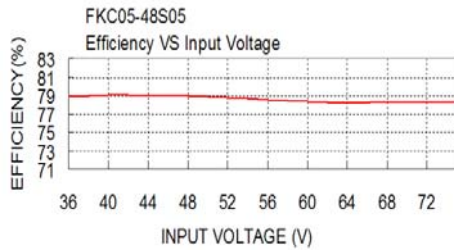

1. All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
2. Pin pitch tolerance ±0.01(0.25)
3. Pin dimension tolerance ±0.004 (0.1)

DIP PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC(Note 8)	NC(Note 8)	15	NC(Note 8)	NC(Note 8)
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT

SMD PIN CONNECTION

PIN	SINGLE	DUAL	PIN	SINGLE	DUAL
2	- INPUT	- INPUT	23	+ INPUT	+ INPUT
3	- INPUT	- INPUT	22	+ INPUT	+ INPUT
9	NC	COMMON	16	- OUTPUT	COMMON
10	NC	NC	15	NC	NC
11	NC	- OUTPUT	14	+ OUTPUT	+ OUTPUT
Others	NC	NC	Others	NC	NC



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А