

MPU/MDU150 Series

AC-DC Power Supplies

The innovative MPU products incorporate Power Factor Correction (PFC) with a low-profile package designed to meet 1U height constraints. The MPU150-4530G and MPU150-4350G provide high current +3.3 V and +5 V on a single platform to support mixed-mode, high-speed digital circuitry. Bel Power Solutions unique dual converter architecture combines high reliability with exceptional regulation.

All multiple output models feature remote sense on outputs V1 and V2 to provide independent compensation of output cable losses. Other standard features include independent current sharing on V1 and V2, thermal shutdown, and remote inhibit. Airflow of 300 linear feet per minute (LFM) is required to deliver the full power density of 3.0 watts per cubic inch.

The MDU150 Series provides the same benefits as the MPU150 Series, with nominal 48 volt DC input.



Key Features & Benefits

- RoHS Compliant
- Power Factor Correction (PFC)
- Low-profile height fits 1U constraints
- Dual main outputs provide 3.3 V and 5 V for mixed mode applications
- Single wire current sense on outputs V1 and V2
- Remote sense on outputs V1 and V2
- Overtemperature, overload, and overvoltage protection
- Available with metric or SAE mountings
- Greater than 340000 Hours MTBF
- MDU150 models have 48 VDC input



bel POWER
SOLUTIONS &
PROTECTION

a bel group

belfuse.com/power-solutions

1. AC INPUT, MULTIPLE-OUTPUT MODEL SELECTION

150 W with 300 LFM Forced-Air Cooling - Isolated V3 and V4 can be used as positive or negative outputs

MODEL ⁶	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT ¹	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE % pk-pk ²	INITIAL SETTING ACCURACY
MPU150-3300G	+3.3V	3.15V to 3.80V	35A	0.6%	1.5%	1.5%	3.28V to 3.32V
	+5V	5.0V to 5.5V	20A	0.4%	3%	1%	4.98V to 5.02V
	+12V	Fixed	2A	0.4%	3%	1%	11.76V to 12.24V
MPU150-3524G	+5V	5.0V to 5.5V	17.5A	0.4%	1%	1%	4.98V to 5.02V
	+12V	10.8V to 13.2V	4A	0.4%	3%	1%	11.94V to 12.06V
	+24V	Fixed	2A	0.4%	3%	1%	23.52V to 24.48V
MPU150-4000G	+5V	5.0V to 5.5V	30A ⁴	0.4%	1%	1%	4.98V to 5.02V
	+12V	10.8V to 13.2V	8A	0.4%	1%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A	0.4%	1%	1%	11.94V to 12.06V
	5V	5.0V to 5.5V	2A	0.4%	1%	1%	4.98V to 5.02V
MPU150-4230G	+2.5V	2.25V to 3.0V	30A ⁴	0.8%	2%	2%	2.49V to 2.51V
	+3.3V	3.15V to 3.8V	15A ⁴	0.6%	1.5%	1.5%	3.28V to 3.32V
	12V	10.8V to 13.2V	4A ⁵	0.4%	1%	1%	11.94V to 12.06V
	5V	5.0V to 5.5V	2A ⁵	0.4%	1%	1%	4.98V to 5.0V
MPU150-4350G	+3.3V	3.15V to 3.80V	30A ⁴	0.6%	1.5%	1%	3.28V to 3.32V
	+5V	5.0V to 5.5V	15A ⁴	0.4%	1%	1%	5.00V to 5.04V
	12V	10.8V to 13.2V	3A ⁵	0.4%	7%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A ⁵	0.4%	7%	1%	11.94V to 12.06V
MPU150-4530G	+5V	5.0V to 5.5V	30A ⁴	0.4%	1%	1%	4.98V to 5.02V
	+3.3V	3.15V to 3.60V	15A ⁴	0.6%	1.5%	1.5%	3.28V to 3.32V
	12V	10.8V to 13.2V	3A ⁵	0.4%	7%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A ⁵	0.4%	7%	1%	11.94V to 12.06V

NOTES:

- ¹ The MPU/MDU150 products require a minimum of 300 LFM of forced-air cooling under ALL load conditions. It is recommended that the airflow be applied from the input side of the power supply blowing towards the output.
- ² Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
- ³ Total power of 180 Watts.
- ⁴ Total current between V1 and V2 is 30A, maximum rating.
- ⁵ Total current between V3 and V4 is 5A, maximum rating.
- ⁶ Non-G models use lead solder exemption and are not recommended for new designs.

2. DC INPUT MODEL SELECTION

150 W with 300 LFM Forced-Air Cooling - Isolated V3 and V4 can be used as positive or negative outputs

MODEL ⁶	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT ¹	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE % pk-pk ²	INITIAL SETTING ACCURACY
MDU150-3300G	+3.3V	3.15V to 3.80V	35A	0.6%	1.5%	1.5%	3.28V to 3.32V
	+5V	5.0V to 5.5V	20A	0.4%	3%	1%	4.98V to 5.02V
	+12V	N/A	2A	0.4%	3%	1%	11.76V to 12.24V
MDU150-4000G	+5V	5.0V to 5.5V	30A ³	0.4%	1%	1%	4.98V to 5.02V
	+12V	10.8V to 13.2V	8A	0.4%	1%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A	0.4%	1%	1%	11.94V to 12.06V
MDU150-4230G	5V	5.0V to 5.5V	2A	0.4%	1%	1%	4.98V to 5.02V
	+2.5V	2.25V to 3.0V	30A ³	2%	2%	2%	2.49V to 2.51V
	+3.3V	3.15V to 3.8V	15A ³	1.5%	1.5%	1.5%	3.28V to 3.32V
MDU150-4350G	12V	10.8V to 13.2V	3A	1%	1%	1%	11.94V to 12.06V
	5V	5.0V to 5.5 V	2A	1%	1%	1%	4.98V to 5.0V
	+3.3V	3.15V to 3.8V	30A ⁵	1.5%	1.5%	1%	3.28V to 3.32V
MDU150-4530G	+5V	5.0V to 5.5V	15A ⁵	1%	1%	1%	5.00V to 5.04V
	12V	10.8V to 13.2V	3A ⁴	7%	7%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A ⁴	7%	7%	1%	11.94V to 12.06V
MDU150-4530G	+5V	5.0V to 5.5V	30A ³	0.4%	1%	1%	4.98V to 5.02V
	+3.3V	3.15V to 3.60V	15A ³	0.6%	1.5%	1.5%	3.28V to 3.32V
	12V	10.8V to 13.2V	3A ⁴	0.4%	7%	1%	11.94V to 12.06V
	12V	10.8V to 13.2V	3A ⁴	0.4%	7%	1%	11.94V to 12.06V

NOTES:

- ¹ The MPU/MDU150 products require a minimum of 300 LFM of forced-air cooling under ALL load conditions. It is recommended that the airflow be applied **from the input side of the power supply blowing towards the output.**
 - ² Maximum peak-to-peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.
 - ³ Total current between V1 and V2 is 30A, maximum rating.
 - ⁴ Total current between V3 and V4 is 5A, maximum rating.
 - ⁵ Total current between V1 and V2 is 40A, maximum rating.
 - ⁶ Non-G models use lead solder exemption
- Models highlighted in yellow are not recommended for new designs. Please contact factory for availability.

3. ORDERING INFORMATION

OPTIONS	SUFFIXES TO ADD TO PART NUMBER
Metric Mounting	Add "M" as a suffix to the model number to order chassis with M4 x 0.7 mounting inserts.
RoHS lead solder exempt	No RoHS suffix character required.
RoHS compliant for all 6 substances	Add "G" as the last character of the part number.



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

4. MPU150 INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range.	85		264	VAC
Input Frequency	AC input.	47		63	Hz
Hold-up Time	After last AC line peak at 150 watts.	MPU150-4350G All other models	17.5 20		ms
Input Current	85 VAC at full rated load.	MPU150		3.0	A _{RMS}
Input Protection	Non-user serviceable internally located AC input line fuse.				
Inrush Surge Current	Internally limited by thermistor. Vin = 230 VAC, one cycle, 25°C.			35	A _{PK}
Power Factor	Per EN61000-3-2.	0.95			W/VA
Operating Frequency	Switching frequency of main output transformer.	100		120	kHz
	Switching frequency of secondary transformer.	65		90	
	Switching frequency of Power Factor Correction circuit.		60		

5. MDU150 INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Input Voltage - DC	Continuous input range.	36		75	VDC
Brown Out Protection	Lowest DC input voltage that regulation is maintained with full rated loads.	34			VDC
Hold-up Time	At 150 watts, over DC input range.	20			ms
Input Current	36 VDC at full rated load.			6.4	A _{RMS}
Input Protection	Non-user serviceable internally located AC input line fuse.				
Operating Frequency	Switching frequency of main output transformer.		100		kHz
	Switching frequency of secondary transformer.		70		
Inrush Current	Consult factory.				

6. OUTPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full Rated Load, 110 VAC. Varies with distribution of loads among outputs.	65	75		%
Minimum Load, V1	Minimum load required to maintain regulation on, V2 at maximum load.	Triple output models V1	4		A
	Minimum load required on single output models.	Quad output models V1	3		
		Single output models V1	0		
Minimum Load, V3	Minimum load required to maintain regulation on V4 at maximum load.	Quad output models V3	0.3		A
		Triple output models V3	0		
Ripple and Noise	Full load, 20 MHz bandwidth.	See Model Selection Charts			
Output Power	With 300 LFM forced air cooling. (Note 1)	150		Watts	
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on.	0	3	5	%
Regulation	Varies by output. Total regulation includes: line changes over the specified. Input range, changes in load starting at 20% load and changing to 100% load.	See Model Selection Charts			
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 5% max. deviation.		500		µs
Turn-on Delay	Time required for initial output voltage stabilization.		2		s
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.		50		ms

NOTE 1: This product is not rated for convection applications.

7. INTERFACE SIGNALS AND INTERNAL PROTECTION

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	Latch style overvoltage protection. Available on V1, V2, all models, and V3 on all models except MPU150-3300G.	2.5 V output, V1	3.0	3.25	V
		3.3 V output, V1	4.1	4.65	
		3.3 V output, V2	3.8	4.2	
		5 V output, V1, V2	6.0	6.4	
		12 V output, V2	14	16	
		12 V output, V3	14	19	
		MPU150-4350G 3.3 V output, V1	4.3	4.65	
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.				
Overtemperature Protection	System shutdown due to excessive internal temperature, automatic reset.				
Output Good Signal, Low to High Transition	TTL compatible signal available for V1. Pull-up resistor is 10kΩ. Signal is high when output is above the specified limits. Signal shall remain low for 20 ms following loss of Output Good.	3.3 V	3.16	3.25	V
		5 V	4.75	4.90	
Input Power Fail Warning	TTL compatible logic signal. Time before regulation dropout due to loss of input power. May be used as independent PSOK signal in redundant applications.	5			ms
Current Share	Accuracy of shared current with up to 6 parallel units. Single wire current share on V1 and V2 with return via -Sense return.		10		%
Remote Sense	Available on V1 and V2. Total voltage compensation for cable losses with respect to the main output.			500	mV
Inhibit	Output voltage is inhibited by application of an external high (5V) signal.				

8. SAFETY, REGULATORY, AND EMI SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Safety Approvals	Approved to the latest edition of the following standards: CSA/UL60950-1, EN60950-1 and IEC60950-1				
Dielectric Withstand Voltage	Input to output per EN60950.	MPU150 MDU150	2600 1544		VDC
Electromagnetic Interference	FCC CFR title 47 Part 15 Sub-Part B - Conducted. EN55022 / CISPR 22 Conducted.	B B			Class
ESD Susceptibility	Per EN61000-4-2, level 4.	8			kV
Radiated Susceptibility	Per EN61000-4-3, level 3.	10			V/M
EFT/Burst	Per EN61000-4-4, level 3.	±2			kV
Input Transient Protection	Per EN61000-4-5, class 3.	MPU150: Line to Line	1		kV
		MPU150: Line to Ground	2		
		MDU150: Line to Line	0.5		
		MDU150: Line to Ground	0.5		
Insulation Resistance	Input to output.		10		MΩ
Leakage Current	Per EN60950.	Dual output MPU150 at 264 VAC		22	mA
		Single and triple output MPU150 at 264 VAC MDU150 at 72 VDC		1.7	
			(Not required by EN60950)		



Asia-Pacific
+86 755 298 85888

Europe, Middle East
+353 61 225 977

North America
+1 408 785 5200

9. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating.			10k	ASL Ft.
	Non-Operating.			40k	
Operating Temperature	Derate linearly above 50°C by 2.5% per °C.	At 100% load	0	50	°C
		At 50% load	0	70	
Storage Temperature		-55		85	°C
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up).		±0.02	±0.05	%/°C
Relative Humidity	Non-Condensing.	5		95	%RH
Shock	Peak acceleration.			20	GPK
Vibration	Random vibration, 10Hz to 2kHz, 3 axis.			6	GRMS

10. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION
Dimensions	8.00" x 4.20" x 1.50" (203.2mm x 106.7mm x 38.1mm)
Weight:	2 lb (0.89 kg)

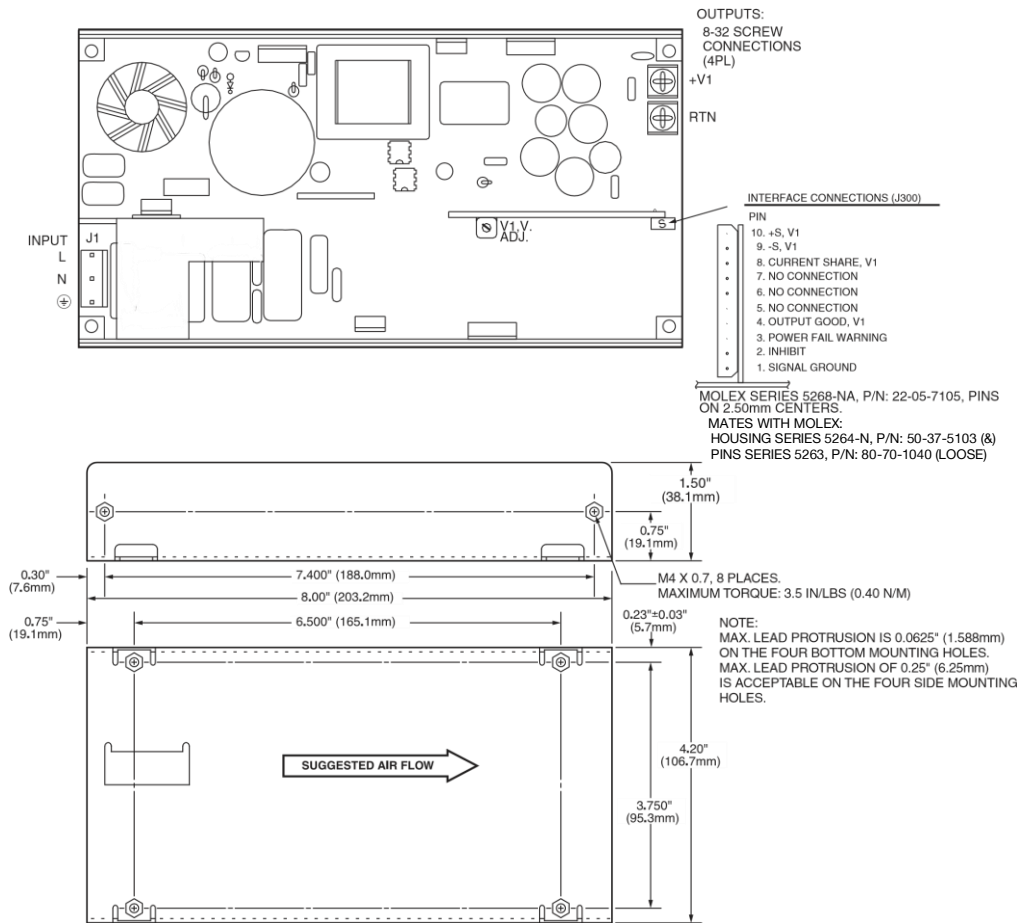


Figure 1. Mechanical Drawing – Single Output

CONNECTOR	MOLEX SERIES	HOUSING	PIN SERIES	PINS (LOOSE)	PINS (CHAIN)	WIRE GAUGE
J1 (ALL MODELS)	41695	09-50-8051	6838	08-50-0189	08-50-0187	18-20AWG
	41695	09-50-8051	2478	08-50-0106	08-50-0105	18-20AWG
	2139	09-50-3051	2478	08-50-0106	08-50-0105	18-20AWG
J300	5264-N	50-37-5103	5263	08-70-1040	08-70-1039	22-28AWG

CHASSIS: 0.063" (1.6mm) ALUMINUM ALLOY, WITH CLEAR FINISH

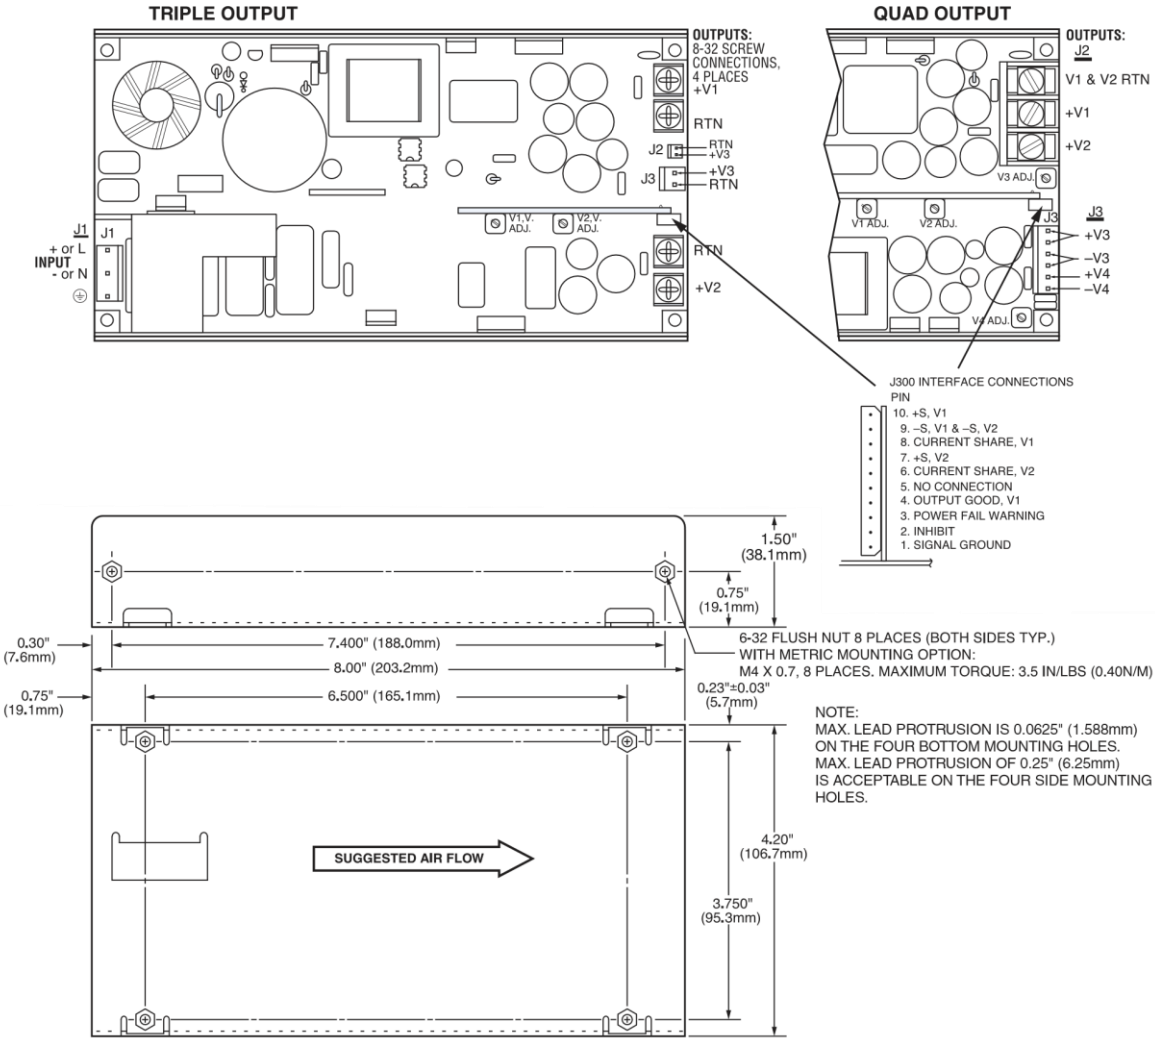


Figure 2. Mechanical Drawing – Triple & Quad Output

CONNECTOR	MOLEX SERIES	HOUSING	PIN SERIES	PINS (LOOSE)	PINS (CHAIN)	WIRE GAUGE
J1 (ALL MODELS)	41695	09-50-8051	6838	08-50-0189	08-50-0187	18-20AWG
	41695	09-50-8051	2478	08-50-0106	08-50-0105	18-20AWG
	2139	09-50-3051	2478	08-50-0106	08-50-0105	18-20AWG
J2 (TRIPLE OUTPUT)	5051-N	22-01-1022	2759	08-50-0114	08-50-0113	22-30AWG
	5051-N	22-01-1022	2759	08-65-0805	08-65-0804	22-30AWG
J3 (TRIPLE OUTPUT)	41695	09-50-8021	6838	08-50-0189	08-50-0187	18-20AWG
	41695	09-50-8021	2478	08-50-0106	08-50-0105	18-20AWG
	2139	09-50-3021	2478	08-50-0106	08-50-0105	18-20AWG
J3 (QUAD OUTPUT)	41695	09-50-8061	6838	08-50-0189	08-50-0187	18-20AWG
	41695	09-50-8061	2478	08-50-0106	08-50-0105	18-20AWG
	2139	09-50-3061	2478	08-50-0106	08-50-0105	18-20AWG
J300	5264-N	50-37-5103	5263	08-70-1040	08-70-1039	22-28AWG

CHASSIS: 0.063" (1.6mm) ALUMINUM ALLOY, WITH CLEAR FINISH

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



tech.support@psbel.com
belfuse.com/power-solutions

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А