

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0480250091

Status:

Active

Overview:

magnetic_modular_jacks

Description:

Modular Jack, Right Angle, 10/100, with Integrated Magnetic and LED, 8/8, Tail Length 3.18mm (.125") for IR Reflow, Lead free

Documents:

3D Model

Drawing (PDF)

Product Specification PS-48025-005 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E107635

General

Product Family

Modular Jacks/Plugs

Series

48025

Comments

With LED

Component Type

PCB Jack

Magnetic

Yes

Overview

magnetic_modular_jacks

Performance Category

5

Power over Ethernet (PoE)

Non-PoE

Product Name

Magnetic Jack

Physical

Boot Color

N/A

Color - Resin

Black

Durability (mating cycles max)

750

Flammability

94V-0

Inverted / Top Latch

Yes

Keying to Mating Part

Yes

Lightpipes/LEDs

LEDs

Material - Metal

Brass, Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Nylon

Orientation

Right Angle (Side Entry)

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness Recommended (in)

0.063 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Tray

Pitch - Mating Interface (in)

0.050 In

Pitch - Mating Interface (mm)

1.27 mm

Pitch - Term. Interface (in)

0.050 In

Pitch - Term. Interface (mm)

1.27 mm

Ports

1

Positions / Loaded Contacts

8/8

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40°C to +70°C

Termination Interface: Style

Through Hole

Waterproof / Dustproof

No

Wire/Cable Type

N/A

Electrical

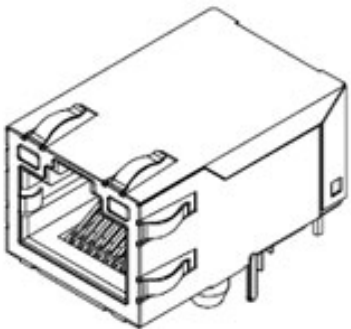


image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

48025Series

Mates With

FCC 68 Plugs

Current - Maximum per Contact	1.5A
Grounding to PCB	Yes
Grounding to Panel	Panel Ground Tab
Shielded	Yes
Voltage - Maximum	150V AC (RMS)







Material Info

Reference - Drawing Numbers

Packaging Specification	PK-48025-001
Product Specification	PS-48025-005
Sales Drawing	SD-48025-007
Test Summary	TS-48025-007

This document was generated on 05/26/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

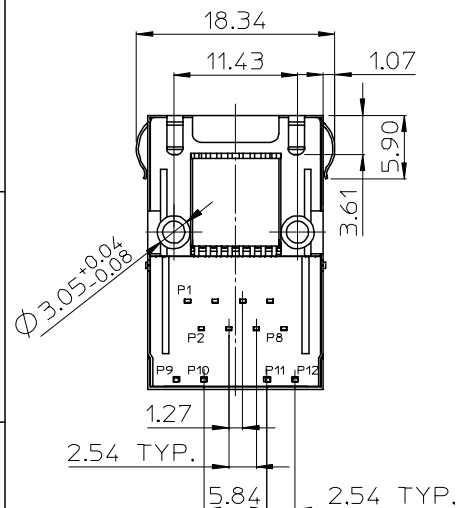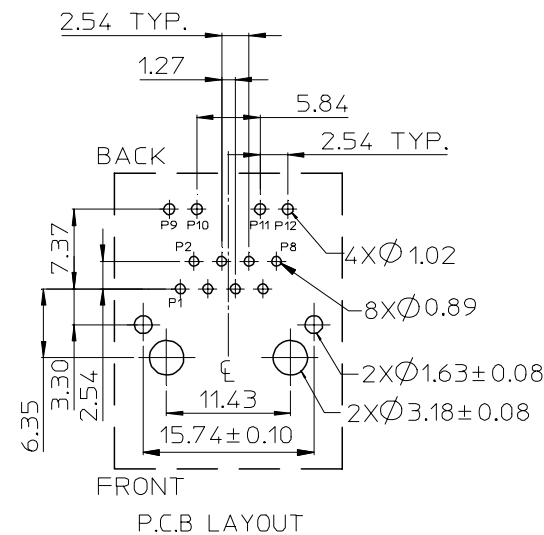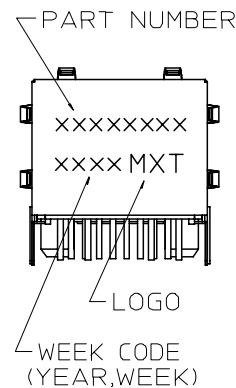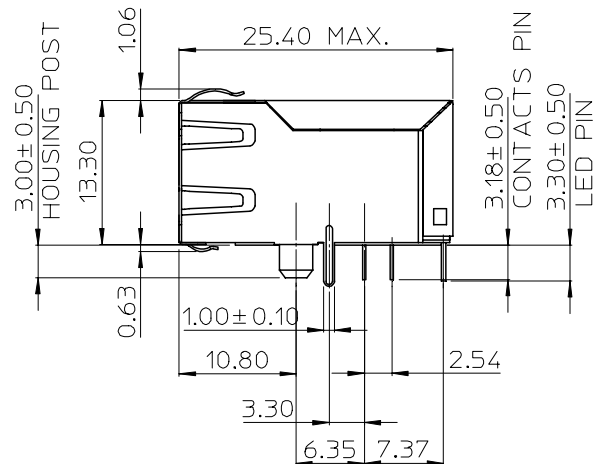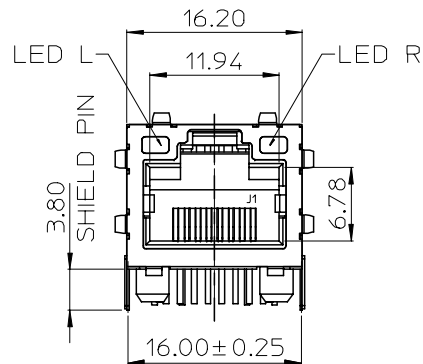

NOTES:

1.MATERIAL:

METAL SHELL: BRASS
HOUSING: POLYAMIDE, GLASS FIBER FILLED, UL94-0,COLOR BLACK
INSERT: POLYAMIDE, GLASS FIBER FILLED, UL94-0,COLOR BLACK
TERMINAL: PHOSPHOR BRONZE

2.PLATING:

TERMINAL:
CONTACT AREA: GOLD(Au),THICKNESS=50 MICROINCH/1.27 MICROMETER
SOLDER TAIL: TIN(Sn),THICKNESS=100 MICROINCH MINIMUM
UNDER PLATE: NICKEL (Ni).

METAL SHELL:

SOLDER TAIL: TIN(Sn),THICKNESS=100 MICROINCH MINIMUM
UNDER PLATE: NICKEL (Ni),(SOLDERING AVAILABLE)
SURFACE APPEARANCE: BRIGHT.

3.RECOMMENDED PCB THICKNESS: 1.60±0.05

4.PRODUCT SPECIFICATION REFER TO PS-48025-005

5.TEST SUMMARY REFER TO TS-48025-007

6.PACKAGING SPECIFICATION REFER TO PK-48025-001

7.LEAD FREE AND RoHS COMPLIANT PRODUCT.

RoHS FOR 48025-0001	2006/10/04
EC NO: SH2007-0129	2006/10/04
DRW:ALLIN	2006/10/04
CHKD:	2006/10/04
APPR:WWSCHANG	2006/10/04
REV	DESCRIPTION

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---
ANGULAR ± 3 °		

DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONS

DIMENSION STYLE MM ONLY

DRAWN BY	DATE
LINDA	2006/08/08
CHECKED BY	DATE
ALLEN LIN	2006/08/10
APPROVED BY	DATE
ERICK LAN	2006/08/10

MATERIAL NO.
48025-0091

SIZE
A3

SCALE

TITLE

MODULAR JACK WITH
INTEGRATED MAGNETICS
WITH LED

DOCUMENT NO.
SD-48025-007


SHEET NO.
1 OF 2

DESIGN UNITS METRIC


THIRD ANGLE
PROJECTION

molex

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

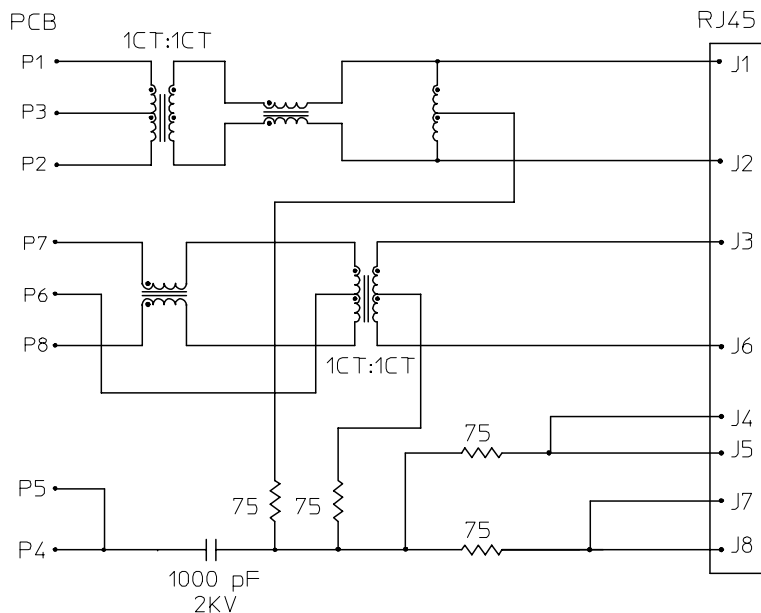

MAGNETIC SCHEMATIC

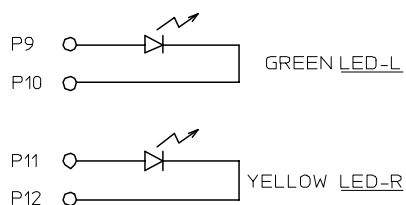

LED SCHEMATIC

MAGNETIC ELECTRICAL SPECIFICATION

PARAMETER	SPECIFICATIONS		
INSERTION LOSS	100 KHz	1-125 MHz	
	1.2 dB MAX	0.2+0.002*f~1.4 dB MAX	
RETURE LOSS (Z OUT=100 OHM±15%)	.1-30 MHz	30-60 MHz	60-80 MHz
	16 dB MIN	10-20*LOG ₁₀ (f/60 MHz) dB MIN.	10 dB MIN.
INDUCTANCE (OCL) (MEDIA SIDE, 0° +70° C)	350 uH MIN	MEASURED AT 100 KHz, 100 mVRMS) AND WITH 8 mA DC BIAS	
CROSSTALK, ADJACENT CHANNELS	1 MHz	10-100 MHz	
	50 dB MIN	50-17*LOG ₁₀ (f/10) dB MIN.	
COMMON MODE REJECTION RATIO	2 MHz	30-200 MHz	
	50 dB MIN	15-20*LOG ₁₀ (f/200) dB MIN.	
DC RESISTANCE 1/2 WINDING	0.60 OHMS MAX.		
DC RESISTANCE IMBALANCE	±0.065 OHMS MAX (CENTER TAP SYMMETRY)		
HI-POT ISOLATION	1500 VRMS AC		

NOTE: f IS FREQUENCY IN MHz.

LED ELECTRICAL SPECIFICATION

PARAMETER	YELLOW (TYP.)		GREEN (TYP.)		UNITS	TEST CONDITIONS
POWER DISSIPATION	105		105		mW	
REVERSE VOLTAGE	5		5		V	
PEAK WAVELENGTH	590		565		nm	I _F =20mA
FORWARD VOLTAGE	2.1	MAX.=2.5	2.2	MAX.=2.5	V	I _F =20mA

SEE SHEET 1 EC NO: SH2007-0129 DRWN:ALLIN CHKD: APPR:WWSCHANG	2006/10/04 2006/10/04 2006/10/04	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
B				4 PLACES ± --- ± ---		DRAWN BY LINDA		TITLE MODULAR JACK WITH INTEGRATED MAGNETICS WITH LED			
				3 PLACES ± --- ± ---		CHECKED BY ALLEN LIN					
				2 PLACES ± 0.25 ± ---		APPROVED BY ERICK LAN		MOLEX INCORPORATED			
				1 PLACE ± 0.25 ± ---		MATERIAL NO. 48025-0091					
				ANGULAR ± 3 °		DOCUMENT NO. SD-48025-007		SHEET NO. 2 OF 2			
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А