

# PDS-208G

## 8 + 2-Port Digital Ceiling PoE Switch



The Microsemi PDS-208G digital ceiling PoE switch offers an optimal and cost-effective solution for PoE lighting and other digital ceiling applications. It allows lighting fixtures and other Ethernet terminals to receive power and data over standard Ethernet cables in the most efficient way. The PDS-208G is a 240 W fanless switch, designed to be deployed in the ceiling or in communications rooms. Output PoE power can be configured per port, and the device supports full-power mode by providing 30 W for eight ports simultaneously and any individual port can go up to 72 W.

The 240 W high-speed switch offers Layer 2 management capabilities. It has eight 10/100/1000 Mbps (Gigabit Ethernet) ports with PoE capabilities based on Microsemi 4-pair PoE technology that enables 50% power loss saving on the Ethernet cables. It also has two Gigabit ports that can be used for uplinks.

### Key Features

- High-efficiency IEEE 802.3az energy-efficient-PoE 4-pair solution
- Supports data rates of 10/100/1000 Mbps
- Fanless design—silent operation and enhanced reliability
- Full-power PoE functionality (IEEE 802.3at)—8 × 30 W
- High-power PoE capability—ports can go up to 72 W
- Layer 2 switch—including 802.1Q-based VLANs enables segmentation of networks for improved performance and security
- Configuration and monitoring—Web management and SNMP

### Specifications

| Feature                     | Description  |
|-----------------------------|--|
| Number of ports             | 8 + 2  |
| Data rates                  | 10/100/1000 Mbps   |
| PoE output                  | 240 W  |
| Pin assignment and polarity | 4/5 (+), 7/8 (-), 1/2 (-), and 3/6 (+)<br>Output power voltage: 55 VDC<br>User port power: 30 W guaranteed |
| MAC address table           | 8K   |
| Jumbo frame                 | 2K   |

### Specifications

| Feature                               | Description  |
|---------------------------------------|--|
| VLAN                                  | IEEE 802.1Q VLAN, port-based, tag-based  |
| IGMP snooping                         | IPv4, IPv6   |
| Spanning tree                         | IEEE 802.1D-2004 rapid spanning tree   |
| Link aggregation                      | IEEE 802.3ad link aggregation control protocol (LACP) on uplink ports  |
| MIB support                           | MIB-II, SNMP MIB, PoE MIB RFC3621  |
| Bridge multicast groups               | 512  |
| Management                            | CLI, Web, Telnet, SNMP V2C   |
| Firmware upgrade                      | HTTP, TFTP   |
| Standards                             | IEEE 802.3 (Ethernet)<br>IEEE 802.3u (100Base-TX Fast Ethernet)<br>IEEE 802.3ab (1000Base-TX)<br>IEEE 802.3az (Energy Efficient Ethernet)<br>IEEE 802.3x (Flow Control and Back Pressure)<br>IEEE 802.3af and at (Power over Ethernet) |
| Input power requirements              | AC input voltage: 90 VAC to 264 VAC<br>AC frequency: 50 Hz to 60 Hz  |
| Weight                                | 4.5 kg   |
| Dimensions                            | 445 mm × 263 mm × 44 mm (L×W×H)  |
| Thermal                               | Passive cooling (no fan)   |
| Connectors                            | Shielded RJ-45, EIA 568A, and 568B   |
| AC input connector                    | Universal 3-pin (IEC60320 Type C14), with option to connect external junction box  |
| Environmental conditions              | Operating ambient temperature:<br>32 °F to 113 °F (0 °C to 45 °C)  |
|                                       | Operating humidity:<br>maximum 90%, non-condensing   |
|                                       | Storage temperature:<br>-40 °F to 158 °F (-40 °C to 70 °C)   |
|                                       | Storage humidity: maximum 95%, non-condensing  |
| Reliability                           | MTBF: 100,000 hours at 25 °C   |
| Warranty                              | 3 years  |
| Regulatory compliance                 | IEEE 802.3at (PoE), CE<br>RoHS-compliant, WEEE-compliant   |
| Electromagnetic emission and immunity | FCC Class B<br>CE<br>EN 55022 Class B<br>EN 55024<br>EN 61000-3-2<br>EN 61000-3-3  |
| Safety                                | UL/EN/IEC 60950-1  |


# PDS-208G

## 8 + 2-Port Digital Ceiling PoE Switch

### Ordering Information

| Microsemi Part Number | Name                        | Description                                     |
|-----------------------|-----------------------------|---|
| PDS-208G/F/M/AC-US    | Microsemi PDS-208G: US plug | 8 + 2 port digital ceiling PoE switch, AC input |
| PDS-208G/F/M/AC-EU    | Microsemi PDS-208G: EU plug | 8 + 2 port digital ceiling PoE switch, AC input |
| PDS-208G/F/M/AC-UK    | Microsemi PDS-208G: UK plug | 8 + 2 port digital ceiling PoE switch, AC input |
| PDS-208G/F/M/AC-AU    | Microsemi PDS-208G: AU plug | 8 + 2 port digital ceiling PoE switch, AC input |

### Microsemi Digital Ceiling

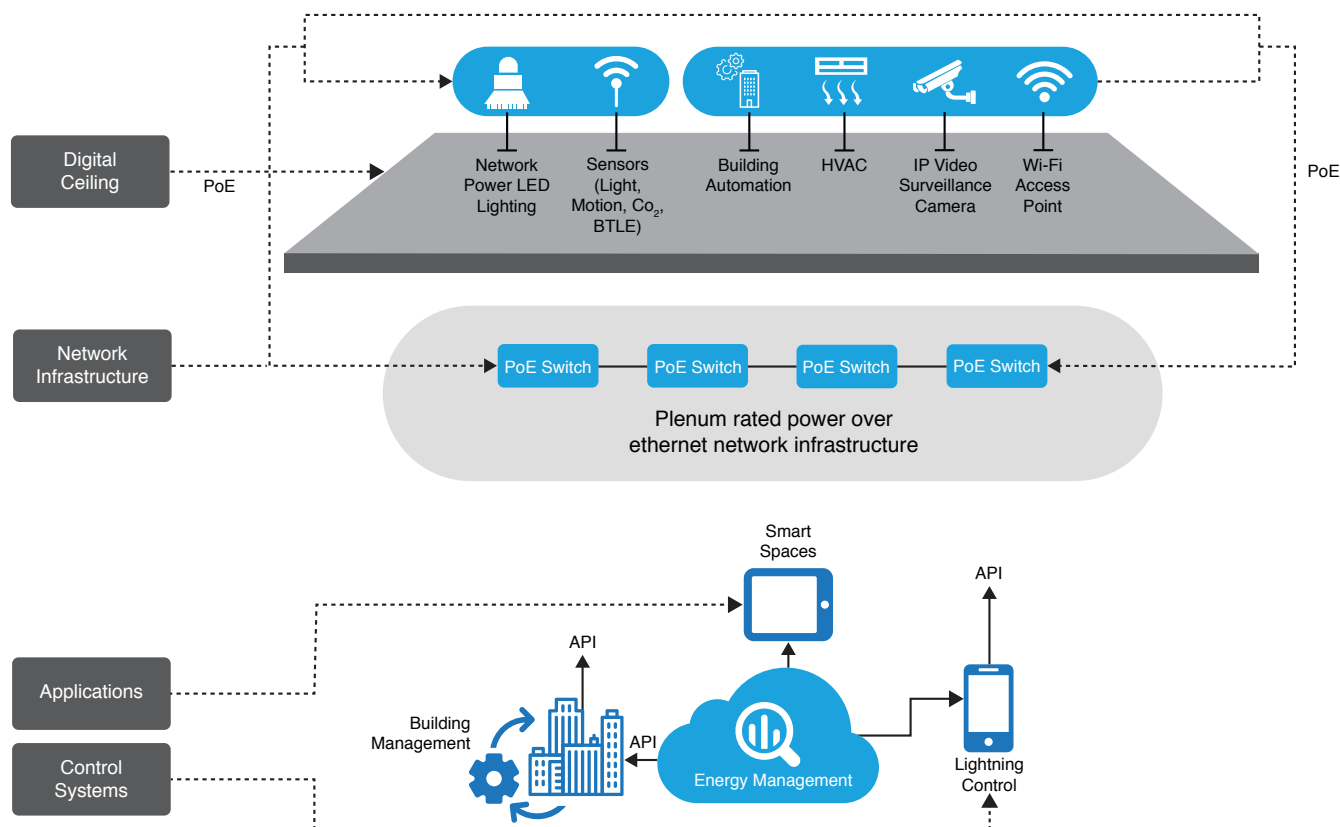

**Microsemi Corporate Headquarters**  
 One Enterprise, Aliso Viejo, CA 92656 USA  
 Within the USA: +1 (800) 713-4113  
 Outside the USA: +1 (949) 380-6100  
 Fax: +1 (949) 215-4996  
 Email: sales.support@microsemi.com  
 www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

©2018 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А