
Table of Contents

Z-PACK HS3 Connector	95-136
Product Line Overview	96-98
Part Number Selection Chart	99, 100
6 Row Connectors	101-112
10 Row Connectors	113-126
Coding Keys (10 Row Only)	127
Power and Guide Hardware	127-133
Mating Sequence Chart	134
Application Tooling and Equipment	135

Z-PACK HS3 Connector (Continued)


Product Line Overview

Product Facts

- High speed, high density two piece board-to-board backplane connector
- Dual beam provides redundant contact for improved reliability
- For data rates of 6.2+ Gb/s
- 10 row, 100 high speed lines per 25.00 [.984]
- 6 row, 60 high speed lines per 25.00 [.984]
- Controlled impedance:
50 ohm Single Ended
100 ohm Differential
- Feedthrough versions for midplane applications
- 250 mating cycles
- End stackable on 2.50 [.098] centerline, signal pin to signal pin
- Advanced ESD/Power (10 Amps) using optional guide pins and power contacts

Applications

- High Speed Telecommunications Equipment
- Mid-range and high-end services
- Recognized under the Component Program of Underwriters Laboratories Inc., File No. E28476

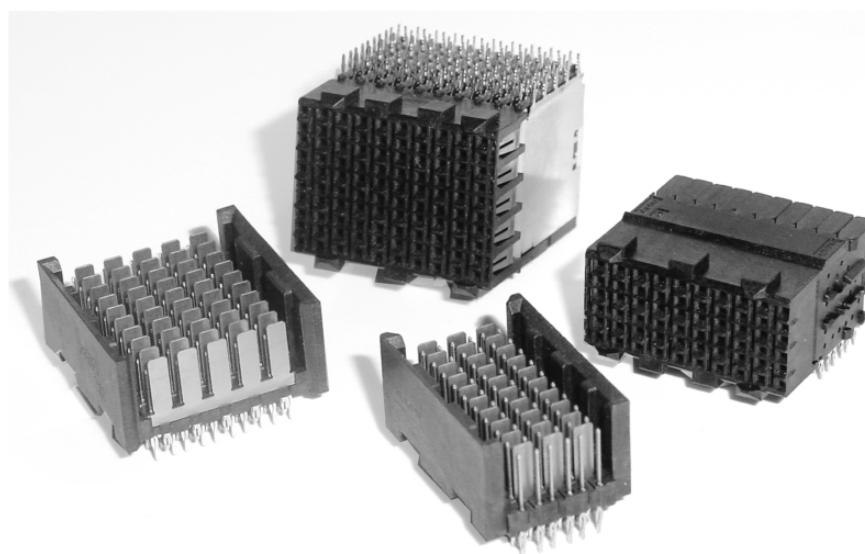

The emergence of high speed serial backplanes has forced interconnections to be able to transfer data at gigabit speeds.

The Z-PACK HS3 connector system has been specifically designed to support this generation of high speed serial data transfer. Tyco Electronics has incorporated a controlled impedance microstrip path through the connector to minimize signal degradation and

crosstalk. Compliant pins are used on both daughter-card and backplane.

This connector family is press fit and is compatible with other Z-PACK HM family connectors on the same board edge. Z-PACK HS3 connectors support data rates of 6.2+ Gb/s per differential pair. The 6 row version is optimized for 20.32mm or 0.8 inch card centerline applications, while the 10 row version is

optimized for high density for 25.4mm or 1.0 inch card centerline applications.

The Tyco Electronics Universal Power Module (UPM) is designed to be compatible with the Z-PACK HS3 connector.

Static Discharge Guide/Power Pins, Guide Pin/Power Receptacles, Universal Guide Pin and Receptacles, and Coding Keys (10 row only) are also available.

Availability

Fully validated SPICE models: E-mail requests to modeling@tycoelectronics.com

Samples: go to <http://tycoelectronics.custhelp.com>

Pro/E models and IGES models: E-mail requests to TycoCAD@tycoelectronics.com

White Papers: available on product website at <http://hs3.tycoelectronics.com>

Electrical Performance Report: <http://hs3.tycoelectronics.com>

6 row EPR #138505; 10 row EPR #138506

Routing Guide: <http://hs3.tycoelectronics.com>

Routing Guide #20GC017

<http://hs3.tycoelectronics.com>

Technical Documents

Product Specification

108-1957

Application Specification

114-13020

Qualification Test Report

501-501

Material and Finish

Contact Area Finish — 0.80µm Au min. over 1.3µm Ni min.

Compliant Pin Finish — 0.8µm SnPb min. over 1.3µm Ni min.

Contact — Copper Alloy

Housing — Glass filled polyester, 94V-0 rated

Ratings

Current — 1.15A per fully energized

Operating Voltage — 250 VAC max.

Temperature — -65°C to 105°C

Mating Force — 0.75N max. per contact (signal = 1 contact, ground = 1 contact)

Durability — 250 cycles

* Reference Product Spec. 108-1957 for complete list of performance data.

IGES is a trademark of IAMBA Networks, Inc.

PRO/E is a trademark of Parametric Technology Corp.

Performance Specifications
Electrical Characteristics

Characteristic Impedance —
 100 ± 10% Ohms

Nominal Resistance — 21 mOhm

Crosstalk — See table at right

Insertion Loss — See chart below

Z-PACK HS3 Connector (Continued)
Asynchronous Diff. NEXT (%)

Edge rate 20-80%	HS3 10-Row Measured Noise Totals			
	50 ps	100 ps	150 ps	250 ps
BC Pair Total NEXT	2.3%	1.9%	1.7%	1.3%
DE Pair Total NEXT	4.0%	3.3%	3.0%	2.4%
FG Pair Total NEXT	4.0%	3.4%	3.1%	2.7%
HJ Pair Total NEXT	2.3%	1.9%	1.7%	1.5%



Synchronous Diff. NEXT (%)

Edge rate 20-80%	HS3 10-Row Measured Noise Totals			
	50 ps	100 ps	150 ps	250 ps
BC Pair Total FEXT	0.5%	0.3%	0.3%	0.2%
DE Pair Total FEXT	1.5%	0.8%	0.5%	0.5%
FG Pair Total FEXT	1.4%	0.8%	0.7%	0.5%
HJ Pair Total FEXT	1.0%	0.6%	0.4%	0.3%


Edge rates specified are at the connector.

Noise includes 1.60 [.063] footprints on both sides of the connector.

Totals include contributions from 8 adjacent aggressor pairs.

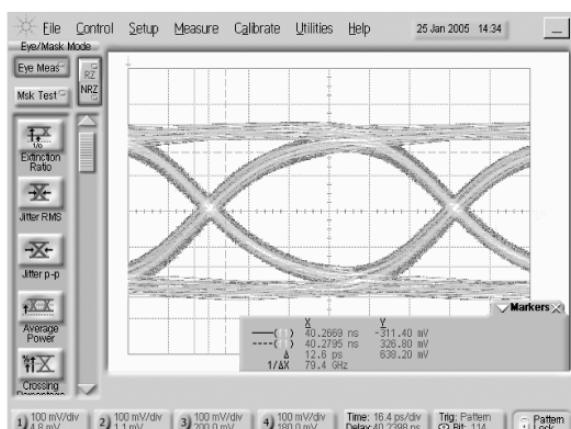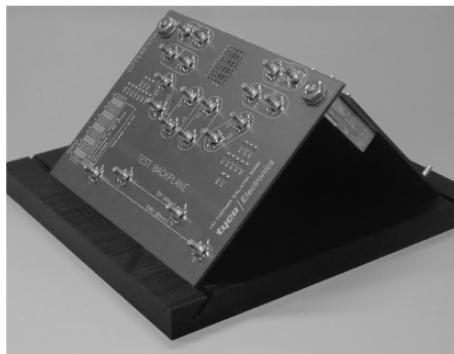

**PRBS 2⁷-1 data pattern
10 Gb/s data rate
BC Pair
64% Eye Opening
12.6ps Jitter**

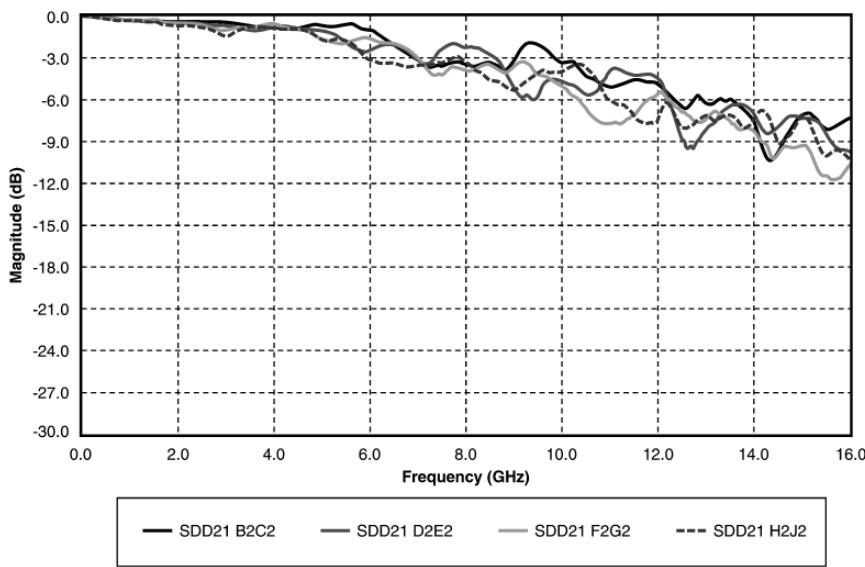

Calibrated to include only the connector and the 1.60 [.063] footprints on both sides of the connector.

Note: All part numbers are RoHS compliant.

Z-PACK HS3 Connector (Continued)

Z-PACK HS3 Connector: Printed Circuit Design Rules for Backplane Routing

Using Standard Commercial Design Rules

This table lists routing specifications which meet design rules practiced by most printed circuit board vendors. This table should be used to route the Z-PACK HS3 connector for most applications and especially under one or more of these considerations:

1. Edge rates require the widest conductors possible.
2. Backplanes having layer counts above 16.
3. Backplanes which exceed 508mm (20") in length or width.
4. Cost is a major factor.

Using Advanced Design Rules

This table lists routing specifications which can be built by a limited number of leading edge printed circuit vendors using advanced design rules. This table can be used as a reference for Z-PACK HS3 connector in backplane applications where very high density is a major factor. The PCB vendor should be consulted regarding applicability of these rules to a specific design. Consideration should be given to the following:

1. Signal layer count reduction is possible with these design rules.
2. Backplanes which exceed 508mm (20") in length or width generally cannot be built with these rules.
3. Cost factors can potentially be higher.

Z-PACK HS3 Connector Routing Pattern

For more details request Report #20GC004-1 or visit http://www.tycoelectronics.com/products/simulation/files/papers/20GC004_1.pdf

Finished Hole Dia.	Drilled Hole Dia.	Pad Dia.	Annular Ring	Pad-Pad Spacing 63 mils (1.58mm) C/C	Conductor Routing Options	
					5 mil spacing	6 mil spacing
24 mils 0.6mm	28 mils 0.7mm	44 mils 1.1mm	2 mils 0.05mm	19 mils 0.475mm	9 mils 0.225mm	7 mils 0.175mm
24 mils 0.6mm	28 mils 0.7mm	42 mils 1.05mm	1 mil 0.025mm	21 mils 0.525mm	11 mils 0.275mm	9 mils 0.225mm
24 mils 0.6mm	28 mils 0.7mm	40 mils 1.0mm	tangency	23 mils 0.575mm	13 mils 0.325mm	11 mils 0.275mm

Commercial Design Rules:

Minimum pad diameter for tangency: Drill Diameter (D)+12 mils (0.3mm)

Hole location tolerance: +/- 3 mils (0.075mm)

Pad/Pad artwork tolerance: +/- 2 mils (0.05mm)

Feature tolerance (1 oz foil): +/- 0.075 mils (0.0175mm)

Finished Hole Dia.	Drilled Hole Dia.	Pad Dia.	Annular Ring	Pad-Pad Spacing 63 mil (1.58mm) C/C	Conductor Routing Options	
					5 mil spacing	6 mil spacing
24 mils 0.6mm	28 mils 0.7mm	38 mils 0.95mm	tangency tangency	25 mils 0.625mm	15 mils 0.35mm	13 mils 0.3mm
Two Conductor Routing						
24 mils 0.6mm	28 mils 0.7mm	42 mils 1.05mm	2 mils 0.05mm	21 mils 0.525mm	4.5 mil lines/4 mil spacing 0.11mm lines/0.09mm spacing	
24 mils 0.6mm	28 mils 0.7mm	40 mils 1.0mm	1 mil 0.025mm	23 mils 0.575mm	5.5 mil lines/4 mil spacing 0.125mm lines/0.1mm spacing	


Advanced Design Rules:

Minimum pad diameter for tangency: Drill Diameter (D)+10 mils (0.25mm)

Hole location tolerance: +/- 2 mils (0.05mm)







Pad/Pad artwork tolerance: +/- 2 mils (0.05mm)

Feature tolerance (1 oz foil): +/- 0.075 mils (0.0175mm)

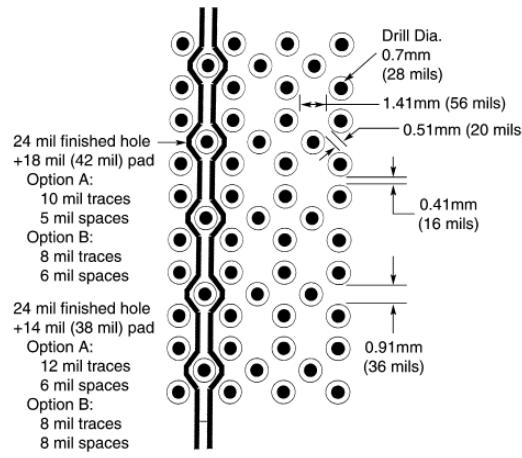

Z-PACK HS3 Connector (Continued)

Part Number Selection Chart 10 Row Z-PACK HS3 Connector






Part Number 5120874
50 Position
Right Receptacle
Univ Pwr Guide Pin

Part Number 5120670
50 Position
Right Header
Univ Pwr Guide Pin

Part Number 5120665
50 Position
Right Feed-Through
ESD/HDI Guide Pin

Part Number 5120667
50 Position
Right Shroud
ESD/HDI Guide Pin






Part Number 5120792
50 Position
Right Receptacle
ESD/HDI Guide Pin

Part Number 5120661
50 Position
Right Header
ESD/HDI Guide Pin

Part Number 5120666
100 Position
Center Feed-Through

Part Number 5120663
100 Position
Center Shroud



Part Number 5120790
100 Position
Center Receptacle

Part Number 5120658
100 Position
Center Header

Part Number 5120664
100 Position
Center Feed-Through

Part Number 5120663
100 Position
Center Shroud







Part Number 5120791
50 Position
Center Receptacle

Part Number 5120747
50 Position
Center Header

Part Number 5120748
50 Position
Center Feed-Through

Part Number 5120750
50 Position
Center Shroud





Part Number 5120793
50 Position
Left Receptacle
ESD/HDI Guide Pin

Part Number 5120662
50 Position
Left Header
ESD/HDI Guide Pin

Part Number 5120666
50 Position
Left Feed-Through
ESD/HDI Guide Pin









Part Number 5120668
50 Position
Left Shroud
ESD/HDI Guide Pin










Part Number 5120875
50 Position
Left Receptacle
Univ Pwr Guide Pin



Part Number 5120672
50 Position
Left Header
Univ Pwr Guide Pin


Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Part Number Selection Chart
6 Row Z-PACK HS3 Connector

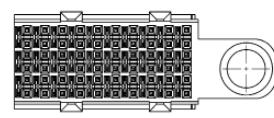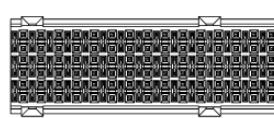Part Number 5120788
 30 Position
 Right Receptacle

Part Number 5120677
 30 Position
 Right Header

Part Number 5120680
 30 Position
 Right Header
 Feed-Through

Part Number 5120683
 30 Position
 Right Shroud

Part Number 120949-1
 60 Position
 Receptacle
 with Guide Module

Part Number 5120786
 60 Position
 Center Receptacle

Part Number 5120674
 60 Position
 Center Header

Part Number 5120679
 60 Position
 Center Header
 Feed-Through

Part Number 5120682
 60 Position
 Center Shroud

Part Number 120948-1
 90 Position
 Receptacle

Part Number 5120787
 30 Position
 Center Receptacle

Part Number 5120732
 30 Position
 Center Header

Part Number 5120742
 30 Position
 Center Header
 Feed-Through

Part Number 5120743
 30 Position
 Center Shroud

Part Number 5120789
 30 Position
 Left Receptacle


Part Number 5120678
 30 Position
 Left Header

Part Number 5120681
 30 Position
 Left Header
 Feed-Through

Part Number 5120684
 30 Position
 Left Shroud

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)

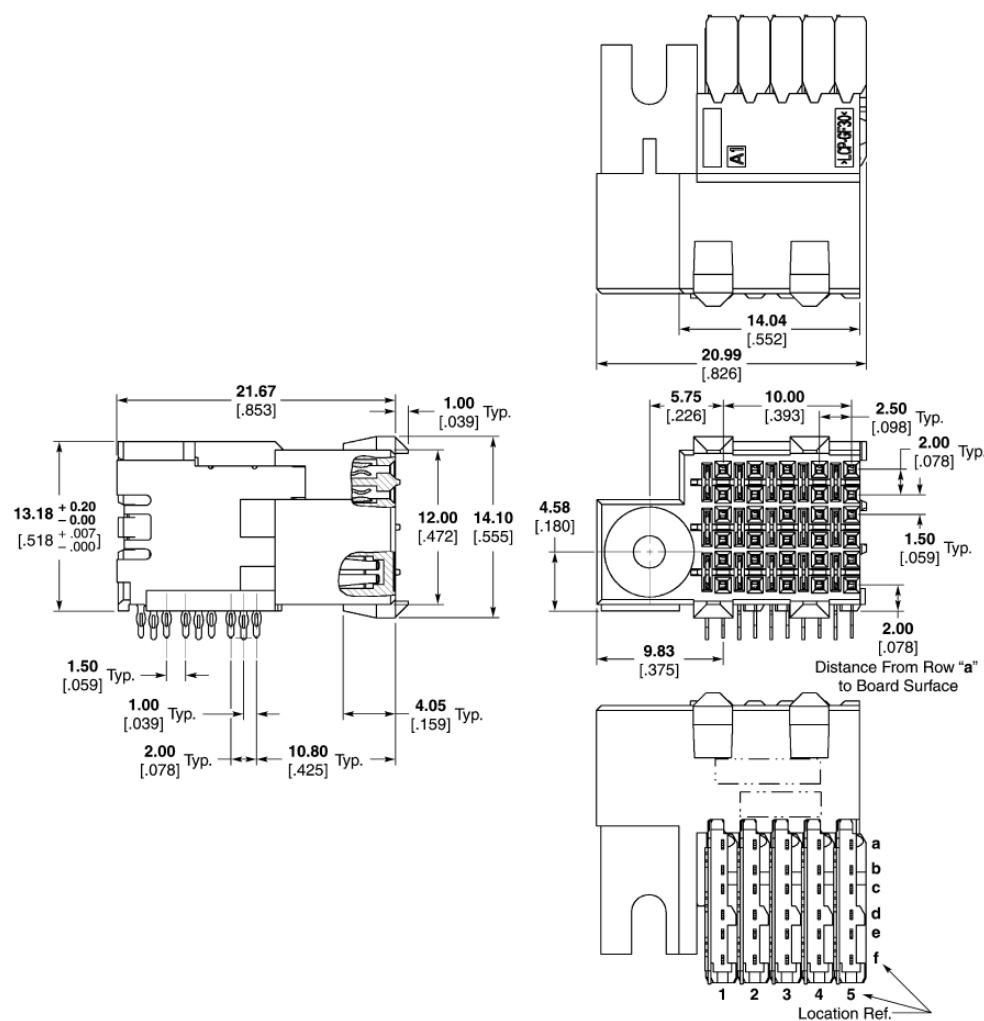**Right Angle Receptacle
6 Row, Left Module (accepts ESD Guide Pin)**


4

Z-PACK HS3 Connector


Pin Header Assemblies

Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	IS Sheet	Chiclet Removal IS Sheet	IS Sheet	
30	5120789-1	1338742-1	408-8394	1338744-1	408-8393	1338745-1	408-8410

P.C.B. Hole Dimensions
Drilled Hole — $0.7 \pm 0.025\text{mm}$
Fin. Hole — 0.55 to 0.65mm
Cu-thickness — 0.025 to 0.050mm
SnPb-thickness — 0.004 to 0.010mm



Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

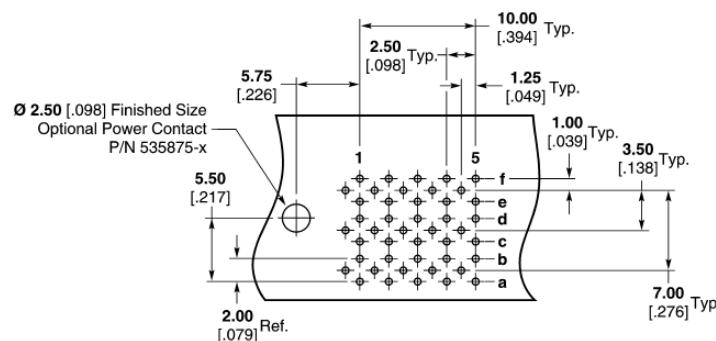
**Recommended PC Board Layout
(Component Side Shown)**

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

(Continued)

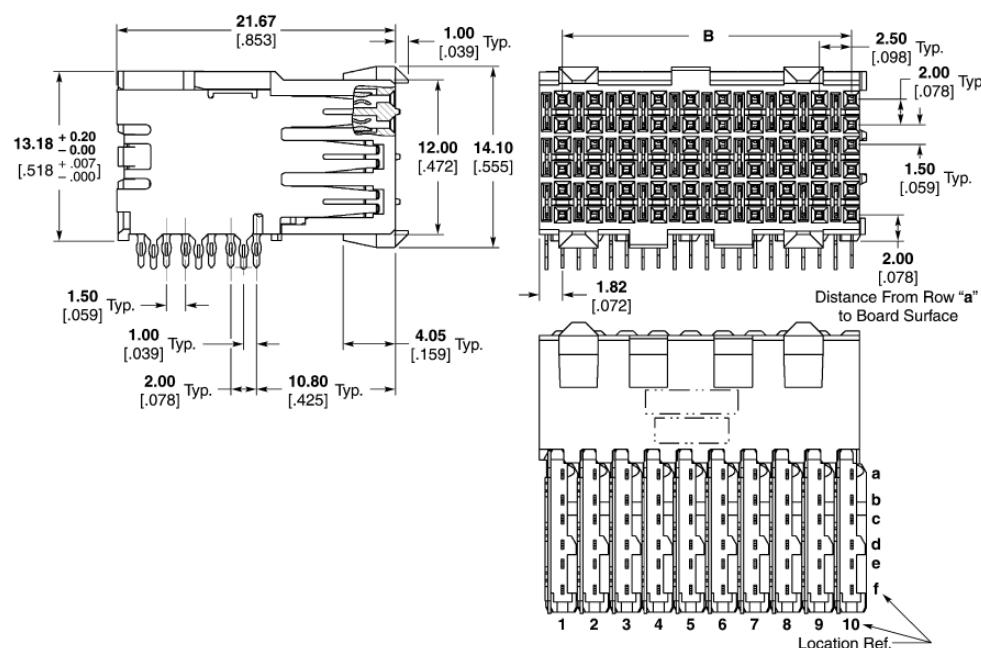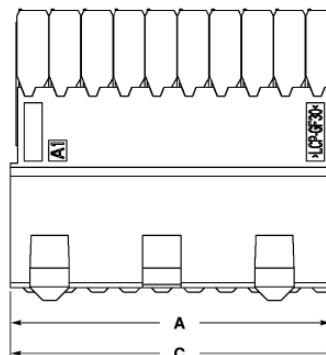6 Row, Center Module

Pin Header Assemblies

Number of Positions	Dimensions			Part Number	Insertion	IS Sheet	Application Tooling			IS Sheet
	A	B	C				Hsg Removal	IS Sheet	Chiclet Removal	
60	24.88 .980	22.50 .886	25.40 1.00	5120786-1	1338742-2	408-8394	1338744-1	408-8393	1338745-1	408-8410
30	12.38 .487	10.00 .394	12.90 .508	5120787-1	1338742-1	408-8394	1338744-1	408-8393	1338745-1	408-8410

P.C.B. Hole Dimensions
Drilled Hole — 0.7±0.025mm


Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

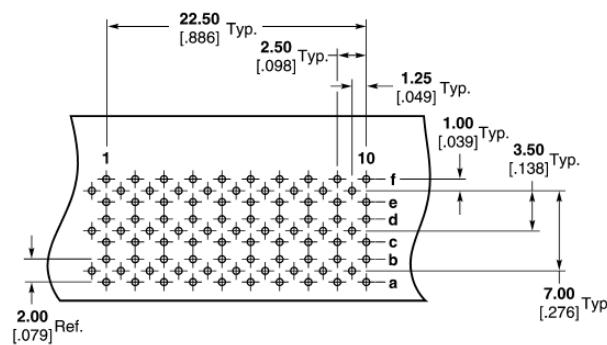
**Recommended PC Board Layout
(Component Side Shown)**

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

(Continued)

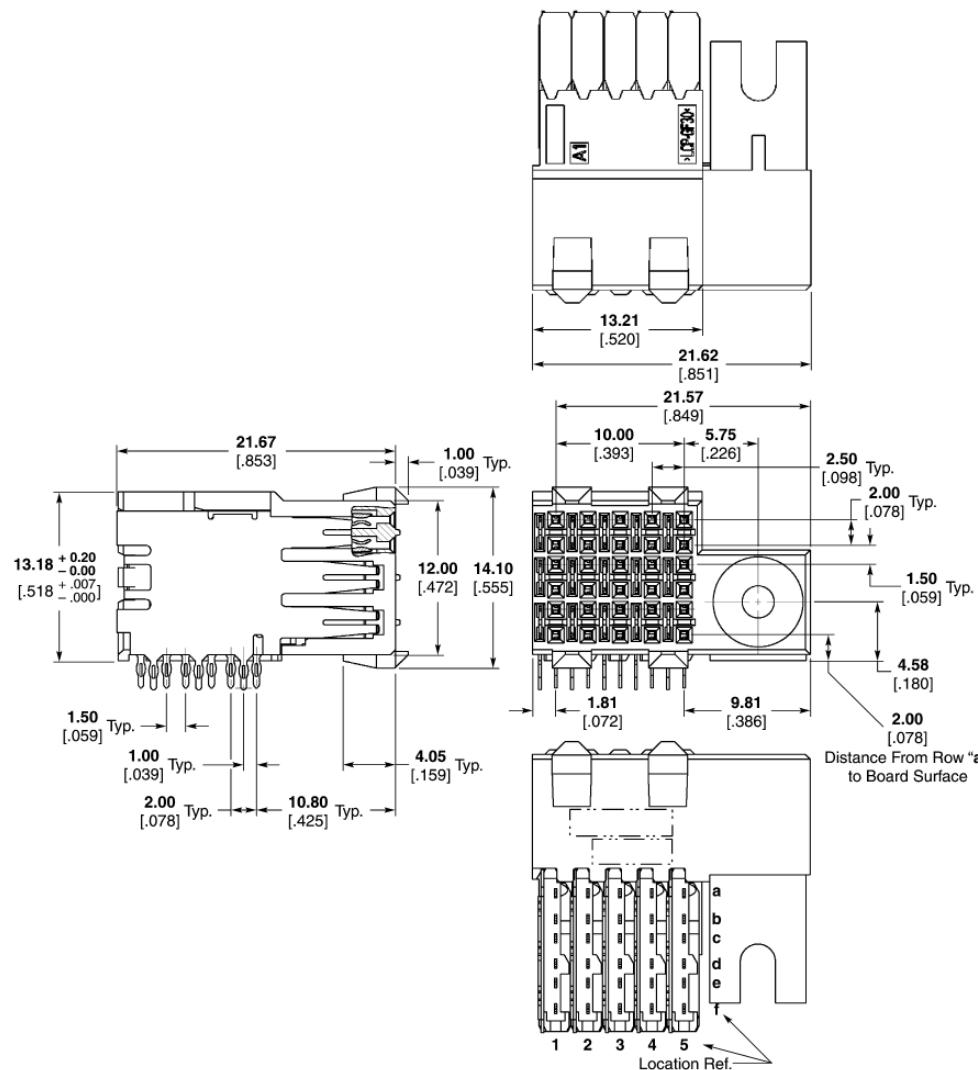**6 Row, Right Module
(accepts ESD Guide Pin)**

Pin Header Assemblies

Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	Chiclet Removal IS Sheet			
30	5120788-1	1338742-1	408-8394	1338744-1	408-8393	1338745-1	408-8410

P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm


Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

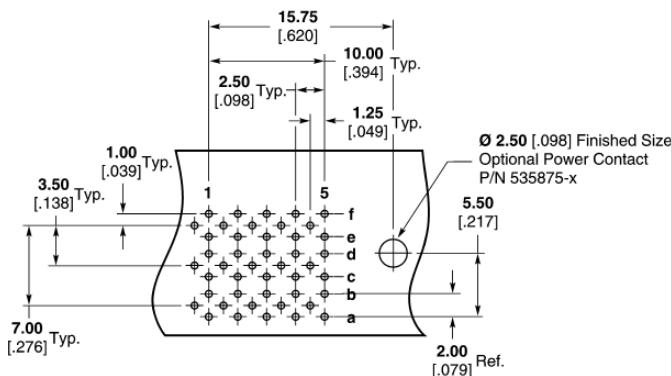
**Recommended PC Board Layout
(Component Side Shown)**

Z-PACK HS3 Connector (Continued)

Vertical Receptacle 6 Row, 90 Position

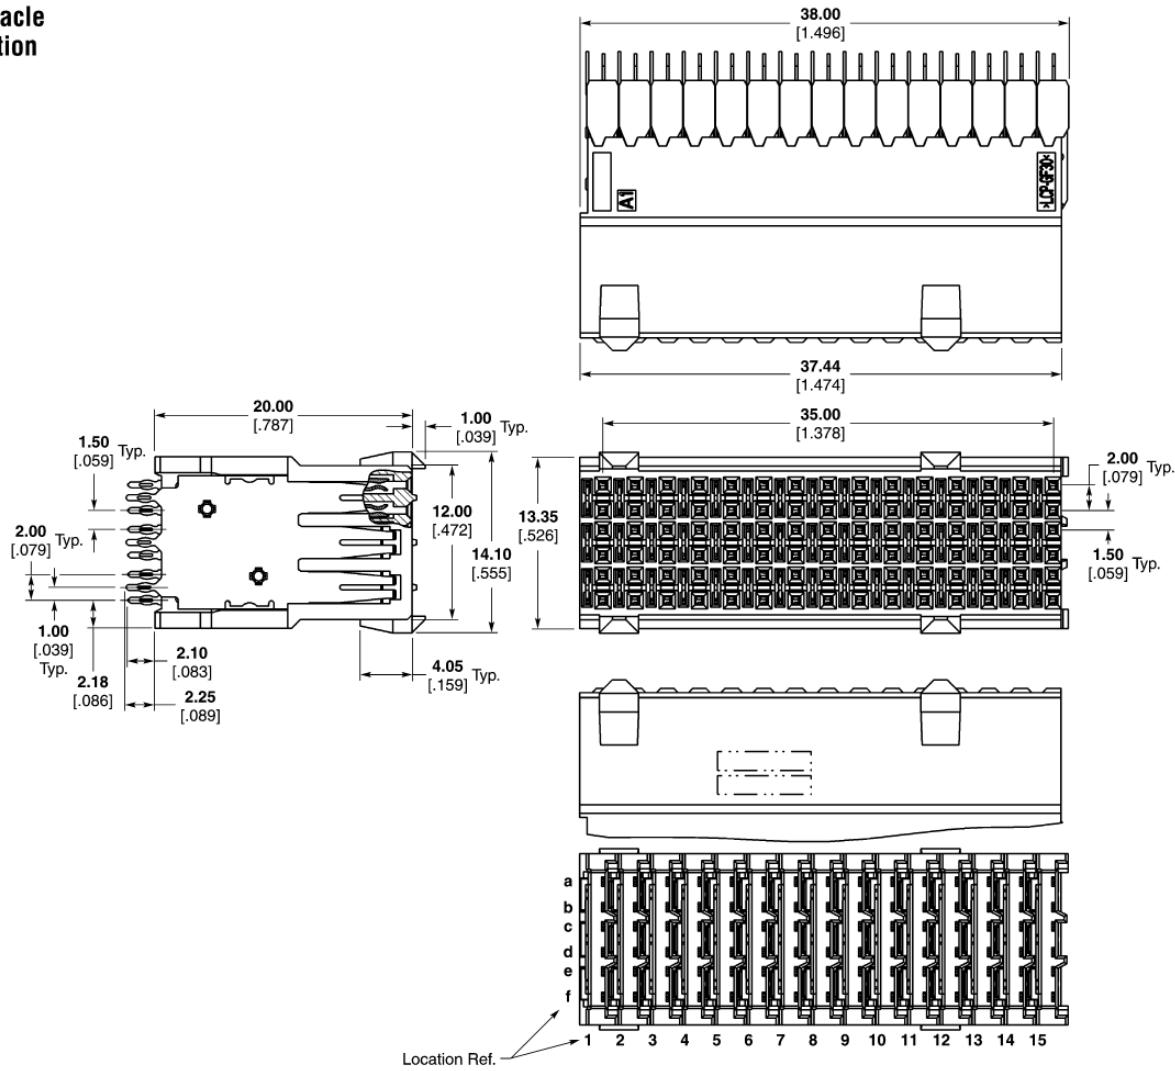

Number of Positions	Part Number	Application Tooling					
		Insertion	IS Sheet	Hsg Removal	IS Sheet	Chiclet Removal	IS Sheet
90	120948-1	1725624-1	408-8870	—	—	—	—

P.C.B. Hole Dimensions

Drilled Hole — $0.7 \pm 0.025\text{mm}$


Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

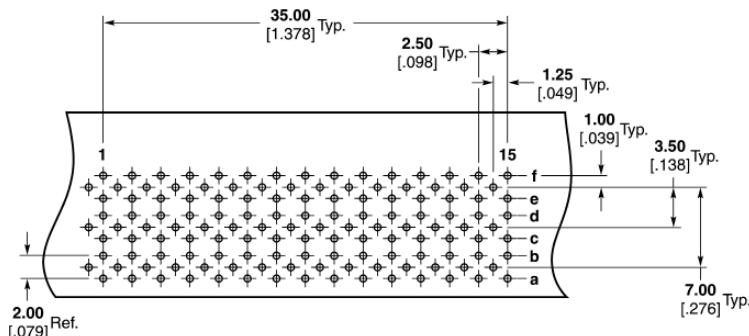

Recommended PC Board Layout (Component Side Shown)

Z-PACK HS3 Connector (Continued)
Vertical Receptacle

(Continued)

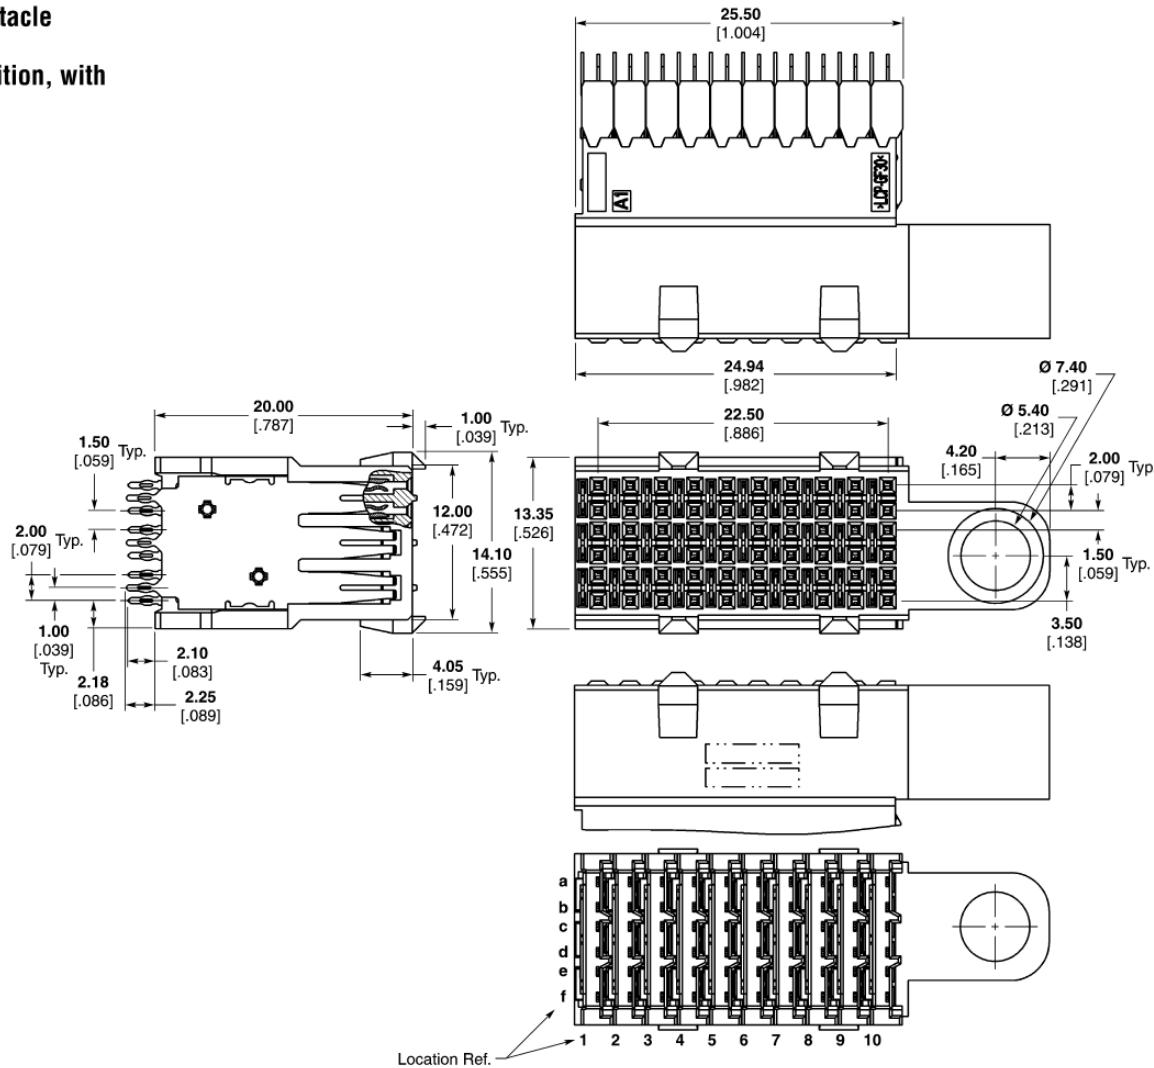**6 Row, 60 Position, with
Guide Module**


Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	Chiclet Removal IS Sheet			
60	120949-1	1725623-1	408-8870	—	—	—	—

P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm


Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

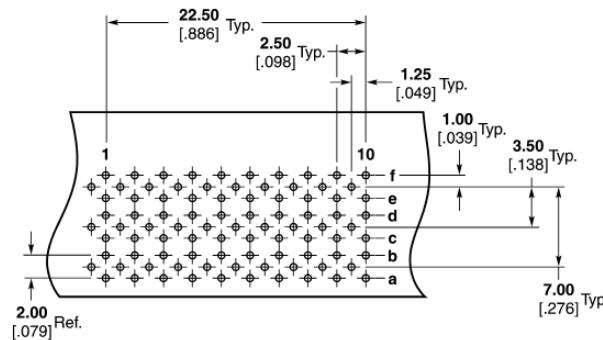
**Recommended PC Board Layout
(Component Side Shown)**

Z-PACK HS3 Connector (Continued)

Vertical Pin Header Assemblies
6 Row, Left Module
 (accepts ESD Guide Pin)

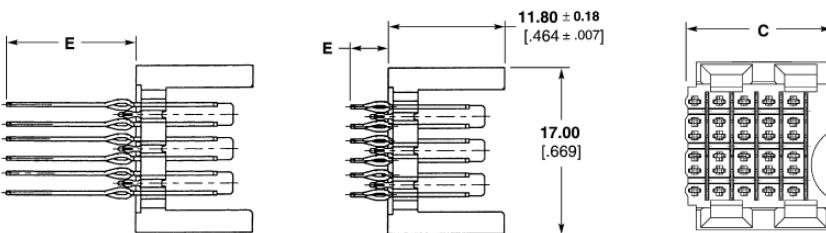
P.C.B. Hole Dimensions


Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm




Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


Pin Header Assemblies

Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling					
	A	B	C	D	E			Seating	IS Sheet	Signal Pin Repair Kit	IS Sheet	Ground Blade Repair Kit	
30	13.70 .539	10.00 .393	14.80 .583	8.20 .322	3.70 .145	A	5120678-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	13.70 .539	10.00 .393	14.80 .583	9.70 .381	3.70 .145	B	5120678-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	13.70 .539	10.00 .393	14.80 .583	8.20 .322	13.00 .511	K	5120681-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	13.70 .539	10.00 .393	14.80 .583	9.70 .381	14.50 .570	P	5120681-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573

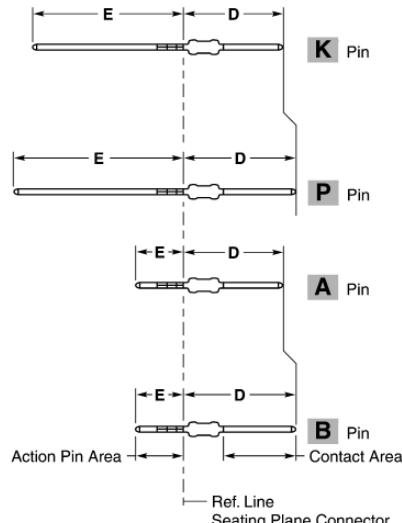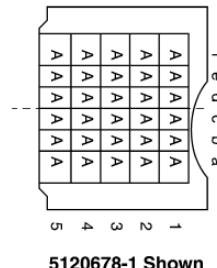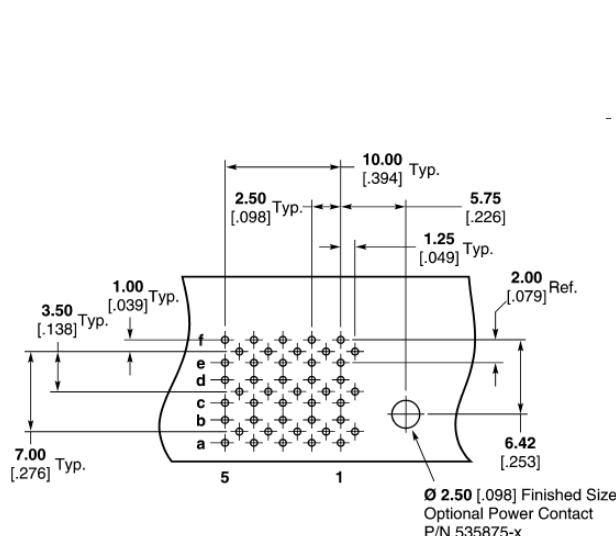

Recommended PC Board Layout
 (Component Side Shown)
 For Non-Midplane Applications
 For Midplane Applications Reference Page 112

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)
**Vertical Pin Header Assemblies (Continued)
6 Row, Center Module**
P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

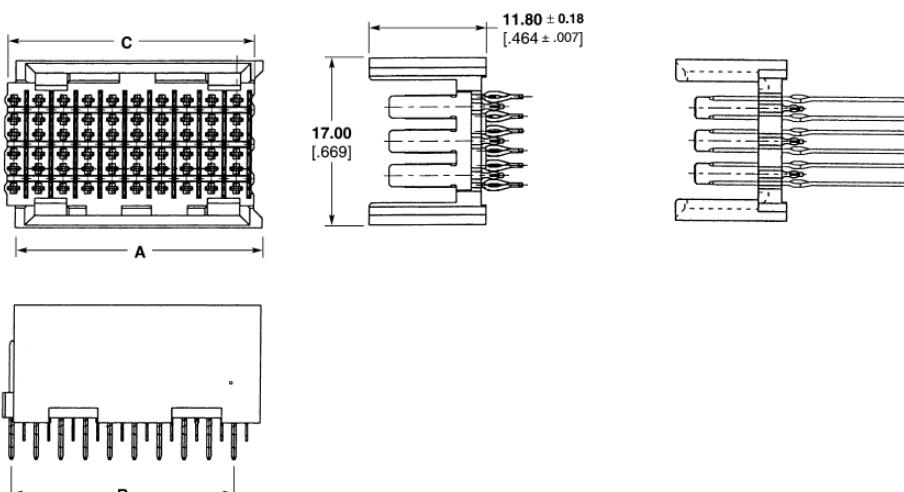
Pin Header Assemblies

Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling					
	A	B	C	D	E			Seating	IS Sheet	Signal Pin Repair Kit	IS Sheet	Ground Blade Repair Kit	
60	24.90 .980	22.50 .885	24.90 .980	8.20 .322	3.70 .145	A	5120674-1	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
	24.90 .980	22.50 .885	24.90 .980	9.70 .381	3.70 .145	B	5120674-2	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
	24.90 .980	22.50 .885	24.90 .980	8.20 .322	13.00 .511	K	5120679-1	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
	24.90 .980	22.50 .885	24.90 .980	9.70 .381	14.50 .570	P	5120679-2	91313-2	408-4546	354687-2	408-9979	1320534-1	408-4573
30	12.41 .488	10.00 .393	12.40 .488	8.20 .322	3.70 .145	A	5120732-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	12.41 .488	10.00 .393	12.40 .488	9.70 .381	3.70 .145	B	5120732-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	12.41 .488	10.00 .393	12.40 .488	8.20 .322	13.00 .511	K	5120742-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	12.41 .488	10.00 .393	12.40 .488	9.70 .381	14.50 .570	P	5120742-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573

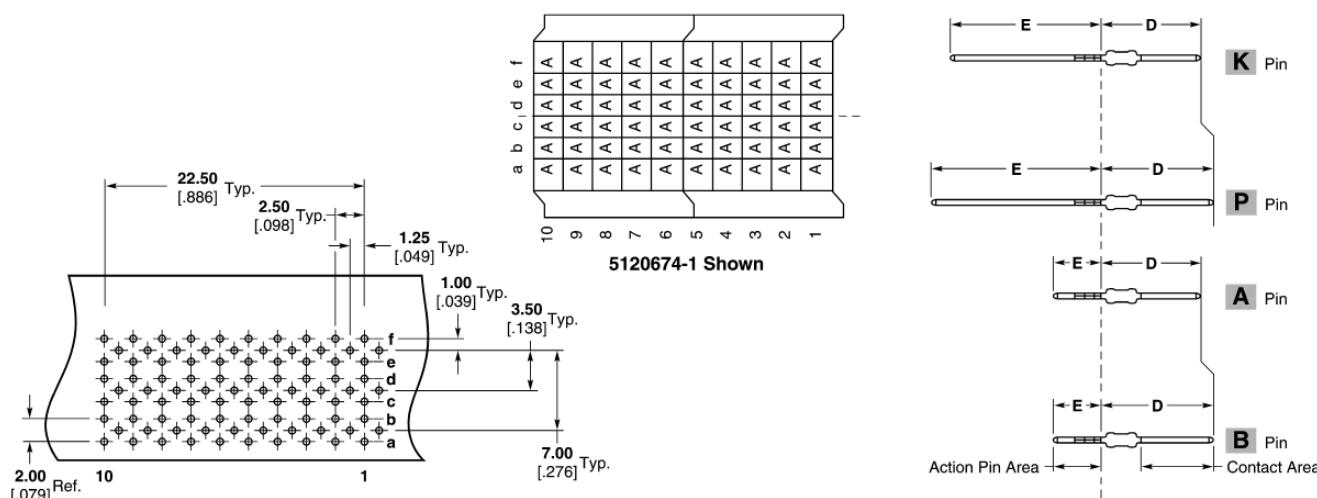


**Recommended PC Board Layout
(Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 112**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)

**Vertical Pin Header Assemblies (Continued)
6 Row, Right Module (accepts ESD Guide Pin)**

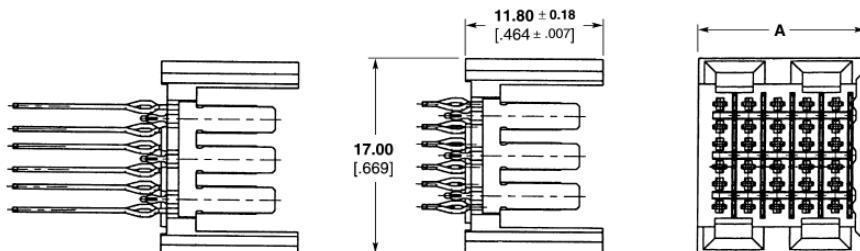
P.C.B. Hole Dimensions


Drilled Hole — $0.7 \pm 0.025\text{mm}$

Fin. Hole — 0.55 to 0.65mm




Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


Pin Header Assemblies

Number of Positions	Dimensions				Pin Ref.	Part Numbers	Application Tooling					
	A	B	D	E			Seating	IS Sheet	Signal Pin Repair Kit	IS Sheet	Ground Blade Repair Kit	IS Sheet
30	14.45 .568	10.00 .393	8.20 .322	3.70 .145	A	5120677-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	14.45 .568	10.00 .393	9.70 .381	3.70 .145	B	5120677-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	14.45 .568	10.00 .393	8.20 .322	13.00 .511	K	5120680-1	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573
	14.45 .568	10.00 .393	9.70 .381	14.50 .570	P	5120680-2	91313-1	408-4546	354687-2	408-9979	1320534-1	408-4573

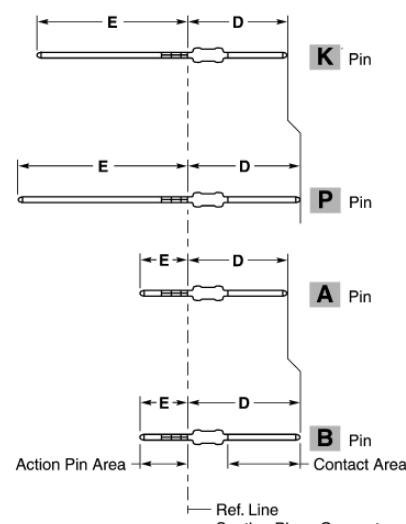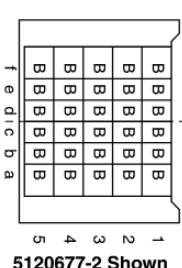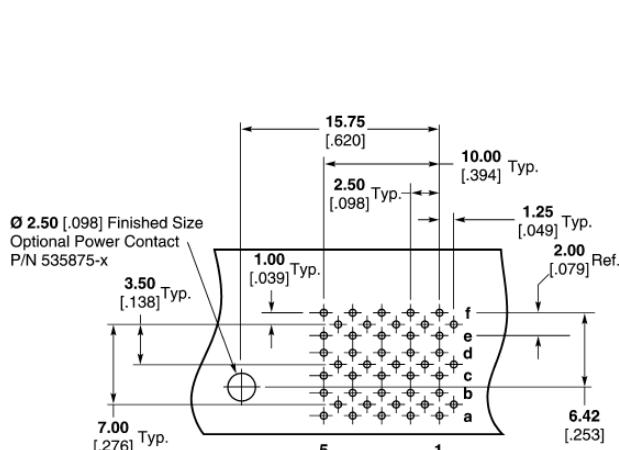




**Recommended PC Board Layout (Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 112**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
**Vertical Pin Header
Shrouds
6 Row, Left Module**
P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

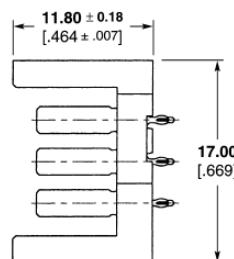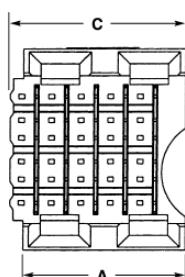SnPb-thickness — 0.004 to 0.010mm


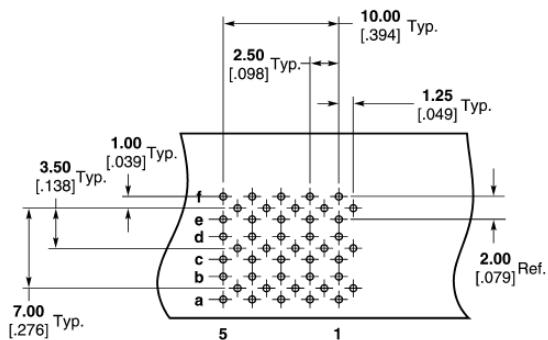
Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

4


Z-PACK HS3 Connector

Pin Header Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling		
	A	B	C		Insertion	IS Sheet	Ground Blade Repair Kit
30	13.70 .537	10.00 .393	14.80 .582	5120684-1	91313-1	408-4546	1320534-1 408-4573



Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1f Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)

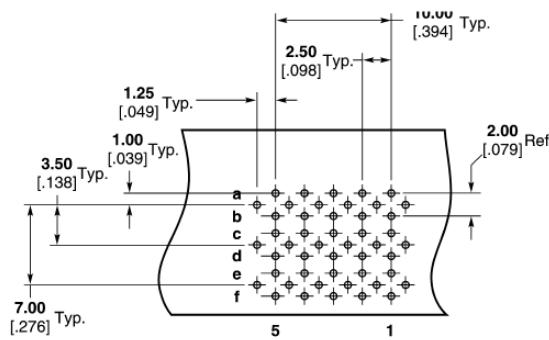



Coplanar Daughtercards
(Pin 1a Header = Pin 5a Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)
**Vertical Pin Header
Shrouds (Continued)
6 Row, Center Module**
P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

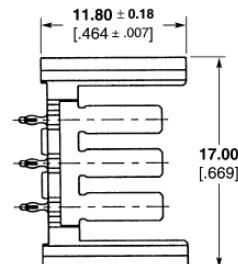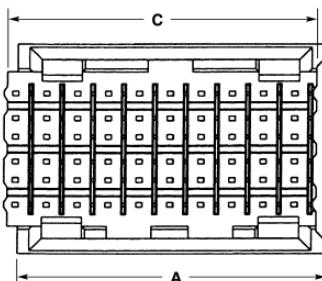SnPb-thickness — 0.004 to 0.010mm


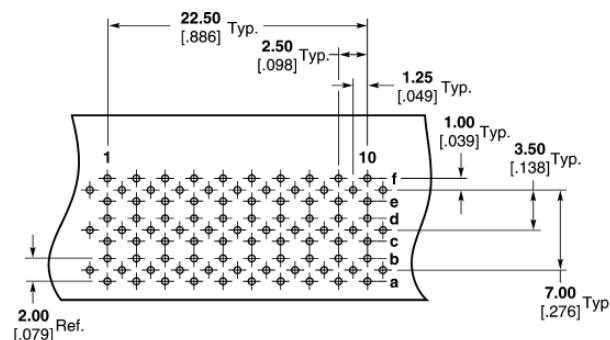
Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

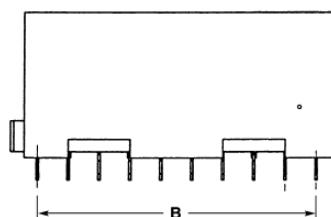
Pin Header Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling		
	A	B	C		Insertion	IS Sheet	Ground Blade Repair Kit
60	24.90 .980	22.50 .885	24.90 .980	5120682-1	91313-2	408-4546	1320534-1 408-4573
30	12.57 .494	10.00 .393	12.40 .488	5120743-1	91313-1	408-4546	1320534-1 408-4573

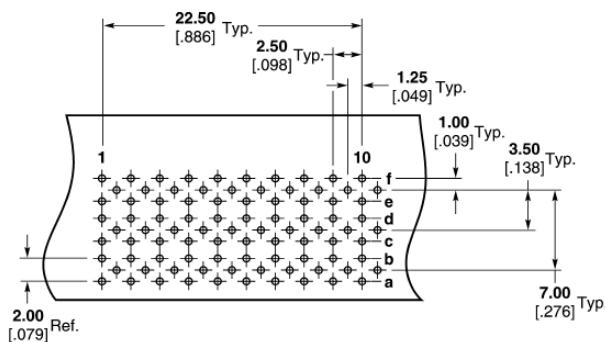

Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1f Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)




Coplanar Daughtercards
(Pin 1a Header = Pin 5a Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)
**Vertical Pin Header
Shrouds (Continued)
6 Row, Right Module**
P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

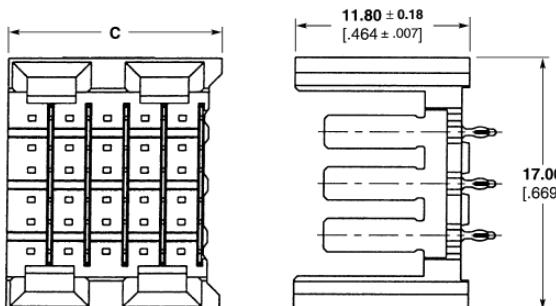SnPb-thickness — 0.004 to 0.010mm


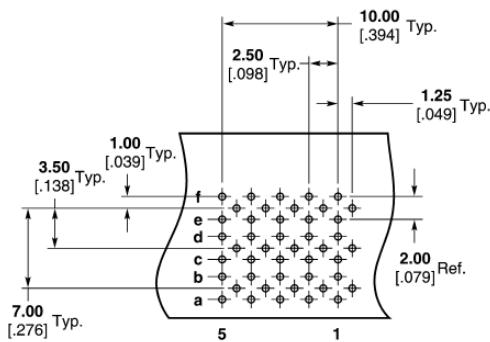
Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


4


Z-PACK HS3 Connector

Pin Header Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling		
	A	B	C		Insertion	IS Sheet	Ground Blade Repair Kit
30	—	10.00 .393	14.20 .559	5120683-1	91313-1	408-4546	1320534-1
							408-4573



Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1f Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)

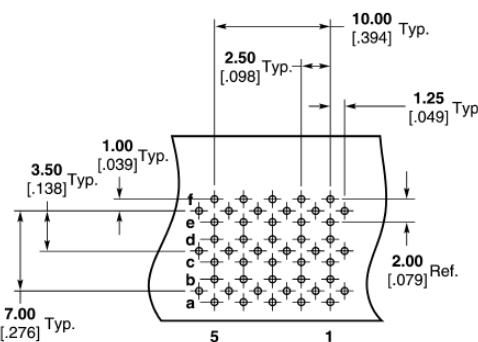


Coplanar Daughtercards
(Pin 1a Header = Pin 5a Shroud Side)
Recommended PC Board Layout — Reference Page 112
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)

Layout Guide for Midplane Applications 6 Row Connectors


Non-Coplanar Applications

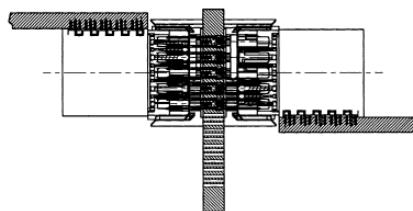

Coplanar Applications

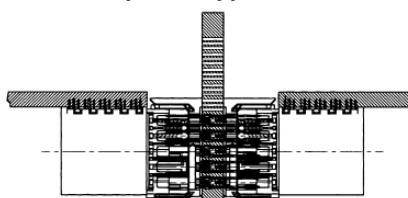


Right Module

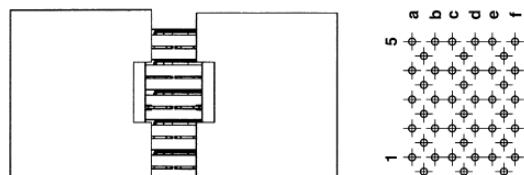


Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120680	5120683-1

Center Module

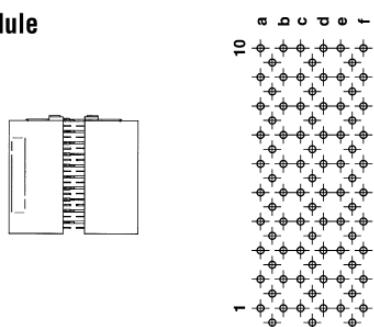

Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120679	5120682-1

Left Module

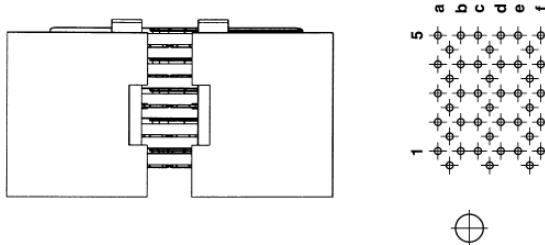


Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120681	5120684-1

Right Module




Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120680	5120684-1

Center Module

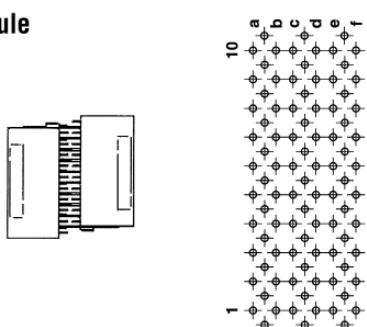

Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120679	5120682-1

Left Module

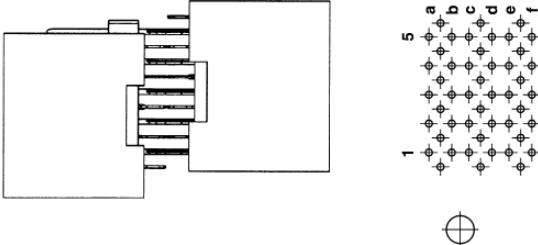


Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120681	5120683-1

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

**10 Row, Left Module
(accepts Universal Guide Pin)**

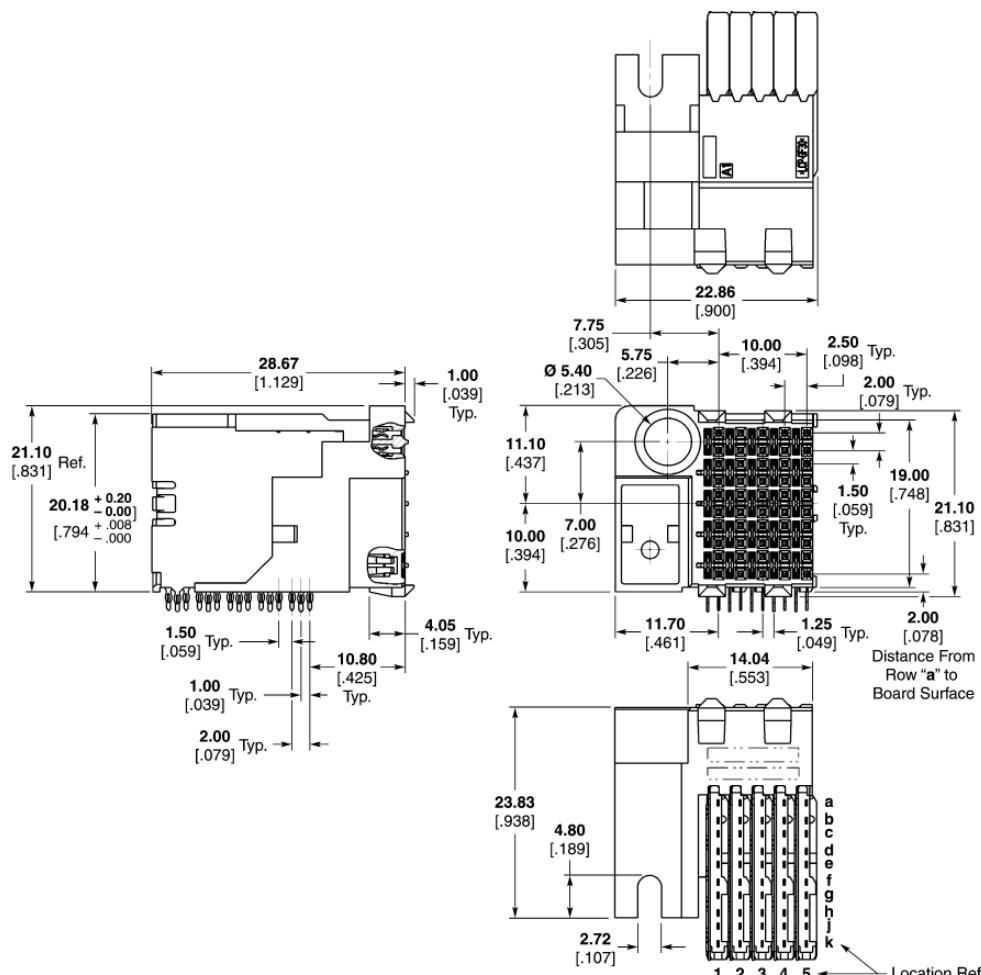
4

Z-PACK HS3 Connector

Receptacle Assemblies

Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	Chiclet Removal IS Sheet			
50	5120875-1	1338743-1	408-8394	1338744-1	408-8393	1338746-1	408-8410


P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

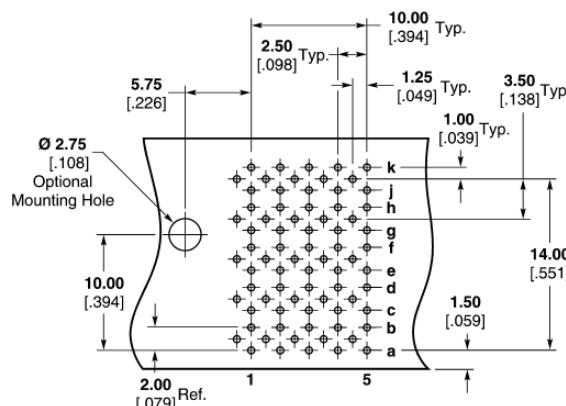
**Recommended PC Board Layout
(Component Side Shown)**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

(Continued)

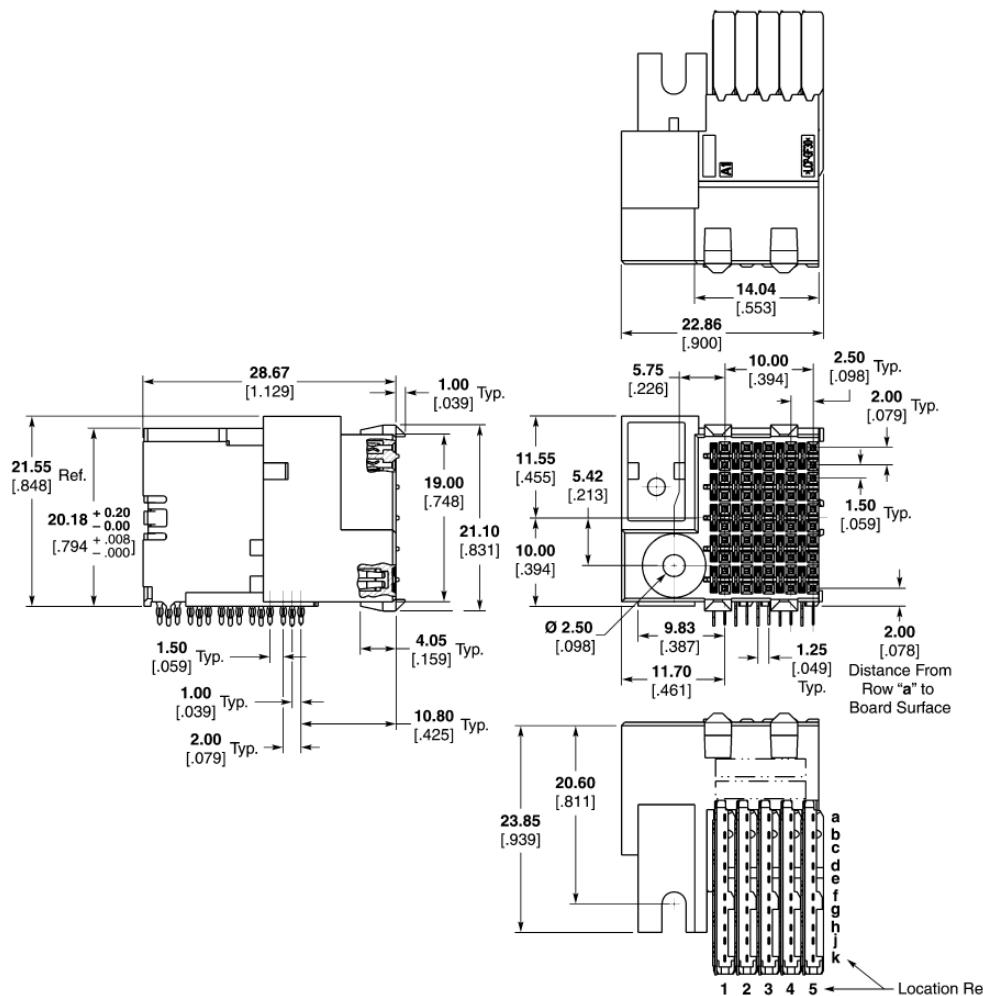**10 Row, Left Module
(accepts ESD Guide Pin)**

Receptacle Assemblies

Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	Chiclet Removal IS Sheet			
50	5120793-1	1338743-1	408-8394	1338744-1	408-8393	1338746-1	408-8410


P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

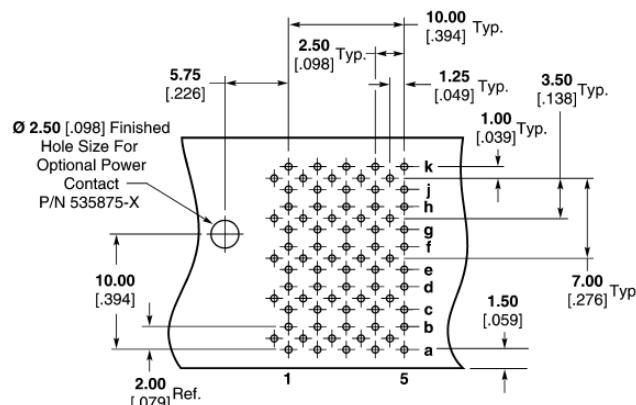
**Recommended PC Board Layout
(Component Side Shown)**


Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)

Right Angle Receptacle

(Continued)

10 Row, Center Module

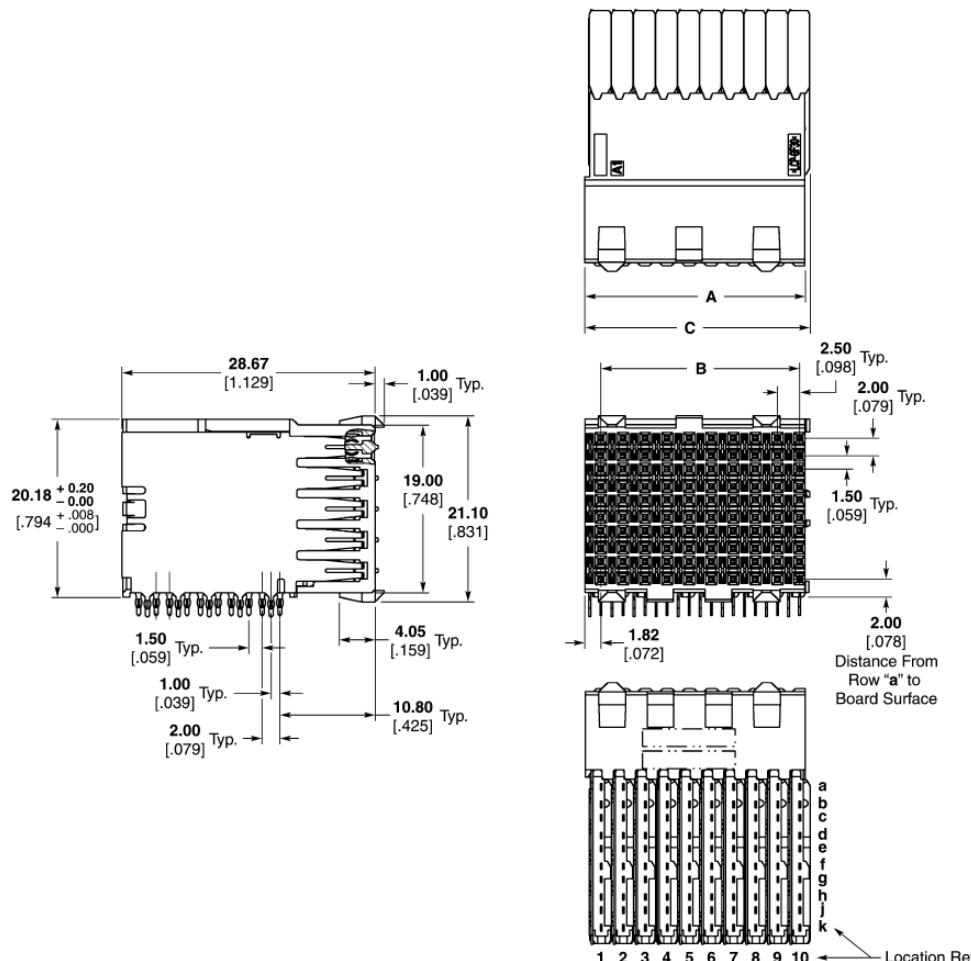

Receptacle Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling					
	A	B	C		Insertion	IS Sheet	Hsg Removal	IS Sheet	Chiclet Removal	IS Sheet
100	24.94 .982	22.50 .886	25.48 1.03	5120790-1	1338743-2	408-8394	1338744-1	408-8393	1338746-1	408-8410
50	12.44 .490	10.00 .394	12.90 .508	5120791-1	1338743-1	408-8394	1338744-1	408-8393	1338746-1	408-8410

P.C.B. Hole Dimensions


Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

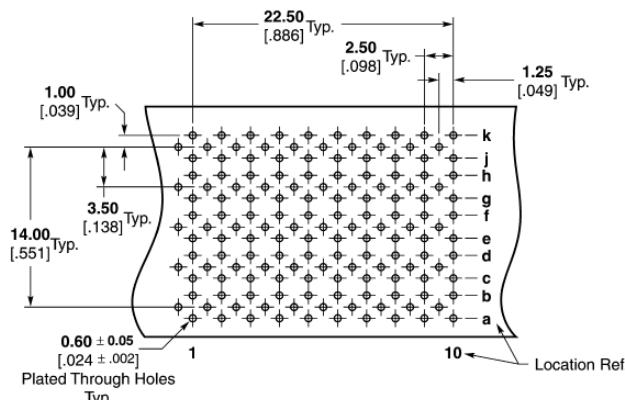


**Recommended PC Board Layout
(Component Side Shown)**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

(Continued)

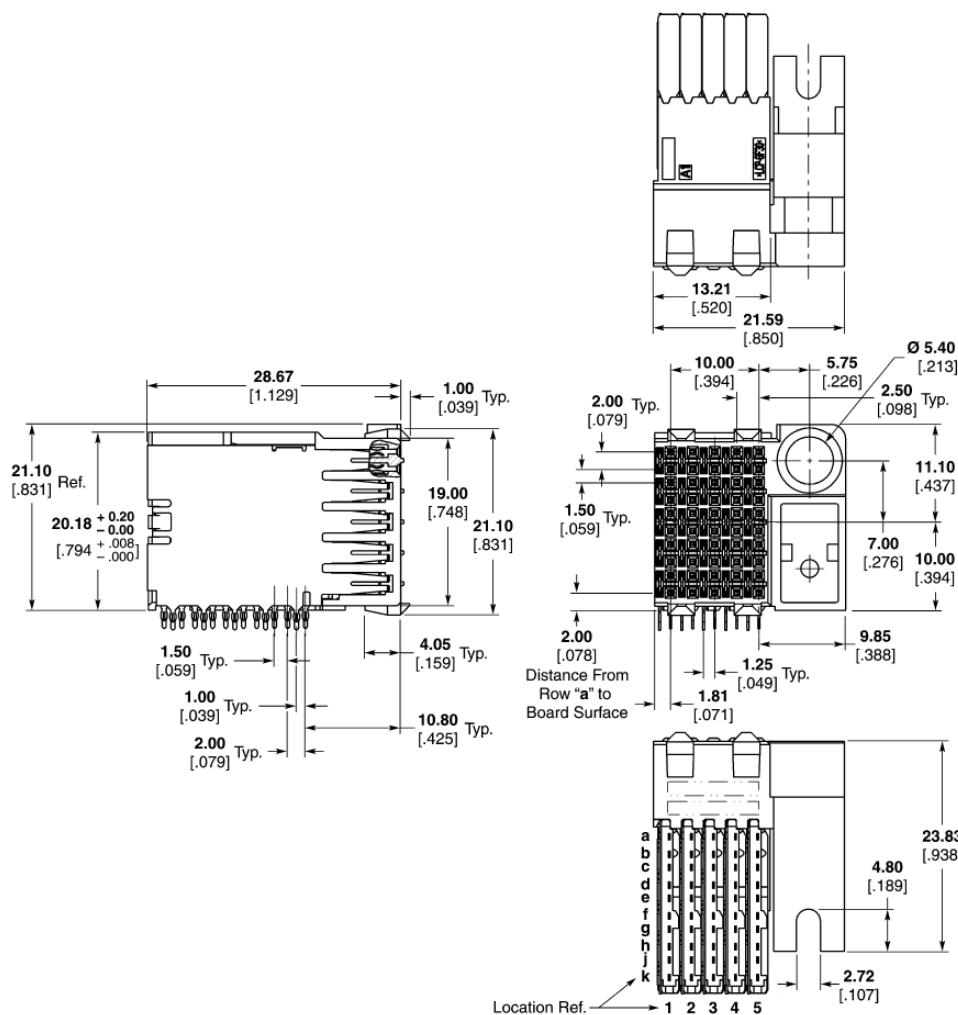**10 Row, Right Module
(accepts Universal Guide Pin)**

Receptacle Assemblies


Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	IS Sheet	Chiclet Removal IS Sheet	IS Sheet	
50	5120874-1	1338743-1	408-8394	1338744-1	408-8393	1338746-1	408-8410

P.C.B. Hole Dimensions
Drilled Hole — $0.7 \pm 0.025\text{mm}$
Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

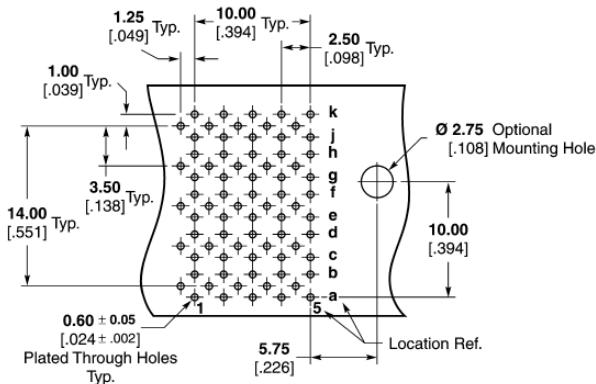
**Recommended PC Board Layout
(Component Side Shown)**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Right Angle Receptacle

(Continued)

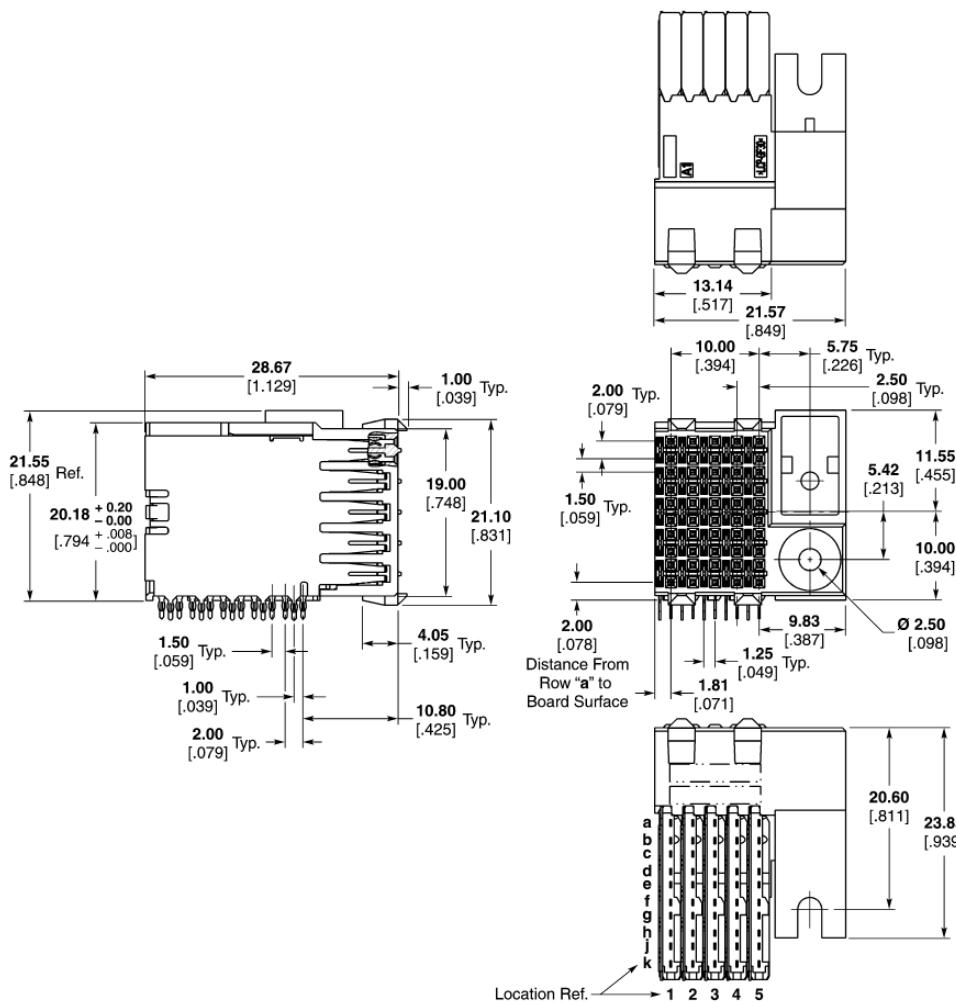**10 Row, Right Module
(accepts ESD Guide Pin)**

Receptacle Assemblies


Number of Positions	Part Number	Application Tooling					
		Insertion IS Sheet	Hsg Removal IS Sheet	IS Sheet	Chiclet Removal IS Sheet	IS Sheet	
50	5120792-1	1338743-1	408-8394	1338744-1	408-8393	1338746-1	408-8410

P.C.B. Hole Dimensions
Drilled Hole — $0.7 \pm 0.025\text{mm}$
Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

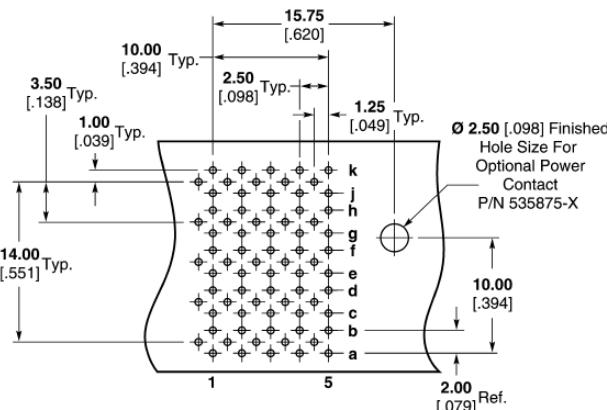
**Recommended PC Board Layout
(Component Side Shown)**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

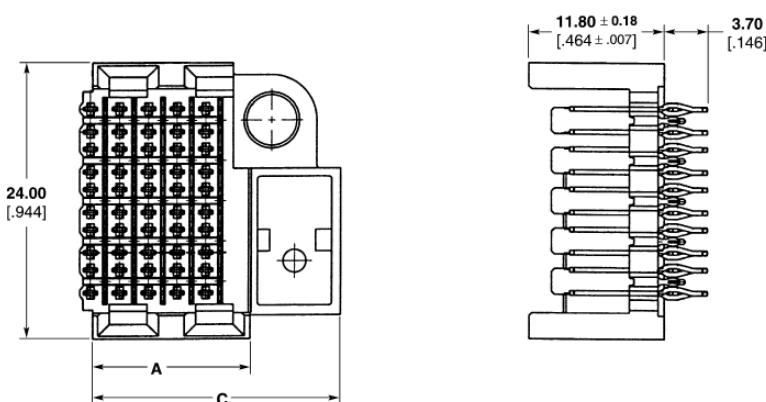
Z-PACK HS3 Connector (Continued)
Vertical Pin Header Assemblies
10 Row, Left Module (accepts Universal Guide Pin)

P.C.B. Hole Dimensions

 Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

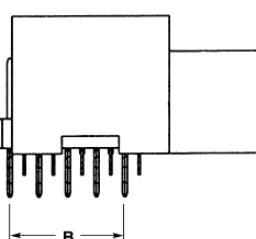SnPb-thickness — 0.004 to 0.010mm




Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Number of Positions	Dimensions				Pin Ref.	Part Numbers	Application Tooling				
	A	B	C	D			Seating	IS Sheet	Signal Pin		
									Repair Kit	IS Sheet	
50	13.70 .539	10.00 .394	21.61 .851	8.20 .323	A	5120672-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	13.70 .539	10.00 .394	21.61 .851	9.70 .383			91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573

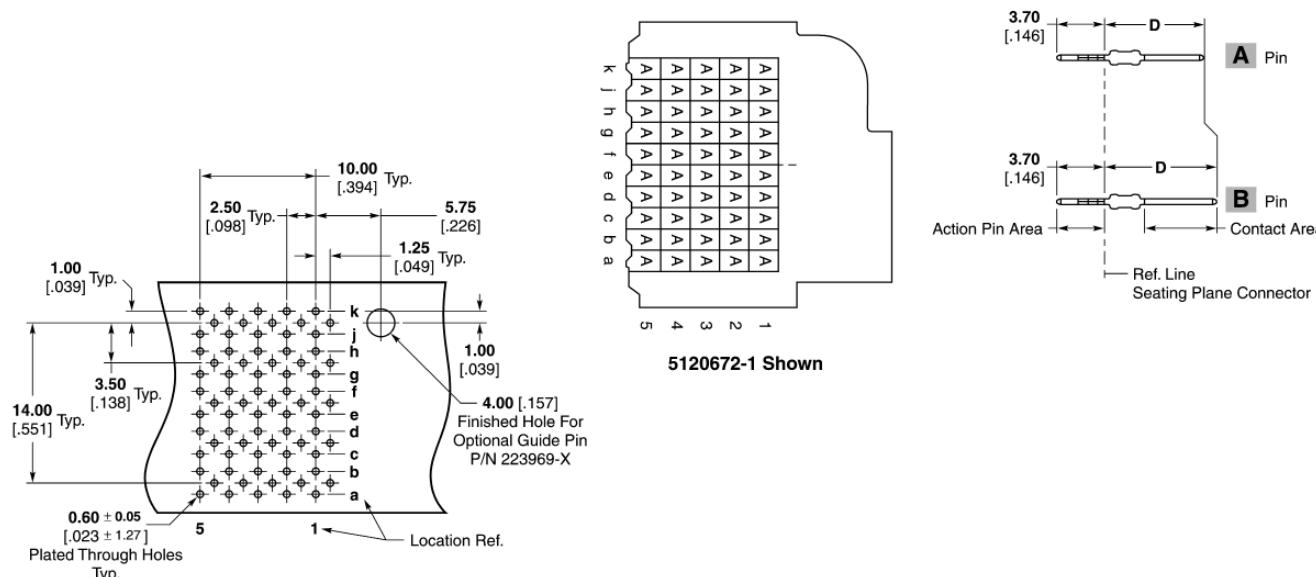

**Recommended PC Board Layout (Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 126**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

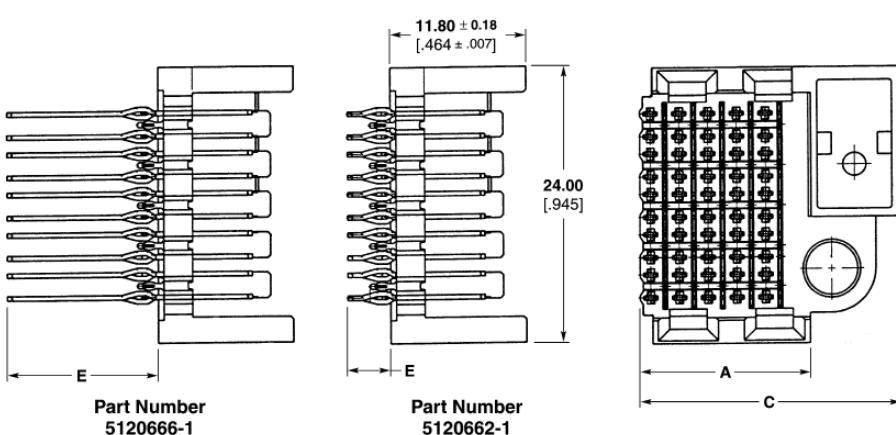
Z-PACK HS3 Connector (Continued)
Vertical Pin Header Assemblies (Continued)
10 Row, Left Module (accepts ESD Guide Pin)

P.C.B. Hole Dimensions
Drilled Hole — 0.7 ± 0.025 mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

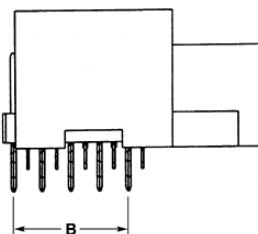Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.



Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling				
	A	B	C	D	E			Seating	IS Sheet	Signal Pin		
										Repair Kit	IS Sheet	
50	14.80 .583	10.00 .394	22.71 .894	8.20 .323	3.70 .146	A	5120662-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.80 .583	10.00 .394	22.71 .894	9.70 .382	3.70 .146	B	5120662-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.80 .583	10.00 .394	22.71 .894	8.20 .323	13.00 .512	K	5120666-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.80 .583	10.00 .394	22.71 .894	9.70 .382	14.50 .571	P	5120666-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573

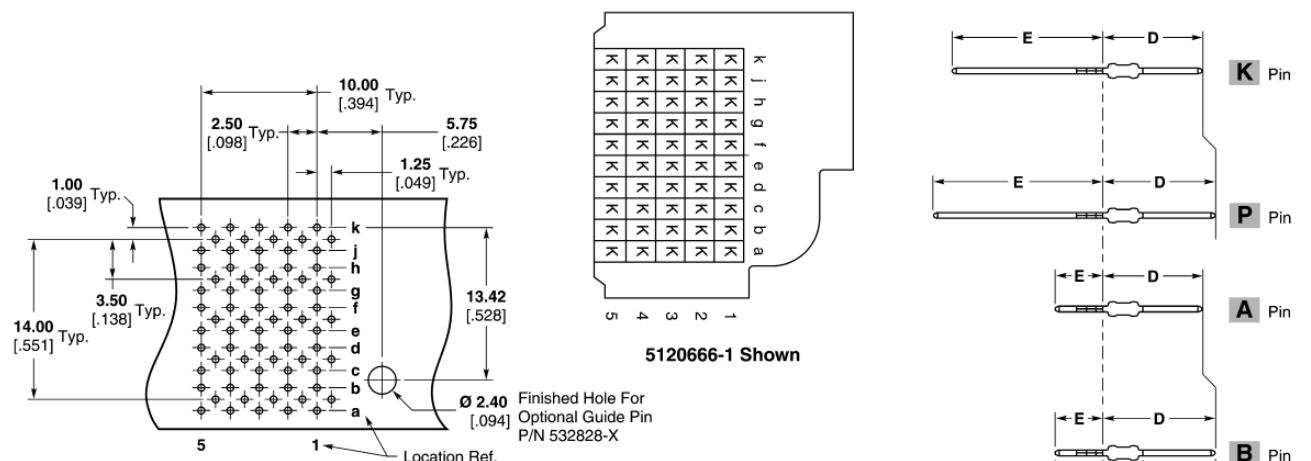

**Recommended PC Board Layout
(Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 126**

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Vertical Pin Header Assemblies (Continued)
10 Row, Center Module
P.C.B. Hole Dimensions


Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

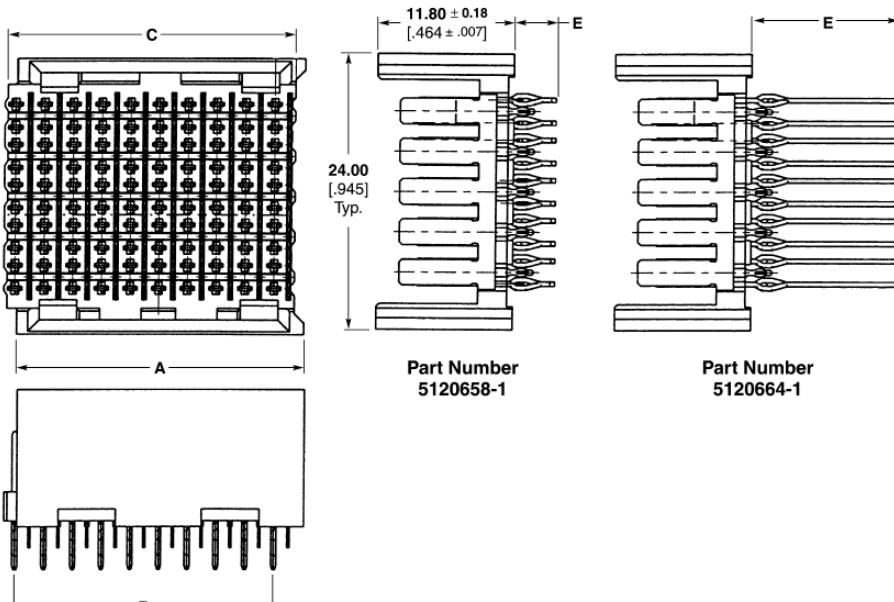

Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling				
	A	B	C	D	E			Seating	IS Sheet	Signal Pin		
										Repair Kit	IS Sheet	Ground Blade
100	24.90 .980	22.50 .885	24.90 .980	8.20 .322	3.70 .145	A	5120658-1	91312-2	408-4546	354687-2	408-9979	1320534-2 408-4573
	24.90 .980	22.50 .885	24.90 .980	9.70 .381	3.70 .145	B	5120658-2	91312-2	408-4546	354687-2	408-9979	1320534-2 408-4573
	24.90 .980	22.50 .885	24.90 .980	8.20 .322	13.00 .511	K	5120664-1	91312-2	408-4546	354687-2	408-9979	1320534-2 408-4573
	24.90 .980	22.50 .885	24.90 .980	9.70 .381	14.50 .570	P	5120664-2	91312-2	408-4546	354687-2	408-9979	1320534-2 408-4573
50	12.41 .488	10.00 .393	12.40 .488	8.20 .322	3.70 .145	A	5120747-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	12.41 .488	10.00 .393	12.40 .488	9.70 .381	3.70 .145	B	5120747-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	12.41 .488	10.00 .393	12.40 .488	8.20 .322	13.00 .511	K	5120748-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	12.41 .488	10.00 .393	12.40 .488	9.70 .381	14.50 .570	P	5120748-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573

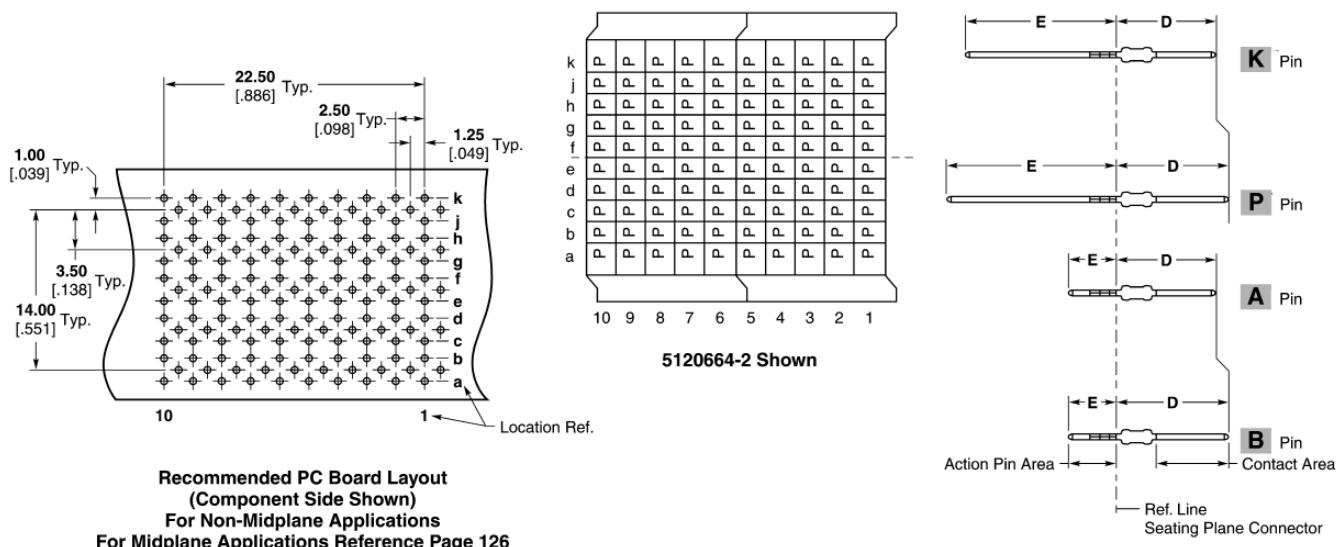


Recommended PC Board Layout (Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 126

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)
Vertical Pin Header Assemblies (Continued)
10 Row, Right Module (accepts Universal Guide Pin)
P.C.B. Hole Dimensions
Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm




Cu-thickness — 0.025 to 0.050mm

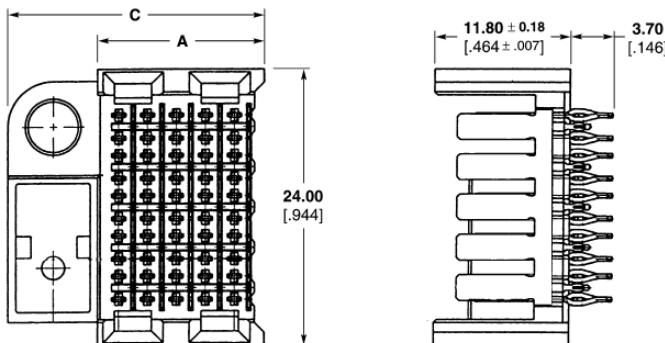SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

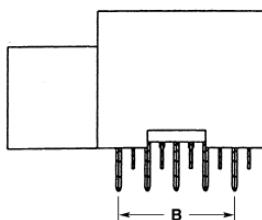

Number of Positions	Dimensions				Pin Ref.	Part Numbers	Application Tooling					
	A	B	C	D			Seating	IS Sheet	Signal Pin		Ground Blade	
									Repair Kit	IS Sheet	Repair Kit	IS Sheet
50	14.45 .568	10.00 .393	22.28 .877	8.20 .322	A	5120670-1	91312-1	408-4546	354687-2	408-9979	1320534-2	408-4573
	14.45 .568	10.00 .393	22.28 .877	9.70 .381								

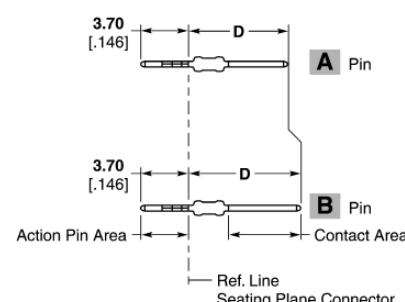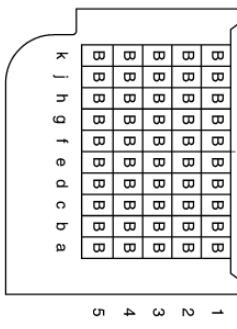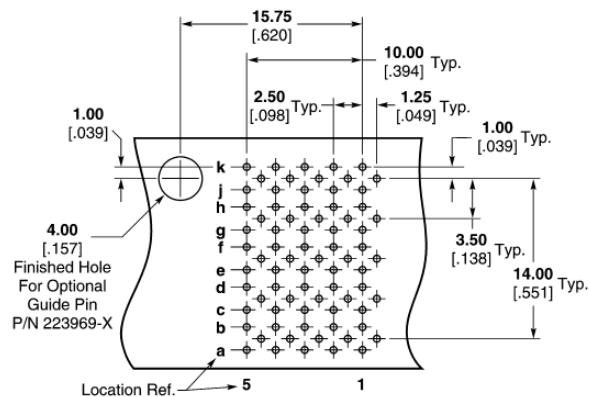

**Recommended PC Board Layout (Component Side Shown)
For Non-Midplane Applications**

For Midplane Applications Reference Page 126

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)
Vertical Pin Header Assemblies (Continued)
10 Row, Right Module (accepts ESD Guide Pin)
P.C.B. Hole Dimensions

Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


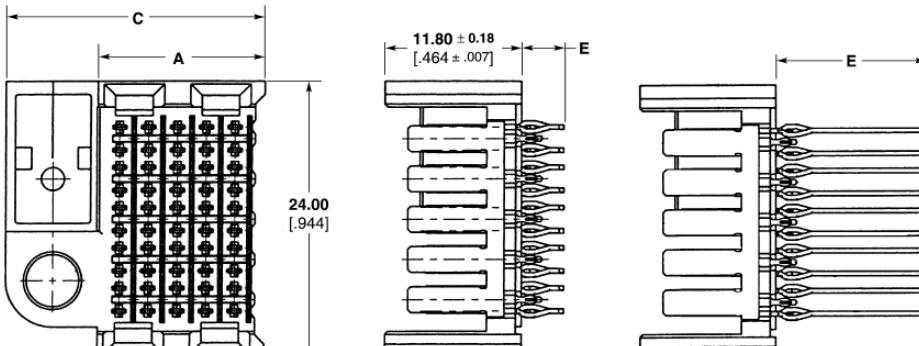

 Part Number
5120661-1

 Part Number
5120665-1


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

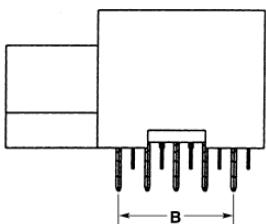

Number of Positions	Dimensions					Pin Ref.	Part Numbers	Application Tooling				
	A	B	C	D	E			Seating	IS Sheet	Signal Pin Repair Kit	IS Sheet	Ground Blade Repair Kit
50	14.46 .569	10.00 .393	22.28 .877	8.20 .322	3.70 .145	A	5120661-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.46 .569	10.00 .393	22.28 .877	9.70 .381	3.70 .145	B	5120661-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.46 .569	10.00 .393	22.28 .877	8.20 .322	13.00 .511	K	5120665-1	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573
	14.46 .569	10.00 .393	22.28 .877	9.70 .381	14.50 .570	P	5120665-2	91312-1	408-4546	354687-2	408-9979	1320534-2 408-4573

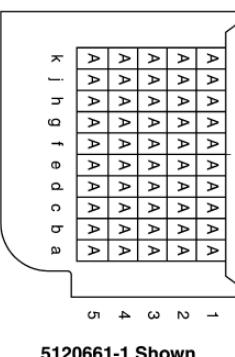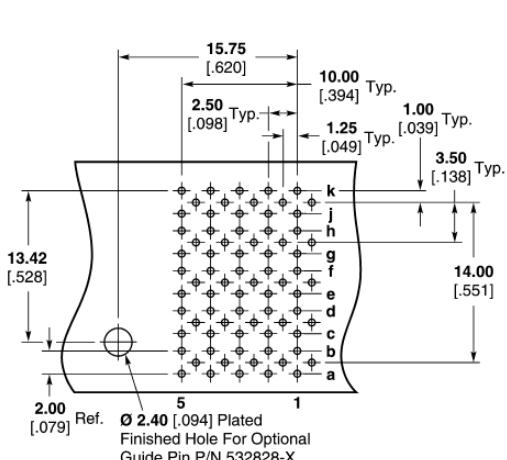


5120661-1 Shown

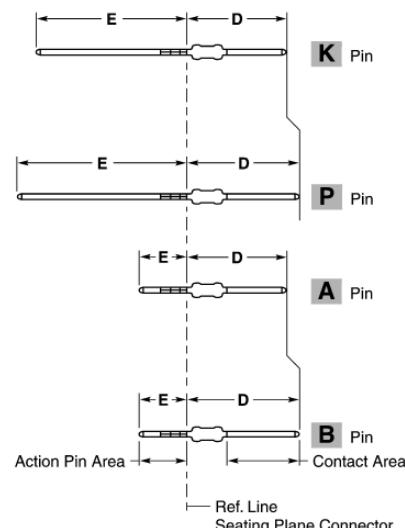

Recommended PC Board Layout (Component Side Shown)
For Non-Midplane Applications
For Midplane Applications Reference Page 126

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

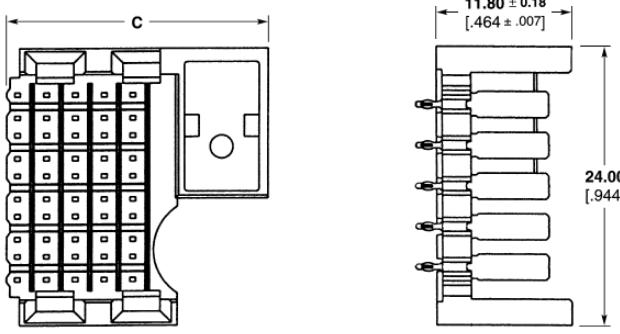
Z-PACK HS3 Connector (Continued)
**Vertical Pin Header
Shrouds**
10 Row, Left Module

P.C.B. Hole Dimensions
Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

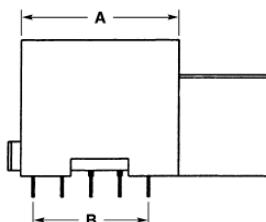
Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


4

Z-PACK HS3 Connector

Receptacle Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling			
	A	B	C		Seating	IS Sheet	Ground Blade Repair Kit	IS Sheet
50	13.70 .539	10.00 .877	22.80 .322	5120668-1	91312-1	408-4546	1320534-2	408-4573

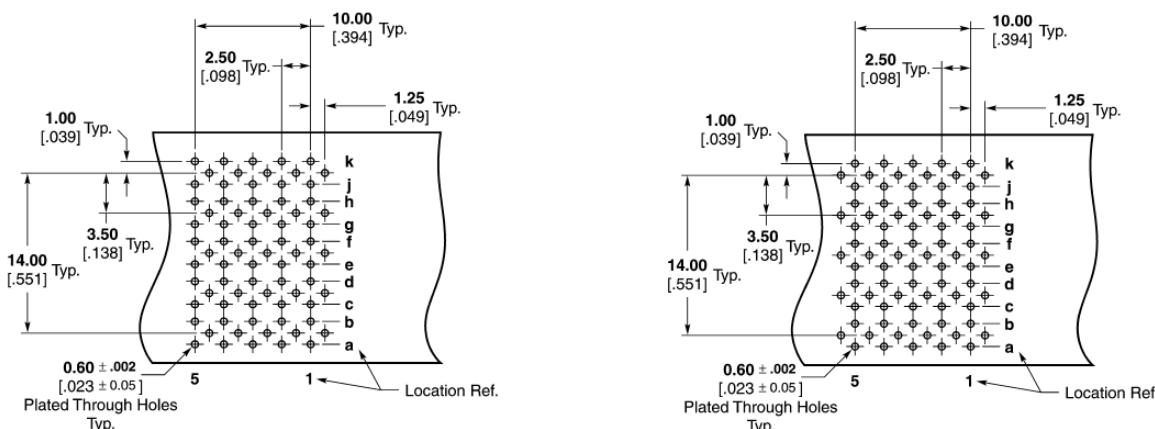

**Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1k Shroud Side)**

 Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)

**Coplanar Daughtercards
(Pin 1a Header = Pin 5a Shroud Side)**

 Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

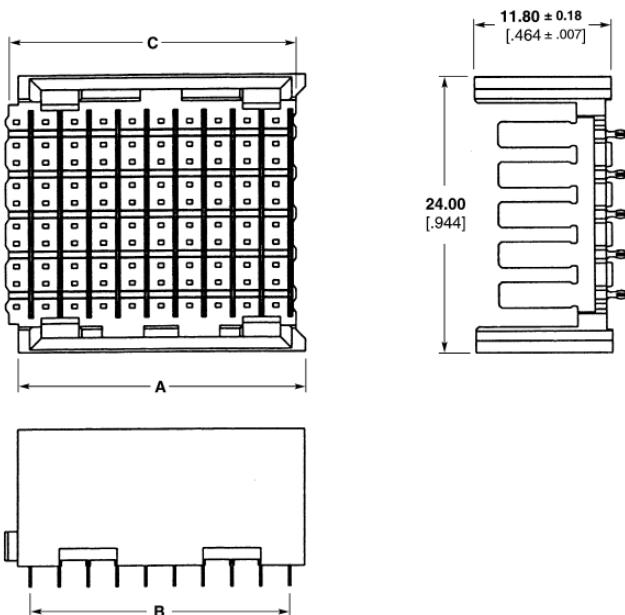Z-PACK HS3 Connector (Continued)
**Vertical Pin Header
Shrouds (Continued)**
10 Row, Center Module

P.C.B. Hole Dimensions
Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm


Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm


Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.

Receptacle Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling		
	A	B	C		Seating	IS Sheet	Ground Blade Repair Kit
100	24.90 .980	22.50 .886	24.90 .980	5120663-1	91312-2	408-4546	1320534-2 408-4573
50	12.41 .488	10.00 .394	12.40 .488	5120750-1	91312-1	408-4546	1320534-2 408-4573

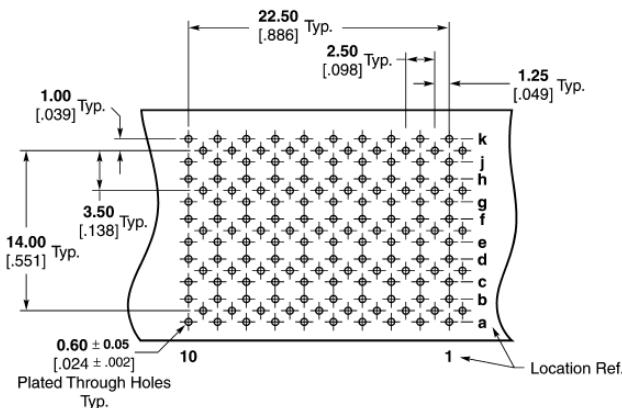

Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1k Shroud Side)
Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)

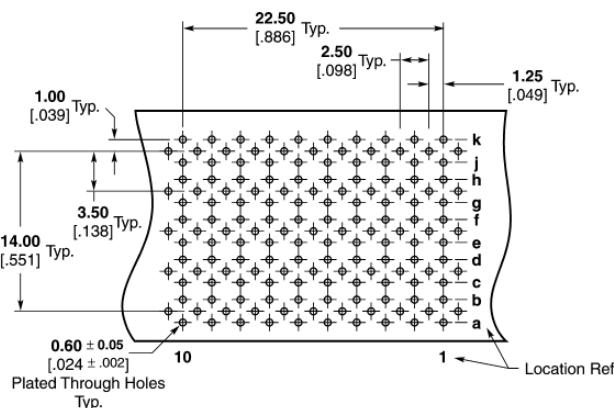



Coplanar Daughtercards
(Pin 1a Header = Pin 10a Shroud Side)
Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)

Vertical Pin Header Shrouds (Continued)

10 Row, Right Module

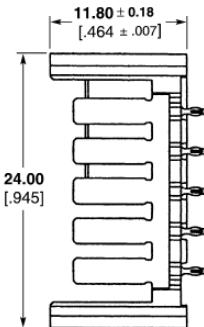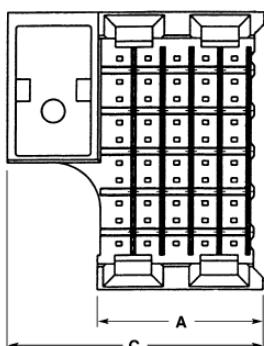

P.C.B. Hole Dimensions


Drilled Hole — 0.7±0.025mm

Fin. Hole — 0.55 to 0.65mm

Cu-thickness — 0.025 to 0.050mm

SnPb-thickness — 0.004 to 0.010mm

Note: For finishes other than Tin-Lead, reference Application Specification 114-13020.


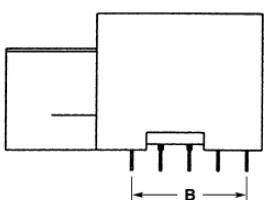


4

Z-PACK HS3 Connector

Receptacle Assemblies

Number of Positions	Dimensions			Part Number	Application Tooling			
	A	B	C		Seating	IS Sheet	Ground Blade Repair Kit	IS Sheet
50	14.46 .569	10.00 .394	22.28 .877	5120667-1	91312-1	408-4546	1320534-2	408-4573

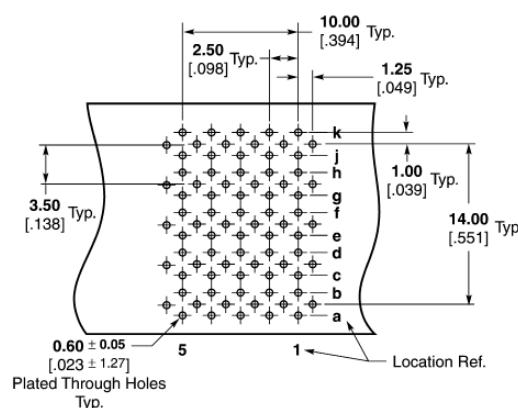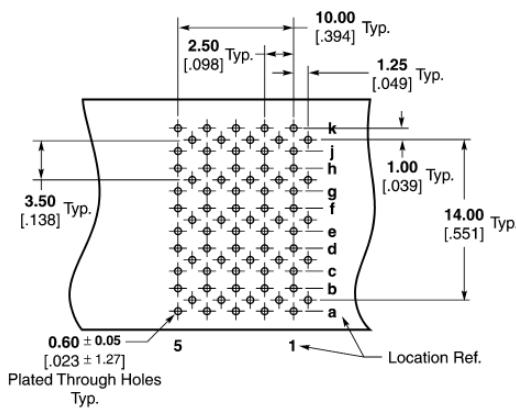

Non-Coplanar Daughtercards
(Pin 1a Header = Pin 1k Shroud Side)
Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)


Coplanar Daughtercards
(Pin 1a Header = Pin 5a Shroud Side)
Recommended PC Board Layout — Reference Page 126
(Shroud Side Shown)

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.


Z-PACK HS3 Connector (Continued)

Layout Guide for Midplane Applications 10 Row Connectors



Non-Coplanar Applications

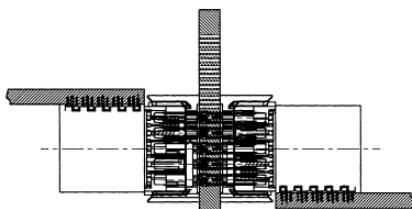

Coplanar Applications


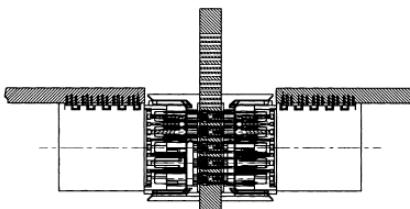


Right Module

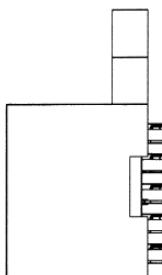



No.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120665	5120667-1	
—		

Right Module

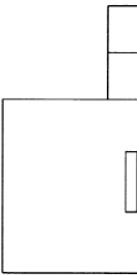



No.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120665	5120668-1	
—		

Center Module

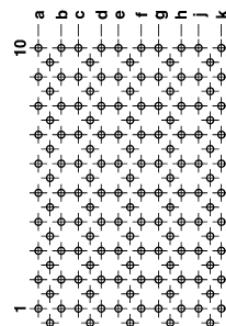


No. of Pos.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
100	5120664	5120663-1
50	—	5120750-1

Center Module

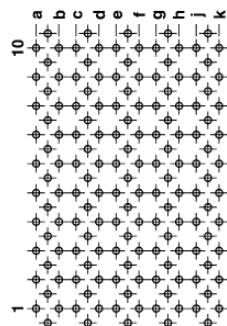



No. of Pos.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
100	5120664	5120663-1
50	—	5120750-1

Left Module



No.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120666	5120667-1	
—		

Left Module

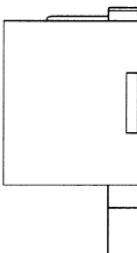

No.	Vertical Pin Header, Feed-Through Part No.	Shroud Part No.
5120666	5120668-1	
—		

Note: All part numbers are RoHS compliant.

Z-PACK HS3 Connector (Continued)
Coding Keys (10 Row Only)

Compatibility — Z-PACK HS3,
Z-PACK 12 row connectors
Part Number 120639-3 (white)
Part Number 120639-6 (red)

Material & Finish — Valox

Power and Guide Hardware
**Universal Power Module
Vertical Receptacle (3 Pos.)**


The Tyco Electronics Universal Power Module is a multi-position, modular, hard metric board-to-board power connector designed to be compatible with Z-PACK 2mm HM connectors. The design is in an "inverse-sex" orientation and the vertical receptacle module meets the IEC 950 safety requirements for finger probe protection.

Both the headers and receptacle utilize Tyco Electronics ACTION PIN press-fit leads for ease of assembly onto printed circuit boards. Additionally, the vertical receptacle leads are polarized to allow only one orientation onto the printed circuit board, eliminating the possibility of reverse placement.


The Universal Power Module is compatible with a wide variety of other Tyco Electronics board-to-board connectors including Z-PACK HS3, Z-PACK HM-Zd and Z-PACK TinMan connectors.

The right angle header contacts are available with sequenced lengths for "make-first/break-last" applications.




Generous alignment features designed into the housings and optional guide pins and receptacles make the Tyco Electronics Universal Power Module ideal for "blind mating" applications.

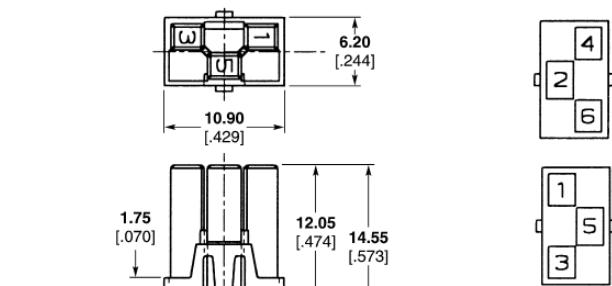

Part Number 120639-6



Part Number 120639-3

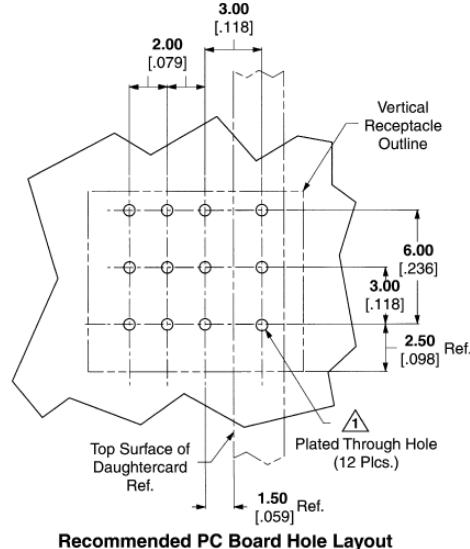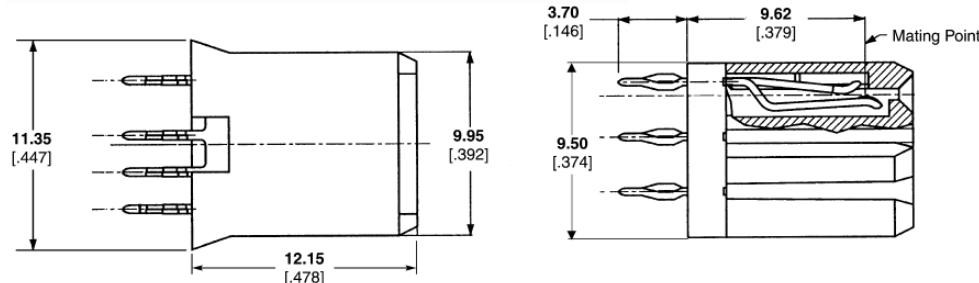
Recommended PC Board Hole Layout

	Position Loaded	Part Numbers
Vertical Receptacle	ABC	5223955-2
	AC	5223984-1
High Current	ABC	5-5223955-2

PCB Hole Dim.
Drilled Hole = **0.7000 ± 0.025** [$.02756 \pm .0010$]
Finished Hole = **0.60 ± 0.05** [$.024 \pm .002$]
Cu Thickness = **0.375 ± 0.0125** [$.0148 \pm .00049$]
SnPb Thickness = **0.007 ± 0.003** [$.0003 \pm .0001$]

Note: For finishes other than Tin-Lead, reference Application Specification 114-1103.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Power and Guide Hardware

(Continued)

Expanded Universal Power Module Vertical Receptacles
Material and Finish
Housing — Polyester, gray

Contact — Copper alloy, plated 0.00127 [.000050] min. gold in mating area, 0.00050 [.000020] min. Tin-Lead on ACTION PIN product area, with entire contact underplated 0.00127 [.000050] min. nickel

Related Product Data
Guiding Hardware (Optional) —
 pages 132 and 133

Application Tooling
Header

 Seating Tool, 224441-1
 Board Support Fixture, 224442-1

Receptacle

 Seating Tool, 224421-1
 Board Support Fixture, 217602-1

Technical Documents
Product Specification

108-1651


Application Specification

114-1103

Tyco Electronics Instruction Sheet

408-4169 (Receptacle)

Seating Tool 224421-1)

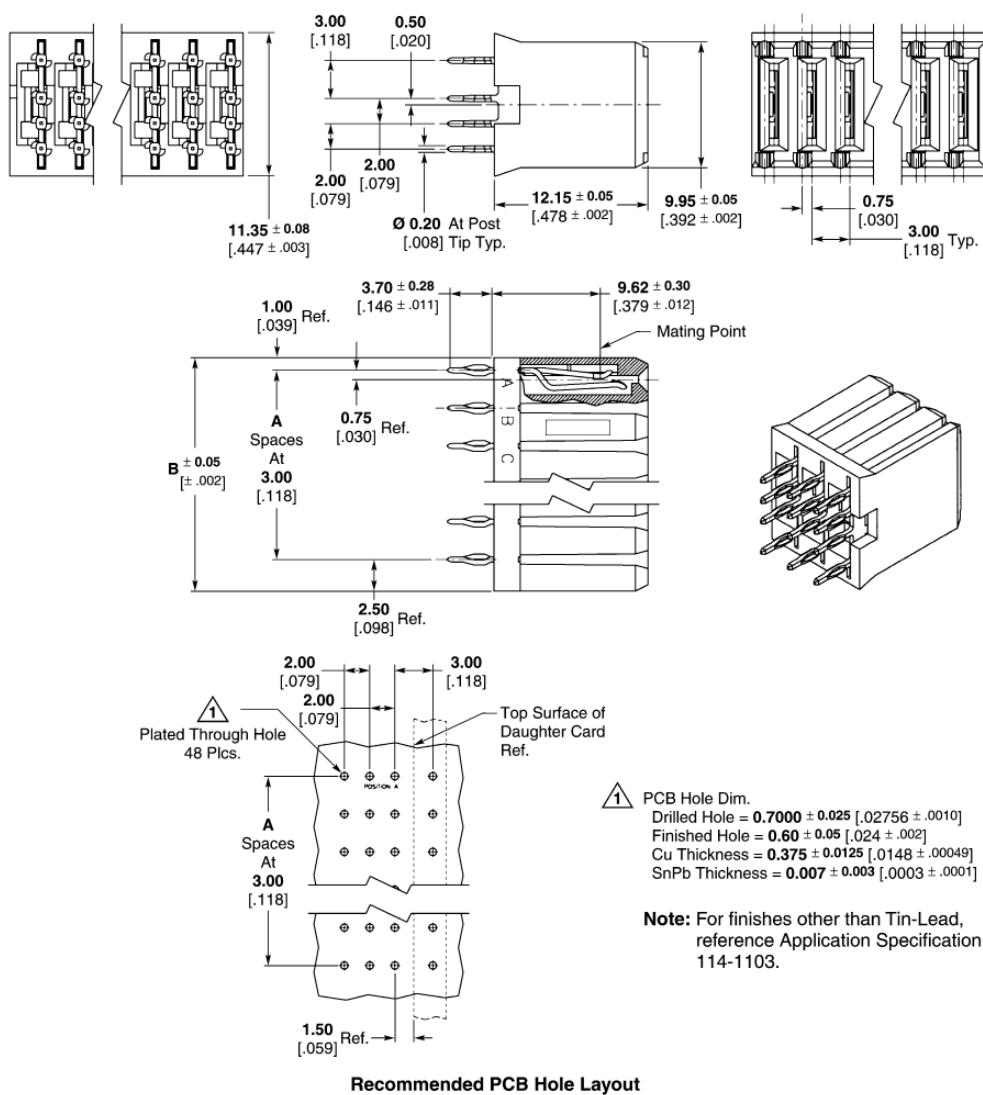
Recommended PCB Hole Layout

Note: For finishes other than Tin-Lead, reference Application Specification 114-1103.

Position	A	B Ref.	Standard *10A Part Number	High Current *15A Part Number
4	3	12.50 .492	5223995-1	120953-1
5	4	15.50 .610	5223995-2	120953-2
6	5	18.50 .728	5223995-3	120953-3
7	6	21.50 .846	5223995-4	120953-4
8	7	24.50 .965	5223995-5	120953-5

*Reference Product Specification 108-1651.


Note: For additional Power Module options reference Catalog 1773096, "Power Connectors and Interconnection Systems," or contact your Tyco Electronics Sales Representative.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Power and Guide Hardware

(Continued)

**Universal Power Module
Right Angle Headers (3 Pos.)**
Material and Finish
Housing — polyester, natural color

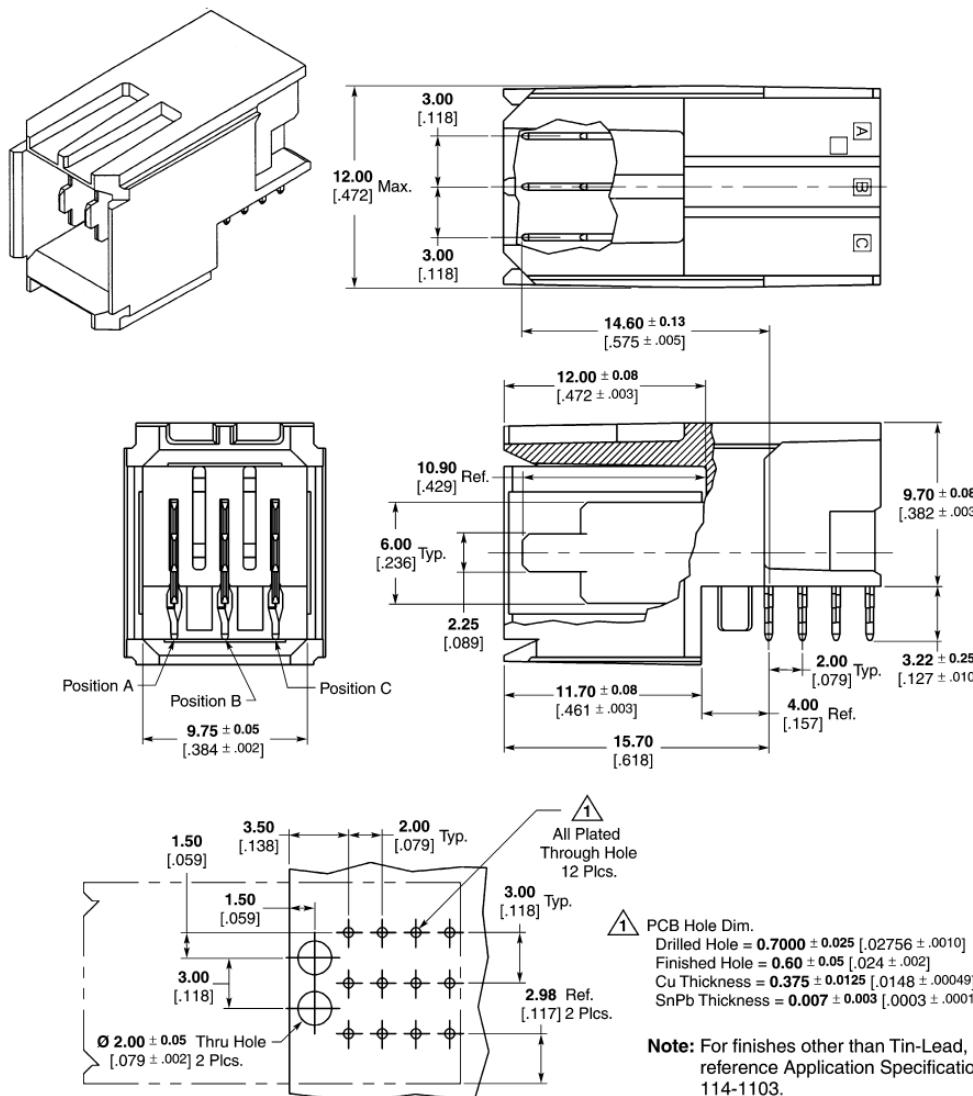Contacts — Copper alloy, plated 0.00127 [.000050] min. gold in mating area, 0.00050 [.000020] min. Tin-Lead on ACTION PIN post area, with entire contact underplated 0.00127 [.000050] min. nickel


Note: For additional Power Module options reference Catalog 1773096, "Power Connectors and Interconnection Systems," or contact your Tyco Electronics Sales Representative.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)
Power and Guide Hardware

(Continued)

Expanded Universal Power Module Right Angle Headers
Material and Finish

Housing — Polyester, gray

Contacts — Phosphor bronze, plated 0.00127 [.000050] min. gold in mating area, 0.00054 [.000021] min. Tin-Lead on ACTION PIN product area, with entire contact underplated 0.00127 [.000050] min. nickel

Related Product Data

Guiding Hardware (Optional) —
pages 132 and 133

Application Tooling
Header

Seating Tool, 224441-1
Board Support Fixture, 224442-1

Receptacle

Seating Tool, 224421-1
Board Support Fixture, 217602-1

Technical Documents
Product Specification

108-1651


Application Specification

114-1103

Tyco Electronics Instruction Sheet

408-4169 (Receptacle)

Seating Tool 224421-1)

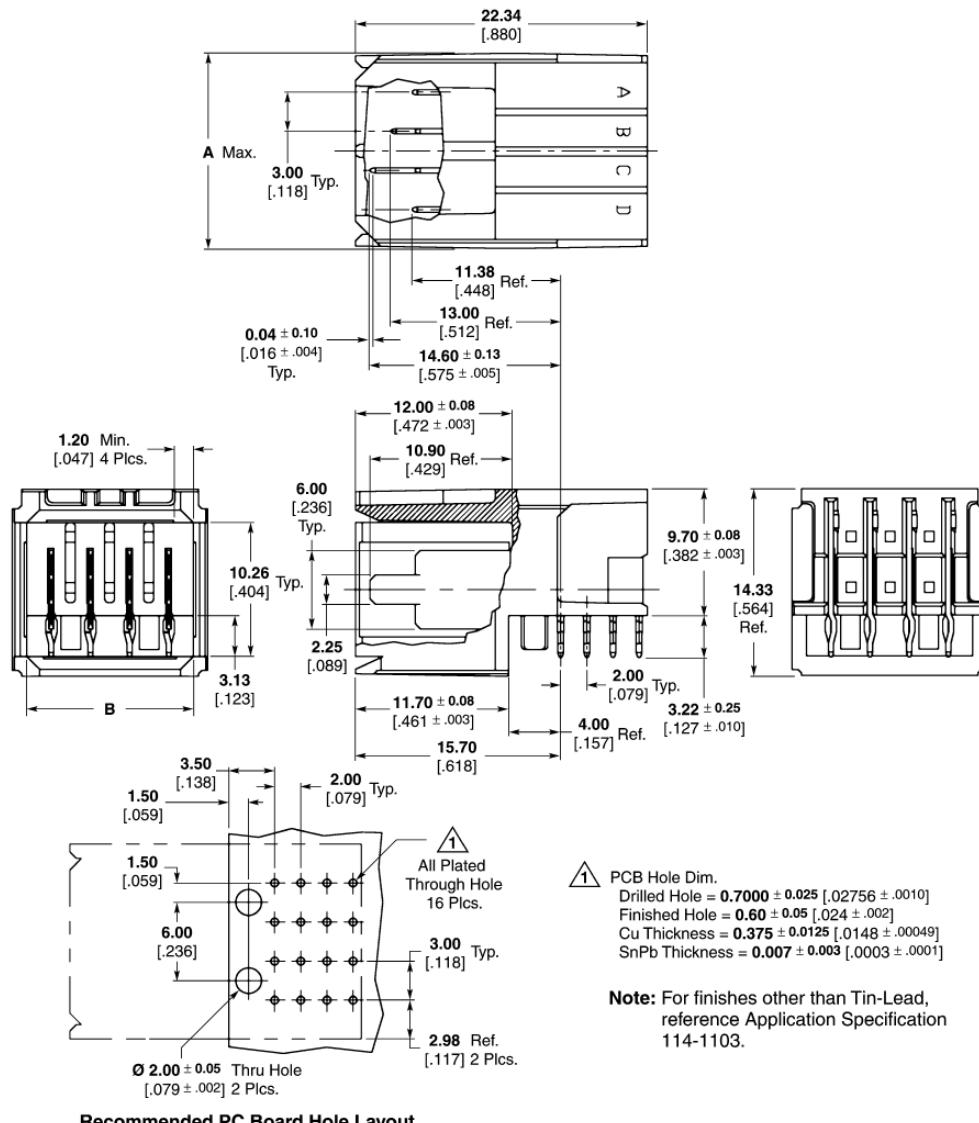

Note: For additional Power Module options reference Catalog 1773096, "Power Connectors and Interconnection Systems," or contact your Tyco Electronics Sales Representative.

Positions	Dimensions		Standard *10A Base Part Number ¹	High Current *15A Base Part Number ¹
	A	B		
4	15.00 .591	12.75 .502	5646954	120954
5	18.00 .709	15.75 .620	5646955	120955
6	21.00 .827	18.75 .738	5646956	120956
7	24.00 .945	21.75 .856	5646957	120957
8	27.00 1.063	24.75 .974	5646958	120958

¹ Dash number indicates sequence pattern. See customer drawing for specific dash numbers.

*Reference Product Specification 108-1651.

Note: All part numbers are RoHS compliant. Tin-Lead parts are RoHS compliant through exemption for lead in press-fit connectors.

Z-PACK HS3 Connector (Continued)

Power and Guide Hardware

(Continued)

AMP-HDI Static Discharge Guide/Power Pins

Compatibility — Z-PACK HS3, Z-PACK 2mm HM connectors


Part Number — 532828-5*

Nut — 21124-4

Washer — 986794-1

Max. Current Rating — 10 Amperes

*Additional sequence lengths are available, contact Tyco Electronics

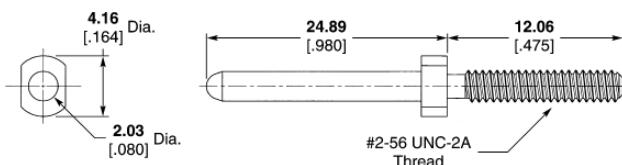

Material and Finish

Brass, plated 0.00076 [.000030] gold over 0.00127-0.00254 [.000050-.000100] nickel


AMP-HDI Guide Pin/Power Receptacles

Compatibility — Z-PACK HS3 connector

Part Number — 535875-1*

Max. Current Rating — 10 Amperes

*Additional lengths are available, see customer drawing.

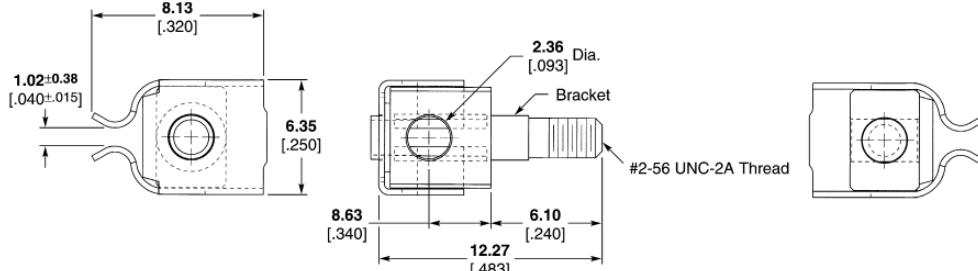

Material and Finish

Contact Finish — 0.00076 [.000030] gold in contact area, over 0.00127 [.000050] min. nickel underplate. Gold flash on remainder of the contact.

ESD-Guide Pin/Feed-through

Compatibility — Z-PACK HS3 connector


Part Number — 120759-2*

Max. Current Rating — 10 Amperes

*Additional sequence lengths are available, contact Tyco Electronics

Material and Finish

Brass, plated 0.00076 [.000030] gold all over 0.001427-0.00254 [.000050-.000100] nickel underplate

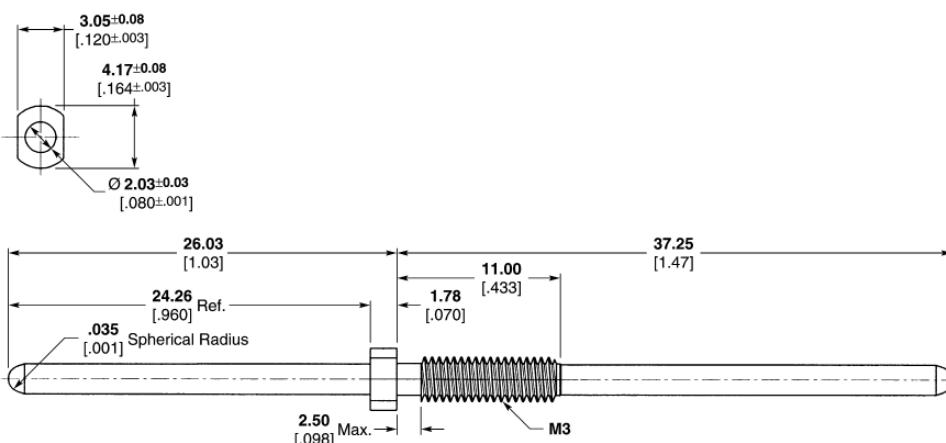

Note: All part numbers are RoHS compliant.

Z-PACK HS3 Connector (Continued)

Power and Guide Hardware


(Continued)

Guide Pin (Unkeyed)

Material and Finish

Guide Pin — Passivated stainless steel

Part Number 223956-1

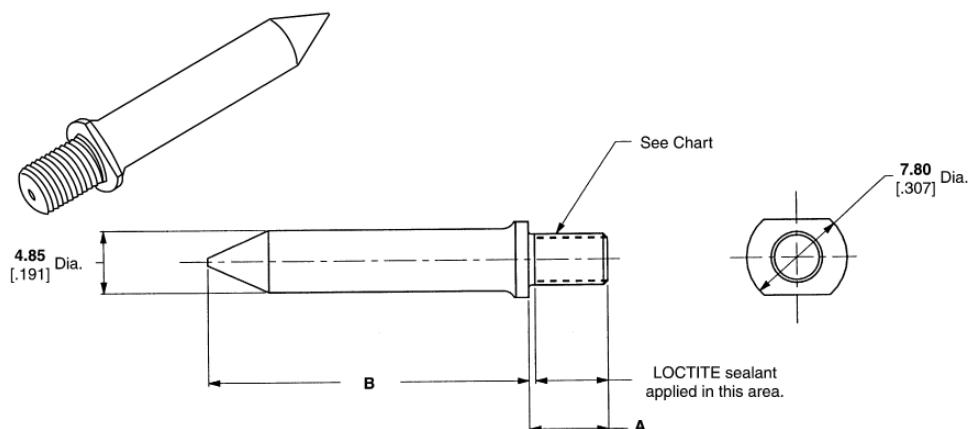

Dimension	Thread	Part Numbers
A 7.50 [.295]	M4 x 7-6g	223982-1*
9.20 [.362]	M4 x 7-6g	223969-7
12.70 [.500]	8-32 UNC-2A	223969-4
12.70 [.500]	M4 x 7-6g	223969-1
6.20 [.244]	M4 x 7-6g	223956-1
12.70 [.500]	8-32 UNC-2A	1-223969-0
3.80** [.150]	27.16 [1.069]	120646-1
2.00** [.079]	27.16 [1.069]	223988-1

*6.35 Hex Base

**Internal Thread

Female Guide Module (Unkeyed)

Material and Finish

Guide Module — Zinc alloy, chromate conversion coated

Related Product Data

Application Tooling

Seating Tool, 224440-1
Board Support Fixture, 217603-1

Technical Documents

Product Specification

108-1651

Application Specification


114-1103

Part Number 223957-1

(as shown)

Part Number 223979-1

(dual alignment posts)

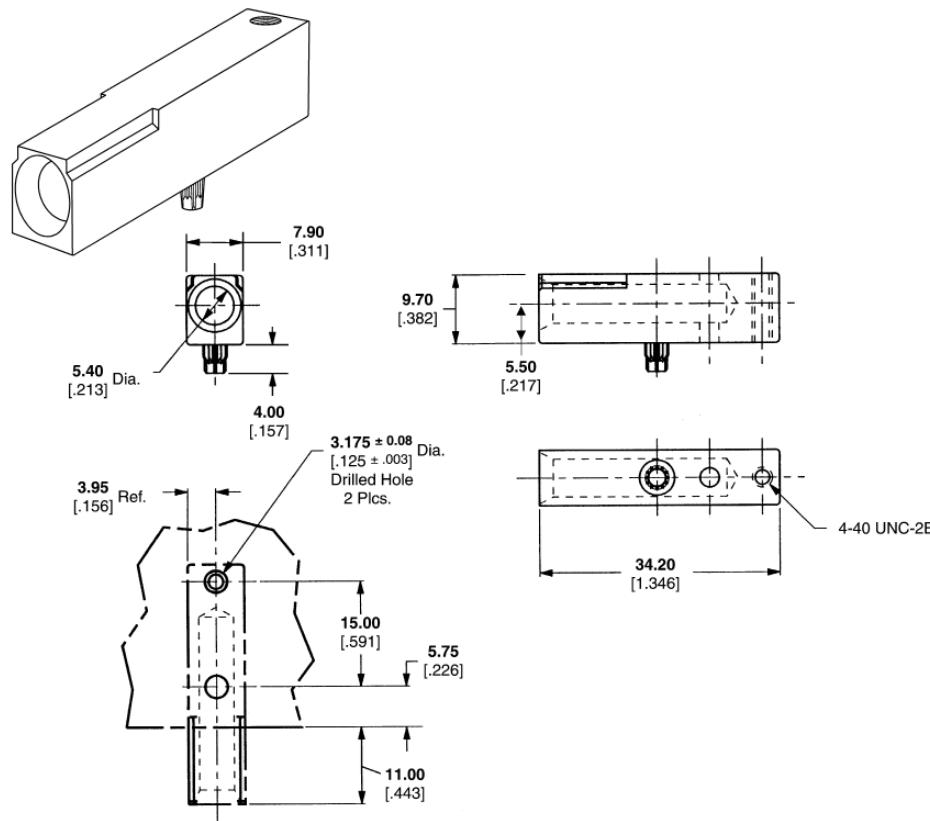

LOCTITE is a trademark of Henkel Corp.

Note: All part numbers are RoHS compliant.

Recommended PC Board Hole Layout


Power and Guide Hardware
 (Continued)

Guide Pin (Keyed)
Material and Finish

Guide Pin — Zinc alloy, chromate conversion coated

Part Number 223985


Dimension		Part Number
A	B	
25.16	20.39	223985-1
.991	.803	
29.00	24.23	223985-3
1.142	.954	

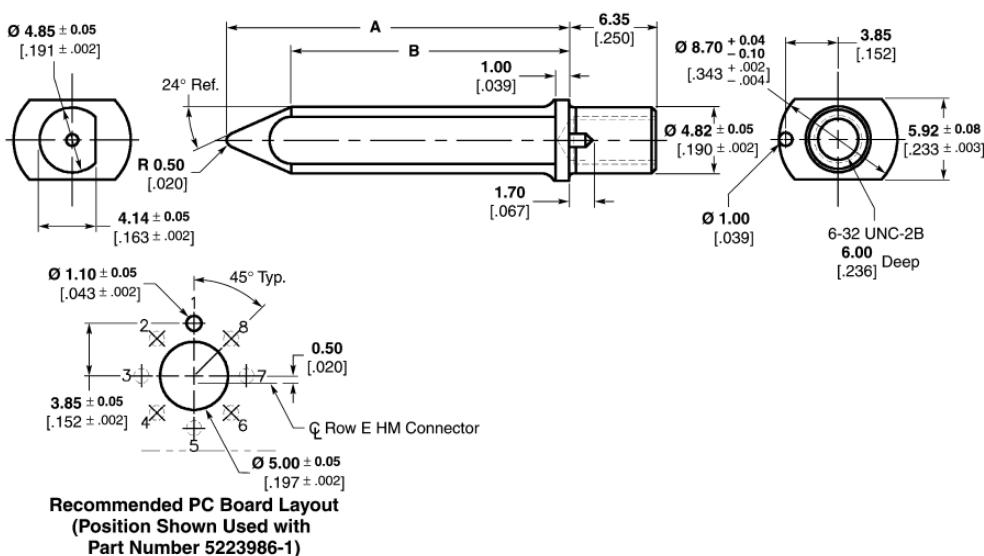Z-PACK HS3 Connector (Continued)

Female Guide Module (Keyed)
Material and Finish



Guide Module — Zinc alloy, chromate conversion coated

Part Number 5223986

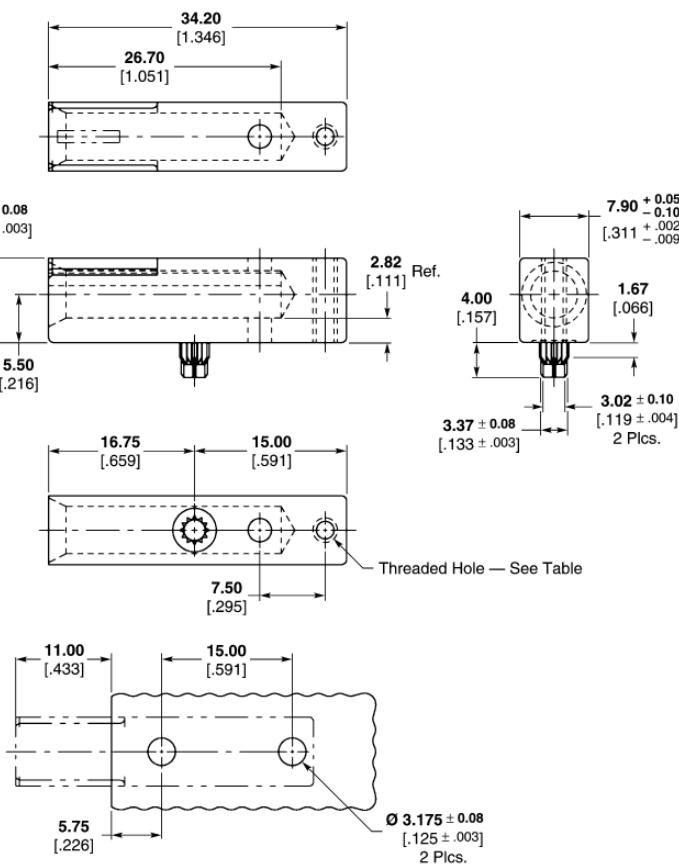Dim.	A	Thread	Part Number
0°	4-40	5223986-1	
45°	4-40	5223986-2	
90°	4-40	5223986-3	
135°	4-40	5223986-4	
180°	4-40	5223986-5	
225°	4-40	5223986-6	
270°	4-40	5223986-7	
315°	4-40	5223986-8	
0°	M2.6	5120913-1	
45°	M2.6	5120913-2	
90°	M2.6	5120913-3	
135°	M2.6	5120913-4	
180°	M2.6	5120913-5	
225°	M2.6	5120913-6	
270°	M2.6	5120913-7	
315°	M2.6	5120913-8	



Note: All part numbers are RoHS compliant.

Z-PACK HS3 Connector (Continued)
**Z-PACK HS-3 Connector
Mating Sequence Chart**

Fully Mated

Reliable Mate

Product Family	Dim. C	Dim. A Fully Mated	Contact	Dim B.		Fully Mated Wipe Length
				Reliable Mate	First Mate Last Break	
Z-PACK HM-Zd Product	1.50 .059	12.50 .492	Ground Shield	16.78 [.661]	17.55 [.691]	4.28 [.169]
			Signal Level 2	15.41 [.607]	15.85 [.624]	2.91 [.115]
			Signal Level 1	13.91 [.548]	14.35 [.565]	1.41 [.056]
Z-PACK HM-Zd Guide Hardware	3.00 .118	12.50 .492	24.0 mm Pin	27.50 [1.083]	33.40 [1.315]	N/A
			22.2 mm Pin	25.70 [1.012]	31.60 [1.244]	N/A
			Key Blocking Point	N/A	22.03 [.867]	N/A
Z-PACK TinMan Product	1.50 .059	12.50 .492	Ground Pins	16.44 [.647]	17.13 [.674]	3.94 [.155]
			Signal Level 2	14.94 [.588]	15.63 [.615]	2.44 [.096]
			Signal Level 1	N/A	N/A	N/A
Z-PACK 2mm HM Product	1.50 .059	12.50 .492	Signal Level 3	18.27 [.719]	18.84 [.742]	5.77 [.227]
			Signal Level 2	16.77 [.660]	17.34 [.683]	4.27 [.168]
			Signal Level 1	15.27 [.601]	15.84 [.624]	2.77 [.109]
MULTIGIG RT T1 Product	2.50 .098	12.50 .492	Ground	18.00 [.709]	—	5.50 [.217]
			Signal Level 3	18.00 [.709]	—	5.50 [.217]
			Signal Level 2	16.50 [.650]	—	4.00 [.157]
			Signal Level 1	15.00 [.591]	—	2.50 [.098]
MULTIGIG RT T2 Product	2.25 .089	12.50 .492	Ground	18.00 [.709]	—	5.50 [.217]
			Signal Level 3	18.00 [.709]	—	5.50 [.217]
			Signal Level 2	16.50 [.650]	—	4.00 [.157]
			Signal Level 1	15.00 [.591]	—	2.50 [.098]
MULTIGIG RT Power Module	5.50 .217	12.50 .492	Power Level 3	23.75 [.935]	—	11.25 [.443]
			Power Level 2	22.25 [.876]	—	9.75 [.384]
			Power Level 1	20.75 [.817]	—	8.25 [.325]
MULTIGIG RT Guide Hardware	N/A	12.50 .492	Guide Pin Key	33.25 [1.309]	N/A	20.75 [.817]
			Guide ESD Contact	30.75 [1.211]	—	18.25 [.719]
Z-PACK HS3 Product	1.50 .059	12.50 .492	Ground	17.08 [.672]	17.60 [.693]	4.78 [.188]
			Signal Level 2	16.05 [.632]	16.47 [.648]	3.75 [.148]
			Signal Level 1	14.55 [.573]	14.97 [.589]	2.25 [.089]
UPM	3.50 .138	12.50 .492	Power Level 3	20.25 [.797]	20.95 [.825]	8.10 [.319]
			Power Level 2	18.65 [.734]	19.35 [.762]	6.50 [.256]
			Power Level 1	17.03 [.670]	17.73 [.698]	4.88 [.192]
UPM Guide Hardware	5.75 .226	12.50 .492	Guide Pin Key	31.39 [1.236]	36.16 [1.424]	N/A
			Keyed Guide Pin	31.39 [1.236]	36.16 [1.424]	N/A
			Keyed Guide Pin	35.23 [1.387]	40.00 [1.575]	N/A
MULTI-BEAM XL Right Angle Header to Vertical Receptacle	5.08 .200	14.73 .580	PreMate Power — Level 1	—	16.84 [.663]	5.61 [.221] Min.
			PostMate Power — Level 2	—	17.81 [.701]	4.34 [.171] Min.
			PreMate Signal — Level 2	—	18.26 [.719]	3.81 [.150] Min.
			PostMate Signal — Level 3	—	19.53 [.769]	2.54 [.100] Min.
MULTI-BEAM XL Right Angle Receptacle to Vertical Header	3.81 .150	13.21 .520	PreMate Power — Level 1	—	15.32 [.603]	5.61 [.221] Min.
			PostMate Power — Level 2	—	16.28 [.641]	4.34 [.171] Min.
			PreMate Signal — Level 2	—	16.74 [.659]	3.81 [.150] Min.
			PostMate Signal — Level 3	—	18.01 [.709]	2.54 [.100] Min.

Z-PACK HS3 Connector (Continued)
Application Tooling and Equipment



1585280-1 Model AP3



1585696-1 Model BMEP 5T




1585699-1 Model MEP 6T

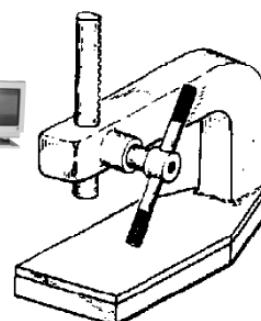

Typical Manual Arbor Frame Assembly (Commercially Available)

 Insertion Tool Assembly
IS 408-9979

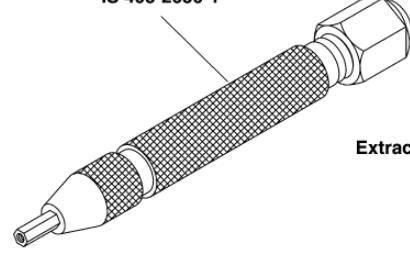 Contact Replacement Tool
IS 408-2636-1

 Replacement Pin Assembly
IS 408-9979

 Tool Tip
IS 408-9979

 Setscrew
IS 408-9979

 Pusher
IS 408-9979

Spacer







 Extraction Tool Assembly
IS 408-9979

 Pin Support Tube
IS 408-9979

 Pin Repair Kit
IS 408-9979

 Chiclet Removal Tool
IS 408-8410

 Ground Blade Repair Kit
IS 408-4573

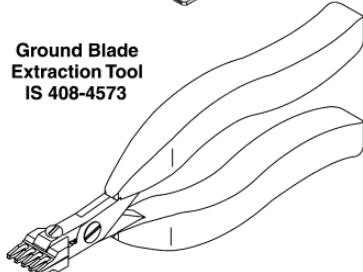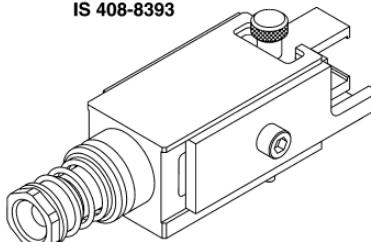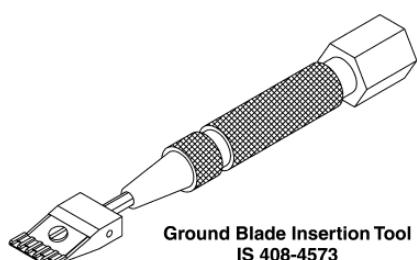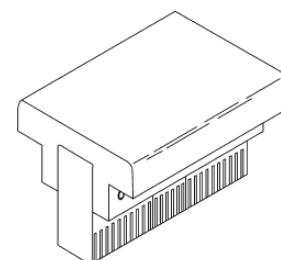 Housing Removal Tool Kit
IS 408-8393

 Ground Blade Extraction Tool
IS 408-4573

 Ground Blade Insertion Tool
IS 408-4573

 Typical PC Board Support
(Customer Supplied)

 Typical Receptacle Seating Tool
IS 408-8500

 Typical Pin Header Seating Tool
IS 408-8501

Note: All part numbers are RoHS compliant.

Catalog 1773095
Revised 12-08

www.tycoelectronics.com


Dimensions are in millimeters and inches unless otherwise specified. Values in brackets are U.S. equivalents.

Dimensions are shown for reference purposes only. Specifications subject to change.

USA: 1-800-522-6752
Canada: 1-905-470-4425
Mexico: 01-800-733-8926
C. America: 52-55-1106-0803

South America: 55-11-2103-6000
Hong Kong: 852-2735-1628
Japan: 81-44-844-8013
UK: 44-8706-080-208

Engineering Notes

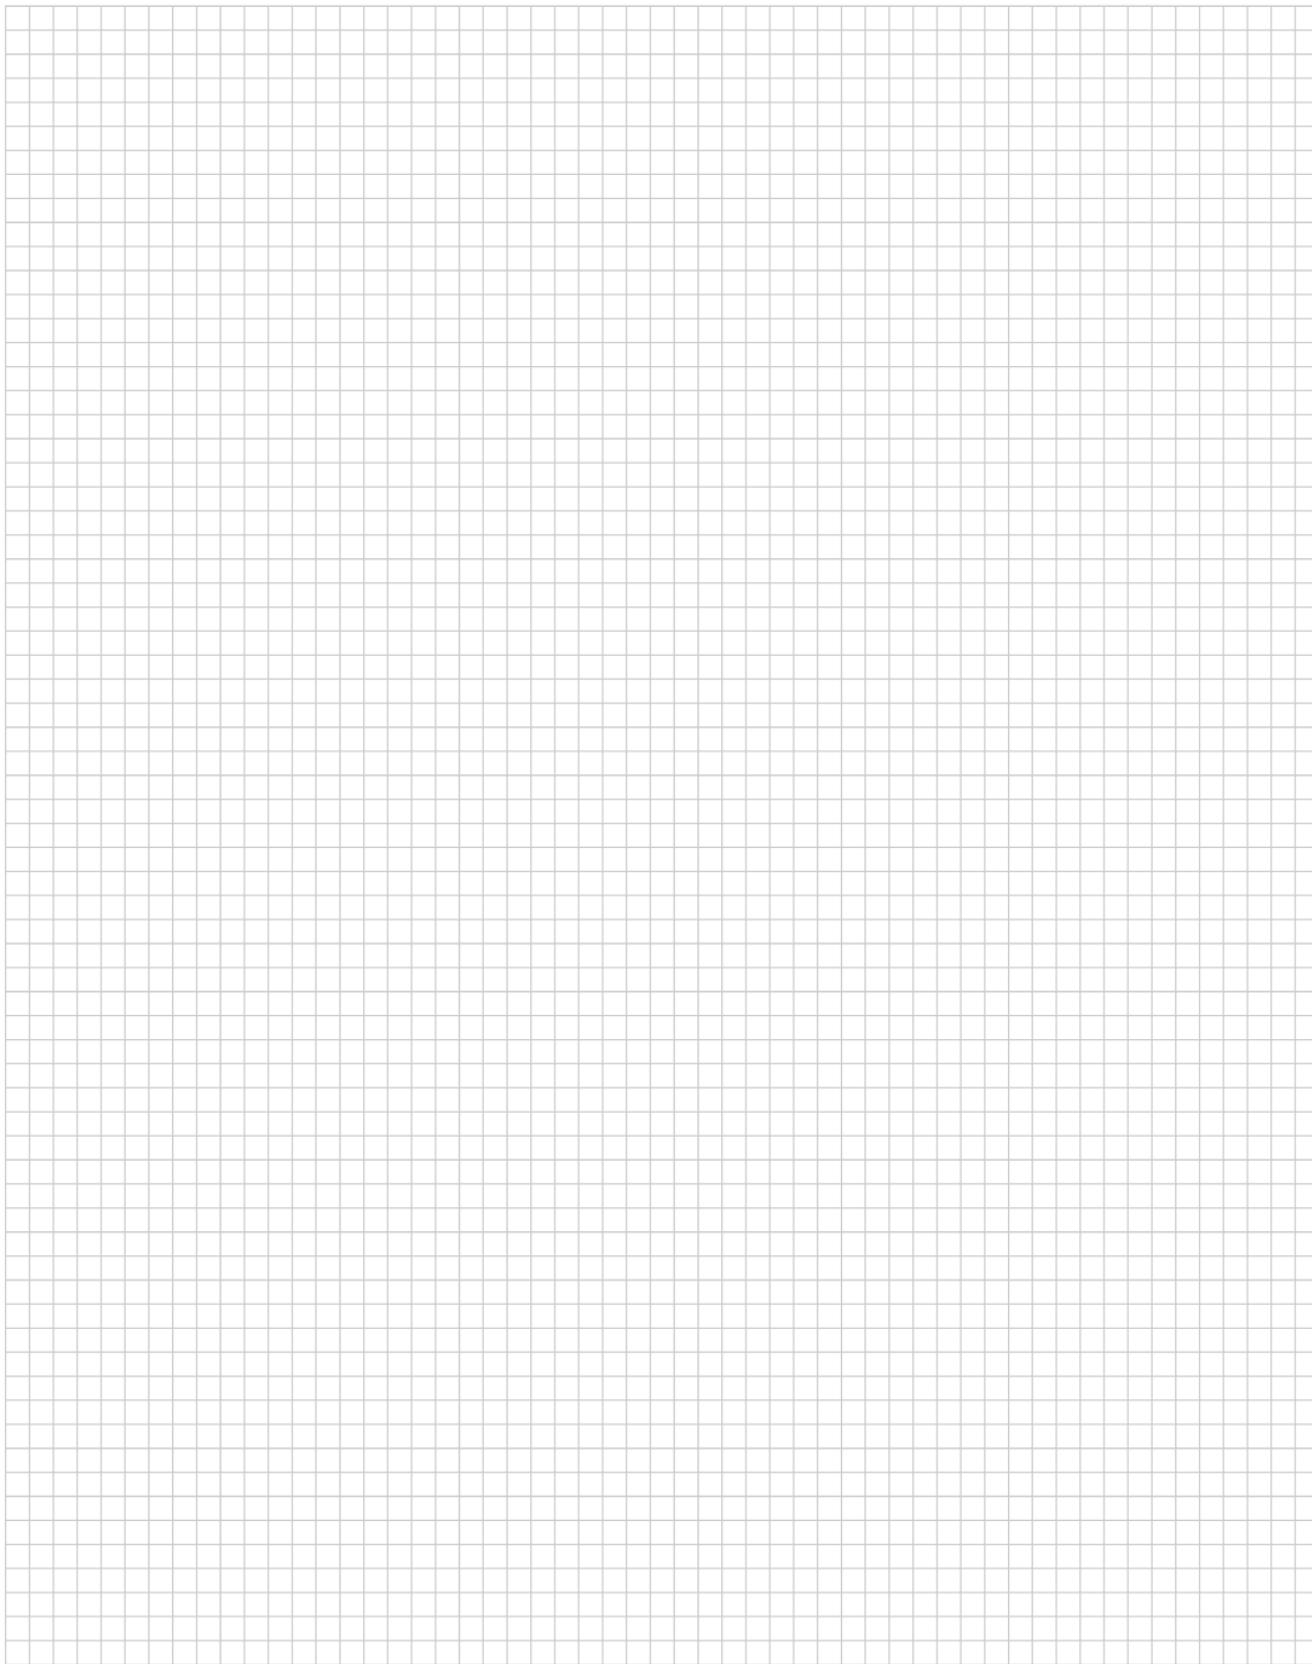



OCEAN CHIPS

Океан Электроники

Поставка электронных компонентов

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибутором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибутором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А