


## Power Metal Strip® Resistors, Wide Terminal, Low Value (0.00075 Ω to 0.006 Ω), Surface Mount

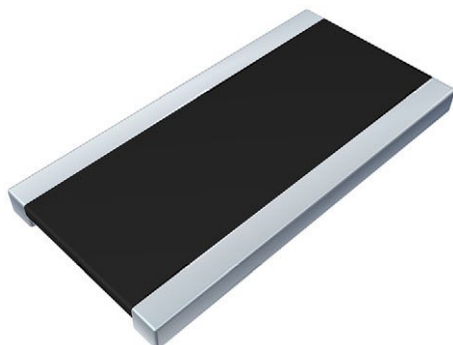

### DESIGN SUPPORT TOOLS

[click logo to get started](#)

**3D**  
Models  
Available

  
Design Tools  
Available

### FEATURES

- Wide side terminal construction that yields high power to foot print size ratio (2 W in 1020 and 1 W in 0612 package)
- All welded construction of the Power Metal Strip® resistors are ideal for all types of current sensing, voltage division and pulse applications
- Proprietary processing technique produces low resistance values (down to 0.00075 Ω)
- Sulfur resistance by construction that is unaffected by high sulfur environments
- Very low inductance, 0.5 nH to 5 nH
- Low thermal EMF (< 3 μV/°C)
- AEC-Q200 qualified <sup>(1)</sup>
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

**AUTOMOTIVE  
GRADE**  
Available

**Pb-free**  
Available

**e3**

**RoHS\***  
Available  
**HALOGEN  
FREE**  
**GREEN**  
(5-2008)  
Available

### Notes

\* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non-RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

- Follow link to Overview of Automotive Grade Products for more details: [www.vishay.com/doc?49924](http://www.vishay.com/doc?49924)

<sup>(1)</sup> Flame retardance test may not be applicable to some resistor technologies

### STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | SIZE | POWER RATING<br>$P_{70^{\circ}\text{C}}$<br>W | TOLERANCE<br>± % | RESISTANCE<br>VALUE RANGE<br>Ω | WEIGHT<br>(typical)<br>g/1000 pieces |
|--------------|------|-----------------------------------------------|------------------|--------------------------------|--------------------------------------|
| WSL0612      | 0612 | 1.0                                           | 1.0, 5.0         | 0.75m to 5m                    | 8.5                                  |
| WSL1020      | 1020 | 2.0                                           | 0.5, 1.0, 5.0    | 1m to 6m                       | 38.74                                |

### GLOBAL PART NUMBER INFORMATION

Global Part Numbering: **WSL10206L000FEA** (visit [www.vishay.net](http://www.vishay.net) Vishay Dale parts numbering manual for all options)

**W** **S** **L** **1** **0** **2** **0** **6** **L** **0** **0** **0** **F** **E** **A**

| GLOBAL MODEL<br>(7 digits)       | RESISTANCE VALUE <sup>(1)</sup><br>(5 digits)                                                                                                                                                                          | TOLERANCE CODE<br>(1 digit)                                    | PACKAGING CODE <sup>(2)</sup><br>(2 digits)                                 | SPECIAL<br>(up to 2 digits)                               |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|-----------------------------------------------------------------------------|-----------------------------------------------------------|
| <b>WSL0612</b><br><b>WSL1020</b> | <b>L</b> = mΩ*<br><b>1L000</b> = 0.001 Ω<br><b>2L000</b> = 0.002 Ω<br><b>3L000</b> = 0.003 Ω<br><b>4L000</b> = 0.004 Ω<br><b>5L000</b> = 0.005 Ω<br><b>6L000</b> = 0.006 Ω<br>* Use "L" for resistance values < 0.01 Ω | <b>D</b> = ± 0.5 %<br><b>F</b> = ± 1.0 %<br><b>J</b> = ± 5.0 % | <b>EA</b> = lead (Pb)-free, tape / reel<br><b>EK</b> = lead (Pb)-free, bulk | (dash number)<br>from <b>1</b> to <b>99</b> as applicable |

### Notes


<sup>(1)</sup> WSL Marking ([www.vishay.com/doc?30327](http://www.vishay.com/doc?30327)); WSL Decade Values ([www.vishay.com/doc?30117](http://www.vishay.com/doc?30117))

<sup>(2)</sup> EB (lead (Pb)-free) is a non-standard packaging code designated for 1000 piece reels. The non-standard packaging code is identical to our standard EA (lead (Pb)-free), except that it has a package quantity of 1000 pieces

| TECHNICAL SPECIFICATIONS                                              |        |                                                                                    |         |
|-----------------------------------------------------------------------|--------|------------------------------------------------------------------------------------|---------|
| PARAMETER                                                             | UNIT   | RESISTOR CHARACTERISTICS                                                           |         |
|                                                                       |        | WSL0612                                                                            | WSL1020 |
| Component temperature coefficient (including terminal) <sup>(1)</sup> | ppm/°C | +250 <sup>(4)</sup> for 0.75 mΩ and 1.9 mΩ<br>+150 <sup>(4)</sup> for 2 mΩ to 6 mΩ | < 50    |
| Element TCR <sup>(2)</sup>                                            | ppm/°C | < 20                                                                               |         |
| Operating temperature range                                           | °C     | -65 to +170                                                                        |         |
| Maximum working voltage <sup>(3)</sup>                                | V      | $(P \times R)^{1/2}$                                                               |         |

**Notes**


- (1) Component TCR - total TCR that includes the TCR effects of the resistor element and the copper terminal  
(2) Element TCR - only applies to the alloy used for the resistor element; refer to item 1 in the construction illustration on the following page  
(3) Maximum working voltage - the WSL is not voltage sensitive, but is limited by power / energy dissipation and is also not ESD sensitive  
(4) Typical TCR is positive, for more details contact factory

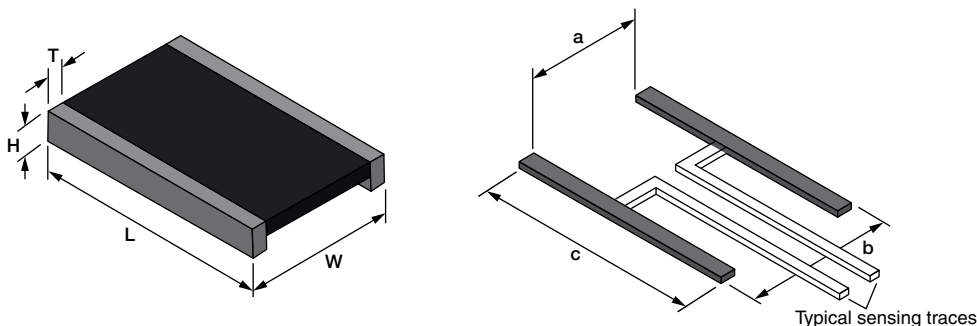**DIMENSIONS**

**Notes**

- 3D models available: [www.vishay.com/doc?30348](http://www.vishay.com/doc?30348)
- Surface mount solder profile recommendations: [www.vishay.com/doc?31052](http://www.vishay.com/doc?31052)

| MODEL   | DIMENSIONS in inches (millimeters) |                                 |                                  |                                  |
|---------|------------------------------------|---------------------------------|----------------------------------|----------------------------------|
|         | L                                  | W                               | H                                | T                                |
| WSL0612 | 0.120 ± 0.005<br>(3.05 ± 0.127)    | 0.060 ± 0.005<br>(1.50 ± 0.127) | 0.018 ± 0.010<br>(0.457 ± 0.254) | 0.015 ± 0.010<br>(0.381 ± 0.254) |
| WSL1020 | 0.200 ± 0.005<br>(5.08 ± 0.127)    | 0.100 ± 0.005<br>(2.54 ± 0.127) | 0.025 ± 0.005<br>(0.635 ± 0.127) | 0.022 ± 0.008<br>(0.558 ± 0.203) |


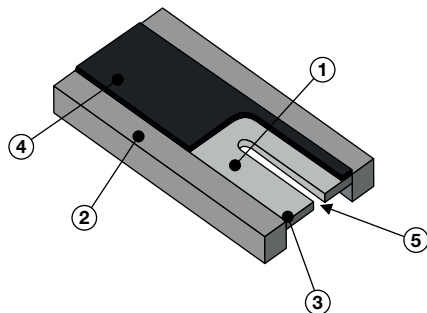
| MODEL   | SOLDER PAD DIMENSIONS in inches (millimeters) |                 |                 |
|---------|-----------------------------------------------|-----------------|-----------------|
|         | a                                             | b               | c               |
| WSL0612 | 0.030<br>(0.76)                               | 0.078<br>(1.98) | 0.134<br>(3.40) |
| WSL1020 | 0.039<br>(1.00)                               | 0.138<br>(3.50) | 0.222<br>(5.65) |

**WELDED CONSTRUCTIONS**


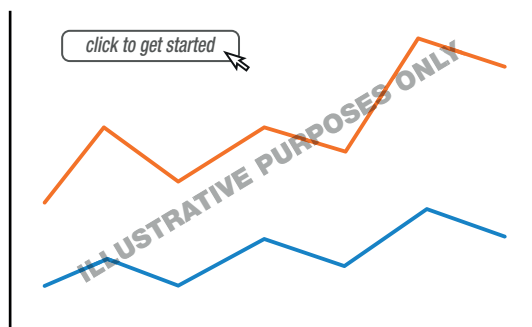
- Resistive element: nickel-chrome or manganese-copper alloy with low TCR (< 20 ppm/°C)
- Terminal: solid copper with 100 % Sn finish  
100 % Sn (100 μ" min.) with 100 % Ni (20 μ" min.) under layer finish
- Terminal / element weld (electron beam weld)
- High temperature encapsulant: "siliconized polyester" coating material
- Laser calibration



## DERATING

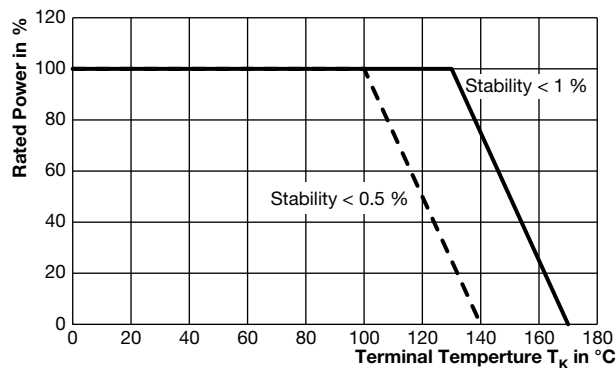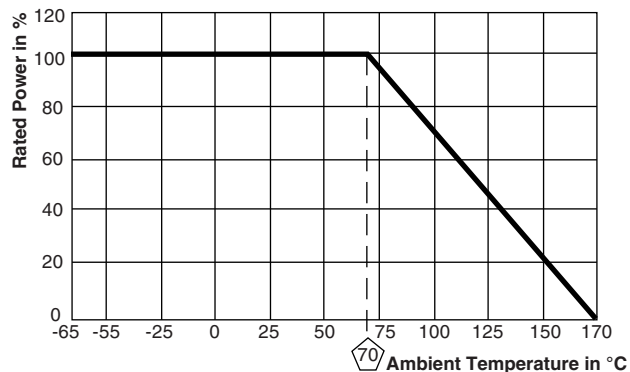

## PULSE CAPABILITY



[www.vishay.com/resistors/power-metal-strip-calculator](http://www.vishay.com/resistors/power-metal-strip-calculator)

| PERFORMANCE               |                                                                |             |
|---------------------------|----------------------------------------------------------------|-------------|
| TEST                      | CONDITIONS OF TEST                                             | TEST LIMITS |
| Thermal shock             | -55 °C to +150 °C, 1000 cycles, 15 min at each extreme         | ± 0.5 %     |
| Low temperature operation | -65 °C for 24 h                                                | ± 0.5 %     |
| High temperature exposure | 1000 h at +170 °C                                              | ± 1.0 %     |
| Bias humidity             | +85 °C, 85 % RH, 10 % bias, 1000 h                             | ± 0.5 %     |
| Mechanical shock          | 100 g's for 6 ms, 5 pulses                                     | ± 0.5 %     |
| Vibration                 | Frequency varied 10 Hz to 2000 Hz in 1 min, 3 directions, 12 h | ± 0.5 %     |
| Load life                 | 1000 h at 70 °C, 1.5 h "ON", 0.5 h "OFF"                       | ± 1.0 %     |
| Resistance to solder heat | +260 °C solder, 10 s to 12 s dwell, 25 mm/s emergence          | ± 0.5 %     |
| Moisture resistance       | MIL-STD-202, method 106, 0 % power, 7b not required            | ± 0.5 %     |

| PACKAGING |                        |           |             |      |
|-----------|------------------------|-----------|-------------|------|
| MODEL     | REEL                   |           |             |      |
|           | TAPE WIDTH             | DIAMETER  | PIECES/REEL | CODE |
| WSL0612   | 8 mm/embossed plastic  | 178 mm/7" | 4000        | EA   |
| WSL1020   | 12 mm/embossed plastic | 178 mm/7" | 4000        | EA   |

### Notes

- Embossed carrier tape per EIA-481-2
- (1) Additional packaging details at [www.vishay.com/doc?20051](http://www.vishay.com/doc?20051)



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А