

- Continuous format heat-shrinkable identification tubing
- Computer printable
- Military specification material and print performance
- -55°C to 135°C operating temperature
- 3:1 shrink ratio
- CSA certified, UL recognised (VW-1 rated)

TTMS

Flat heat-shrinkable identification tubing

TTMS tubing is flattened, heat-shrinkable tubing intended for wire and cable identification. Available in continuous spools, TTMS tubing is designed for computer-based printing using Raychem's TMS 2000Plus printer. This product format makes TTMS identification tubing ideal for applications where in-sequence kitting is not of overriding importance, for example where several hundred identical markers are required. Large pack sizes, usually 100m (328 feet), minimise the number of spool

changes necessary during production runs.

TTMS identification tubing is made from durable, flame retarded, radiation-crosslinked heat-shrinkable polyolefin. The printed tubing meets the mark permanence requirements of MIL-DTL-23053/5 classes 1 and 3. The identification marks are permanent immediately after printing and remain legible even when exposed to solvents, fuels and oils. The tubing meets the mark permanence requirements of MIL-M-

81531 and MIL-STD-202 both before and after shrinking. Raychem-recommended ribbons should always be used. The tubing has a 3:1 shrink ratio (except sizes 38.1 and 50.8, which are 2:1) and cover a wide range of wire diameters, thus simplifying inventory. The tubing shrinks extremely rapidly, so installation is fast and economical. The installed markers are low profile and lightweight. They may be used to provide strain relief and insulation in addition to identification.



Temperature rating

| | |
|------------------------------|----------------|
| Operating temperature range | -55°C to 135°C |
| Minimum recovery temperature | 85°C |
| Maximum storage temperature | 40°C |

Specifications and approvals


| | |
|---------------|--|
| Raychem | RW 2025 |
| UL recognised | Standard 224, file E35586 |
| CSA certified | CSA C22.2 No. 198.1-98, file 31929 |
| Military | MIL-DTL-23053/5, MIL-M-81531, MIL-STD-202F |

TTMS

Dimensions inches (*millimeters*)

| | Inside diameter | | Recommended use range | Recovered wall thickness | Weight lb/ft (<i>g/m</i>) |
|-----------|------------------------|------------------------|--|---|-----------------------------|
| | Expanded (minimum) | Recovered (maximum) | | | |
| TTMS-2.4 | 0.093 (<i>2.36</i>) | 0.031 (<i>0.79</i>) | 0.032 - 0.075 (<i>0.81 - 1.90</i>) | 0.021 ± 0.003 (<i>0.53 ± 0.08</i>) | 0.0017 (<i>2.76</i>) |
| TTMS-3.2 | 0.125 (<i>3.18</i>) | 0.042 (<i>1.07</i>) | 0.044 - 0.105 (<i>1.11 - 2.66</i>) | 0.023 ± 0.003 (<i>0.58 ± 0.08</i>) | 0.0025 (<i>3.73</i>) |
| TTMS-4.8 | 0.187 (<i>4.75</i>) | 0.062 (<i>1.57</i>) | 0.069 - 0.160 (<i>1.75 - 4.06</i>) | 0.023 ± 0.003 (<i>0.58 ± 0.08</i>) | 0.0033 (<i>4.93</i>) |
| TTMS-6.4 | 0.250 (<i>6.35</i>) | 0.083 (<i>2.11</i>) | 0.091 - 0.215 (<i>2.31 - 5.46</i>) | 0.023 ± 0.003 (<i>0.58 ± 0.08</i>) | 0.0043 (<i>6.46</i>) |
| TTMS-9.5 | 0.375 (<i>9.53</i>) | 0.125 (<i>3.18</i>) | 0.137 - 0.320 (<i>3.47 - 8.12</i>) | 0.023 ± 0.003 (<i>0.61 ± 0.08</i>) | 0.0062 (<i>9.27</i>) |
| TTMS-12.7 | 0.500 (<i>12.70</i>) | 0.166 (<i>4.22</i>) | 0.183 - 0.425 (<i>4.64 - 10.79</i>) | 0.024 ± 0.003 (<i>0.61 ± 0.08</i>) | 0.0084 (<i>12.53</i>) |
| TTMS-19.0 | 0.750 (<i>19.05</i>) | 0.250 (<i>6.35</i>) | 0.275 - 0.640 (<i>6.99 - 16.25</i>) | 0.024 ± 0.003 (<i>0.61 ± 0.08</i>) | 0.0149 (<i>22.13</i>) |
| TTMS-25.4 | 1.000 (<i>25.40</i>) | 0.333 (<i>8.46</i>) | 0.366 - 0.850 (<i>9.29 - 21.59</i>) | 0.025 ± 0.003 (<i>0.64 ± 0.08</i>) | 0.0190 (<i>28.24</i>) |
| TTMS-38.1 | 1.500 (<i>38.10</i>) | 0.750 (<i>19.05</i>) | 0.825 - 1.300 (<i>20.95 - 33.02</i>) | 0.020 ± 0.003 (<i>0.51 ± 0.08</i>) | 0.0340 (<i>50.61</i>) |
| TTMS-50.8 | 2.000 (<i>50.80</i>) | 1.000 (<i>25.40</i>) | 1.100 - 1.750 (<i>27.94 - 44.95</i>) | 0.025 ± 0.003 (<i>0.64 ± 0.08</i>) | 0.0584 (<i>86.96</i>) |

Part numbering system

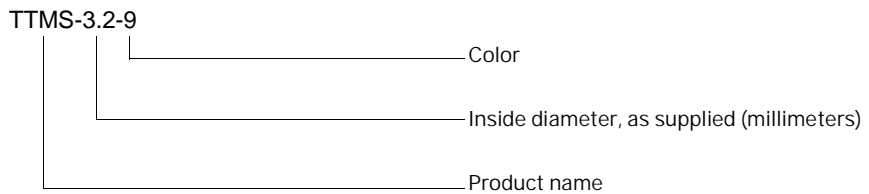

Ordering information

| | | | | | | | |
|-----------|---------------------------------|---|--------|-----------------------|------|--------|------|
| Colors | Standard | Yellow | White | Black | | | |
| | Code | 4 | 9 | 0 | | | |
| | Non-standard | Red | Orange | Green | Blue | Violet | Gray |
| | Code | 2 | 3 | 5 | 6 | 7 | 8 |
| Packaging | Standard | 328ft (100m) spools for all sizes except 38.1 and 50.8, which are 164ft (50m) | | | | | |
| Ribbons | Tubing size | Total length | | Order description | | Color | |
| | 2.4mm (3/32") to 12.7mm (1/2") | 300m (984ft) | | 2000P-RIBBON-4TT-NAR | | Black | |
| | 19.0mm (3/4") & 25.4 mm (1") | 300m (984ft) | | 2000P-RIBBON-4TT-MED | | Black | |
| | 38.1 mm (1 1/2") & 50.8mm (2") | 300m (984ft) | | TMS-RJS-RIBBON-4RPSCE | | Black | |
| | 2.4mm (3/32") to 12.7mm (1/2") | 300m (984ft) | | 2000P-RIBBON-4AG-NAR | | Silver | |
| | 19.0mm (3/4") & 25.4 mm (1") | 300m (984ft) | | 2000P-RIBBON-4AG-MED | | Silver | |
| | 38.1 mm (1 1/2") & 50.8 mm (2") | 300m (984ft) | | TMS-RJS-RIBBON-4AG | | Silver | |

* Raychem-recommended ribbons should always be used.

TTMS



TMS 2000Plus in-line thermal transfer printer

Typical TTMS performance

refer to Raychem specification RW-2025 for details

| | Property | Performance | Test method |
|-----------------------------|---|---|---|
| Physical | Tensile strength | 10.3MPa (1500psi) minimum | MIL-DTL-23053, section 4.6.13 |
| | Ultimate elongation | 200% minimum | MIL-DTL-23053, section 4.6.13 |
| | Longitudinal change | 0 to -20% maximum | MIL-DTL-23053, section 4.6.4 |
| | Specific gravity | 1.35 maximum | ASTM D 792 |
| | Heat aging 168 hours at 175°C (347°F) | Minimum 100% ultimate elongation Print legible after 50 rubs | MIL-DTL-23053, section 4.6.9 See RW-2025 |
| | Heat shock 4 hours at 250°C (482°F) | No cracking, dripping or flowing Print legible | MIL-DTL-23053, section 4.6.8 See RW-2025 |
| | Print performance | Print legible after 50 rubs Print legible after 30 strokes | MIL-M-81531, section 4.6.2 MIL-STD-202, method 215 |
| Electrical | Dielectric strength | 19.7 kV/mm (500V/mil) minimum | ASTM D 2671 |
| Chemical | Flammability | No flaming or glowing after 1 minute | ASTM D 2671, procedure B |
| | | 25% maximum flag burn | ASTM D 2671, procedure C |
| | | No burning of cotton; no dripping | ASTM D 2671, procedure C |
| | Fungus resistance | Rating 1 maximum | ASTM G 21 |
| | | Original tensile properties retained | ISO 846 B |
| | Corrosive effect 16 hours at 175°C (347°F) | Non-corrosive (copper contact) | MIL-DTL-23053, section 4.6.10.1 |
| | | No pitting or blackening (copper mirror) | MIL-DTL-23053, section 4.6.10.2 |
| | Fluid resistance 24 hours at 24°C (75°F) | Print legible after 20 rubs | MIL-M-81531, section 4.6.2 |
| | | Dielectric strength 15.8kV/mm min | ASTM D 2671 |
| | | Tensile strength 6.9Mpa min | MIL-DTL-23053, section 4.6.13 |
| JP-8 | | MIL-T-5624 | |
| Aviation Gasoline (100/130) | | | |
| Hydraulic fluid | | MIL-H-5606 | |
| Skydrol 500 | | | |
| Lubricating Oil | | MIL-L-7808 | |
| Lubricating Oil | MIL-L-23699 | | |
| 5% salt water | | | |
| Anti-icing fluid | MIL-A-8243 | | |

* Skydrol is a trademark of Monsanto Company.

Raychem is a trademark of Raychem Interconnect, a division of Tyco Electronics Corporation.

All of the above information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Tyco Electronics only obligations are those in the Standard Terms and Conditions of Sale for this product and in no case will Tyco Electronics be liable for any incidental, indirect or consequential damages arising from the sale, resale, use or misuse of the product. Tyco Electronics Specifications are subject to change without notice. In addition Tyco Electronics reserves the right to make changes in materials or processing, without notification to the Buyer, which do not affect compliance with any applicable specification.

Tyco Electronics Corporation
Raychem Interconnect
306 Constitution Drive
Menlo Park, CA 94025
U.S.A.
www.tycoelectronics.com

Tyco Electronics UK Ltd.
Raychem Interconnect
Cheney Manor Industrial Estate
Swindon, Wiltshire SN2 2QE
U.K.

Tyco Electronics Raychem K.K.
Raychem Interconnect
3816 Noborito, Tama-ku
Kawasaki 214-8533
Japan

Raychem Singapore Pte Ltd.
Raychem Interconnect
No. 26 Ang Mo Kio Ind. Park
Singapore 569507

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А