


## Miniature Relay PT

- 2 pole 12A, 3 pole 10A or 4 pole 6A, 2, 3 or 4 form C (CO) contacts
- DC or AC coil
- Switching performance up to 3000VA
- Relay height 29mm
- Mechanical indicator, optional LED and protection diode
- Manual test tab, optionally lockable
- White marking tabs

Typical applications  
Universal use in control and automation

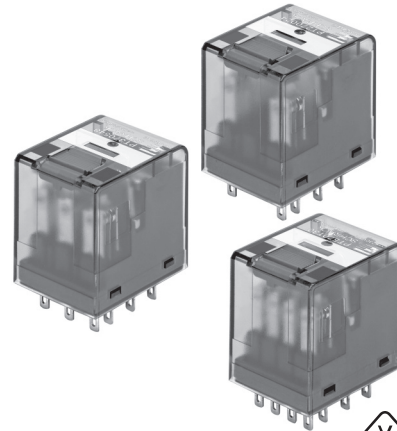

F0191-B





### Approvals

VDE Cert. No. 40009108, UL E214025, Lloyds 00/20059  
Technical data of approved types on request

| Contact Data                                | PT2                                                           | PT3              | PT5              |
|---------------------------------------------|---------------------------------------------------------------|------------------|------------------|
| Contact arrangement                         | 2 form C<br>2 CO                                              | 3 form C<br>3 CO | 4 form C<br>4 CO |
| Rated voltage                               |                                                               | 240VAC           |                  |
| Max. switching voltage                      | 400VAC                                                        | 400VAC           | 240VAC           |
| Rated current                               | 12A                                                           | 10A              | 6A               |
| Limiting making current, max. 20ms          | 24A                                                           | 20A              | 12A              |
| Limiting breaking current                   | 12A                                                           | 10A              | 6A               |
| Limiting short-time current                 |                                                               | 300A/30ms        |                  |
| Switching power                             | 3000VA                                                        | 2500VA           | 1500VA           |
| Contact material                            | AgNi90/10, AgNi90/10 gold plated                              |                  |                  |
| Min. recommended contact load               | 12V at 10mA<br>gold plated: 20mV at 1mA<br>30mV at 100mA/6VDC |                  |                  |
| Initial voltage drop                        |                                                               |                  |                  |
| Frequency of operation<br>with/without load | 360/36000h <sup>-1</sup>                                      |                  |                  |
| Operate time typ., DC coil                  | 15ms                                                          |                  |                  |
| Release time typ., DC coil, without/with PD | 10/18ms                                                       |                  |                  |
| Bounce time typ., DC coil, form A/form B    | 6/8ms                                                         |                  |                  |

### Contact ratings

| Type             | Contact          | Load                      | Cycles              |
|------------------|------------------|---------------------------|---------------------|
| <b>IEC 61810</b> |                  |                           |                     |
| PT 2 DC/AC coil  | C (CO)           | 12A, 250VAC, cosφ=1, 70°C | 70x10 <sup>3</sup>  |
| PT 2 DC/AC coil  | A (NO) of C (CO) | 9A, 250VAC, cosφ=1, 80°C  | 150x10 <sup>3</sup> |
| PT 2 DC/AC coil  | A (NO) of C (CO) | 4A, 250VAC, cosφ=1, 80°C  | 300x10 <sup>3</sup> |
| PT 3 DC/AC coil  | C (CO)           | 10A, 250VAC, cosφ=1, 70°C | 100x10 <sup>3</sup> |
| PT 5 DC/AC coil  | C (CO)           | 6A, 250VAC, cosφ=1, 70°C  | 100x10 <sup>3</sup> |



### Contact Data (continued)

#### Contact ratings

| Type          | Contact          | Load                               | Cycles              |
|---------------|------------------|------------------------------------|---------------------|
| <b>UL 508</b> |                  |                                    |                     |
| PT 2          | C (CO)           | 12A, 250VAC, general purpose, 70°C | 6.000               |
| PT 2          | C (CO)           | 12A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 2          | A (NO) of C (CO) | 12A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 2          | A (NO) of C (CO) | 12A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 3          | C (CO)           | 10A, 250VAC, general purpose, 70°C | 6.000               |
| PT 3          | C (CO)           | 10A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 3          | A (NO) of C (CO) | 10A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 3          | B (NC) of C (CO) | 10A, 250VAC, resistive, 70°C       | 100x10 <sup>3</sup> |
| PT 5          | C (CO)           | 6A, 250VAC, general purpose, 70°C  | 6.000               |
| PT 5          | C (CO)           | 6A, 250VAC, resistive, 70°C        | 100x10 <sup>3</sup> |
| PT 5          | A (NO) of C (CO) | 6A, 250VAC, resistive, 70°C        | 100x10 <sup>3</sup> |
| PT 5          | B (NC) of C (CO) | 6A, 250VAC, resistive, 70°C        | 100x10 <sup>3</sup> |

#### EN60947-4-1

|      |                  |                                                              |
|------|------------------|--------------------------------------------------------------|
| PT 2 | A (NO) of C (CO) | 400VAC, 3.75A, AC3, opposite polarity, 70°C                  |
| PT 2 | A (NO) of C (CO) | 230VAC, 1.7A, AC5b (400W lamp load), opposite polarity, 70°C |
| PT 3 | A (NO) of C (CO) | 250VAC, 2A, AC3, opposite polarity 70°C                      |
| PT 3 | A (NO) of C (CO) | 230VAC, 1.7A, AC5b (400W lamp load), opposite polarity, 70°C |
| PT 5 | A (NO) of C (CO) | 250VAC, 3A, AC3, same polarity 70°C                          |
| PT 5 | A (NO) of C (CO) | 230VAC, 1.7A, AC5b (400W lamp load), same polarity, 70°C     |

#### Mechanical endurance

|         |                               |
|---------|-------------------------------|
| DC coil | 30x10 <sup>6</sup> operations |
| AC coil | 20x10 <sup>6</sup> operations |

### Coil Data

|                                     |                            |
|-------------------------------------|----------------------------|
| Coil voltage range                  | 6 to 220VDC<br>6 to 230VAC |
| Operative range, IEC 61810          |                            |
| DC coil, AC-coil 50Hz               | 2                          |
| AC coil 60 Hz at 70°C               | 90..110% of rated voltage  |
| Coil insulation system according UL | class 155 (F)              |

## Miniature Relay PT (Continued)

### Coil Data (continued)

#### Coil versions, DC coil, standard

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance $\Omega \pm 10\%$ <sup>1)2)</sup> | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|---------------------------------------------------|---------------------|
| 006       | 6                 | 4.5                 | 0.6                 | 48                                                | 750                 |
| 012       | 12                | 9.0                 | 1.2                 | 192                                               | 750                 |
| 024       | 24                | 18.0                | 2.4                 | 777                                               | 741                 |
| 048       | 48                | 36.0                | 4.8                 | 3072                                              | 750                 |
| 060       | 60                | 45.0                | 6                   | 4845 <sup>1)</sup>                                | 743                 |
| 110       | 110               | 82.5                | 11                  | 16133 <sup>2)</sup>                               | 750                 |
| 220       | 220               | 165.0               | 22                  | 64533 <sup>2)</sup>                               | 750                 |

#### Coil versions, DC coil with bipolar LED or LED and protection diode

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance $\Omega \pm 10\%$ <sup>1)2)</sup> | Rated coil power +LED pwr. mW |
|-----------|-------------------|---------------------|---------------------|---------------------------------------------------|-------------------------------|
| L06 LA6   | 6                 | 4.5                 | 0.6                 | 48                                                | 750+3.5                       |
| L12 LB2   | 12                | 9.0                 | 1.2                 | 192                                               | 750+10                        |
| L24 LC4   | 24                | 18.0                | 2.4                 | 777                                               | 741+18                        |
| L48 LE8   | 48                | 36.0                | 4.8                 | 3072                                              | 750+38                        |
| L60 LG0   | 60                | 45.0                | 6.0                 | 4845 <sup>1)</sup>                                | 743+56                        |
| M10 MB0   | 110               | 82.5                | 11.0                | 16133 <sup>2)</sup>                               | 750+96.5                      |
| N20 NC0   | 220               | 165.0               | 22.0                | 64533 <sup>2)</sup>                               | 750+202.5                     |

1) Coil resistance  $\pm 12\%$ , 2) Coil resistance  $\pm 15\%$ ,

3) Protection diode PD; standard polarity: +A1/-A2



All figures are given for coil without pre-energization, at ambient temperature +23°C

#### Coil versions, AC coil, 50/60Hz

| Coil code | Rated voltage VAC | Operate voltage 50/60Hz VAC | Release voltage 50/60Hz VAC | Coil resistance $\Omega \pm 10\%$ <sup>1)2)</sup> | Rated coil power 50/60Hz VA |
|-----------|-------------------|-----------------------------|-----------------------------|---------------------------------------------------|-----------------------------|
| STD LED   |                   |                             |                             |                                                   |                             |
| 506 R06   | 6                 | 4.8/5.4                     | 1.8                         | 11                                                | 1.0/0.85                    |
| 512 R12   | 12                | 9.6/10.8                    | 3.6                         | 48                                                | 1.0/0.85                    |
| 524 R24   | 24                | 19.2/21.6                   | 7.2                         | 192                                               | 1.0/0.79                    |
| 548 R48   | 48                | 38.4/43.2                   | 14.4                        | 777                                               | 1.0/0.87                    |
| 560 R60   | 60                | 48.0/54.0                   | 18.0                        | 1306                                              | 1.0/0.87                    |
| 615 S15   | 115               | 92.0/103.5                  | 34.5                        | 4845 <sup>1)</sup>                                | 1.0/0.86                    |
| 730 T30   | 230               | 184/207                     | 69.0                        | 19465 <sup>2)</sup>                               | 1.0/0.90                    |

1) Coil resistance  $\pm 12\%$ , 2) Coil resistance  $\pm 15\%$

All figures are given for coil without pre-energization, at ambient temperature +23°C



### Insulation Data

|                                    | PT2                  | PT3                  | PT5                  |
|------------------------------------|----------------------|----------------------|----------------------|
| Initial dielectric strength        |                      |                      |                      |
| between open contacts              | 1200V <sub>rms</sub> | 1200V <sub>rms</sub> | 1200V <sub>rms</sub> |
| between contact and coil           | 2500V <sub>rms</sub> | 2500V <sub>rms</sub> | 2500V <sub>rms</sub> |
| between adjacent contacts          | 2500V <sub>rms</sub> | 2500V <sub>rms</sub> | 2000V <sub>rms</sub> |
| Initial surge withstand voltage    |                      |                      |                      |
| between contact and coil           | 5000V (1.2/50μs)     |                      |                      |
| Clearance/creepage                 |                      |                      |                      |
| between contact and coil           | ≥4/4mm               | ≥4/4mm               | ≥4/4mm               |
| between adjacent contacts          | ≥3.5/9.5mm           | ≥2.6/3.5mm           | ≥1.8/3.5mm           |
| Material group of insulation parts | IIIa                 |                      |                      |

### Other Data

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)

|                                                            |                                |
|------------------------------------------------------------|--------------------------------|
| Ambient temperature                                        | -40 to +70°C                   |
| Cold storage, IEC 60068-2-1                                | -40°C/16h                      |
| Dry heat, IEC 60068-2-2                                    | 85°C/16h                       |
| Category of environmental protection                       |                                |
| IEC 61810                                                  | RTII - flux proof              |
| Vibration resistance (functional), form A (NO)/form B (NC) | 7/4g                           |
| Shock resistance (functional), form A (NO)/form B (NC)     | 20/5g                          |
| Terminal type                                              | PCB-THT, plug-in quick-connect |
| Cover retention, pull/push force                           | 100/100N                       |
| Weight                                                     | 30g                            |
| Mounting distance, for mounting on PCB                     | 5mm                            |
| Resistance to soldering heat THT                           |                                |
| IEC 60068-2-20                                             | 270°C/10s                      |
| Packaging unit                                             | 10/250pcs.                     |

### Accessories

For details see datasheet [Accessories Miniature Relay PT](#)

Note: indicated contact ratings and electrical endurance data for direct wiring of relays (according IEC 61810-1); for relays mounted on sockets deratings may apply.

### Product Sets

Complete sets consisting of a relay mounted on a socket see


[Package PT](#)

## Miniature Relay PT (Continued)


### PCB layout / terminal assignment

Bottom view on pins

4 pole




S0354-AA




S0354-AD

3 pole




S0354-AB




S0354-AE

2 pole



S0354-AC





S0354-AF

Circuit


LED

protection diode+LED




### Dimensions

Solder- and plug-in terminals (standard version)

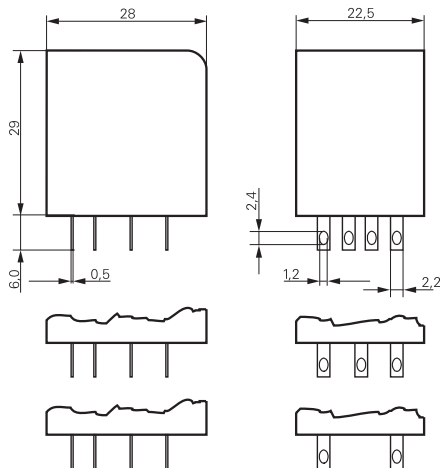

PCB version

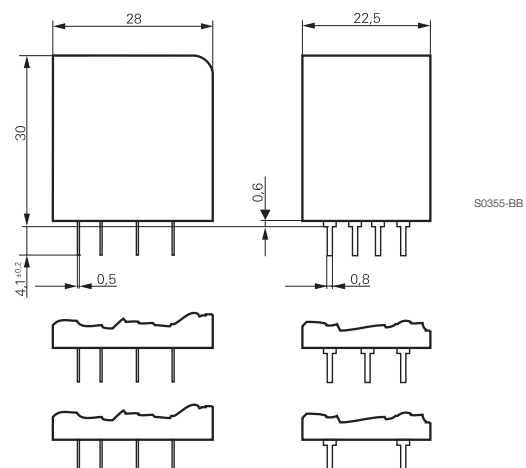

## Miniature Relay PT (Continued)

### Product code structure

Typical product code **PT 5 7 0 730**

|                        |                                                                                                                                                                                                           |  |  |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|
| Type                   | PT Miniature Relay PT                                                                                                                                                                                     |  |  |
| Contact arrangement    | <div><div>22 form C contacts (2 CO contacts)</div><div>33 form C contacts (3 CO contacts)</div><div>54 form C contacts (4 CO contacts)</div></div>                                                        |  |  |
| Contact material       | <div><div>7AgNi 90/10, with test button</div><div>8AgNi 90/10 gold plated, with test button</div><div>2AgNi 90/10, without test button</div><div>3AgNi 90/10 gold plated, without test button</div></div> |  |  |
| Version                | <div><div>0Standard, 2.8mm quick connect term.</div><div>1PCB terminals</div></div>                                                                                                                       |  |  |
| Coil                   | Coil code: please refer to coil versions table                                                                                                                                                            |  |  |
| Other types on request |                                                                                                                                                                                                           |  |  |

| Product code | Cont. Config.             | Cont. material                           | Version               | Coil           | Coil   | Part number |
|--------------|---------------------------|------------------------------------------|-----------------------|----------------|--------|-------------|
| PT270024     | 2 form C<br>2 CO contacts | AgNi 90/10<br>test button                | AMP 2.8<br>connectors | DC coil        | 24VDC  | 4-1419111-2 |
| PT270524     |                           |                                          |                       | AC coil        | 24VAC  | 4-1419111-8 |
| PT270615     |                           |                                          |                       |                | 115VAC | 5-1419111-0 |
| PT270730     |                           |                                          |                       |                | 230VAC | 5-1419111-1 |
| PT270L24     |                           |                                          |                       | DC coil+LED    | 24VDC  | 9-1415001-1 |
| PT270R24     |                           |                                          |                       | AC coil+LED    | 24VAC  | 1415002-1   |
| PT270S15     |                           |                                          |                       |                | 115VAC | 2-1415039-1 |
| PT270T30     |                           |                                          |                       |                | 230VAC | 3-1415002-1 |
| PT271024     |                           |                                          |                       |                | 24VDC  | 5-1419111-3 |
| PT271524     |                           |                                          |                       |                | 24VAC  | 5-1419111-6 |
| PT271615     |                           |                                          |                       |                | 115VAC | 4-1419135-0 |
| PT271730     |                           |                                          |                       |                | 230VAC | 5-1419111-8 |
| PT370024     | 3 form C<br>3 CO contacts | AgNi 90/10<br>test button                | AMP 2.8<br>connectors | DC coil        | 24VDC  | 6-1419111-1 |
| PT370524     |                           |                                          |                       | AC coil        | 24VAC  | 6-1419111-6 |
| PT370615     |                           |                                          |                       |                | 115VAC | 6-1419111-8 |
| PT370730     |                           |                                          |                       |                | 230VAC | 6-1419111-9 |
| PT370L24     |                           |                                          |                       | DC coil+LED    | 24VDC  | 5-1415002-1 |
| PT370R24     |                           |                                          |                       | AC coil+LED    | 24VAC  | 7-1415002-1 |
| PT370S15     |                           |                                          |                       |                | 115VAC | 9-1415039-1 |
| PT370T30     |                           |                                          |                       |                | 230VAC | 9-1415002-1 |
| PT371024     |                           |                                          |                       |                | 24VDC  | 7-1419111-1 |
| PT371524     |                           |                                          |                       |                | 24VAC  | 7-1419111-3 |
| PT371615     |                           |                                          |                       |                | 115VAC | 1393154-8   |
| PT371730     |                           |                                          |                       |                | 230VAC | 7-1419111-5 |
| PT570024     | 4 form C<br>4 CO contacts | AgNi 90/10<br>test button                | AMP 2.8<br>connectors | DC coil        | 24VDC  | 1-1393154-2 |
| PT570524     |                           |                                          |                       | AC coil        | 24VAC  | 8-1419111-7 |
| PT570615     |                           |                                          |                       |                | 115VAC | 9-1419111-0 |
| PT570730     |                           |                                          |                       |                | 230VAC | 9-1419111-1 |
| PT570L24     |                           |                                          |                       | DC coil+LED    | 24VDC  | 6-1415001-1 |
| PT570LC4     |                           |                                          |                       | DC coil+LED+PD | 24VAC  | 7-1415541-0 |
| PT570R24     |                           |                                          |                       | AC coil+LED    | 24VAC  | 7-1415001-1 |
| PT570S15     |                           |                                          |                       |                | 115VAC | 7-1415003-1 |
| PT570T30     |                           |                                          |                       |                | 230VAC | 8-1415001-1 |
| PT571024     |                           |                                          |                       |                | 24VDC  | 9-1419111-3 |
| PT571524     |                           |                                          |                       |                | 24VAC  | 9-1419111-6 |
| PT571615     |                           |                                          |                       |                | 115VAC | 1-1393154-5 |
| PT571730     |                           |                                          |                       |                | 230VAC | 9-1419111-8 |
| PT580024     |                           | AgNi 90/10<br>gold plated<br>test button | AMP 2.8<br>connectors | DC coil        | 24VDC  | 1-1393154-7 |
| PT580524     |                           |                                          |                       | AC coil        | 24VAC  | 2-1393154-1 |
| PT580730     |                           |                                          |                       |                | 230VAC | 2-1393154-2 |
| PT580L24     |                           |                                          |                       |                | 24VDC  | 5-1415026-1 |
| PT580R24     |                           |                                          |                       | AC coil+LED    | 24VAC  | 6-1415026-1 |
| PT580T30     |                           |                                          |                       |                | 230VAC | 7-1415026-1 |
| PT581024     |                           |                                          |                       |                | 24VDC  | 7-1419135-2 |
| PT581730     |                           |                                          |                       |                | 230VAC | 2-1393154-3 |

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А