

# LT3799-1

## Offline Isolated Flyback LED Driver with PFC

### DESCRIPTION

Demonstration circuit 1816B is an off-line isolated flyback LED driver featuring LT<sup>®</sup>3799-1. The demo board provides a single constant current output of 3A over an LED string voltage from 22V to 38V. It is optimized to operate over a wide AC input voltage range (90VAC to 305VAC, 47Hz to 63Hz). LED current typically stays within  $\pm 5\%$  over the whole input voltage range. It provides a high power factor ( $>0.9$ ) enabling a single design to be used worldwide. It is also designed to comply with the IEC 61000-3-2 Class C harmonics standard and the EN55015B conducted EMI standard.

The LT3799-1 controls an isolated flyback converter in boundary mode. Its novel current sensing scheme delivers a well-regulated output current to the secondary side

without using an opto-coupler. Open- and shorted-LED protection ensures long term reliability.

The LT3799-1 is available in a low profile, thermally-enhanced 16-lead MSOP package.

The LT3799-1 data sheet gives a complete description of the device, operation and application information. The data sheet must be read in conjunction with this quick start guide for demo circuit 1816B.

**Design files for this circuit board are available at <http://www.linear.com/demo>**

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

### PERFORMANCE SUMMARY (T<sub>A</sub> = 25°C)

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Input Voltage Range	Line Frequency, 47Hz to 63Hz	90	277	305	VAC
Output Current I <sub>OUT</sub>	V <sub>IN</sub> = 120VAC, V <sub>LED</sub> = 36V		3		A
Output Voltage		22	36	38	V
Open LED Voltage	(Note 1)	45			V

Note 1: For applications with low LED string voltage, FB pin divider resistor R4 and output clamp Z3 can be adjusted to reduce the open voltage limit. See "Protection from Open LED and Shorted LED Faults" section in the data sheet for detail.

# DEMO MANUAL DC1816B

## QUICK START PROCEDURE

### IMPORTANT NOTE TO CUSTOMERS

HIGH VOLTAGES ARE PRESENTED ON THE DEMO CIRCUIT, AND CAN LEAD TO LETHAL INJURIES TO HUMAN BODY. ONLY QUALIFIED PERSONNEL SHOULD OPERATE IT. IT IS STRONGLY RECOMMENDED TO USE SAFETY GLASSES AND AN ISOLATION TRANSFORMER.

NOTE. IMPROPER COMPONENTS REPLACEMENT ON THE DEMO CIRCUIT CAN CAUSE PERFORMANCE DETERIORATIONS, CIRCUIT MALFUNCTION, PROPERTY DAMAGE, AND EVEN LIFE-THREATENING INJURIES. CONTACT LINEAR TECHNOLOGY APPLICATIONS ENGINEERS FOR PROPER COMPONENT REPLACEMENT.

Demonstration circuit 1816B is easy to set up to evaluate the performance of the LT3799-1. Refer to Figure 1

for proper measurement equipment setup and follow the procedure below:

1. Connect a 3A LED string with forward voltage less than 38V, but greater than 22V, between LED<sup>+</sup> and LED<sup>-</sup> terminals.
2. With power off, connect the input power supply to line (L) input and neutral (N) input.
3. Turn on the power at the input.

NOTE. Make sure that the input voltage does not exceed the maximum input voltage (305VAC).

4. Check for the proper output current.

Once the proper output currents are established, adjust the input voltage and/or the load and observe the output current regulation, efficiency, power factor and other parameters.

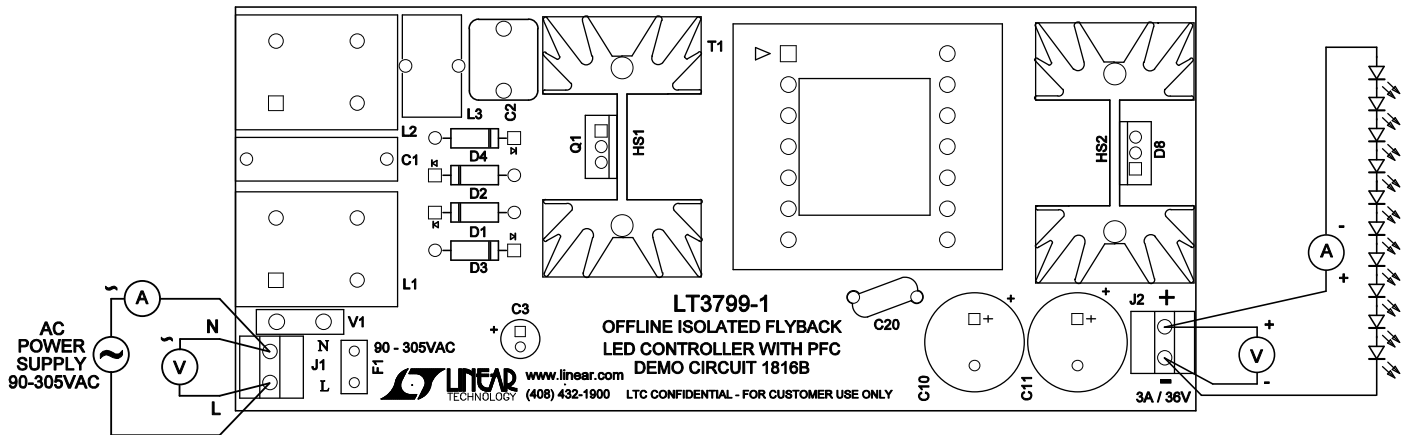


Figure 1. Proper Measurement Equipment Setup

## QUICK START PROCEDURE

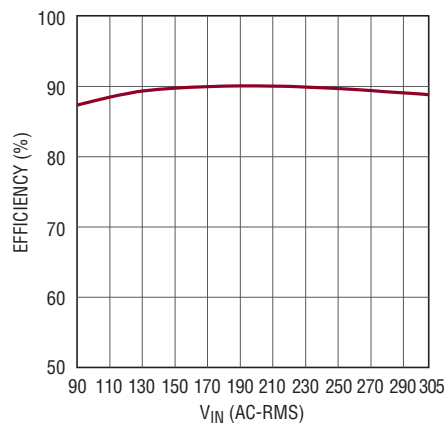


Figure 2. Efficiency vs Input Voltage

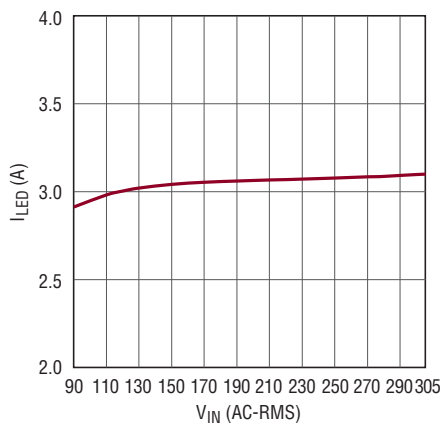


Figure 3.  $I_{OUT}$  vs Input Voltage

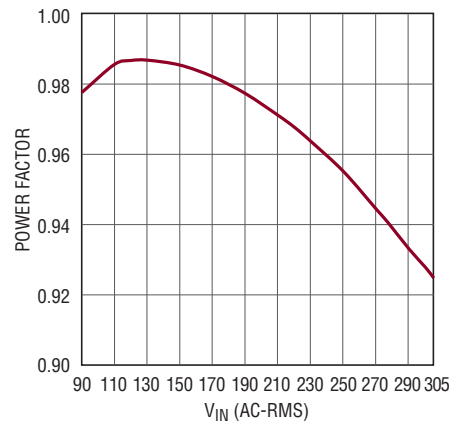


Figure 4. Power Factor vs Input Voltage

### Input Line Voltage and Current

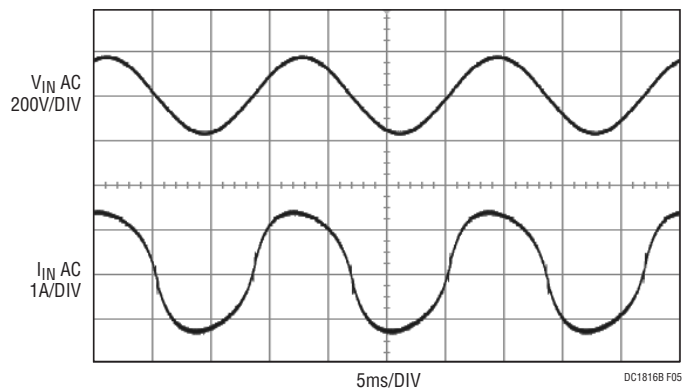


Figure 5.  $V_{IN} = 120VAC$

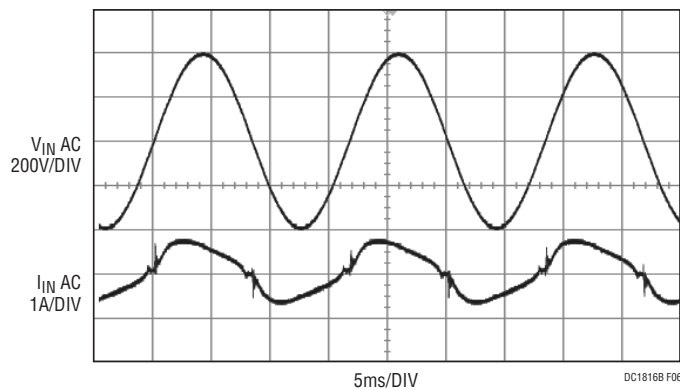


Figure 6.  $V_{IN} = 277VAC$

### Switch Node Voltage

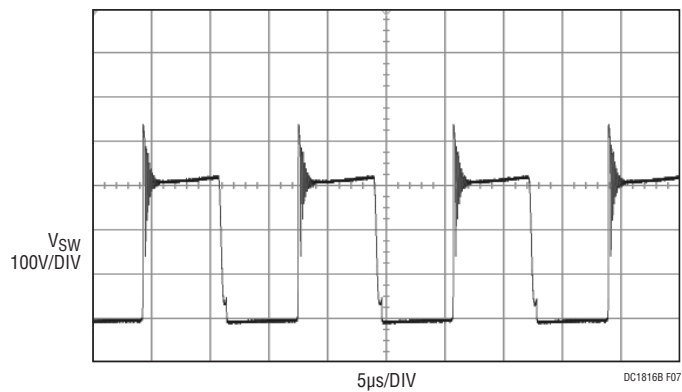


Figure 7.  $V_{IN} = 120VAC$

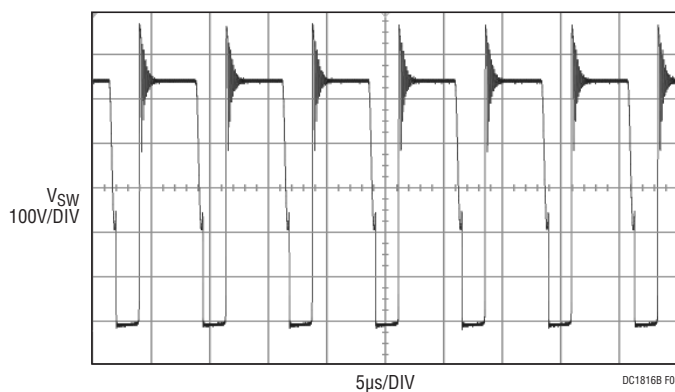


Figure 8.  $V_{IN} = 277VAC$

## QUICK START PROCEDURE

### Output Voltage and Switch Node Voltage During Output Open

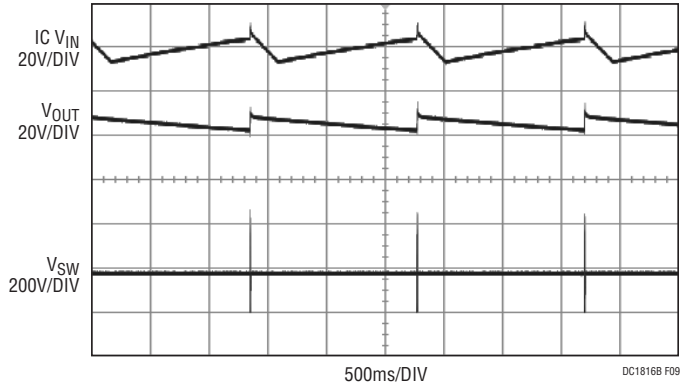


Figure 9.  $V_{IN} = 120VAC$

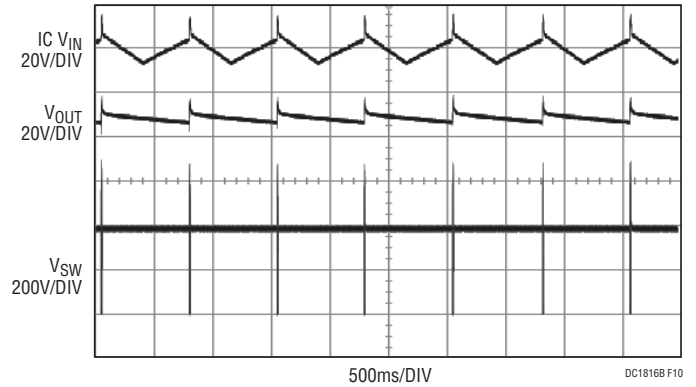


Figure 10.  $V_{IN} = 277VAC$

### Output Current and Switch Node Voltage During Output Short

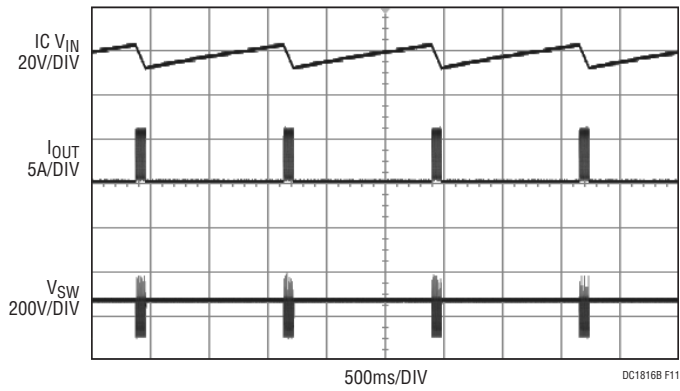


Figure 11.  $V_{IN} = 120VAC$

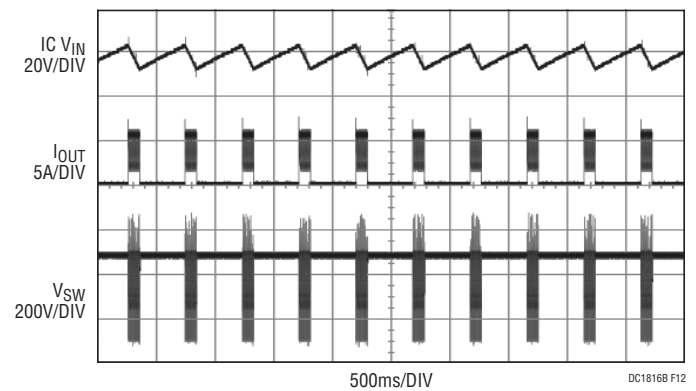


Figure 12.  $V_{IN} = 277VAC$

## PARTS LIST


ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Required Circuit Components</b>				
1	1	C1	CAP, 0.47 $\mu$ F 20% 310V POLYPROPYLENE	VISHAY BFC33820474
2	1	C2	CAP, 0.47 $\mu$ F 20% 450V FILM	RUBYCON 450MMK474K
3	1	C3	CAP, 22 $\mu$ F 20% 35V ALUM	NIC NRSZ220M35V5X11F
4	1	C6	CAP, 0603 10nF 10% 50V X7R	AVX 06035C103KAT2A
5	1	C7	CAP, 0603 0.1 $\mu$ F 10% 50V X7R	AVX 06035C104KAT2A
6	1	C8	CAP, 0805 4.7 $\mu$ F 20% 16V X5R	AVX 0805YD475MAT2A
7	1	C9	CAP, 2220 10 $\mu$ F 20% 100V X7S	TDK C5750X7S2A106M
8	2	C10, C11	CAP, 1000 $\mu$ F 20% 63V ELEC	PANASONIC EEU-FC1J102
9	1	C13	CAP, 1210 2.2nF 5% 630V U2J	MURATA GRM32A7U2J222JW31D
10	1	C20	CAP, 2.2nF 10% Y5B TYPE "Y1"	VISHAY 440LD22-R
11	1	C21	CAP, 0603 4.7pF $\pm$ 0.1pF 50V NPO	AVX 06035A4R7CAT2A
12	4	D1, D2, D3, D4	DIODES, RECTIFIER 1.0A	DIODES INC. 1N4005-T
13	2	D5, D6	DIODE, FAST SWITCHING	DIODES INC. BAV20W-7-F
14	1	D7	DIODE, ULTRA FAST RECOVERY SILICON RECTIFIER	CENTRAL SEMI.CMR1U-10M
15	1	D8	DIODE, SUPER BARRIER RECTIFIER 10A	DIODES INC. SBR10U300CT
16	1	D9	DIODE, RECOVERY RECTIFIER	CENTRAL SEMI.CMR1U-02M
17	1	F1	FUSE, FAST ACTING 3.15A	BUSSMAN SS-5H-3.15A-APH
18	2	L1,L2	IND, 10mH COMMON MODE CHOKE	SUMIDA LF2628NP-103
19	1	L3	IND, 150 $\mu$ H LINE CHOKE	WÜRTH ELECTRONIK 7447018
20	1	Q1	XSTR, COOL MOS POWER TRANSISTOR	INFINEON SPP17N80C3
21	2	R1, R2	RES, 1206 249k 1% 1/4W	VISHAY CRCW1206249KFKEA
22	2	R3, R18	RES, 0603 100k 5% 1/10W	VISHAY CRCW0603100KJNEA
23	1	R4	RES, 0603 4.32k 1% 1/10W	VISHAY CRCW06034K32FKEA
24	1	R5	RES, 0603 20 $\Omega$ 5% 1/10W	VISHAY CRCW060320R0JNEA
25	1	R6	RES, 2512 200k 5% 1W	VISHAY CRCW2512200KJNEG
26	1	R7	RES, 0603 2k 5% 1/10W	VISHAY CRCW06032K00JNEA
27	1	R8	RES, 1206 0.015 $\Omega$ 1% 1/4W	VISHAY WSL1206R0150FEA
28	1	R9	RES, 1206 10k 1% 1/4W	VISHAY CRCW120610K0FKEA
29	2	R10, R11	RES, 1206 499k 1% 1/4W	VISHAY CRCW1206499KFKEA
30	1	R12	RES, 0603 3.09k 1% 1/10W	VISHAY CRCW06033K09FKEA
31	1	R19	RES, 0603 40.2k 1% 1/10W	NIC NRC06F4222TRF
32	1	R20	RES, 0603 16.9k 1% 1/10W	VISHAY CRCW060316K9FKEA
33	1	R21	RES, 0603 0 $\Omega$ JUMPER	VISHAY CRCW06030000Z0EA
34	1	R25	RES, 0603 17.8 $\Omega$ 1% 1/10W	VISHAY CRCW060317R8FKEA
35	1	T1	XFMR, FLYBACK	WÜRTH ELECTONIK 750811351
36	1	U1	IC, OFFLINE ISOLATED LED CONTROLLER	LINEAR TECH. LT3799EMSE-1
37	1	V1	VARISTOR, 385V RMS 13.5MM RADIAL	SEI CV385K10B
38	1	Z2	DIODE, TRANSIENT VOLTAGE SUPPRESSOR	DIODES INC. SMBJ130(C)A-13-F
39	1	Z3	DIODE, TRANSIENT VOLTAGE SUPPRESSOR	DIODES INC. SMCJ40(C)A-13-F
40	1	Z4	DIODE, TRANSIENT VOLTAGE SUPPRESSOR	LITTELFUSE INC. SMCJ220CA

# DEMO MANUAL DC1816B

## PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
<b>Additional Demo Board Circuit Components</b>				
1	0	C14	CAP, 1206 100pF 5% 1000V U2J	MURATA GRM31A7U3A101JW31D
2	0	D10	DIODE, ULTRA FAST RECOVERY SILICON RECTIFIER	CENTRAL SEMI. CMR1U-10M
3	0	R13	RES, 1206 10k 1% 1/2W	VISHAY CRCW120610K0JNEAHP
4	0	R22	RES, 0603	
<b>Hardware—For Demo Board Only</b>				
1	2	HS1, HS2	HEAT SINK, TO-220	AAVID THERMALLOY 529802B02500G
2	2	J1, J2	TERMINAL BLOCK, 2 POSITION	WEIDMULLER 1715250000
3	1		NUT, TIN PLATE#4-40	ANY, #4-40
4	1		WASHER, #4, FLAT WASHER	ANY
5	1		SCREW, 4/40 X 3/8	ANY, 4/40 X 3/8, PHILIPS SCREW
6	1		NUT, TIN PLATE# 2-56	ANY, #2-56
7	1		WASHER, #2, FLAT WASHER	ANY
8	1		SPACER, NYLON SHOULDER	KEYSTONE, 3051
9	1		SCREW, 2-56 X 3/8	ANY, 2-56 X 3/8 PHILIPS SCREW
10	1		THERMAL PAD	BERGQUIST, SP600-58
11	1		SILICONE HEAT SINK	RAWN
12	1		FAB, PRINTED CIRCUIT BOARD	DEMO CIRCUIT 1816B
13	1		STENCIL	STENCIL DC1816B

**SCHEMATIC DIAGRAM**

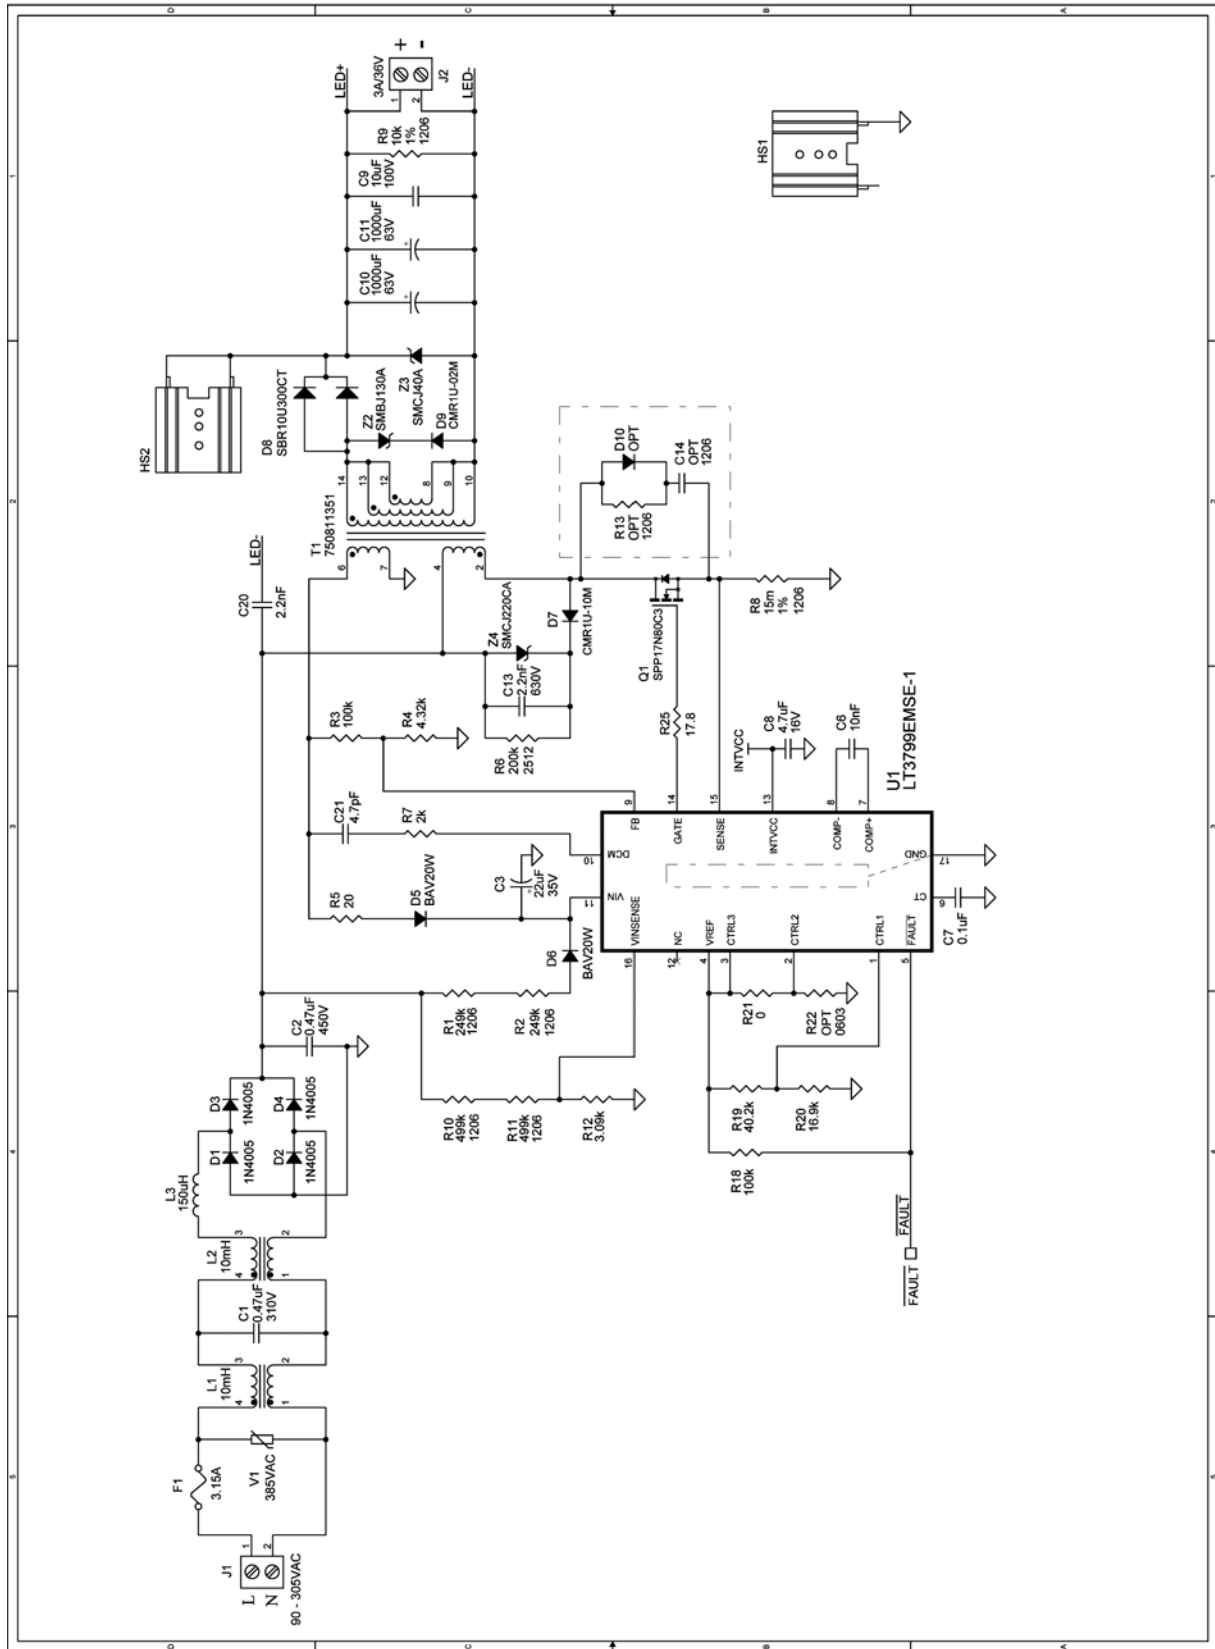

# DEMO MANUAL DC1816B

---

## DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

**Please read the DEMO BOARD manual prior to handling the product.** Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology  
1630 McCarthy Blvd.  
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А