

# FDD03U SERIES

DC - DC CONVERTER

2 ~ 3W SINGLE & DUAL OUTPUT



## FEATURES

- EFFICIENCY UP TO 79%
- 4:1 & 3:1 & 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 2 YEARS WARRANTY



EN 60950-1

## MODEL LIST

| MODEL NO. | INPUT VOLTAGE | INPUT CURRENT (typ.) | INPUT CURRENT (max.) | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|-----------|---------------|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|-----------------------|
|-----------|---------------|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|-----------------------|

### Single Output Models

|               |           |        |        |           |          |        |     |     |              |
|---------------|-----------|--------|--------|-----------|----------|--------|-----|-----|--------------|
| FDD03 - 05SU  | 20~60 VDC | 70 mA  | 180 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12SU  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15SU  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |
| FDD03 - 05S1U | 9~18 VDC  | 265 mA | 340 mA | 2 WATTS   | + 5 VDC  | 400 mA | 63% | 65% | 1000 $\mu$ F |
| FDD03 - 12S1U | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | + 12 VDC | 200 mA | 65% | 67% | 470 $\mu$ F  |
| FDD03 - 15S1U | 9~18 VDC  | 285 mA | 380 mA | 2.4 WATTS | + 15 VDC | 160 mA | 65% | 67% | 330 $\mu$ F  |
| FDD03 - 05S2U | 18~36 VDC | 155 mA | 200 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 67% | 69% | 1000 $\mu$ F |
| FDD03 - 12S2U | 18~36 VDC | 175 mA | 230 mA | 3 WATTS   | + 12 VDC | 250 mA | 70% | 72% | 470 $\mu$ F  |
| FDD03 - 15S2U | 18~36 VDC | 175 mA | 230 mA | 3 WATTS   | + 15 VDC | 200 mA | 70% | 72% | 330 $\mu$ F  |
| FDD03 - 05S3U | 36~72 VDC | 70 mA  | 100 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12S3U | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15S3U | 36~72 VDC | 80 mA  | 110 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |
| FDD03 - 05S4U | 9~36 VDC  | 155 mA | 440 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 67% | 69% | 1000 $\mu$ F |
| FDD03 - 12S4U | 9~36 VDC  | 175 mA | 510 mA | 3 WATTS   | + 12 VDC | 250 mA | 70% | 72% | 470 $\mu$ F  |
| FDD03 - 15S4U | 9~36 VDC  | 175 mA | 510 mA | 3 WATTS   | + 15 VDC | 200 mA | 70% | 72% | 330 $\mu$ F  |
| FDD03 - 05S5U | 18~72 VDC | 70 mA  | 200 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 72% | 74% | 1000 $\mu$ F |
| FDD03 - 12S5U | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | + 12 VDC | 250 mA | 77% | 79% | 470 $\mu$ F  |
| FDD03 - 15S5U | 18~72 VDC | 80 mA  | 225 mA | 3 WATTS   | + 15 VDC | 200 mA | 77% | 79% | 330 $\mu$ F  |

### Dual Output Models

|               |           |        |        |           |              |              |     |     |                   |
|---------------|-----------|--------|--------|-----------|--------------|--------------|-----|-----|-------------------|
| FDD03 - 05DU  | 20~60 VDC | 70 mA  | 180 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 73% | 75% | $\pm$ 100 $\mu$ F |
| FDD03 - 12DU  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 75% | 77% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15DU  | 20~60 VDC | 80 mA  | 200 mA | 3 WATTS   | $\pm$ 15 VDC | $\pm$ 100 mA | 75% | 77% | $\pm$ 22 $\mu$ F  |
| FDD03 - 05D1U | 9~18 VDC  | 265 mA | 340 mA | 2 WATTS   | $\pm$ 5 VDC  | $\pm$ 200 mA | 63% | 65% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D1U | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | $\pm$ 12 VDC | $\pm$ 100 mA | 65% | 67% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15D1U | 9~18 VDC  | 310 mA | 380 mA | 2.4 WATTS | $\pm$ 15 VDC | $\pm$ 80 mA  | 65% | 67% | $\pm$ 22 $\mu$ F  |
| FDD03 - 05D2U | 18~36 VDC | 155 mA | 200 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 66% | 68% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D2U | 18~36 VDC | 180 mA | 230 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 68% | 70% | $\pm$ 47 $\mu$ F  |



### MODEL LIST

| MODEL NO.                 | INPUT VOLTAGE | INPUT CURRENT (typ.) | INPUT CURRENT (max.) | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|---------------------------|---------------|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|-----------------------|
| <b>Dual Output Models</b> |               |                      |                      |                |                |                |             |             |                       |
| FDD03 - 15D2U             | 18~36 VDC     | 180 mA               | 230 mA               | 3 WATTS        | ± 15 VDC       | ± 100 mA       | 68%         | 70%         | ± 22 $\mu$ F          |
| FDD03 - 05D3U             | 36~72 VDC     | 70 mA                | 100 mA               | 2.5 WATTS      | ± 5 VDC        | ± 250 mA       | 73%         | 75%         | ± 100 $\mu$ F         |
| FDD03 - 12D3U             | 36~72 VDC     | 80 mA                | 110 mA               | 3 WATTS        | ± 12 VDC       | ± 125 mA       | 75%         | 77%         | ± 47 $\mu$ F          |
| FDD03 - 15D3U             | 36~72 VDC     | 80 mA                | 110 mA               | 3 WATTS        | ± 15 VDC       | ± 100 mA       | 75%         | 77%         | ± 22 $\mu$ F          |
| FDD03 - 05D4U             | 9~36 VDC      | 155 mA               | 440 mA               | 2.5 WATTS      | ± 5 VDC        | ± 250 mA       | 66%         | 68%         | ± 100 $\mu$ F         |
| FDD03 - 12D4U             | 9~36 VDC      | 180 mA               | 510 mA               | 3 WATTS        | ± 12 VDC       | ± 125 mA       | 68%         | 70%         | ± 47 $\mu$ F          |
| FDD03 - 15D4U             | 9~36 VDC      | 180 mA               | 510 mA               | 3 WATTS        | ± 15 VDC       | ± 100 mA       | 68%         | 70%         | ± 22 $\mu$ F          |
| FDD03 - 05D5U             | 18~72 VDC     | 70 mA                | 200 mA               | 2.5 WATTS      | ± 5 VDC        | ± 250 mA       | 73%         | 75%         | ± 100 $\mu$ F         |
| FDD03 - 12D5U             | 18~72 VDC     | 80 mA                | 225 mA               | 3 WATTS        | ± 12 VDC       | ± 125 mA       | 75%         | 77%         | ± 47 $\mu$ F          |
| FDD03 - 15D5U             | 18~72 VDC     | 80 mA                | 225 mA               | 3 WATTS        | ± 15 VDC       | ± 100 mA       | 75%         | 77%         | ± 22 $\mu$ F          |

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### GENERAL

| Characteristics         | Conditions                  | min.                  | typ.    | max.   | unit       |
|-------------------------|-----------------------------|-----------------------|---------|--------|------------|
| Switching frequency     | Vi nom, Io nom              | 50                    |         |        | KHz        |
| Isolation voltage       | Input - Output              | 1500                  |         |        | VDC        |
| Isolation resistance    | Input - Output, @ 500VDC    | 100                   |         |        | M $\Omega$ |
| Ambient temperature     | Operating at Vi nom, Io nom | -40                   |         | + 71   | °C         |
| Case temperature        | Operating at Vi nom, Io nom |                       |         | + 90   | °C         |
| Derating                | Vi nom                      | See derating curve    |         |        |            |
| Storage temperature     | Non operational             | -40                   |         | + 100  | °C         |
| Relative humidity       | Vi nom, Io nom              | 20                    |         | 95     | % RH       |
| Temperature coefficient | Vi nom, Io min              |                       |         | ± 0.02 | % / °C     |
| Dimension               |                             | L31.8 x W20.3 x H12.7 |         |        | mm         |
| MTBF                    | Bellcore issue 6@40°C, GB   |                       | 1640000 |        | Hours      |
| Cooling                 | Free air convection         |                       |         |        |            |

#### INPUT SPECIFICATIONS

| Characteristics          | Conditions                | min.         | typ. | max. | unit |
|--------------------------|---------------------------|--------------|------|------|------|
| Input voltage range      | Ta min ... Ta max, Io nom | 2 : 1 models |      |      |      |
|                          |                           | 9            | 12   | 18   | VDC  |
|                          |                           | 18           | 24   | 36   | VDC  |
|                          |                           | 36           | 48   | 72   | VDC  |
|                          |                           | 3 : 1 models |      |      |      |
|                          |                           | 20           | 48   | 60   | VDC  |
| No load input current    | Vi nom, Io = 0            | 4 : 1 models |      |      |      |
|                          |                           | 9            | 24   | 36   | VDC  |
|                          |                           | 18           | 48   | 72   | VDC  |
|                          |                           | 12V models   |      | 18   | mA   |
|                          |                           | 24V models   |      | 15   | mA   |
|                          |                           | 48V models   |      | 8    | mA   |
| Input voltage w/o damage | Io nom                    | 12V models   |      | 20   | VDC  |
|                          |                           | 24V models   |      | 40   | VDC  |
|                          |                           | 48V models   |      | 75   | VDC  |
| Startup voltage          | Io nom                    | 12V models   |      | 7.2  | VDC  |
|                          |                           | 24V models   |      | 7.2  | VDC  |
|                          |                           | 48V models   |      | 16.1 | VDC  |

#### OUTPUT SPECIFICATIONS

| Characteristics         | Conditions     | min.                             | typ. | max. | unit |
|-------------------------|----------------|----------------------------------|------|------|------|
| Output voltage accuracy | Vi nom, Io nom |                                  |      | ± 2  | %    |
| Minimum load            | Vi nom         | single output models             |      | 0    | %    |
|                         |                | dual output models (each output) |      | 20   | %    |

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### OUTPUT SPECIFICATIONS

| Characteristics               | Conditions                                   | min.                                           | typ. | max. | unit |
|-------------------------------|----------------------------------------------|------------------------------------------------|------|------|------|
| Line regulation               | Io nom, Vi min ...Vi max                     |                                                |      | ± 1  | %    |
| Load regulation               | Vi nom, Io 0 ...Io nom, single output models |                                                |      | ± 2  | %    |
|                               | Vi nom, Io min ...Io nom, dual output models |                                                |      | ± 5  | %    |
| Cross regulation (Dual model) | Aymmetrical load 20% - 100% FL               |                                                |      | ± 10 | %    |
| Startup time                  | Vi nom, Io nom                               |                                                |      | 30   | ms   |
| Transient recovery time       | Vi nom, I ~0.5 Io nom                        |                                                |      | 3    | ms   |
| Ripple & noise                | Vi nom, Io nom, BW = 20MHz                   |                                                |      | 300  | mV   |
| Efficiency                    | Vi nom, Io nom, Po / Pi                      | Up to 79%, See model list and efficiency curve |      |      |      |

#### CONTROL AND PROTECTION

|                      |                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------|
| Input reversed       | External shunt diode, external fuse recommended ( 12Vin : 0.75A, 24Vin : 0.75A, 48Vin : 0.5A ) |
| Output short circuit | Current limited (Auto-recovery)                                                                |

#### APPROVALS AND STANDARD

|           |                                                                                                 |
|-----------|-------------------------------------------------------------------------------------------------|
| cTUVus    | UL 60950-1 Recognized                                                                           |
| TUV       | EN 60950-1                                                                                      |
| CE I)     | EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8 |
| Vibration | meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)               |


NOTE 1 : Pls refer to recommended circuit .

### PHYSICAL CHARACTERISTICS

|                  |                                                 |
|------------------|-------------------------------------------------|
| Case size        | 31.8 x 20.3 x 12.7 mm (1.25 x 0.8 x 0.5 inches) |
| Case material    | Plastic                                         |
| Weight           | 15 g                                            |
| Patting material | Epoxy                                           |

### MECHANISM & PIN CONFIGURATION

mm [inch]

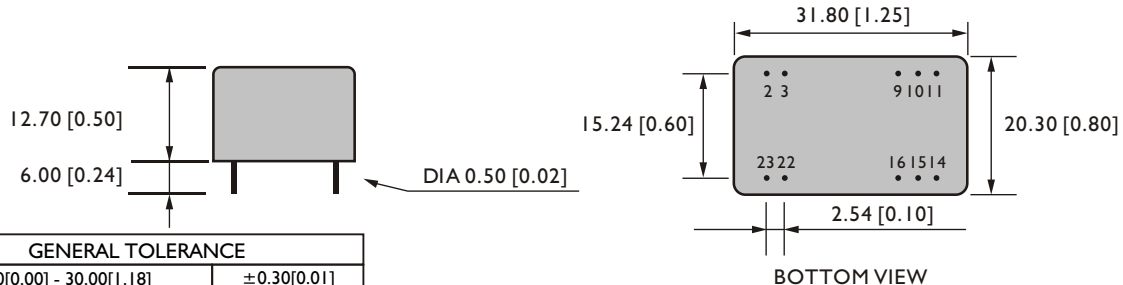

| GENERAL TOLERANCE          |             |
|----------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]   | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72] | ±0.50[0.02] |


### PIN ASSIGNMENT

#### GENERAL


| PIN NO. | 2&3  | 9     | 10&15 | 11    | 14   | 16   | 22&23 |
|---------|------|-------|-------|-------|------|------|-------|
| SINGLE  | Vi - | N. C. | N. C. | N. C. | Vo + | Vo - | Vi +  |
| DUAL    | Vi - | com   | N. C. | Vo -  | Vo + | com  | Vi +  |

### APPLICATION CIRCUIT

a. SINGLE OUTPUT MODELS :

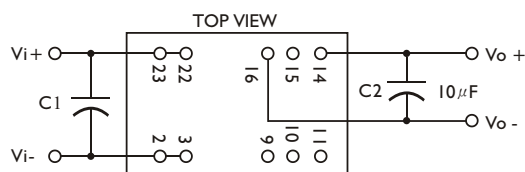

b. DUAL OUTPUT MODELS :

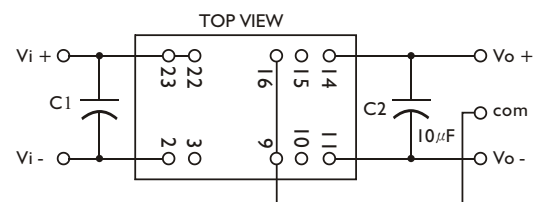

NOTE:

a. C1 = 4.7µF / 100V, C2 = 10µF


b. C1 MUST BE ADDED WHEN APPLICATION .

c. C2 OPTIONAL TO MINIMIZE THE R & N < 100mV .


d. MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS .

### CIRCUIT SCHEMATIC

- Block diagram for FDD03U series with single output

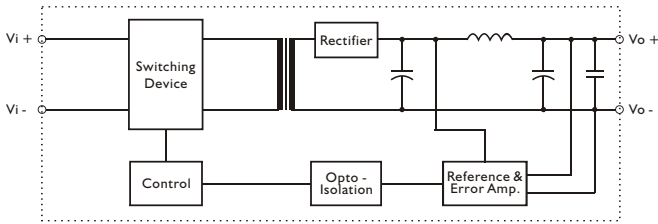


- Block diagram for FDD03U series with dual output

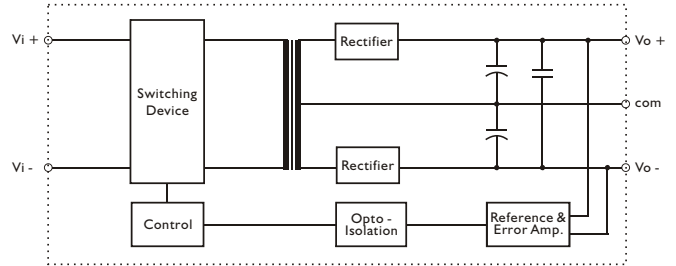


### RECOMMENDED CIRCUIT

- Recommended filter for EN55022 Class B compliance

SINGLE OUTPUT MODELS

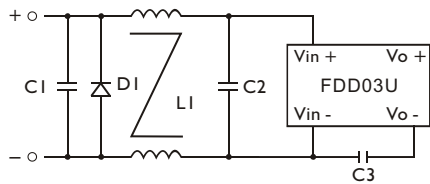

DUAL OUTPUT MODELS

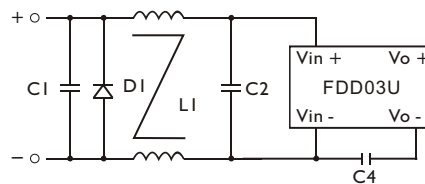


Note: D1 - Reverse Diode (1A/100V)

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.


|             | C1                      | C2                      | C3           | C4           | L1               |
|-------------|-------------------------|-------------------------|--------------|--------------|------------------|
| FDD03-XXSXU | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC | 1nF/2KV MLCC |              | 3mH Common Choke |
| FDD03-XXDXU | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC |              | 1nF/2KV MLCC | 3mH Common Choke |

- Recommended EN 55022 Class B filter circuit layout.

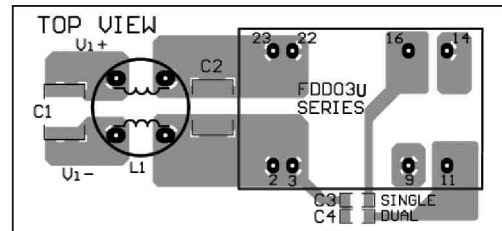


### DERATING AND EFFICIENCY CURVE


Temperature derating curve

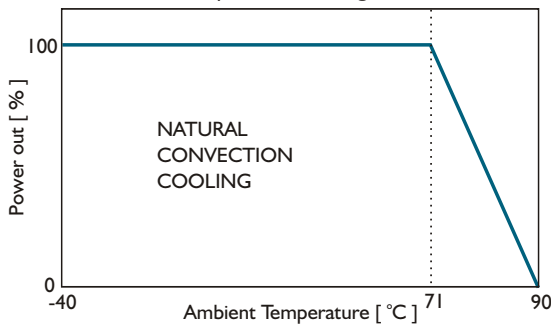

Efficiency Vs Input Voltage  
FDD03-05S4U

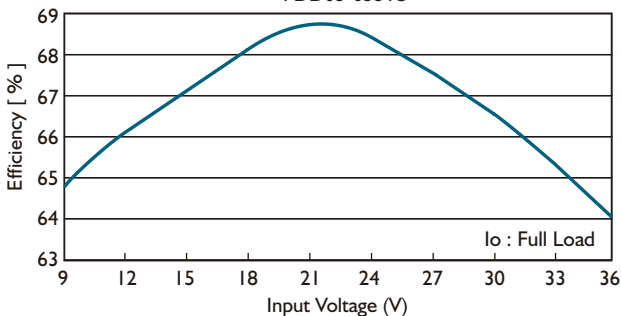

Efficiency Vs Output Load  
FDD03-05S4U

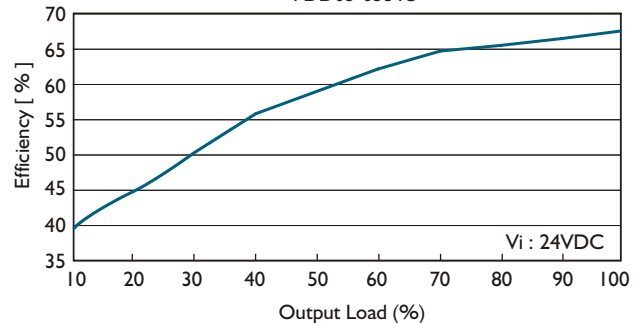

# FDD03U SERIES

DC - DC CONVERTER

2.5 ~ 3W SINGLE & DUAL OUTPUT



## FEATURES

- 4:1 WIDE INPUT RANGE
- DIP24 PACKAGE
- I/O, O/O ISOLATION
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- UL/cUL/TUV/CE
- 2 YEARS WARRANTY



EN 60950-1

## MODEL LIST

| MODEL NO. | INPUT VOLTAGE | INPUT CURRENT (typ.) | INPUT CURRENT (max.) | OUTPUT WATTAGE | OUTPUT VOLTAGE | OUTPUT CURRENT | EFF. (min.) | EFF. (typ.) | CAPACITOR LOAD (max.) |
|-----------|---------------|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|-----------------------|
|-----------|---------------|----------------------|----------------------|----------------|----------------|----------------|-------------|-------------|-----------------------|

### Single Output Models

|                |           |        |        |           |          |        |     |     |              |
|----------------|-----------|--------|--------|-----------|----------|--------|-----|-----|--------------|
| FDD03 - 05S4AU | 9~36 VDC  | 160 mA | 440 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 65% | 67% | 1000 $\mu$ F |
| FDD03 - 12S4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | + 12 VDC | 250 mA | 68% | 70% | 470 $\mu$ F  |
| FDD03 - 15S4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | + 15 VDC | 200 mA | 68% | 70% | 330 $\mu$ F  |
| FDD03 - 05S5AU | 18~72 VDC | 75 mA  | 205 mA | 2.5 WATTS | + 5 VDC  | 500 mA | 70% | 72% | 1000 $\mu$ F |
| FDD03 - 12S5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | + 12 VDC | 250 mA | 75% | 77% | 470 $\mu$ F  |
| FDD03 - 15S5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | + 15 VDC | 200 mA | 75% | 77% | 330 $\mu$ F  |

### Dual Output Models

|                |           |        |        |           |              |              |     |     |                   |
|----------------|-----------|--------|--------|-----------|--------------|--------------|-----|-----|-------------------|
| FDD03 - 05D4AU | 9~36 VDC  | 155 mA | 440 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 66% | 68% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 68% | 70% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15D4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | $\pm$ 15 VDC | $\pm$ 100 mA | 68% | 70% | $\pm$ 22 $\mu$ F  |
| FDD03 - 05D5AU | 18~72 VDC | 70 mA  | 205 mA | 2.5 WATTS | $\pm$ 5 VDC  | $\pm$ 250 mA | 72% | 74% | $\pm$ 100 $\mu$ F |
| FDD03 - 12D5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | $\pm$ 12 VDC | $\pm$ 125 mA | 75% | 77% | $\pm$ 47 $\mu$ F  |
| FDD03 - 15D5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | $\pm$ 15 VDC | $\pm$ 100 mA | 75% | 77% | $\pm$ 22 $\mu$ F  |

### Double Output Models

|                  |           |        |        |           |             |              |     |     |             |
|------------------|-----------|--------|--------|-----------|-------------|--------------|-----|-----|-------------|
| FDD03 - 0505D4AU | 9~36 VDC  | 160 mA | 440 mA | 2.5 WATTS | 5 / 5 VDC   | 250 / 250 mA | 66% | 68% | 100 $\mu$ F |
| FDD03 - 1212D4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | 12 / 12 VDC | 125 / 125 mA | 68% | 70% | 47 $\mu$ F  |
| FDD03 - 1515D4AU | 9~36 VDC  | 180 mA | 530 mA | 3 WATTS   | 15 / 15 VDC | 100 / 100 mA | 68% | 70% | 22 $\mu$ F  |
| FDD03 - 0505D5AU | 18~72 VDC | 70 mA  | 205 mA | 2.5 WATTS | 5 / 5 VDC   | 250 / 250 mA | 72% | 74% | 100 $\mu$ F |
| FDD03 - 1212D5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | 12 / 12 VDC | 125 / 125 mA | 75% | 77% | 47 $\mu$ F  |
| FDD03 - 1515D5AU | 18~72 VDC | 80 mA  | 235 mA | 3 WATTS   | 15 / 15 VDC | 100 / 100 mA | 75% | 77% | 22 $\mu$ F  |

### NOTE :

MAX. 80% LOAD WHEN INPUT VOLTAGE AT 9-11VDC FOR 9-36VDC INPUT MODELS & 18-21VDC FOR 18-72VDC INPUT MODELS.

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### GENERAL

| Characteristics         | Conditions                  | min.                  | typ.    | max.   | unit   |
|-------------------------|-----------------------------|-----------------------|---------|--------|--------|
| Switching frequency     | Vi nom, Io nom              | 50                    |         |        | KHz    |
| Isolation voltage       | Input - Output              | 1500                  |         |        | VDC    |
| Isolation resistance    | Input - Output, @ 500VDC    | 100                   |         |        | MΩ     |
| Ambient temperature     | Operating at Vi nom, Io nom | -40                   |         | + 71   | °C     |
| Case temperature        | Operating at Vi nom, Io nom |                       |         | +90    | °C     |
| Derating                | Vi nom                      | See derating curve    |         |        |        |
| Storage temperature     | Non operational             | -40                   |         | + 100  | °C     |
| Relative humidity       | Vi nom, Io nom              | 20                    |         | 95     | % RH   |
| Temperature coefficient | Vi nom, Io min              |                       |         | ± 0.02 | % / °C |
| Dimension               |                             | L31.8 x W20.3 x H12.7 |         |        | mm     |
| MTBF                    | Bellcore issue 6@40°C, GB   |                       | 1640000 |        | Hours  |
| Cooling                 | Free air convection         |                       |         |        |        |

#### INPUT SPECIFICATIONS

| Characteristics          | Conditions                | min.       | typ. | max. | unit |
|--------------------------|---------------------------|------------|------|------|------|
| Input voltage range      | Ta min ... Ta max, Io nom | 9          | 24   | 36   | VDC  |
|                          |                           | 18         | 48   | 72   | VDC  |
| No load input current    | Vi nom, Io = 0            | 24V models |      | 15   | mA   |
|                          |                           | 48V models |      | 8    | mA   |
| Input voltage w/o damage | Io nom                    | 24V models |      | 40   | VDC  |
|                          |                           | 48V models |      | 75   | VDC  |
| Startup voltage          | Io nom                    | 24V models | 7.2  |      | VDC  |
|                          |                           | 48V models | 16.1 |      | VDC  |

#### OUTPUT SPECIFICATIONS

| Characteristics               | Conditions                                    | min.                                           | typ. | max. | unit |
|-------------------------------|-----------------------------------------------|------------------------------------------------|------|------|------|
| Output voltage accuracy       | Vi nom, Io nom                                |                                                |      | ± 2  | %    |
| Minimum load                  | Vi nom single output models                   | 0                                              |      |      | %    |
|                               | Vi nom dual output models (each output)       | 20                                             |      |      | %    |
| Line regulation               | Io nom, Vi min ... Vi max                     |                                                |      | ± 1  | %    |
| Load regulation               | Vi nom, Io 0 ... Io nom, single output models |                                                |      | ± 2  | %    |
|                               | Vi nom, Io min ... Io nom, dual output models |                                                |      | ± 5  | %    |
| Cross regulation (Dual model) | Aymmetrical load 20% - 100% FL                |                                                |      | ± 10 | %    |
| Startup time                  | Vi nom, Io nom                                |                                                |      | 30   | ms   |
| Transient recovery time       | Vi nom, I ~ 0.5 Io nom                        |                                                |      | 3    | ms   |
| Ripple & noise                | Vi nom, Io nom, BW = 20MHz                    |                                                |      | 150  | mV   |
| Efficiency                    | Vi nom, Io nom, Po / Pi                       | Up to 77%, See model list and efficiency curve |      |      |      |

#### CONTROL AND PROTECTION

|                      |                                                                                                           |
|----------------------|-----------------------------------------------------------------------------------------------------------|
| Remote ON / OFF      | ON: opened or 5~10 VDC applied, reference to input GND<br>OFF: -0.3~2 VDC applied, reference to input GND |
| Input reversed       | External shunt diode, external fuse recommended ( 24Vin : 0.75A, 48Vin : 0.5A )                           |
| Output short circuit | Current limited (Auto-recovery)                                                                           |

#### APPROVALS AND STANDARD

|           |                                                                                                 |
|-----------|-------------------------------------------------------------------------------------------------|
| cTUVus    | UL 60950-I Recognized                                                                           |
| TUV       | EN 60950-I                                                                                      |
| CE I)     | EN 61204-3, EN 55022 Class B, EN 61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-6, EN 61000-4-8 |
| Vibration | meet IEC 60068-2-6 (10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)               |



NOTE 1 : Pls refer to recommended circuit .

### PHYSICAL CHARACTERISTICS

|                  |                                                 |
|------------------|-------------------------------------------------|
| Case size        | 31.8 × 20.3 × 12.7 mm (1.25 × 0.8 × 0.5 inches) |
| Case material    | Plastic                                         |
| Weight           | 15 g                                            |
| Patting material | Epoxy                                           |

### MECHANISM & PIN CONFIGURATION

mm [inch]

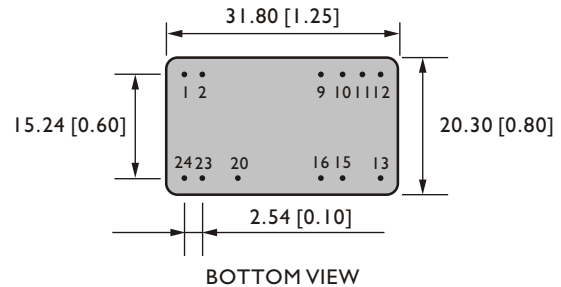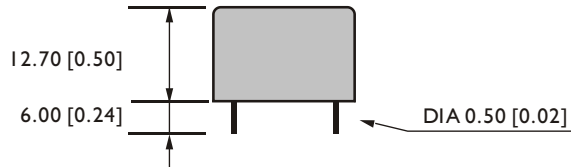

| GENERAL TOLERANCE          |             |
|----------------------------|-------------|
| 0.00[0.00] - 30.00[1.18]   | ±0.30[0.01] |
| 30.00[1.18] - 120.00[4.72] | ±0.50[0.02] |


### PIN ASSIGNMENT

#### GENERAL


| PIN NO. | I&2  | 9      | 10&11  | 12     | 13     | 15     | 16     | 20            | 23&24 |
|---------|------|--------|--------|--------|--------|--------|--------|---------------|-------|
| SINGLE  | Vi + | NO PIN | NO PIN | Vo -   | Vo +   | NO PIN | NO PIN | Remote ON/OFF | Vi -  |
| DUAL    | Vi + | NO PIN | com    | NO PIN | Vo -   | Vo +   | NO PIN | Remote ON/OFF | Vi -  |
| DOUBLE  | Vi + | Vo I - | NO PIN | Vo I + | Vo 2 + | NO PIN | Vo 2 - | Remote ON/OFF | Vi -  |

### CIRCUIT SCHEMATIC


• Block diagram for FDD03AU series with single output

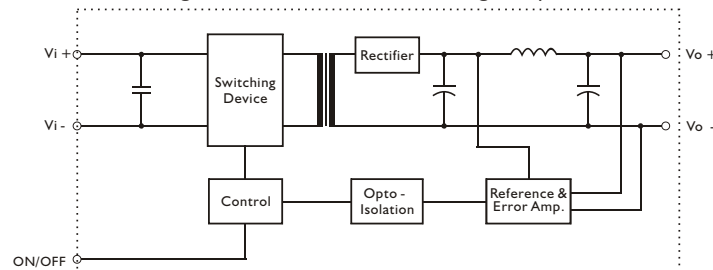

• Block diagram for FDD03AU series with dual output

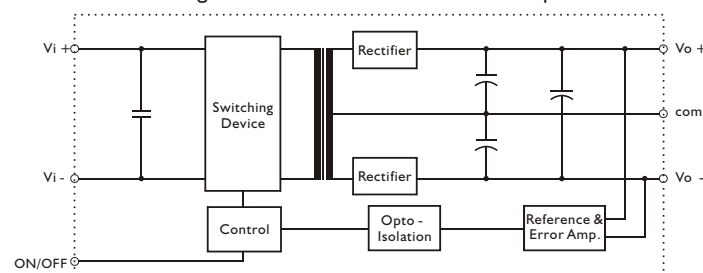


• Block diagram for FDD03AU series with double output

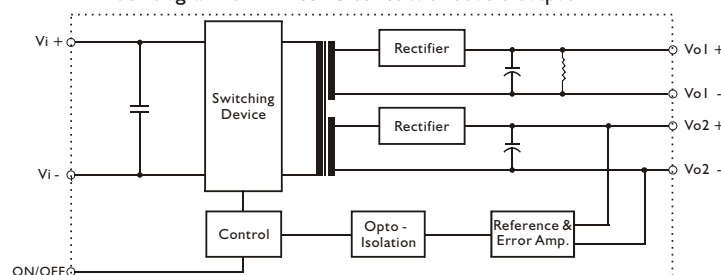


### RECOMMENDED CIRCUIT

- Recommended filter for EN55022 Class B compliance


SINGLE OUTPUT MODELS

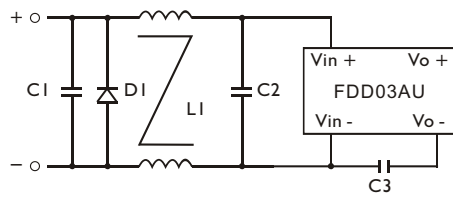

DUAL OUTPUT MODELS

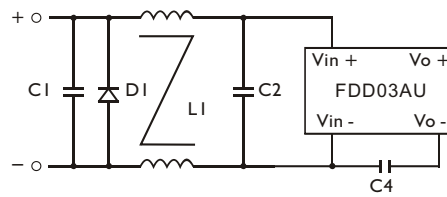

DOUBLE OUTPUT MODELS

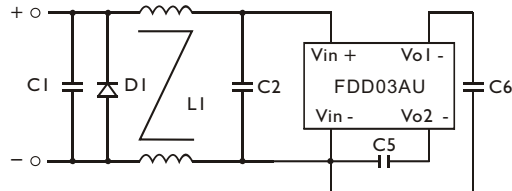


Note: D1 - Reverse Diode (1A / 100V)

- The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.


|                | C1                      | C2                      | C3           | C4           | C5           | C6           | L1               |
|----------------|-------------------------|-------------------------|--------------|--------------|--------------|--------------|------------------|
| FDD03-XXSXAU   | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC | InF/2KV MLCC |              |              |              | 3mH Common Choke |
| FDD03-XXDXAU   | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC |              | InF/2KV MLCC |              |              | 3mH Common Choke |
| FDD03-XXXXDXAU | 6.8 $\mu$ F / 100V MLCC | 4.7 $\mu$ F / 100V MLCC |              |              | InF/2KV MLCC | InF/2KV MLCC | 3mH Common Choke |

- Recommended EN 55022 Class B filter circuit layout.

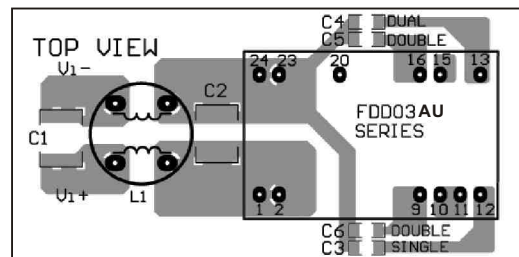


### DERATING AND EFFICIENCY CURVE


Temperature derating curve

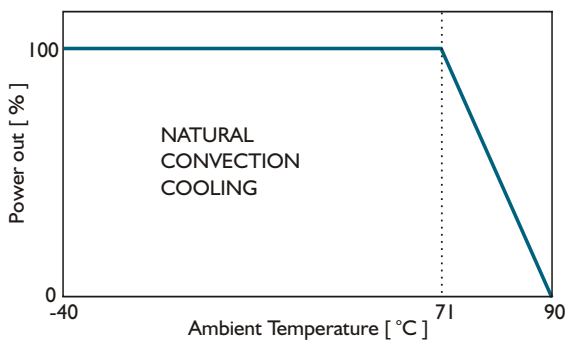

Efficiency Vs Input Voltage  
FDD03-05S4AU

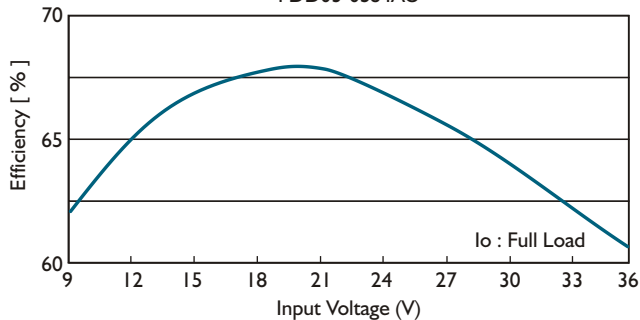

Efficiency Vs Output Load  
FDD03-05S4AU

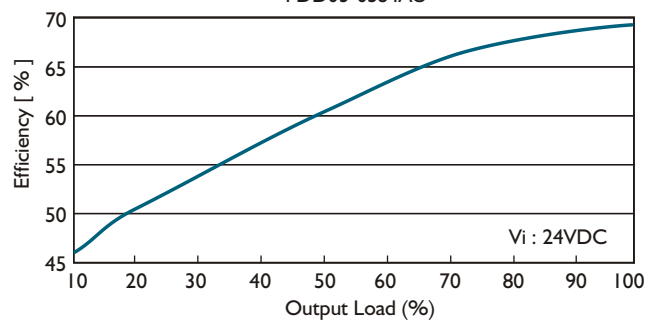



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А