# FMMT591A SOT23 PNP silicon planar medium power transistor

## **Features**

Low equivalent on resistance  $R_{CE(sat)}=350m\Omega$  at 1A Part Marking Detail -91A Complementary type -FMMT491A

## Absolute maximum ratings.

Parameter	Symbol	Value	Unit
Collector-Base voltage	V <sub>CBO</sub>	-40	V
Collector-Emitter voltage	V <sub>CEO</sub>	-40	V
Emitter-Base voltage	V <sub>EBO</sub>	-5	V
Peak pulse current	I <sub>CM</sub>	-2	Α
Continuous Collector current	I <sub>C</sub>	-1	Α
Base current	I <sub>B</sub>	-200	mA
Power dissipation at Tamb=25oC	P <sub>tot</sub>	500	mW
Operating an storage temperature range	T <sub>j</sub> ; T <sub>STG</sub>	-55 to +150	°C


## Electrical characteristics (at $T_{amb} = 25$ °C)

Parameter	Symbol	Min	Max	Unit	Conditions
Collector-Base breakdown voltage	V <sub>(BR)CBO</sub>	-40		V	I <sub>C</sub> =-100μA
Collector-Emitter breakdown voltage	V <sub>(BR)CEO</sub>	-40		V	I <sub>C</sub> =-10mA <sup>(*)</sup>
Emitter-Base breakdown voltage	$V_{(BR)EBO}$	-5		V	I <sub>E</sub> =-100μA
Collector cut-off current	I <sub>CBO</sub>		-100	nA	V <sub>CB</sub> =-30V
Emitter cut-off current	I <sub>EBO</sub>		-100	nA	V <sub>EB</sub> =-4V
Collector-Emitter cut-off current	I <sub>CES</sub>		-100	nA	V <sub>CES</sub> =-30V
Collector-Emitter saturation voltage	V <sub>CE(sat)</sub>		-0.2	V	I <sub>C</sub> =-100mA, I <sub>B</sub> =-1mA <sup>(*)</sup>
			-0.35	V	I <sub>C</sub> =-500mA, I <sub>B</sub> =-20mA <sup>(*)</sup>
			-0.5	V	I <sub>C</sub> =-1A, I <sub>B</sub> =-100mA <sup>(*)</sup>
Base-Emitter saturation voltage	V <sub>BE(sat)</sub>		-1.1	V	I <sub>C</sub> =-1A, I <sub>B</sub> =-50mA <sup>(*)</sup>
Base-Emitter turn-on voltage	V <sub>BE(on)</sub>		-1.0	V	I <sub>C</sub> =-1A, V <sub>CE</sub> =-5V <sup>(*)</sup>
Static forward current transfer ratio	h <sub>FE</sub>	300			I <sub>C</sub> =-1mA,
		300	800		I <sub>C</sub> =-100mA <sup>(*)</sup>
		250			I <sub>C</sub> =-500mA <sup>(*)</sup> , V <sub>CE</sub> =-5V
		160			I <sub>C</sub> =-1A <sup>(*)</sup>
		30			I <sub>C</sub> =-2A <sup>(*)</sup>
Transition frequency	f <sub>T</sub>	150		MHz	I <sub>C</sub> =-50mA, V <sub>CE</sub> =-10V f=100MHz
Output capacitance	C <sub>obo</sub>		10	pF	V <sub>CB</sub> =-10V, f=1MHz

#### NOTES:

(\*) Measured under pulse conditions. Pulse width=300  $\mu s.$  Duty cycle 2%

## **Electrical characteristics**

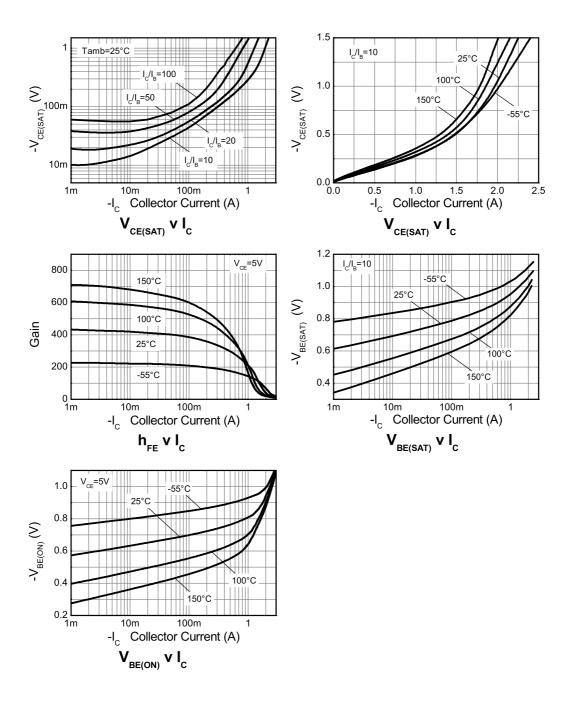

# **FMMT591A**

Intentionally left blank

#### Definitions

#### Product change

Diodes Incorporated reserves the right to alter, without notice, specifications, design, price or conditions of supply of any product or service. Customers are solely responsible for obtaining the latest relevant information before placing orders.

#### Applications disclaimer

The circuits in this design/application note are offered as design ideas. It is the responsibility of the user to ensure that the circuit is fit for the user's application and meets with the user's requirements. No representation or warranty is given and no liability whatsoever is assumed by Diodes Inc. with respect to the accuracy or use of such information, or infringement of patents or other intellectual property rights arising from such use or otherwise. Diodes Inc. does not assume any legal responsibility or will not be held legally liable (whether in contract, tort (including negligence), breach of statutory duty, restriction or otherwise) for any damages, loss of profit, business, contract, opportunity or consequential loss in the use of these circuit applications, under any circumstances.

#### Life support

Diodes Zetex products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body

\_

- 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

#### Reproduction

The product specifications contained in this publication are issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned.

#### **Terms and Conditions**

All products are sold subjects to Diodes Inc. terms and conditions of sale, and this disclaimer (save in the event of a conflict between the two when the terms of the contract shall prevail) according to region, supplied at the time of order acknowledgement.

For the latest information on technology, delivery terms and conditions and prices, please contact your nearest Diodes Zetex sales office.

#### **Quality of product**

Diodes Zetex Semconductors Limited is an ISO 9001 and TS16949 certified semiconductor manufacturer.

To ensure quality of service and products we strongly advise the purchase of parts directly from Diodes Inc. or one of our regionally authorized distributors. For a complete listing of authorized distributors please visit: www.zetex.com or www.diodes.com

Diodes Inc. does not warrant or accept any liability whatsoever in respect of any parts purchased through unauthorized sales channels.

## ESD (Electrostatic discharge)

Semiconductor devices are susceptible to damage by ESD. Suitable precautions should be taken when handling and transporting devices. The possible damage to devices depends on the circumstances of the handling and transporting, and the nature of the device. The extent of damage can vary from immediate functional or parametric malfunction to degradation of function or performance in use over time. Devices suspected of being affected should be replaced.

## Green compliance

Diodes Inc. is committed to environmental excellence in all aspects of its operations which includes meeting or exceeding regulatory requirements with respect to the use of hazardous substances. Numerous successful programs have been implemented to reduce the use of hazardous substances and/or emissions.

All Diodes Zetex components are compliant with the RoHS directive, and through this it is supporting its customers in their compliance with WEEE and ELV directives.

Product status key:	
"Preview"	Future device intended for production at some point. Samples may be available
"Active"	Product status recommended for new designs
"Last time buy (LTB)"	Device will be discontinued and last time buy period and delivery is in effect
"Not recommended for new designs"	Device is still in production to support existing designs and production
"Obsolete"	Production has been discontinued
Datasheet status key:	
"Draft version"	This term denotes a very early datasheet version and contains highly provisional information, which may change in any manner without notice.
"Provisional version"	This term denotes a pre-release datasheet. It provides a clear indication of anticipated performance. However, changes to the test conditions and specifications may occur, at any time and without notice.
"Issue"	This term denotes an issued datasheet containing finalized specifications. However, changes to specifications may occur, at any time and without notice.

#### Zetex sales offices

Europe	Americas	Asia Pacific	Corporate Headquarters
Zetex GmbH	Zetex Inc	Diodes Zetex (Asia) Ltd	Diodes Incorporated
Kustermann-park	700 Veterans Memorial Highway	3701-04 Metroplaza Tower 1	15660 N Dallas Parkway
Balanstraße 59	Hauppauge, NY 11788	Hing Fong Road, Kwai Fong	Suite 850, Dallas
D-81541 München	USA	Hong Kong	TX75248, USA
Germany			
Telefon: (49) 89 45 49 49 0	Telephone: (1) 631 360 2222	Telephone: (852) 26100 611	Telephone: (1) 972 385 2810
Fax: (49) 89 45 49 49 49	Fax: (1) 631 360 8222	Fax: (852) 24250 494	
europe.sales@zetex.com	usa.sales@zetex.com	asia.sales@zetex.com	www.diodes.com

© 2008 Published by Diodes Incorporated



Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

### Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



**«JONHON»** (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«**FORSTAR**» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: http://oceanchips.ru/

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А