
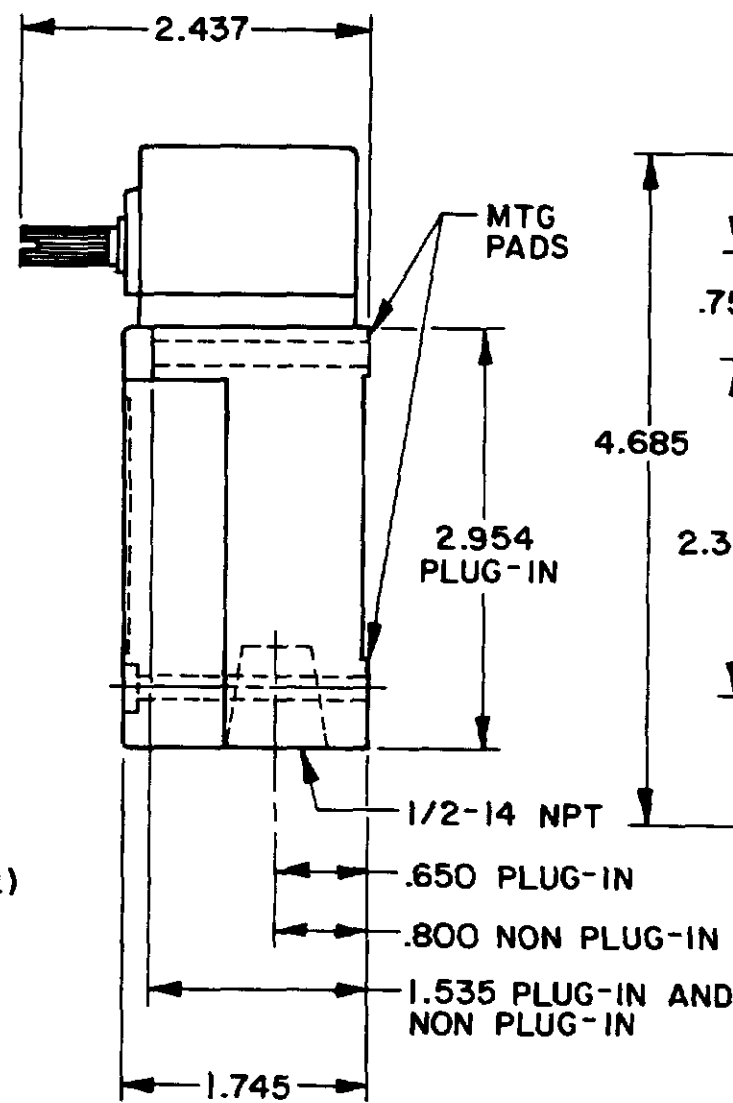


OPERATING CHARACTERISTICS	LSYA MOMENTARY	LSYR MOMENTARY LOW TORQUE	LSYN MAINTAINED	LSYP MOMENTARY LOW PRETRAVEL AND DIFF. TRAVEL	LSYH MOMENTARY LOW PRETRAVEL AND LOW TORQUE	LSYL SEQUENCE DOUBLE POLE ONLY	LSYM CENTER NEUTRAL DOUBLE POLE ONLY	LSYS GRAVITY RETURN	LSYU LOW PRETRAVEL
PRETRAVEL(MAX)	15°	15°	65°	9°	9°	1ST STEP 15° 2ND STEP 10° ADD'L	18°	NOT APPLICABLE	5°
OVERTRAVEL(MIN)	60°	60°	20°	68°	68°	48°	57°	NOT APPLICABLE	70°
DIFFERENTIAL TRAVEL(MAX)	SINGLE POLE 5° DOUBLE POLE 7°	SINGLE POLE 5° DOUBLE POLE 7°	40°	SINGLE POLE 3° DOUBLE POLE 4°	SINGLE POLE 3° DOUBLE POLE 4°	5°	10°	12°	SGL POLE 3° DBL POLE 4°
TOTAL TRAVEL (REF)	75°	75°	90°	75°	75°	75°	75°	360°	75°
OPERATING TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS
FULL TRAVEL TORQUE(MAX)	4 IN. LBS	1.7 IN. LBS		4 IN. LBS	1.7 IN. LBS	4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS



SIDE ROTARY

SINGLE POLE


DOUBLE POLE

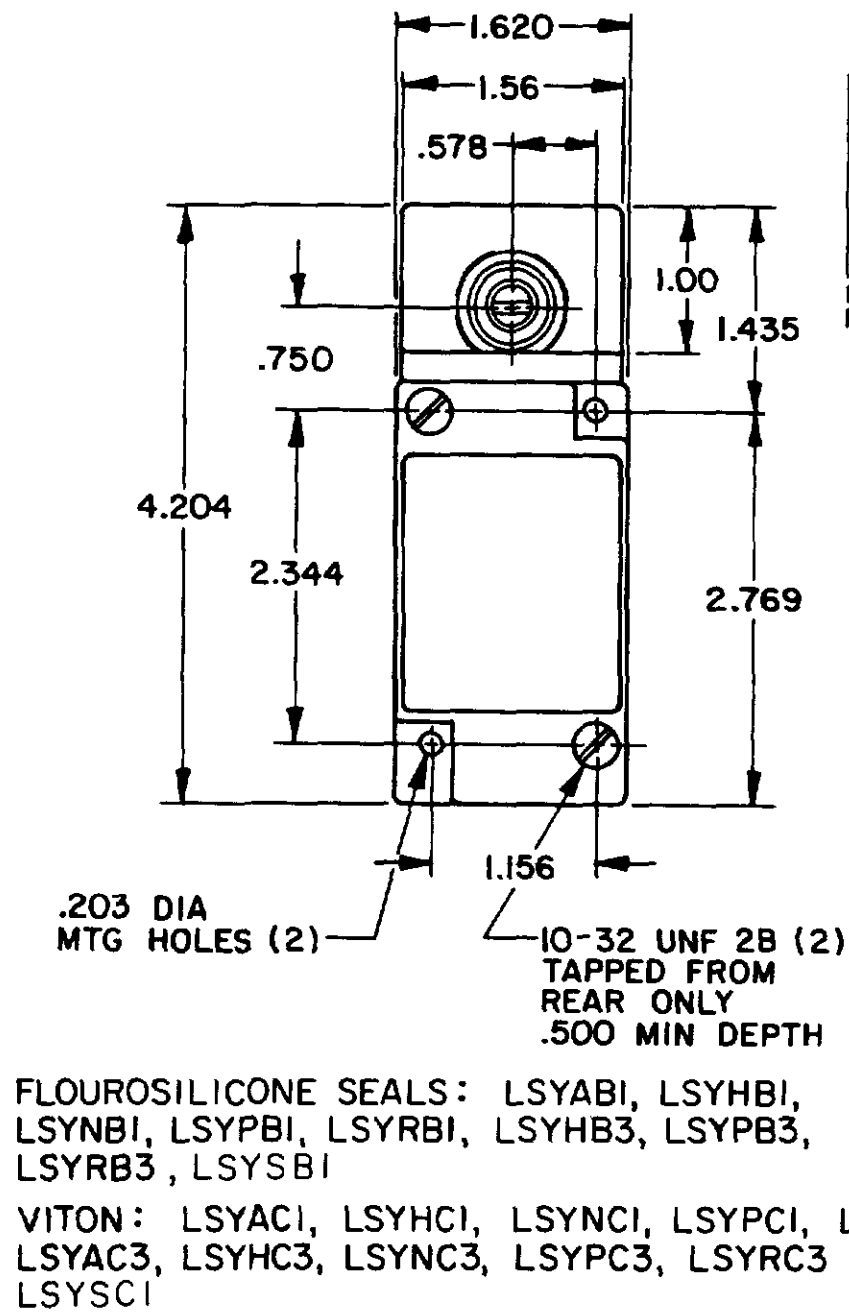

FLOUROSILICONE SEALS: LSYAB2, LSYHB2, LSYMB2, LSYNB2, LSYPB2, LSYRB2, LSYAB4, LSYHB4, LSYMB4, LSYNB4, LSYPB4, LSYRB4
 * (LSYAB6, LSYHB6, LSYMB6, LSYNB6, LSYPB6, LSYRB6, LSYAB7, LSYHB7, LSYMB7, LSYNB7, LSYPB7, LSYRB7 HAVE 1/2-14 CONDUIT HOLE)

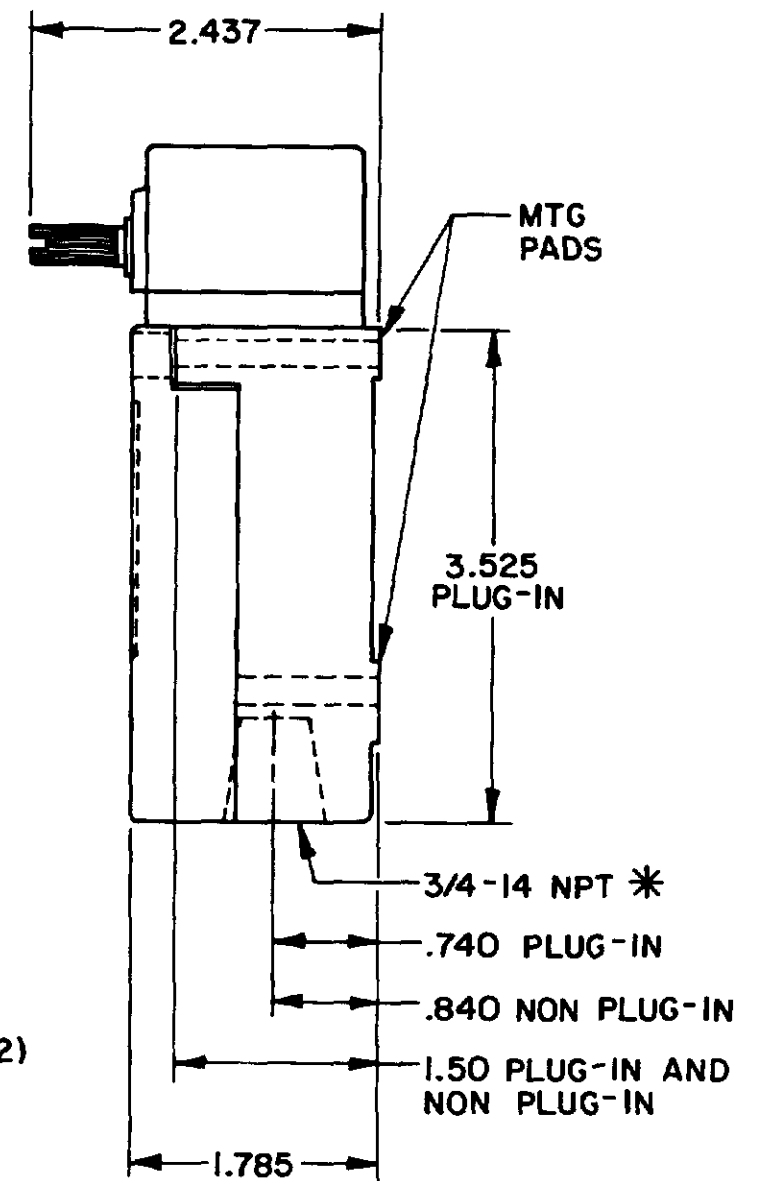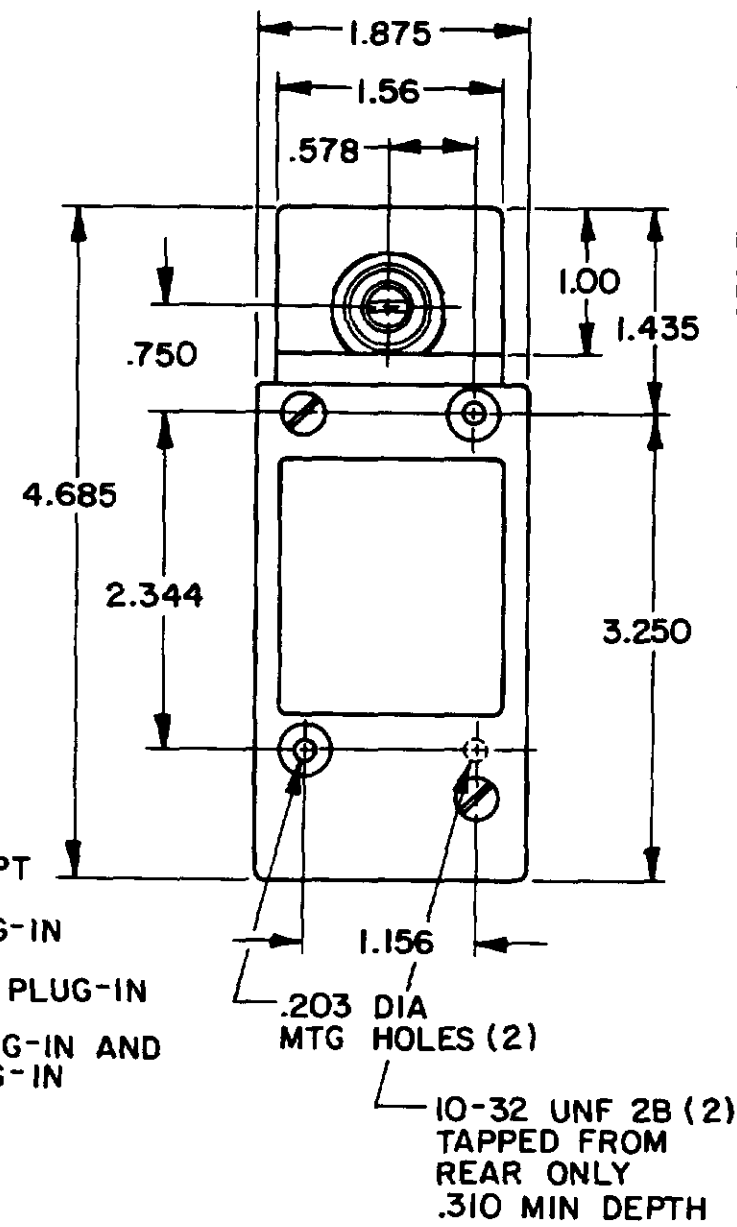


VITON SEALS: LSYAC2, LSYHC2, LSYNC2, LSYPC2, LSYRC2, LSYAC4, LSYHC4, LSYNC4, LSYPC4, LSYRC4, LSYMC2, LSYMC4, LSYMC6, LSYMC7, LSYLC2, LSYLC4, LSYLC6, LSYLC7

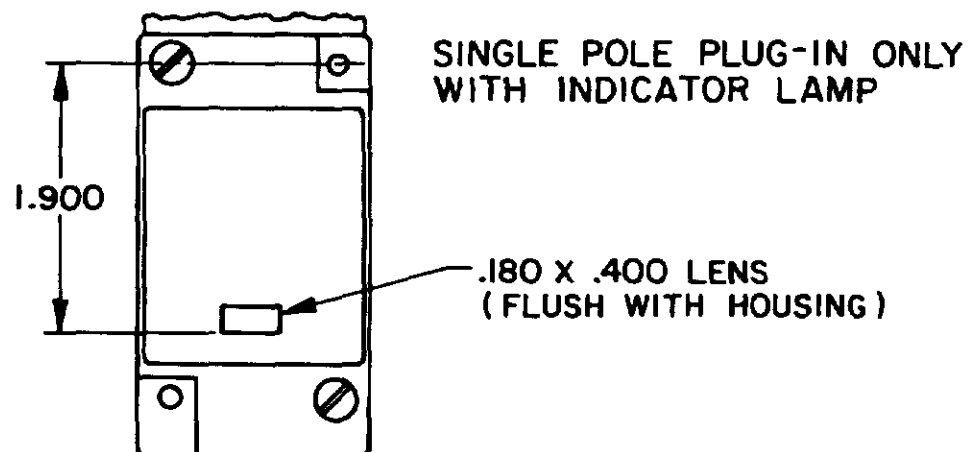


120 LAMP VOLTAGE -
 TYPE LSYAB5, LSYHB5, LSYNB5, LSYPB5, LSYRB5, LSYAC5, LSYHC5, LSYNC5, LSYPC5, LSYRC5
 240 LAMP VOLTAGE -
 TYPE LSYAB8, LSYHB8, LSYNB8, LSYPB8, LSYRB8, LSYAC8, LSYHC8, LSYNC8, LSYPC8, LSYRC8

NOTE
 1 - ALL UNITS AVAILABLE WITH FLUOROSILICONE AND VITON SEALS

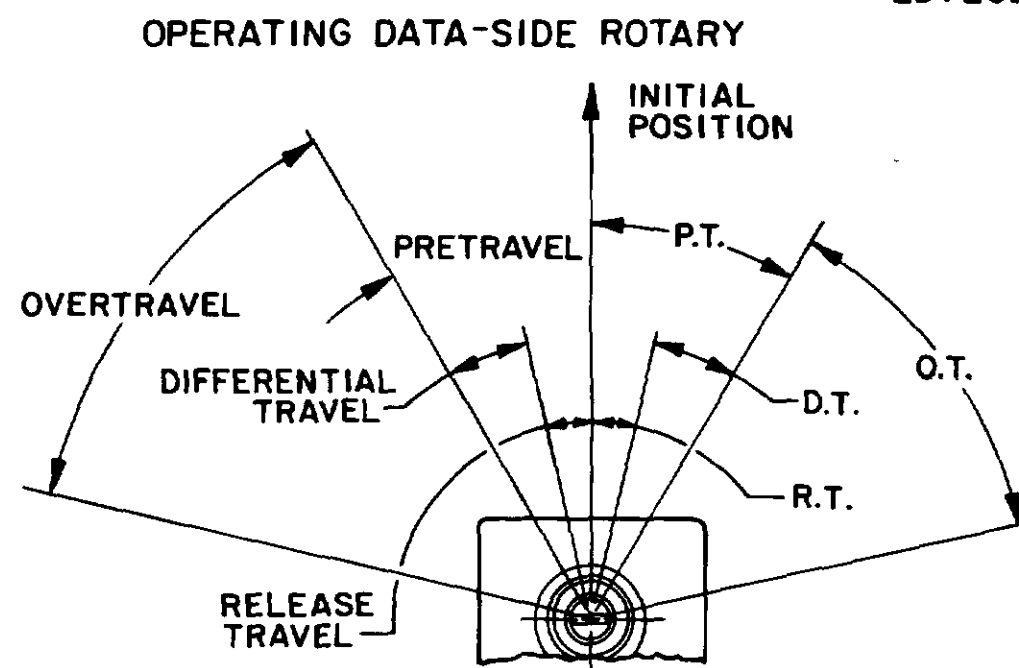



MANIFOLD MOUNT (PLUG-IN ONLY)
 SINGLE POLE AND DOUBLE POLE
 TYPE LSYA THROUGH LSYW SERIES

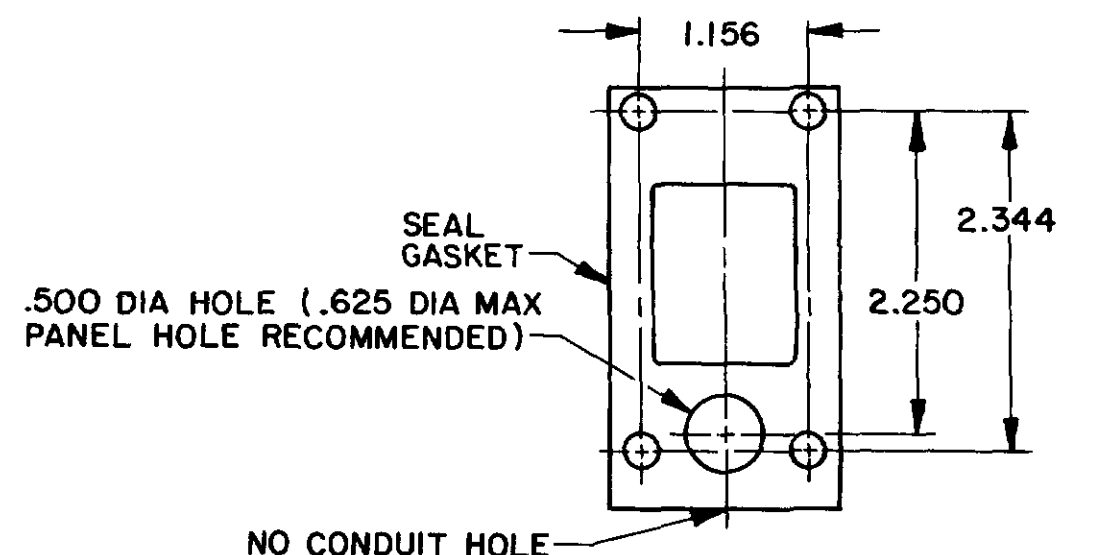



MICRO SWITCH
 SWITCH-ENCLOSED
 CHART 1
 LSY SERIES
 CATALOG LISTING

DESIGN UNITS	WEIGHT
1.000	0.100
0.500	0.050
0.250	0.025
0.125	0.012
0.062	0.006
0.031	0.003
0.015	0.001



SIDE ROTARY CAM TRACKING

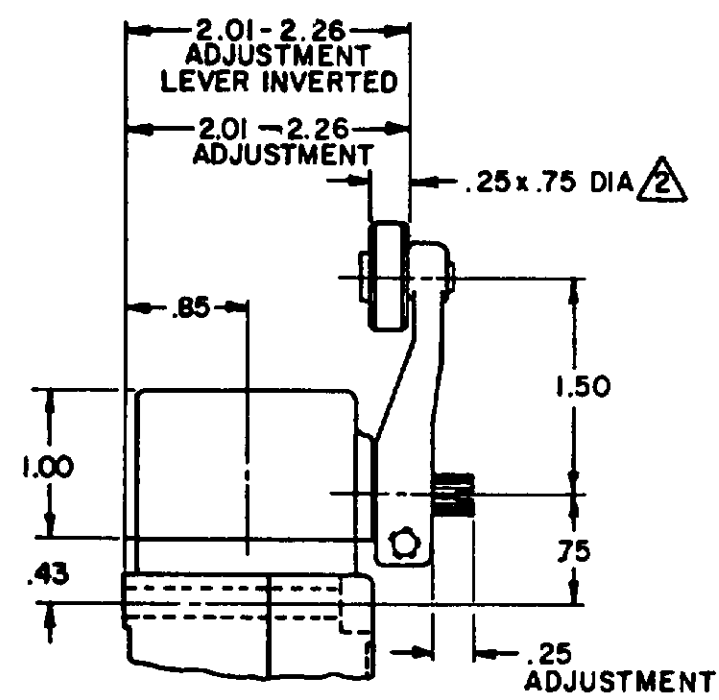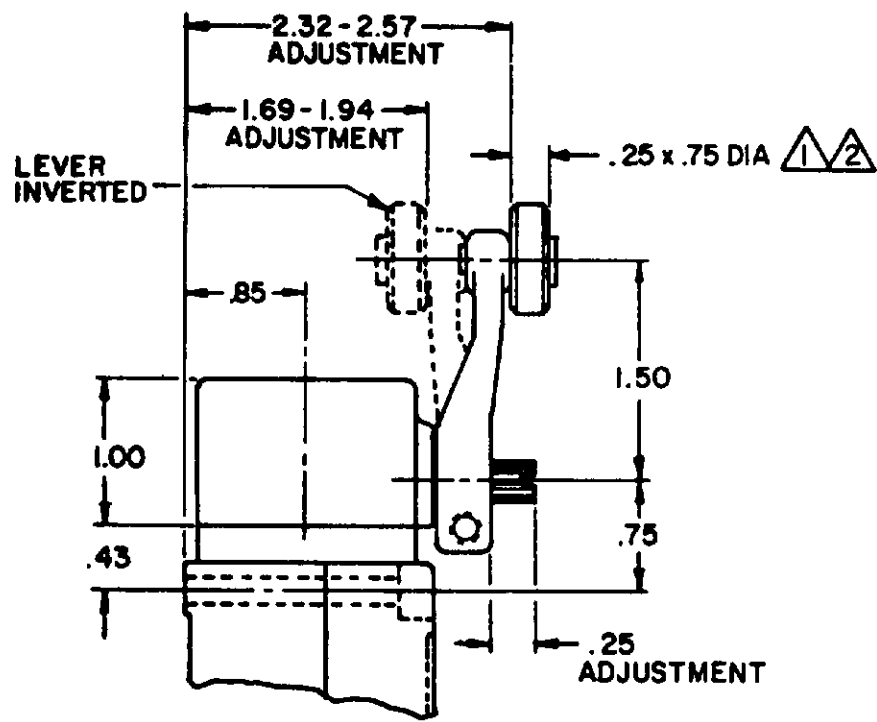

LSZ51 TYPE LEVERS

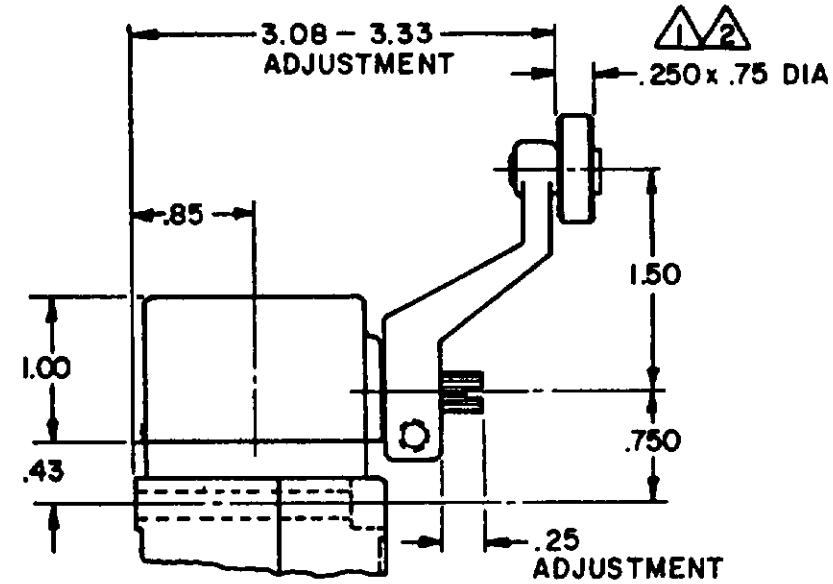
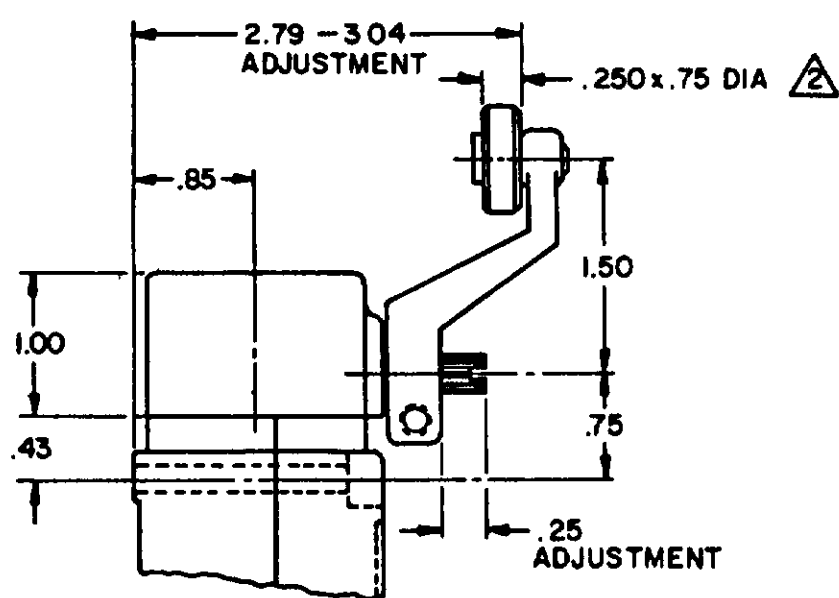


LSZ55 TYPE LEVERS

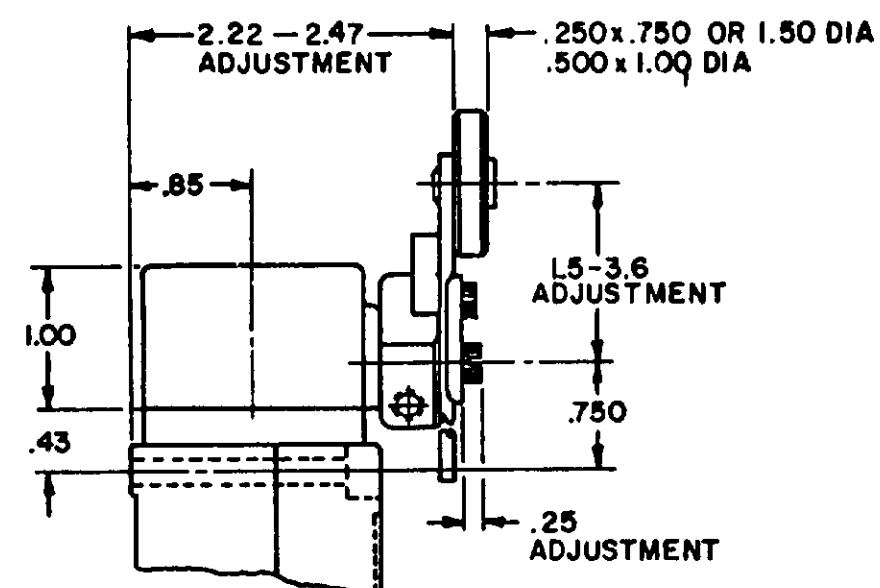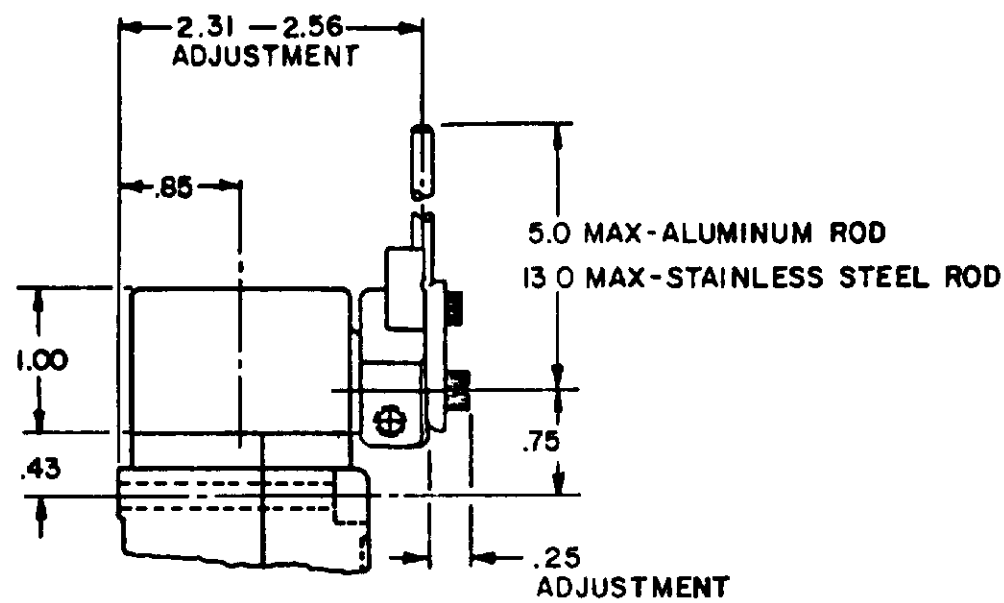

LSZ54 TYPE LEVER

LSZ52 TYPE LEVER

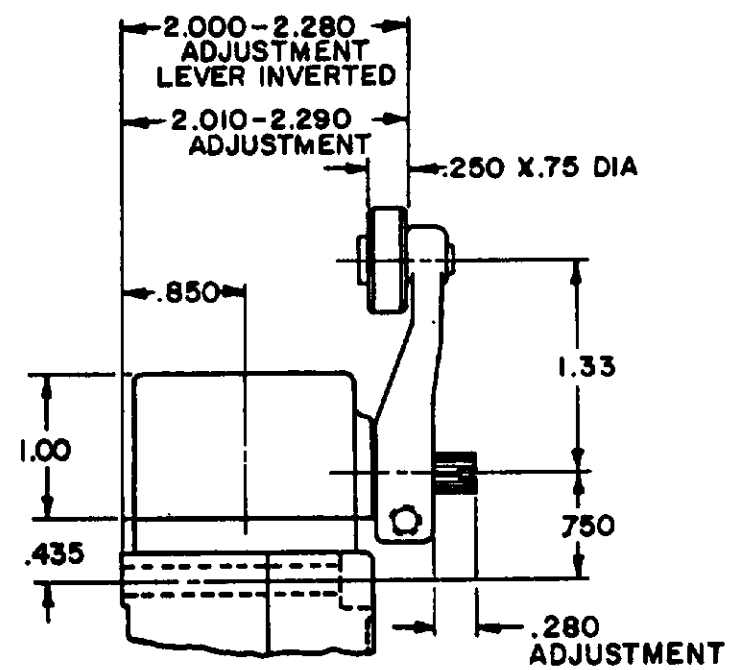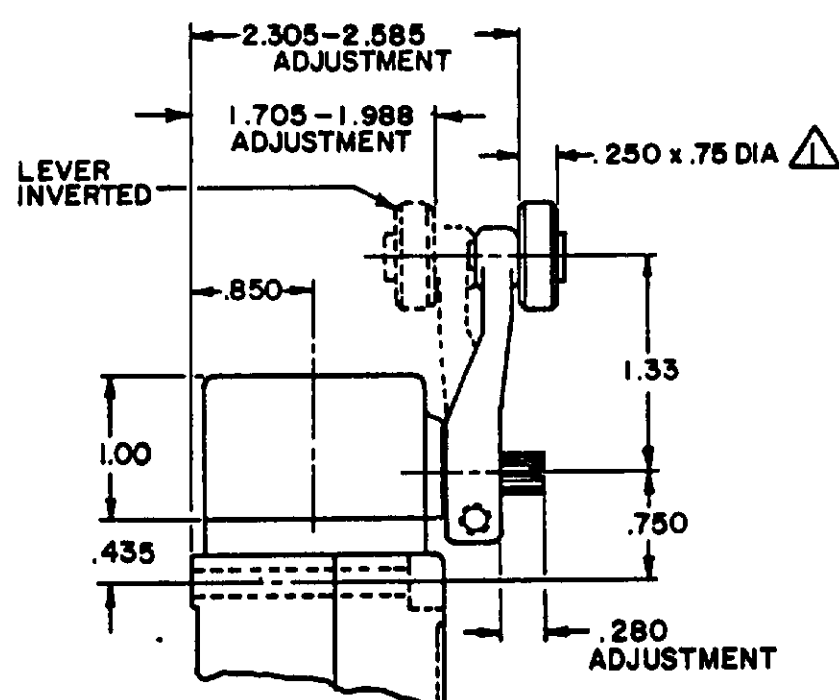

LSZ59 TYPE LEVERS

NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FEEDING CODE 31829

CHART 1

LSY SERIES

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030

TWO PLACE (.00) ± .015


THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT


TOP ROTARY

SINGLE POLE

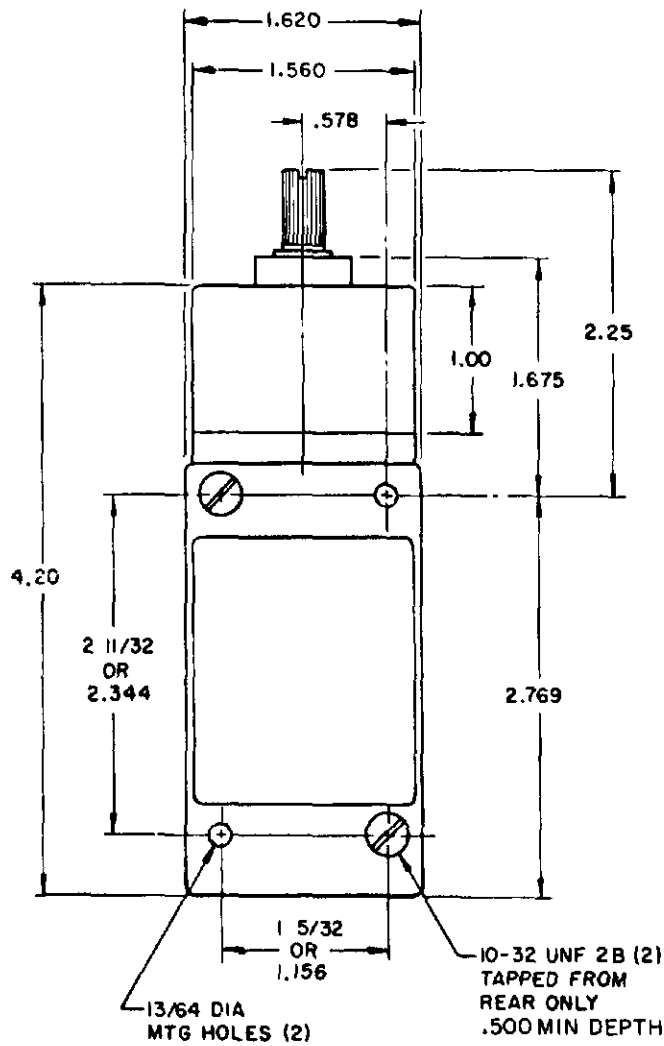


FLOUROSILICONE SEALS
LSYBB1 & LSYBB3

VITON SEALS
LSYBC1 & LSYBC3

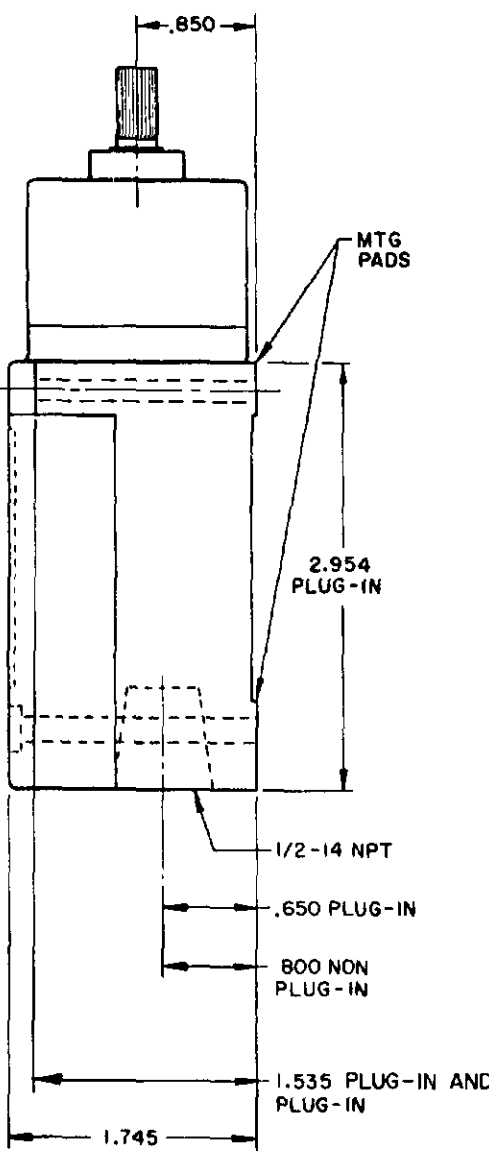

DOUBLE POLE

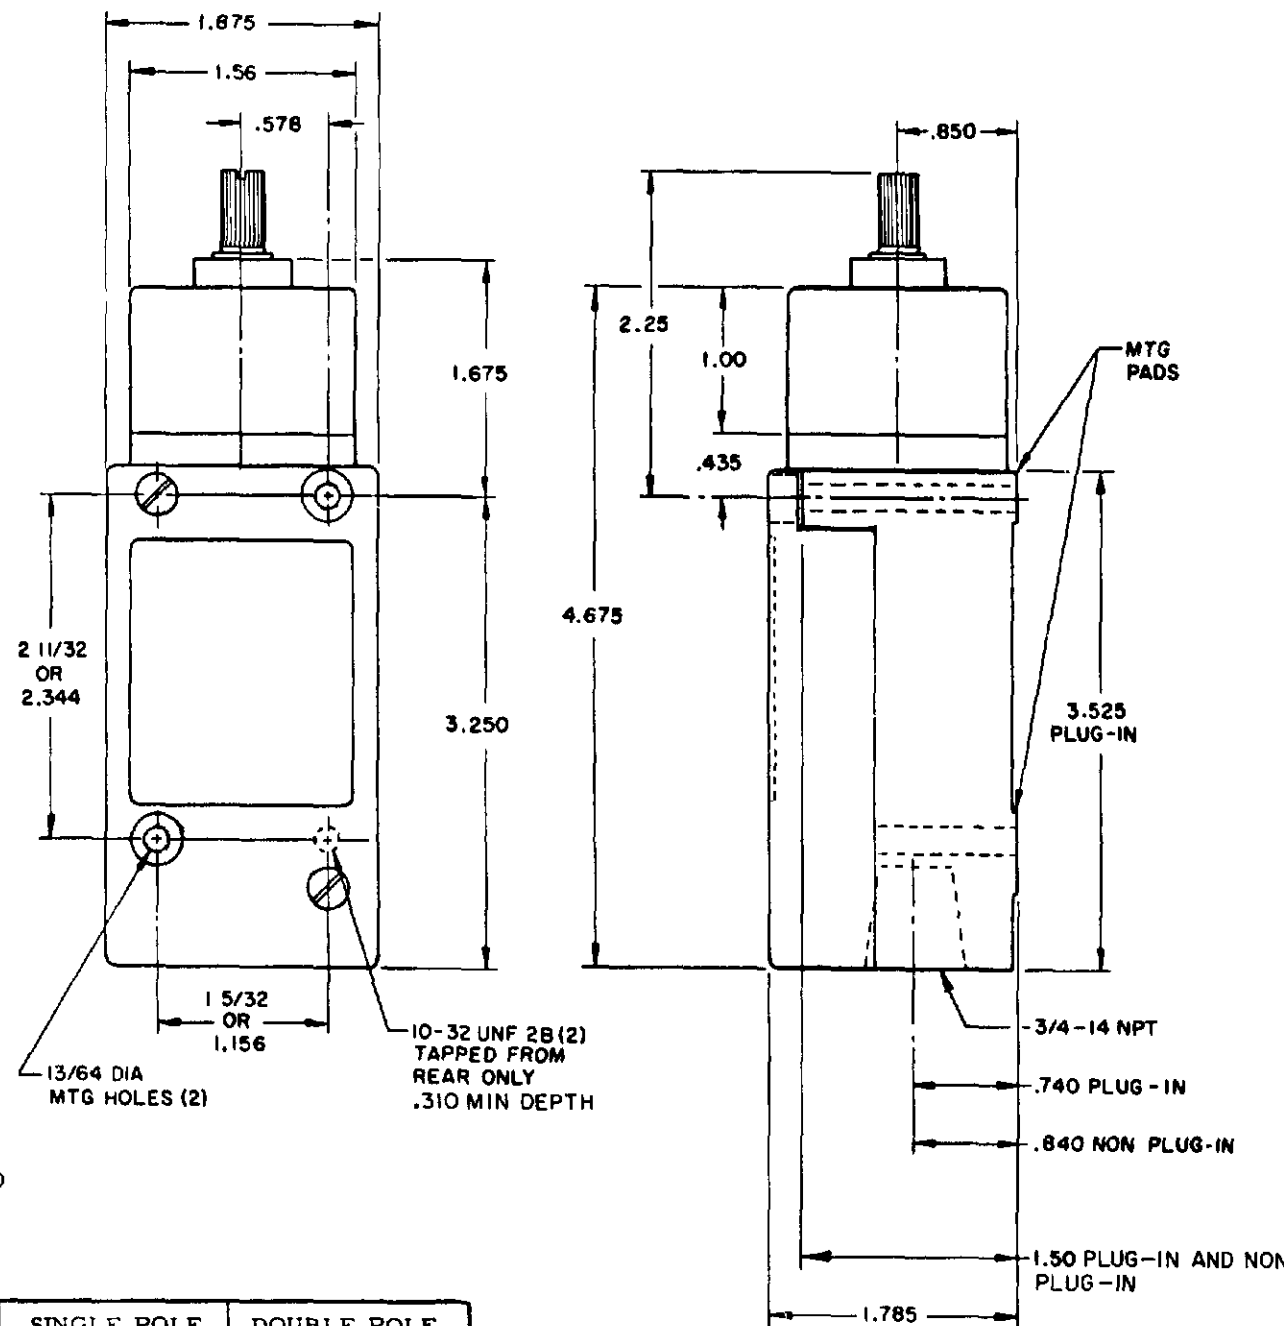

FLOUROSILICONE SEALS
LSYBB2 & LSYBB4
LSYBB6 & LSYBB7 HAVE 1/2 -14NPT
CONDUIT HOLE

VITON SEALS
LSYBC2 & LSYBC4 , LSYBC6 & LSYBC7
HAVE 1/2 -14NPT CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2.5 IN. LBS	2.5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

A.C. VOLTAGE	AMPS AT .35 POWER FACTOR			
	SINGL. POL.		DOUBLE POL.	
	MAKE	BREAK	MAKE	BREAK
120	60	6	10	3
240	30	3	15	1.5
480	15	1.5	7.5	.75
600	12	1.2	6	.6


D.C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT.


VOLTAGE	
5 AC OR DC MIN	.01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

SINGLE POLE
MOMENTARY

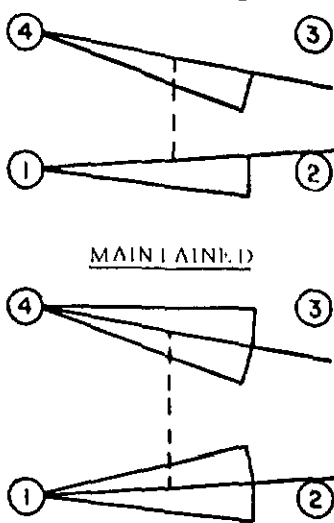


SINGLE POLE
ELECTRONIC DUTY
MOMENTARY

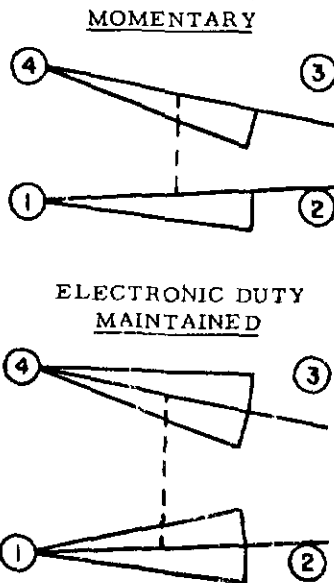


DIRECT ACTING



DOUBLE POLE
MOMENTARY

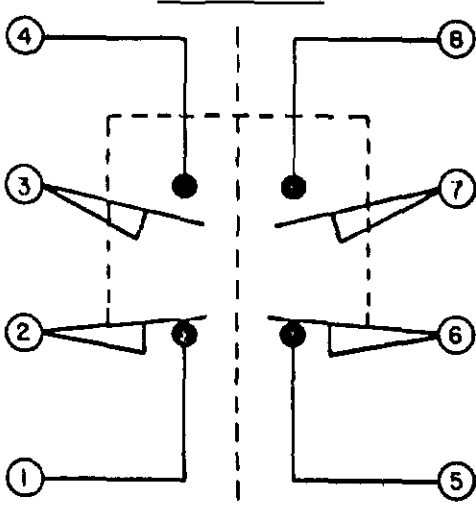

MAINTAINED

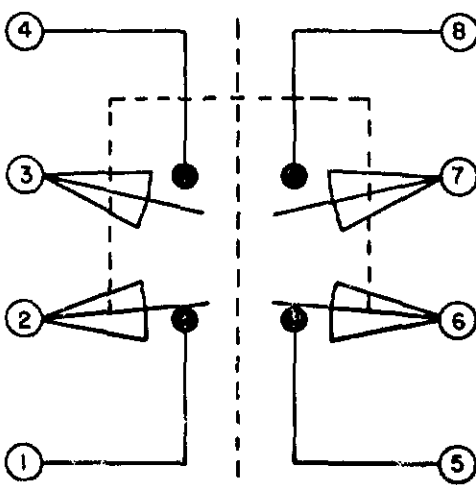

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL
OPERATING CHARACTERISTICS NOT
APPLICABLE


MICRO SWITCH
A DIVISION OF HONEYWELL
FREEPORT, L.I., N.Y. U.S.A.
FED. REG. CODE 91918

SWITCH - ENCLOSED



LSY SERIES
CHART 1

PLUNGER TYPE TOP



SINGLE POLE

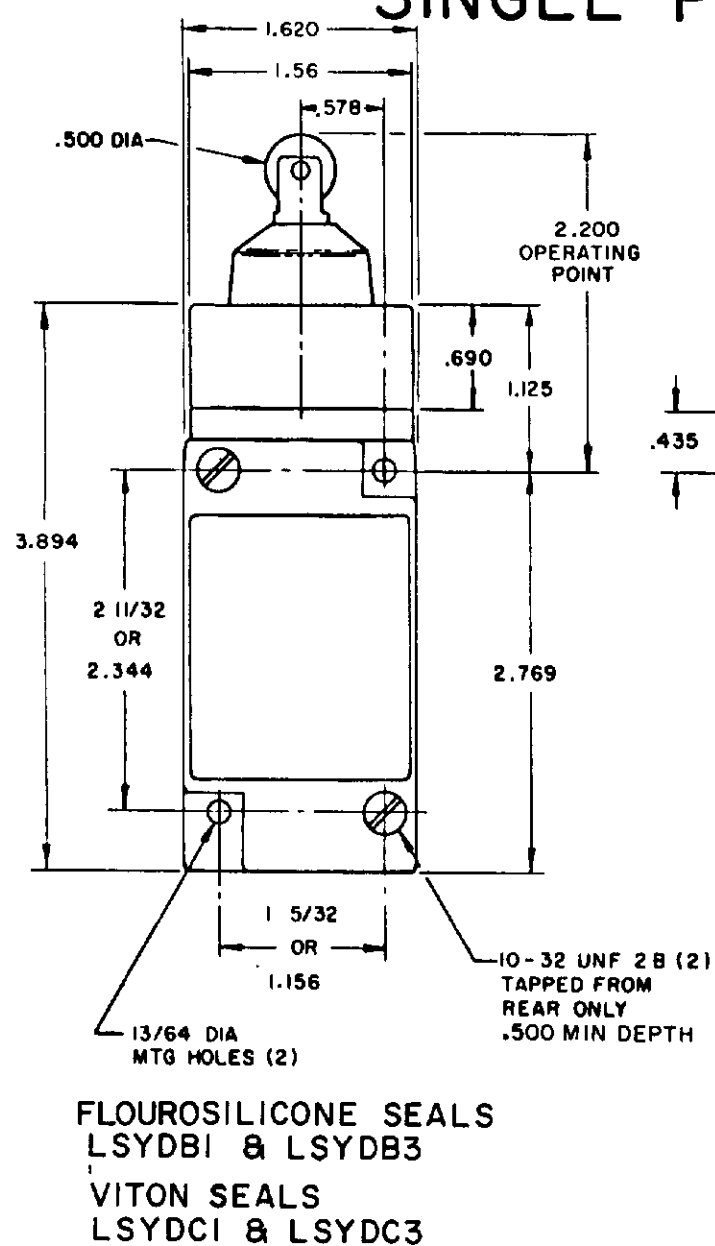


DOUBLE POLE

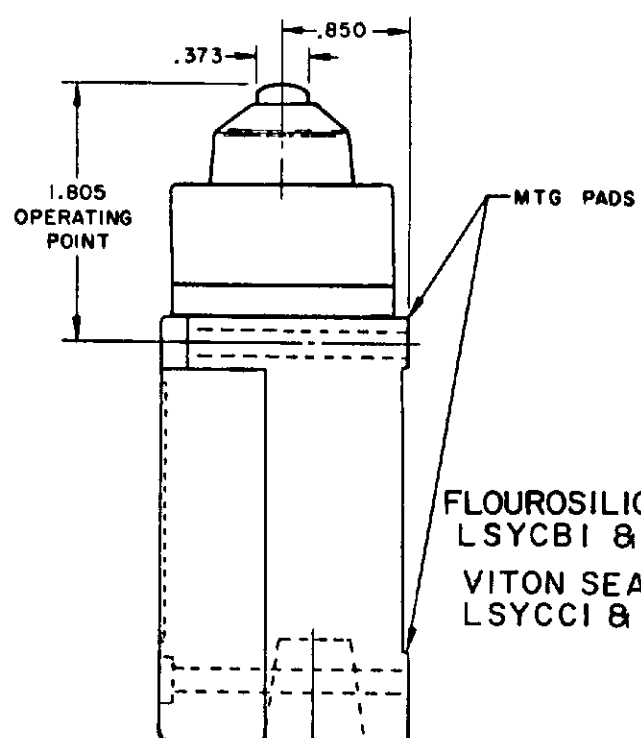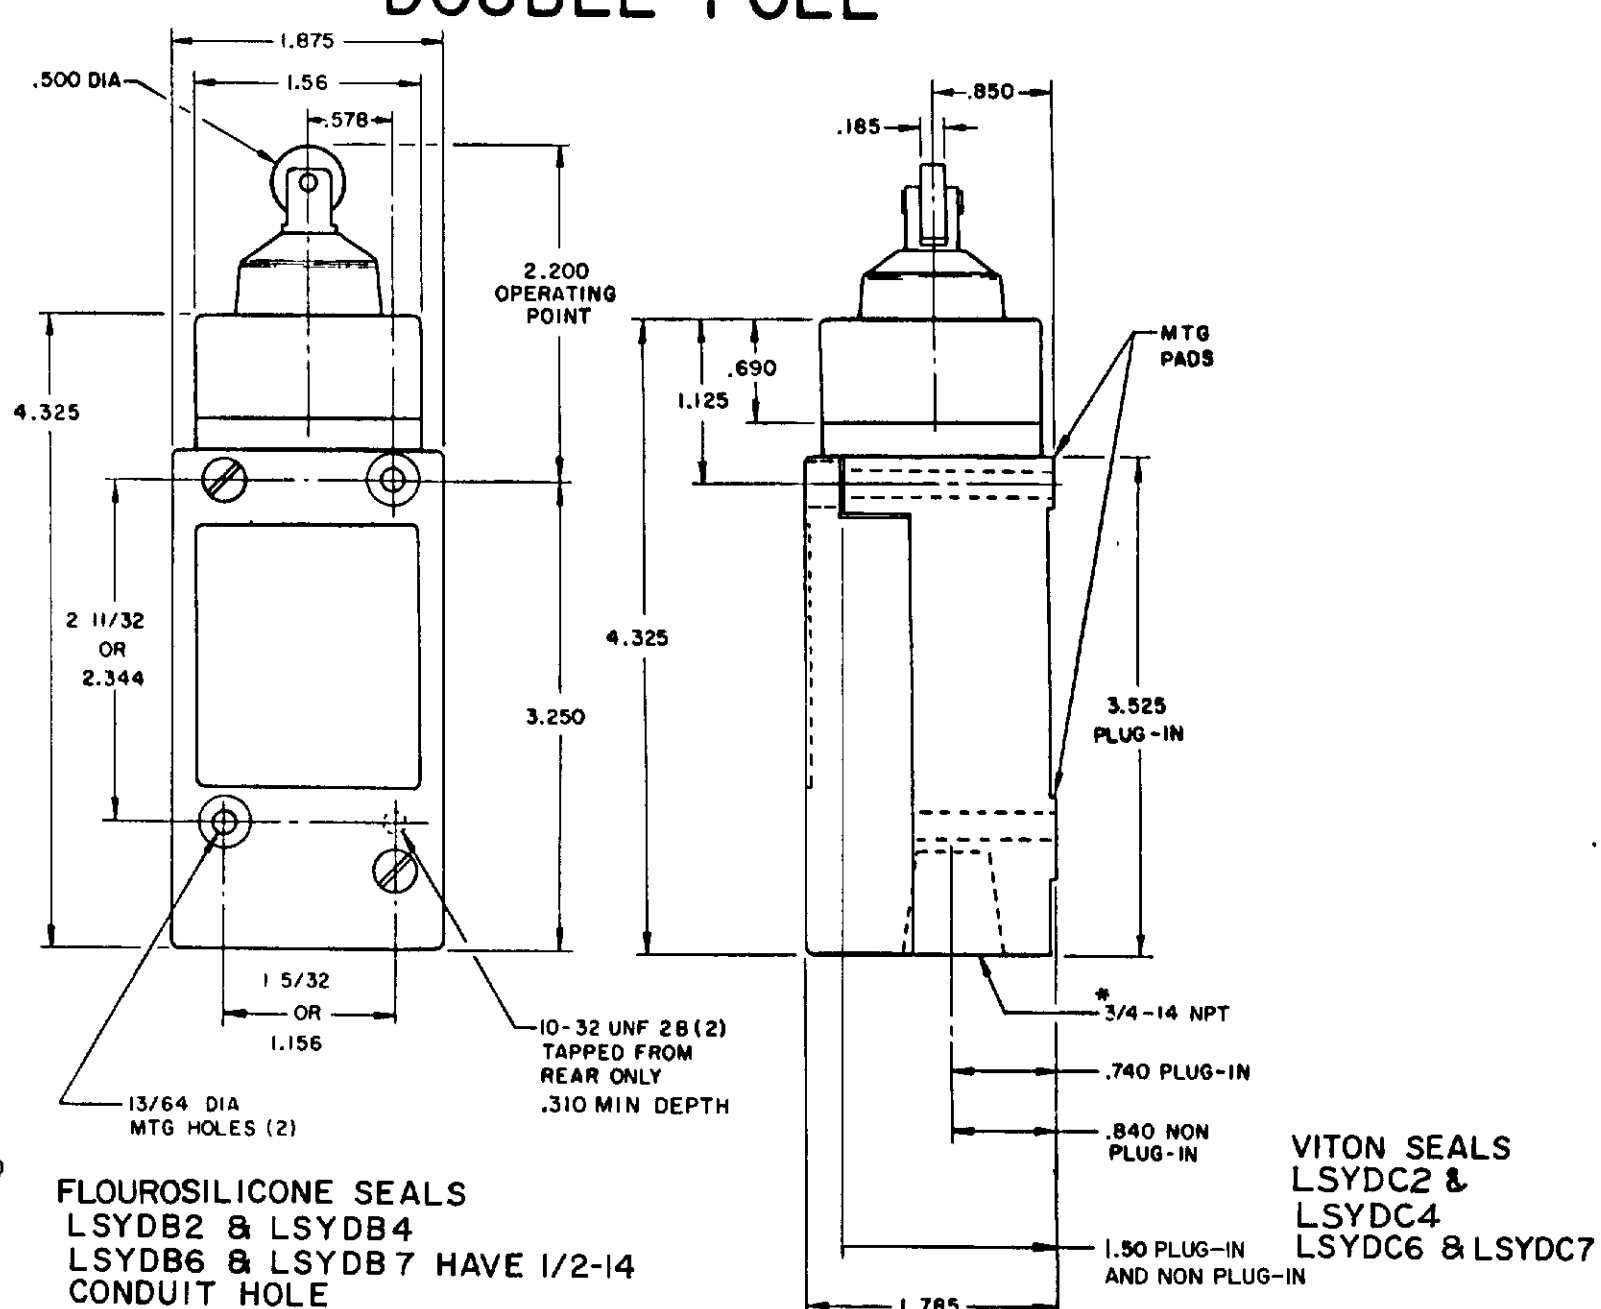

120 LAMP VOLTAGE -
LSYCB 5, LSYDB5, LSYVB5
LSYCC5, LSYDC5, LSYVC5
240 LAMP VOLTAGE -
LSYCB8, LSYDB8, LSYVB8
LSYCC8, LSYDC8, LSYVC8

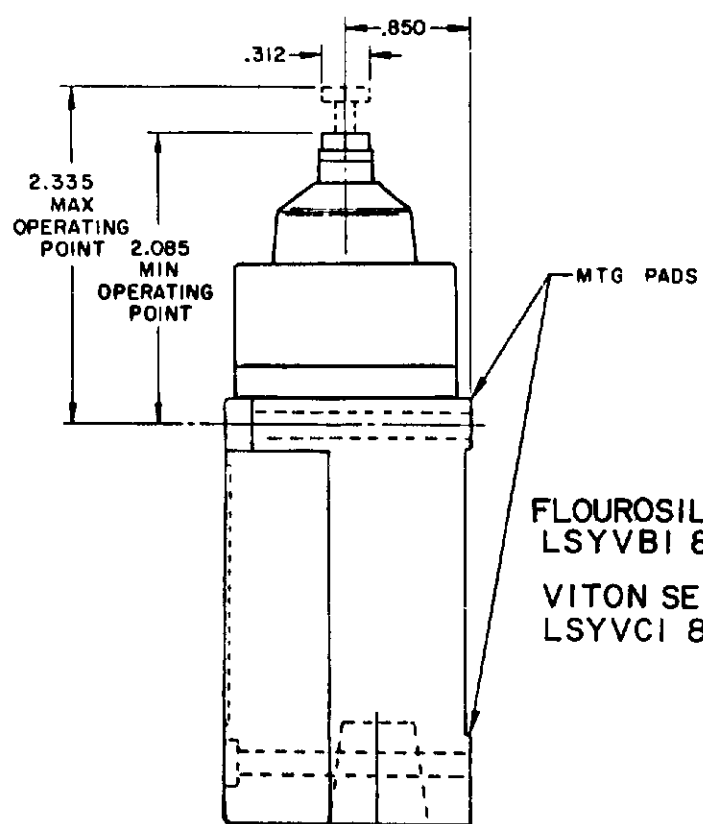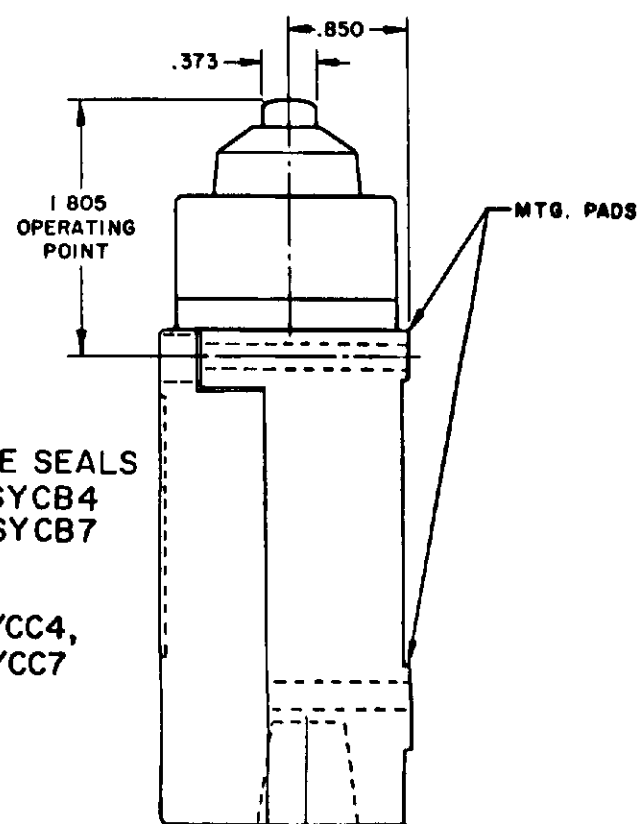

FLOUROSILICONE SEALS
LSYVB2 & LSYVB4,
LSYVB6 & LSYVB7
VITON SEALS
LSYVC2 & LSYVC4,
LSYVC6 & LSYVC7

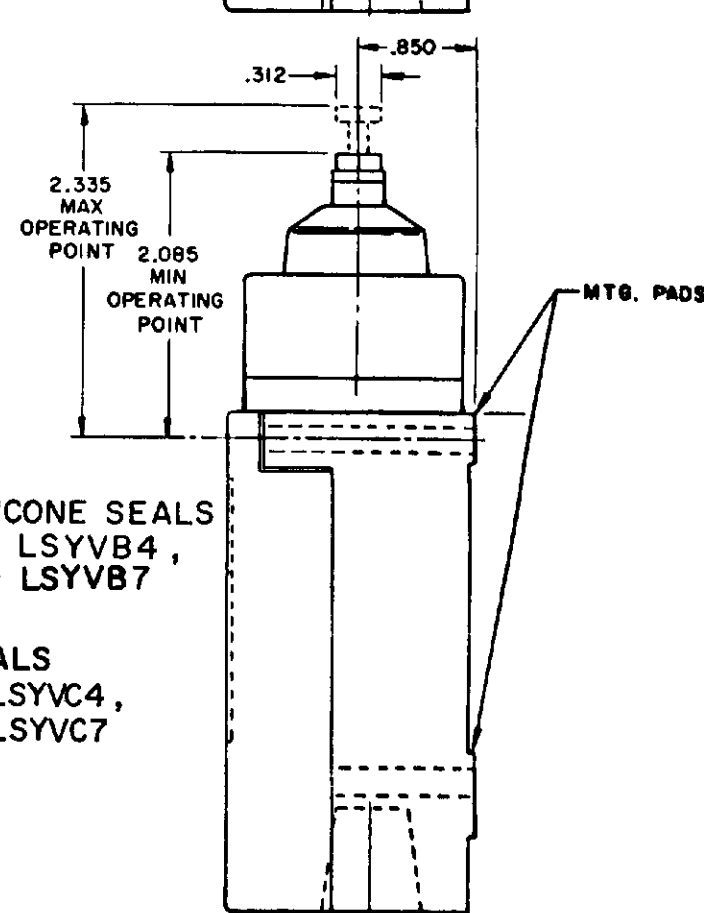

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS






MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF
MONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.
A DIVISION OF MONEYWELL
FID. MFG. CO. 21111111
SWITCH - ENCLOSED
LSY SERIES
CHART 1

SCALE NONE
DO NOT SCALE PRINT

SIDE PLUNGER TYPE




SINGLE POLE

DOUBLE POLE

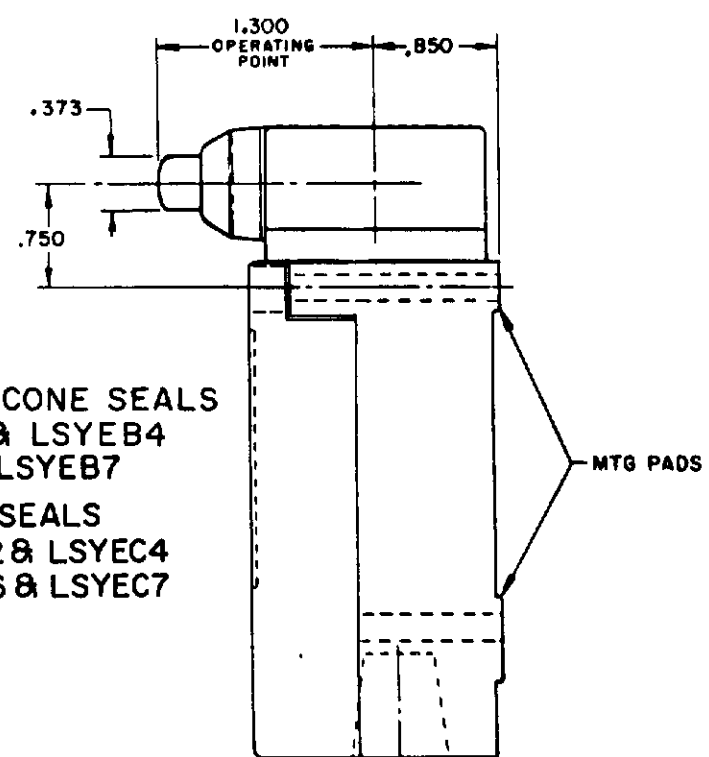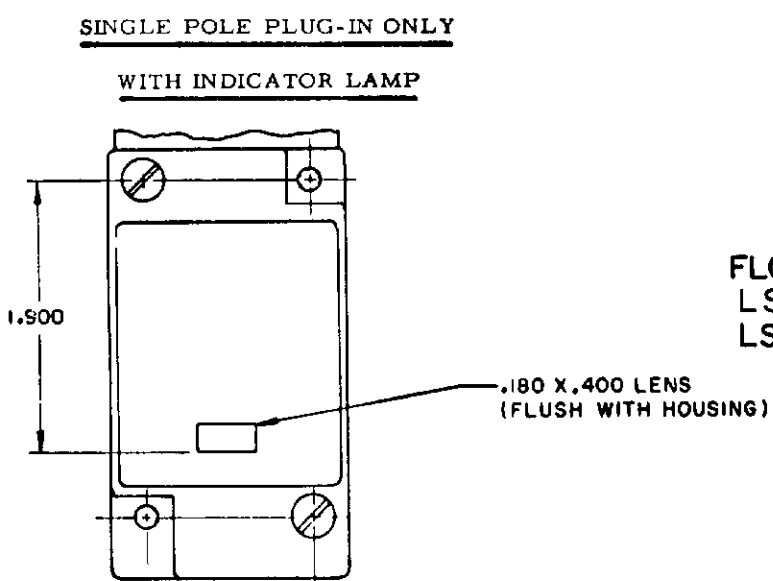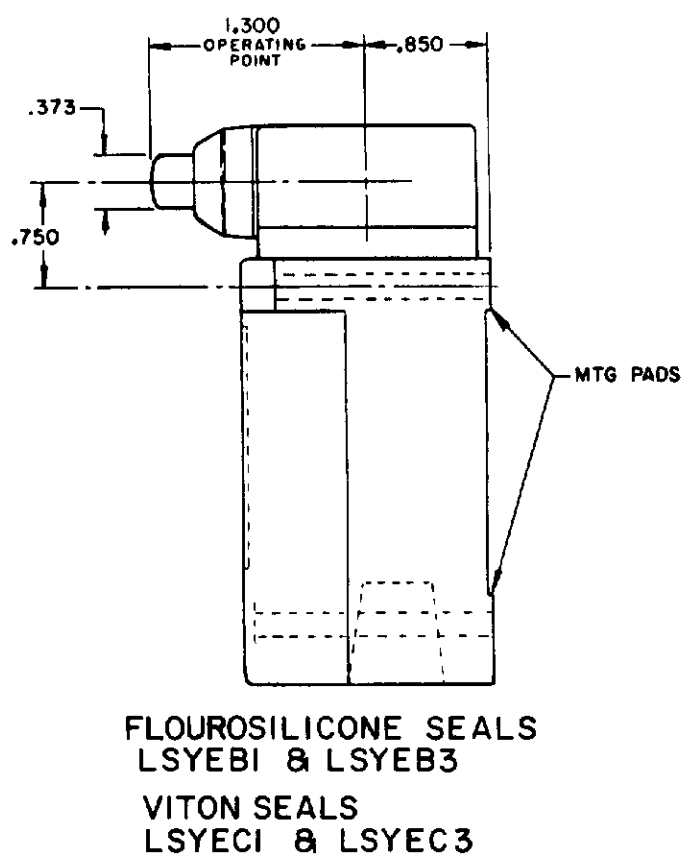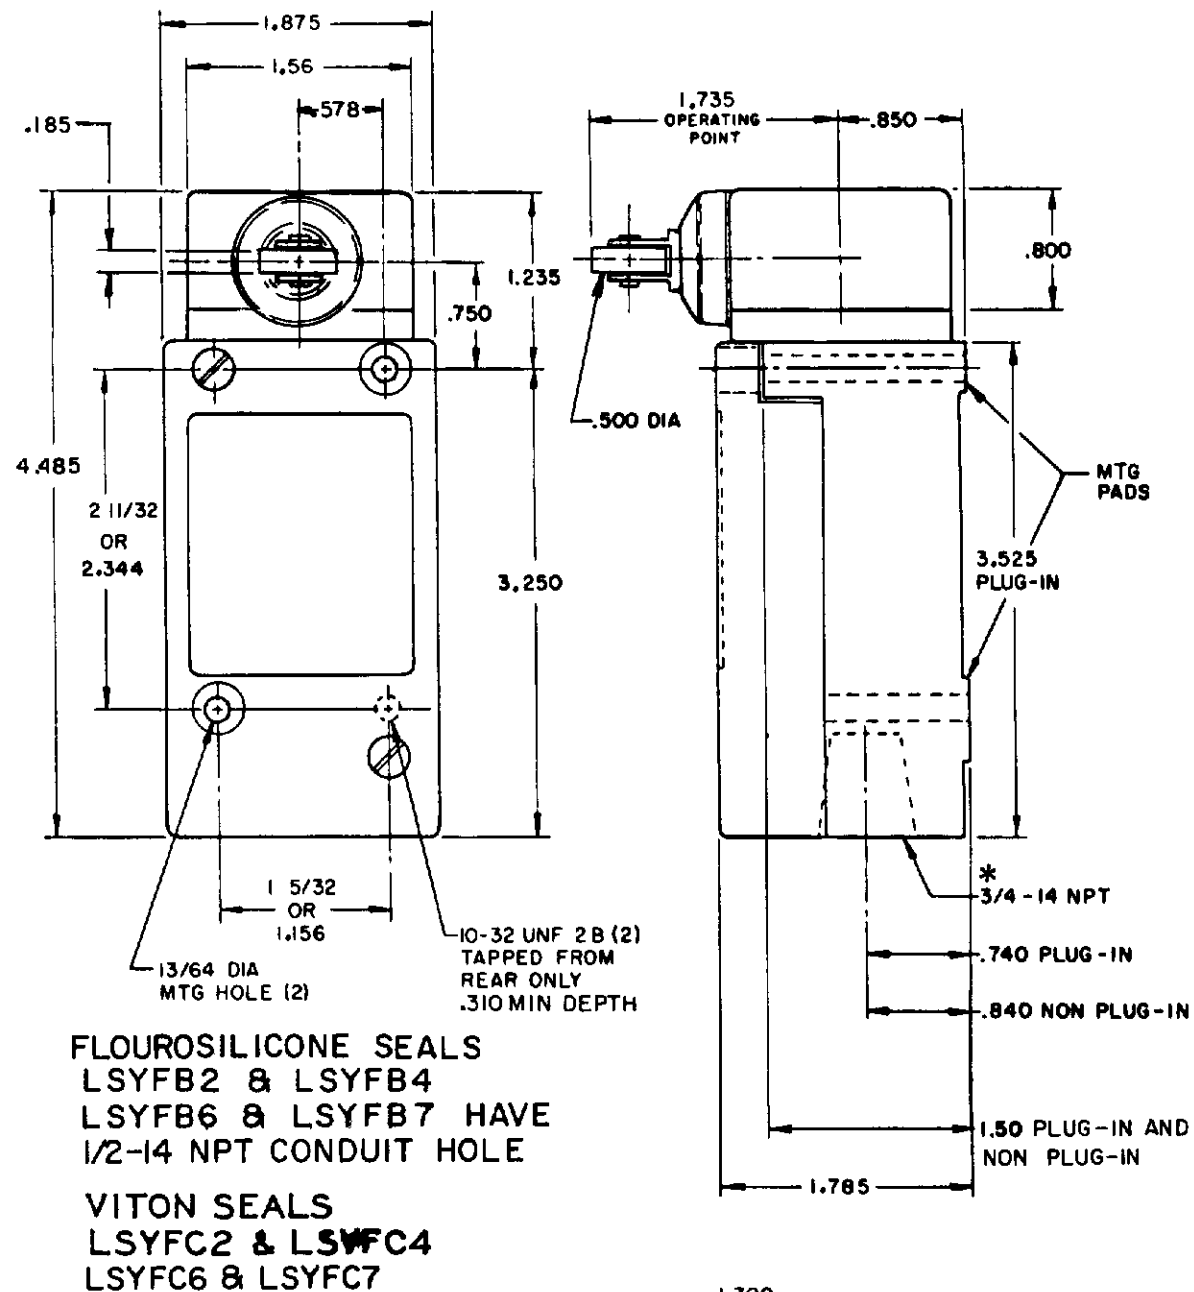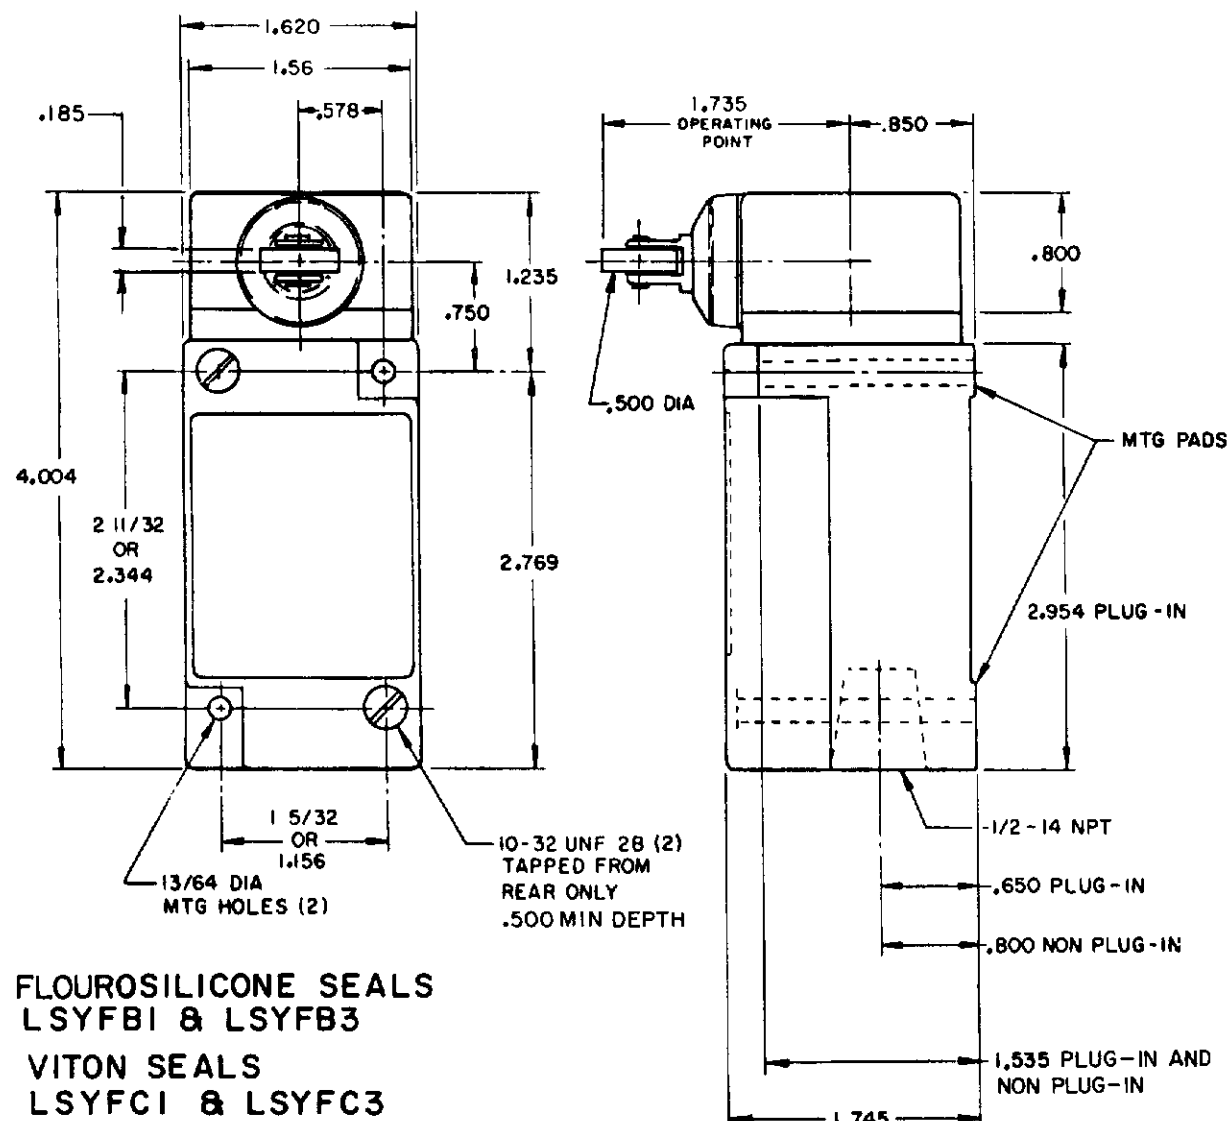

120 LAMP VOLTAGE -
LSYFB5, LSYEB5, LSYWB5
LSYFC5, LSYEC5, LSYWC5

240 LAMP VOLTAGE -
LSYFB8, LSYEB8, LSYWB8
LSYFC8, LSYEC8, LSYWC8

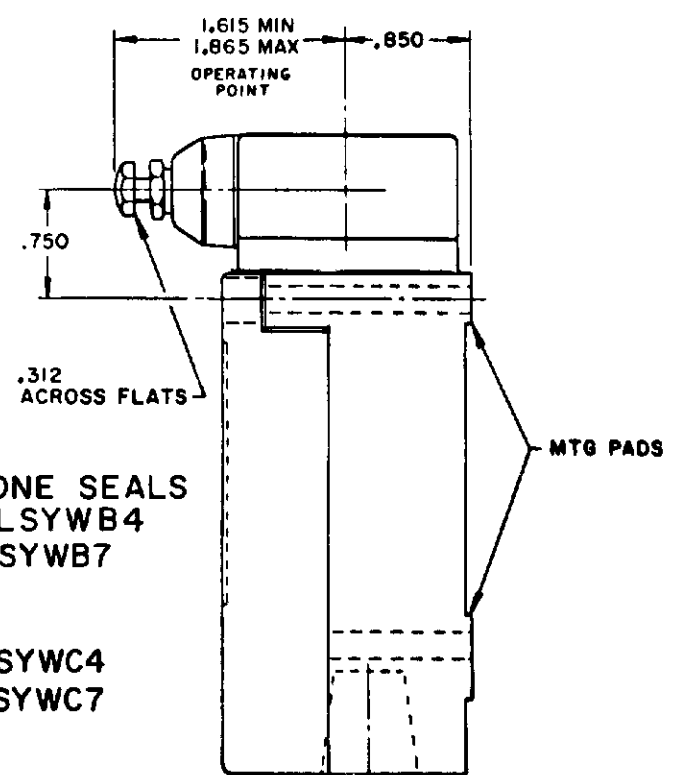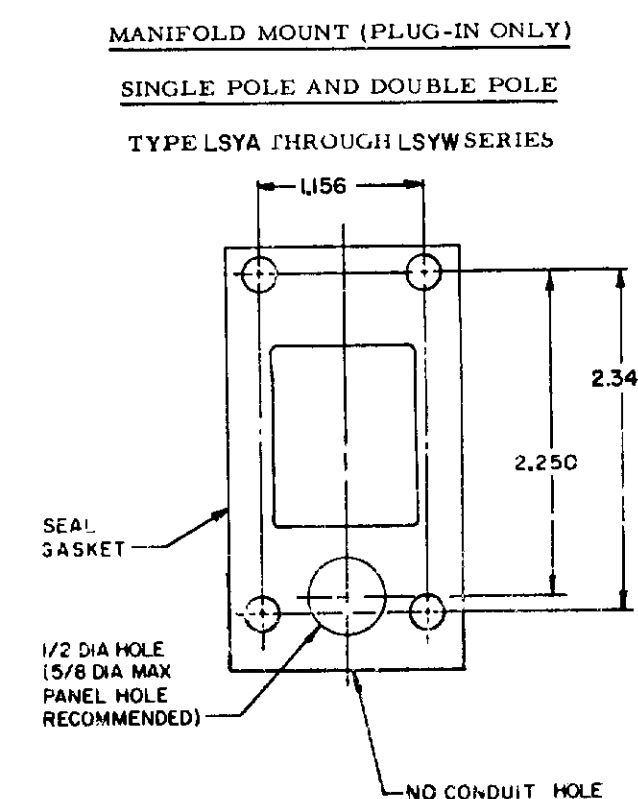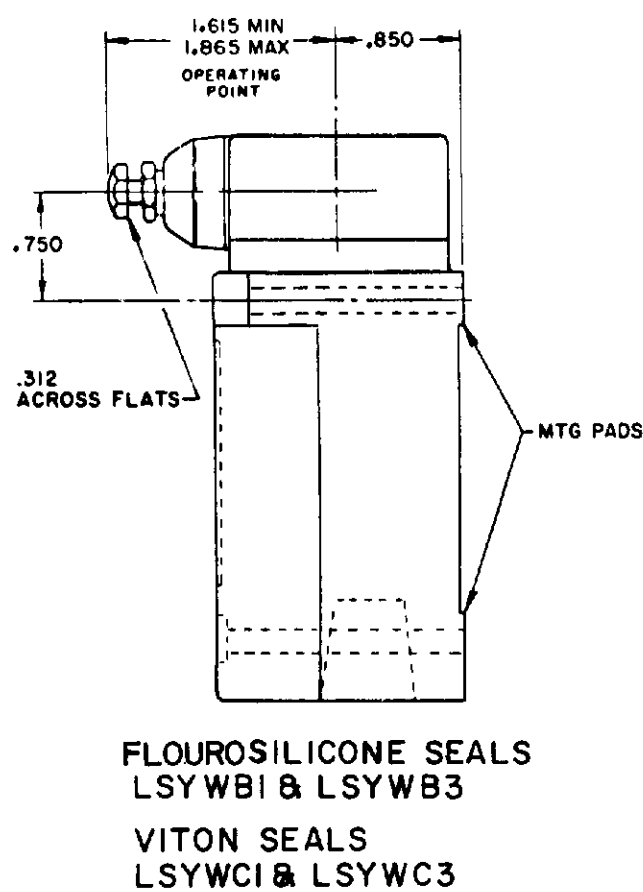


NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH, A DIVISION OF HONEYWELL.
FED. REG. COPY # 948

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE NONE
DO NOT SCALE PRINT

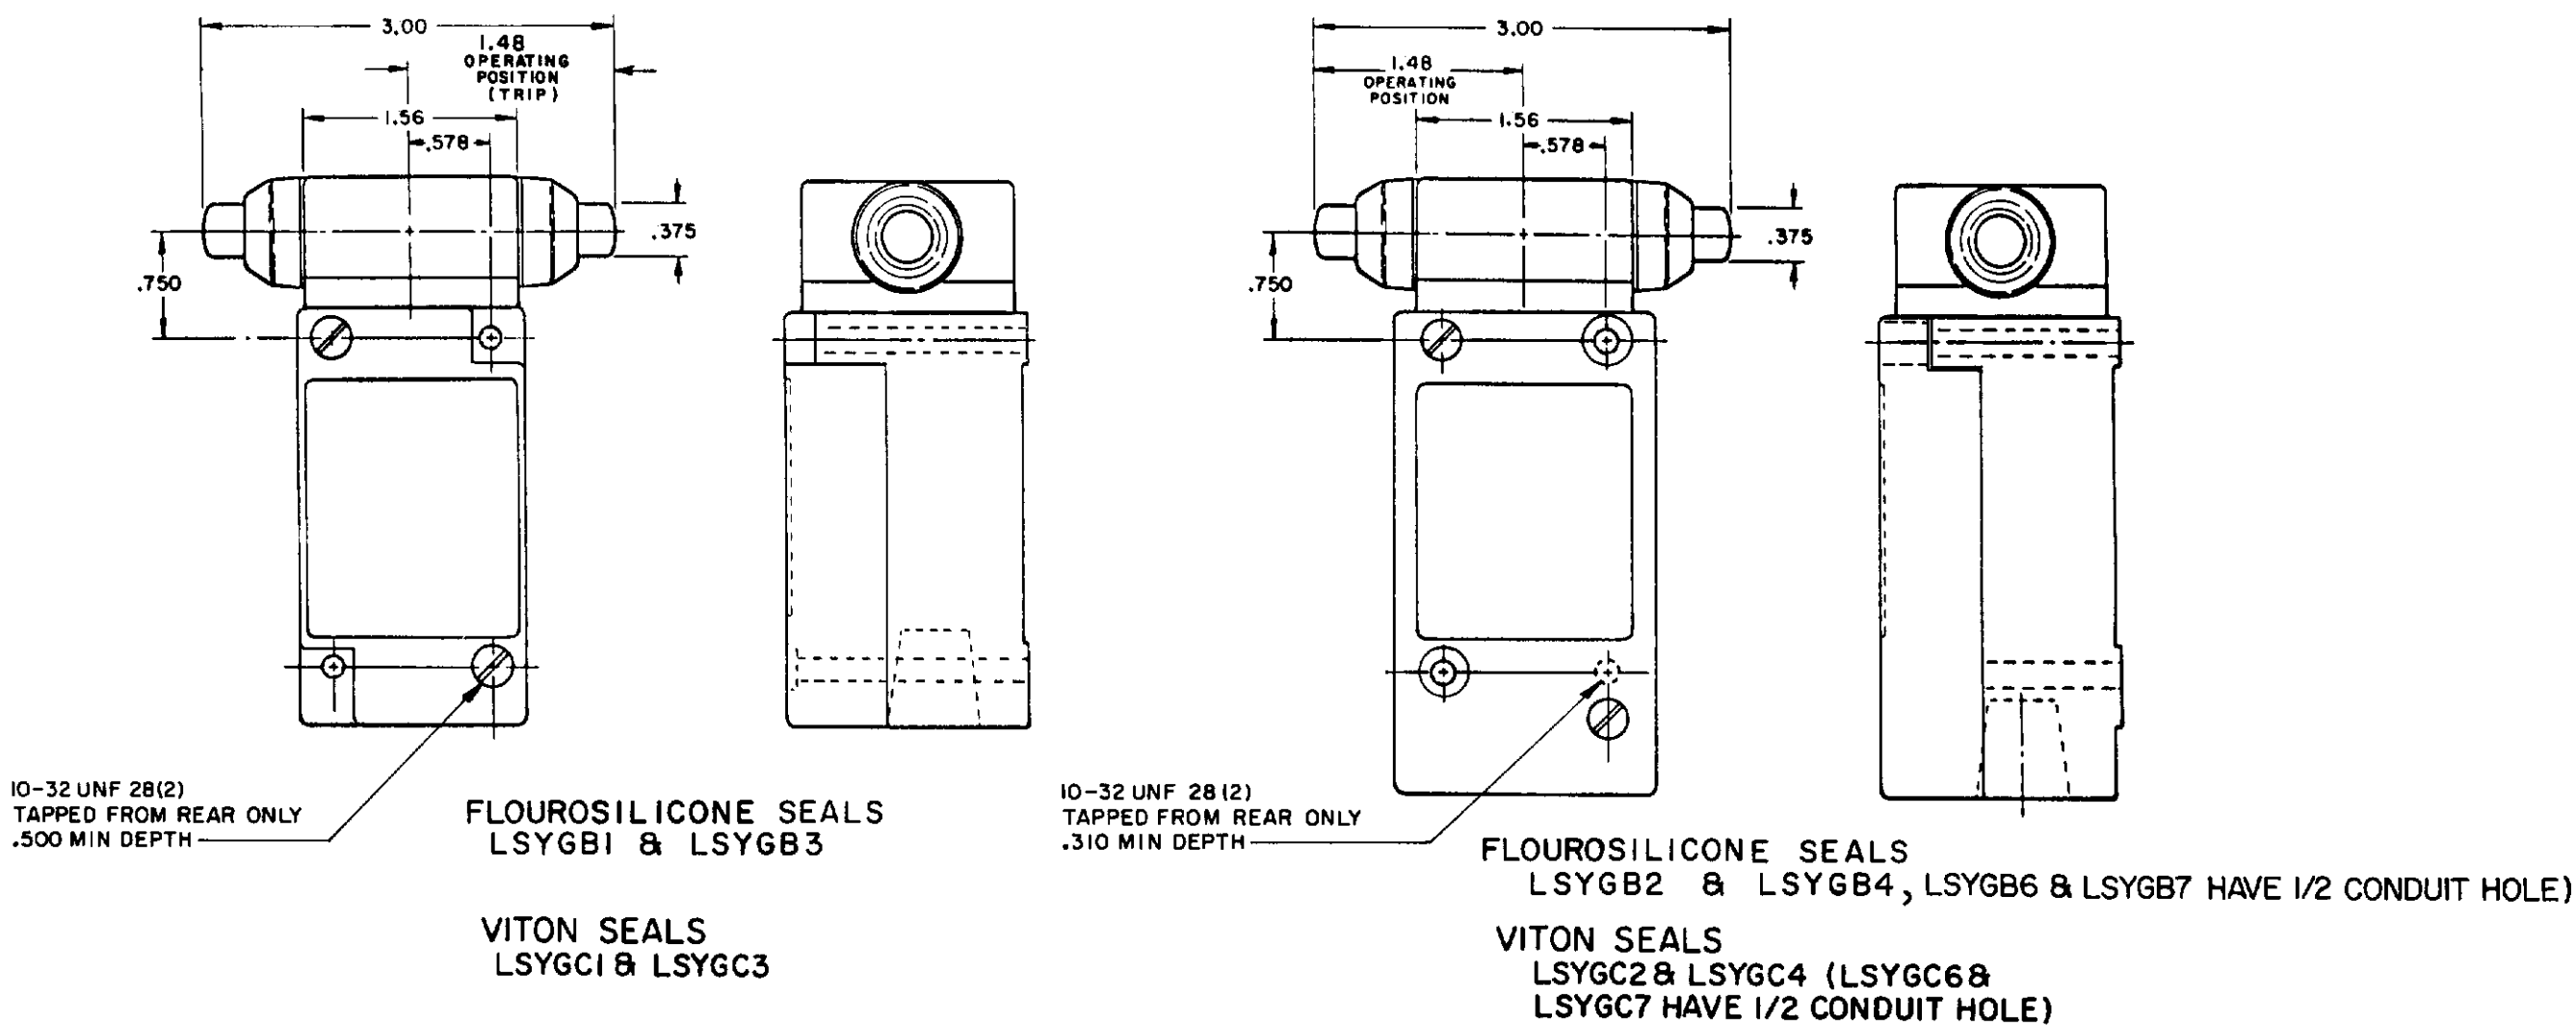

INITIAL POSITION (FREE POSITION) }
OPERATING POINT } PRETRAVEL
FULL TRAVEL } DIFFERENTIAL TRAVEL
OVERTRAVEL

1 OF 10

SERIES CHART 1

MICRO SWITCH

A DIVISION OF HONEYWELL

FED. REG. CODE 51329

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

SWITCH - ENCLOSED

CHART 1

LSY SERIES

CATALOG LISTING

OPERATING POINT GIVEN IN
RELATION TO TOP MOUNTING HOLE

TOP PLUNGER TYPES

CHARACTERISTICS	LSYC PLUNGER		LSYD ROLLER PLUNGER		LSYV ADJ PLUNGER		SEQUENCE BASIC		
							LSYC	LSYD	LSYV
PRETRAVEL (MAX)	.070		.070		.070		1ST STEP .070 2ND STEP .016 MIN ADD'L		
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	.015 EACH STEP		
OVERTRAVEL (MIN)	.190		.190		.190		.170		
OPERATING FORCE (MAX)	4 LBS		4 LBS		4 LBS		4 LBS		
OPERATING POINT	1.805 ± .030		2.200 ± .040		2.085 MIN 2.335 MAX		1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX		
FULL OVERTRAVEL FORCE (MAX)	7 LBS		7 LBS		7 LBS		7 LBS		

OPERATING POINT GIVEN IN
RELATION TO CENTER OF HEAD

SIDE PLUNGER TYPES

CHARACTERISTICS	LSYE PLUNGER	LSYF ROLLER PLUNGER	LSYW ADJ PLUNGER	LSYG PLUNGER MAINTAINED	SEQUENCE BASIC		
					LSYE	LSYF	LSYW
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100 2ND STEP .020 MIN ADD'L		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	.025 EACH STEP		
OVERTRAVEL (MIN)	.190	.190	.190	.080	.170		
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

TOLERANCES
UNLESS OTHERWISE SPECIFIED

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. DIMENSIONS NOTED TO CLOSEST .001 INCH.

DESIGN UNITS
INCHES
FRACTIONS
DECIMALS
ANGLES
WEIGHT

USE SI UNITS
SI METRIC
US CUSTOMARY

FOR MATERIALS COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY
PROTECTIVE COATINGS ARE SPECIFIED

1ST STEP

2ND STEP

3RD STEP

4TH STEP

5TH STEP

6TH STEP

7TH STEP

8TH STEP

9TH STEP

10TH STEP

11TH STEP

12TH STEP

13TH STEP

14TH STEP

15TH STEP

16TH STEP

17TH STEP

18TH STEP

19TH STEP

20TH STEP

21ST STEP

22ND STEP

23RD STEP

24TH STEP

25TH STEP

26TH STEP

27TH STEP

28TH STEP

29TH STEP

30TH STEP

31ST STEP

32ND STEP

33RD STEP

34TH STEP

35TH STEP

36TH STEP

37TH STEP

38TH STEP

39TH STEP

40TH STEP

41ST STEP

42ND STEP

43RD STEP

44TH STEP

45TH STEP

46TH STEP

47TH STEP

48TH STEP

49TH STEP

50TH STEP

51ST STEP

52ND STEP

53RD STEP

54TH STEP

55TH STEP

56TH STEP

57TH STEP

58TH STEP

59TH STEP

60TH STEP

61ST STEP

62ND STEP

63RD STEP

64TH STEP

65TH STEP

66TH STEP

67TH STEP

68TH STEP

69TH STEP

70TH STEP

71ST STEP

72ND STEP

73RD STEP

74TH STEP

75TH STEP

76TH STEP

77TH STEP

78TH STEP

79TH STEP

80TH STEP

81ST STEP

82ND STEP

83RD STEP

84TH STEP

85TH STEP

86TH STEP

87TH STEP

88TH STEP

89TH STEP

90TH STEP

91ST STEP

92ND STEP

93RD STEP

94TH STEP

95TH STEP

96TH STEP

97TH STEP

98TH STEP


99TH STEP

100TH STEP


WOBBLE STICK

SINGLE POLE


DOUBLE POLE

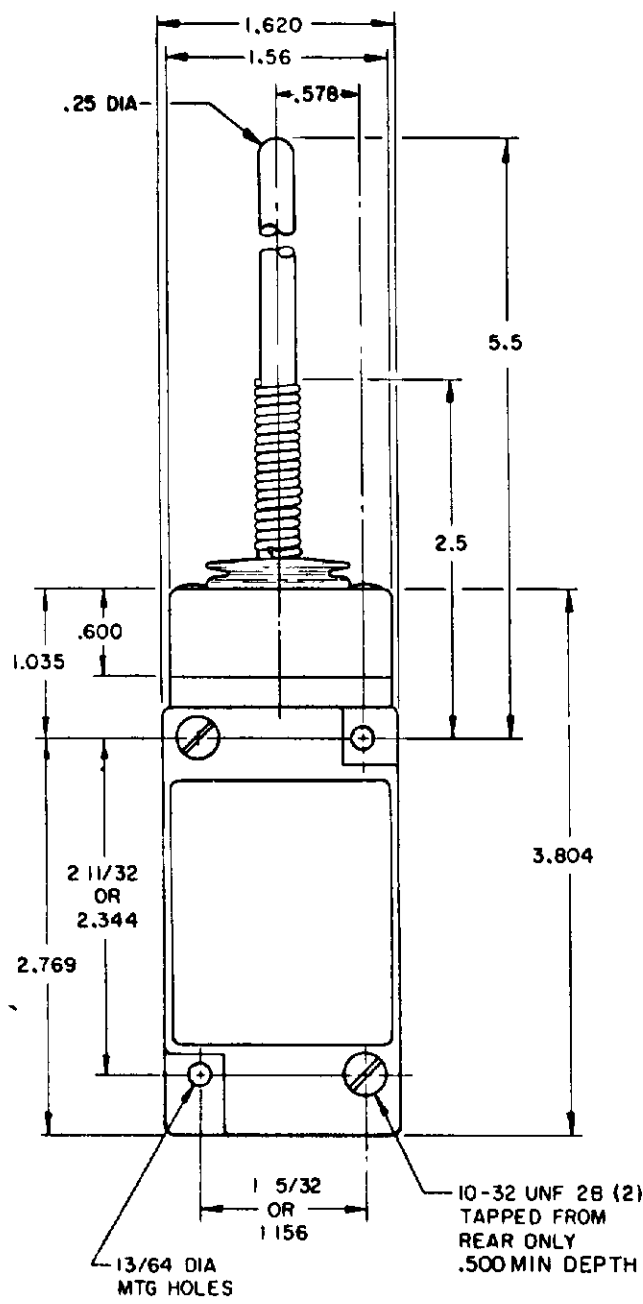


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

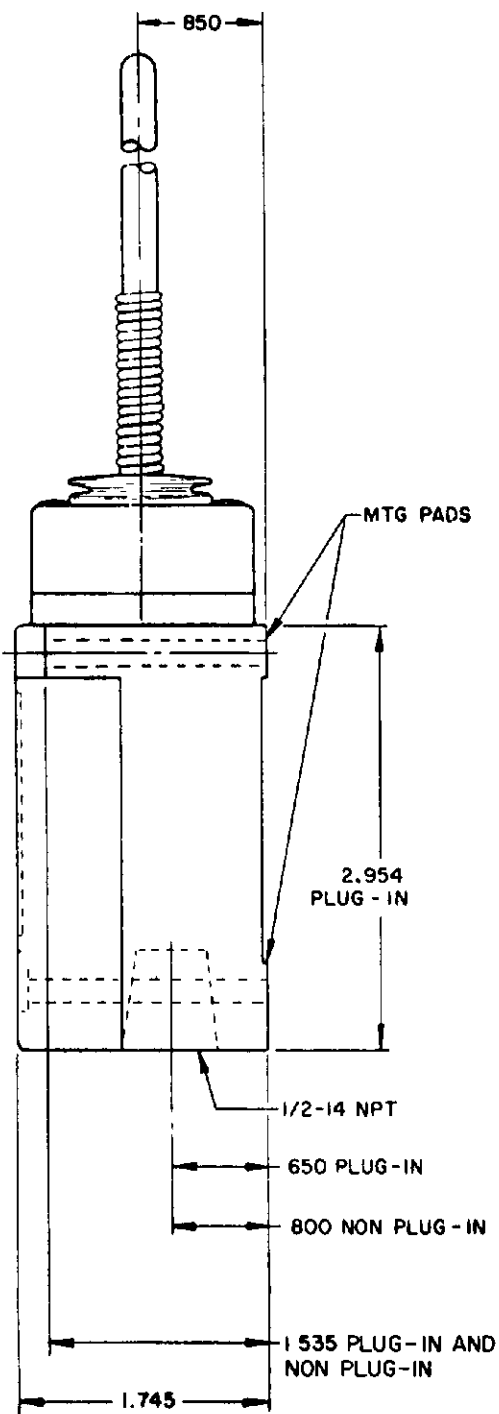


**REPLACEMENT ACTUATOR
LSZ 4009**

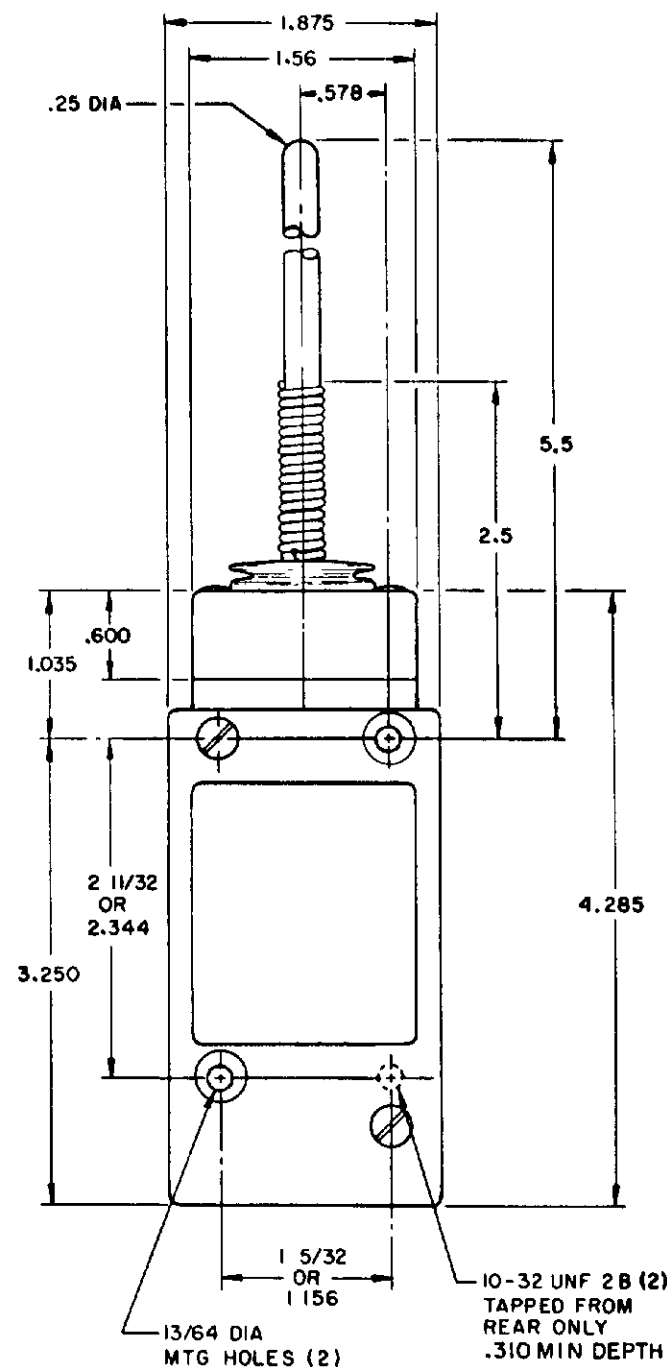


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

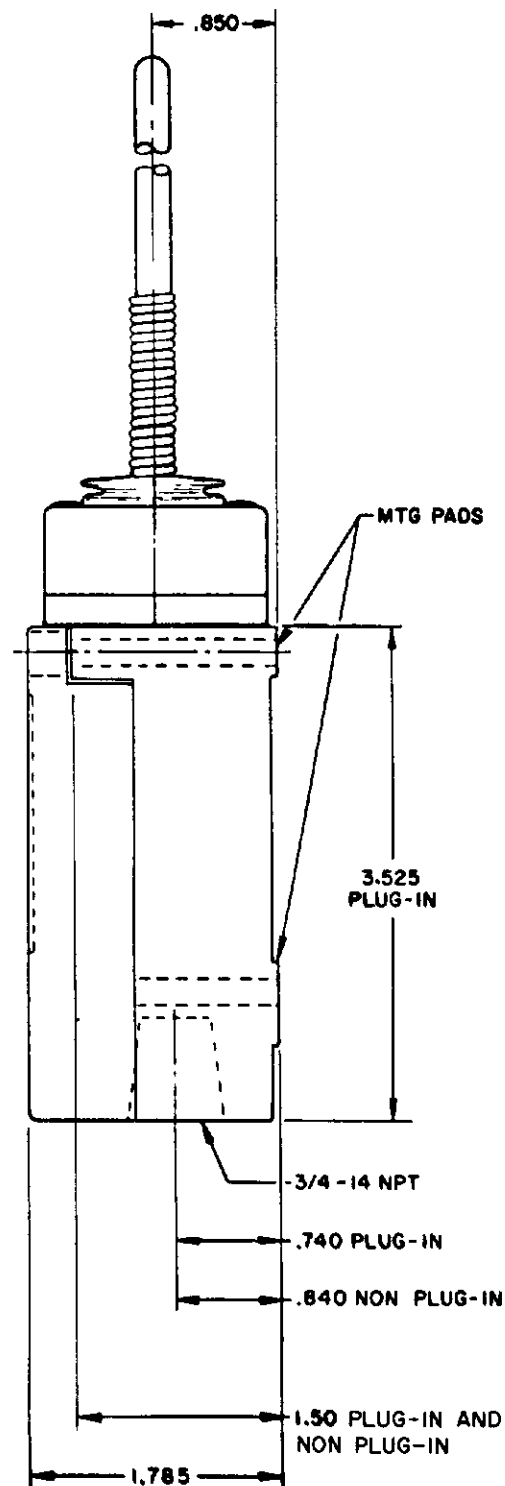

**REPLACEMENT ACTUATOR
LSZ 4011**

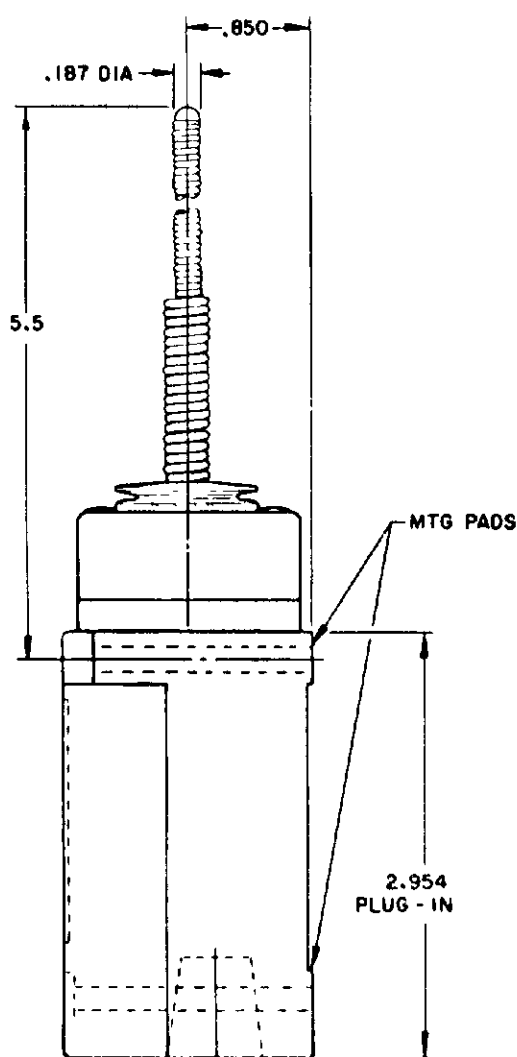


**CABLE EXTENSION
TYPE 7N ACTUATOR**

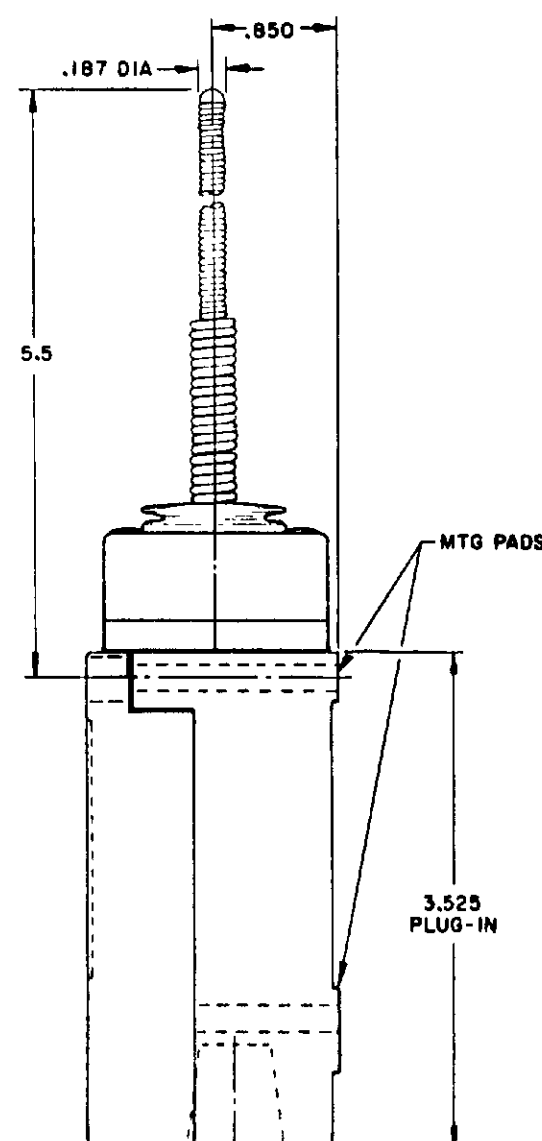

**CABLE EXTENSION
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

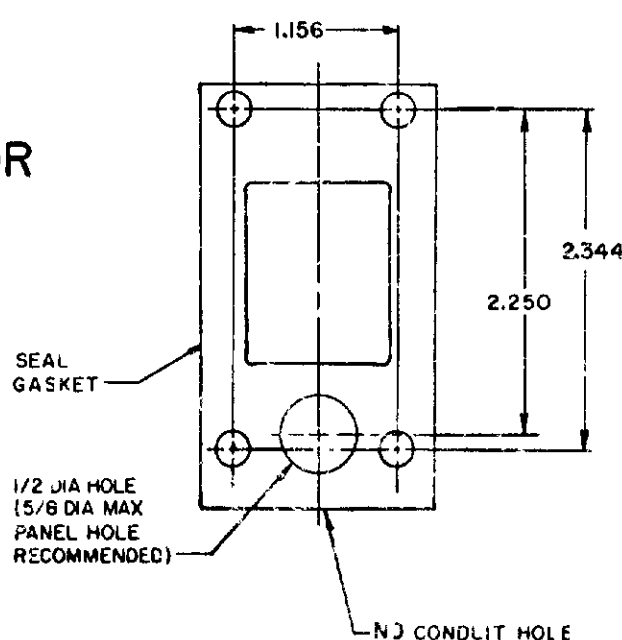

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

SWITCH-ENCLOSED

CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT

Technical drawing of a mechanical assembly (Fig. 1). The drawing shows a vertical shaft with a diameter of .850. A spring is mounted on the shaft, with a height of 2.63. The total height of the assembly is 13.0. The base of the assembly is labeled MTG PADS.

120 LAMP VOLTAGE TYPE-LSYJB5 & LSYJC5
240 LAMP VOLTAGE TYPE-LSYJB8 & LSYJC8

FLOUROSILICONE SEALS
LSYJBI & LSYJB3

VITON SEALS
LSYJC1 & LSYJC3

CAT WHISKER

A cross-sectional diagram of a mechanical assembly. The diagram shows a central vertical shaft with a diameter of .850. A spring is mounted on the shaft, with a dimension of 2.56 indicating the distance from the base of the spring to the top of the assembly. A dimension of .047 DIA is shown for a small feature on the shaft. The assembly includes several layers: a top layer labeled 'FLOUROSILICONE SEALS LSYKBI & LSYKB3', a middle layer labeled 'VITON SEALS LSYKCI & LSYKC3', and a bottom layer labeled 'MTG PADS'. A dimension of 2.56 is also shown for the distance from the base of the assembly to the top of the Viton seals. A dimension of .850 is shown for the diameter of the shaft. A dimension of .047 DIA is shown for a small feature on the shaft. A dimension of 2.56 is shown for the distance from the base of the assembly to the top of the Viton seals. A dimension of 2.56 is also shown for the distance from the base of the spring to the top of the assembly. A dimension of .850 is shown for the diameter of the shaft. A dimension of .047 DIA is shown for a small feature on the shaft.

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C COIL ACTUATOR 5.5 IN

Technical drawing of a mechanical assembly, likely a valve or actuator component, showing a vertical shaft and internal components.

Key dimensions and features:

- Overall height dimension: 2.56
- Spring length dimension: .850
- Wire diameter dimension: .047 DIA
- Internal components labeled: SEALS, YKB4, YKB7, NPT, LE
- Mounting pads labeled: MTG PADS

WIRE EXTENSION REPLACEMENTS

*TYPE 8A ACTUATOR 5.5 IN. - LSZ 4012
TYPE 8B ACTUATOR 7.5 IN. - LSZ 4013
TYPE 8C ACTUATOR 5.5 IN. - LSZ 4014

NOTE-
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

	CAT WHISKER			WOBBLE STICK		
PRETRAVEL (APPROX) IN. RADIUS	5 1/2" COIL WIRE	5 1/2" WIRE	7 1/2" WIRE	ROD	CABLE	WIRE
	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

MICRO SWITCH
FREERPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED REG CODE 91919

SWITCH-ENCLOSED


CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT


CONVERSION BASES

SINGLE POLE (SIDE ROTARY) LSZ 4003

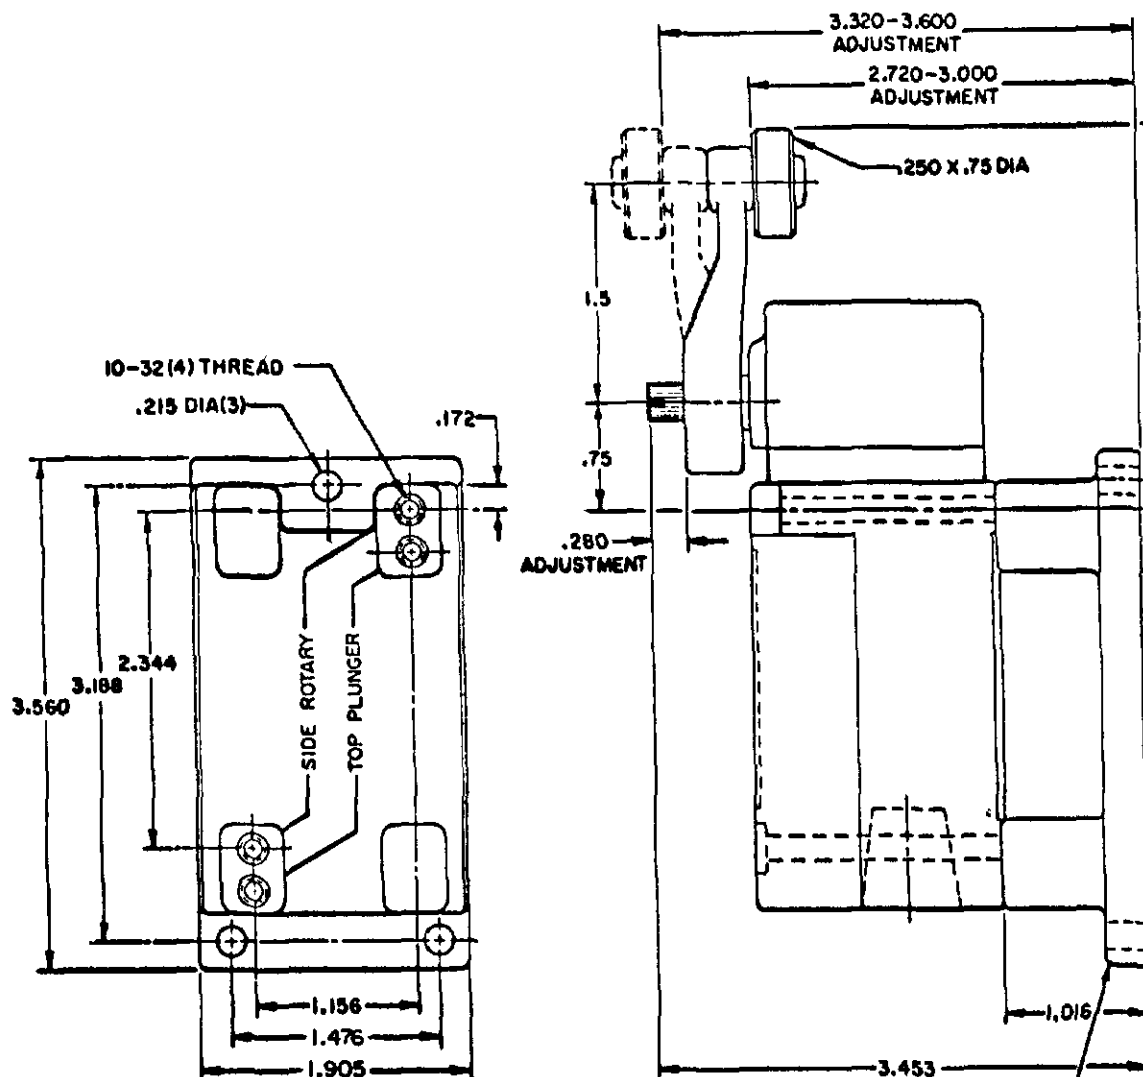



LSZ4003 CONVERSION BASE, WHEN USED WITH HEAVY DUTY LS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

DOUBLE POLE (SIDE ROTARY) LSZ4004

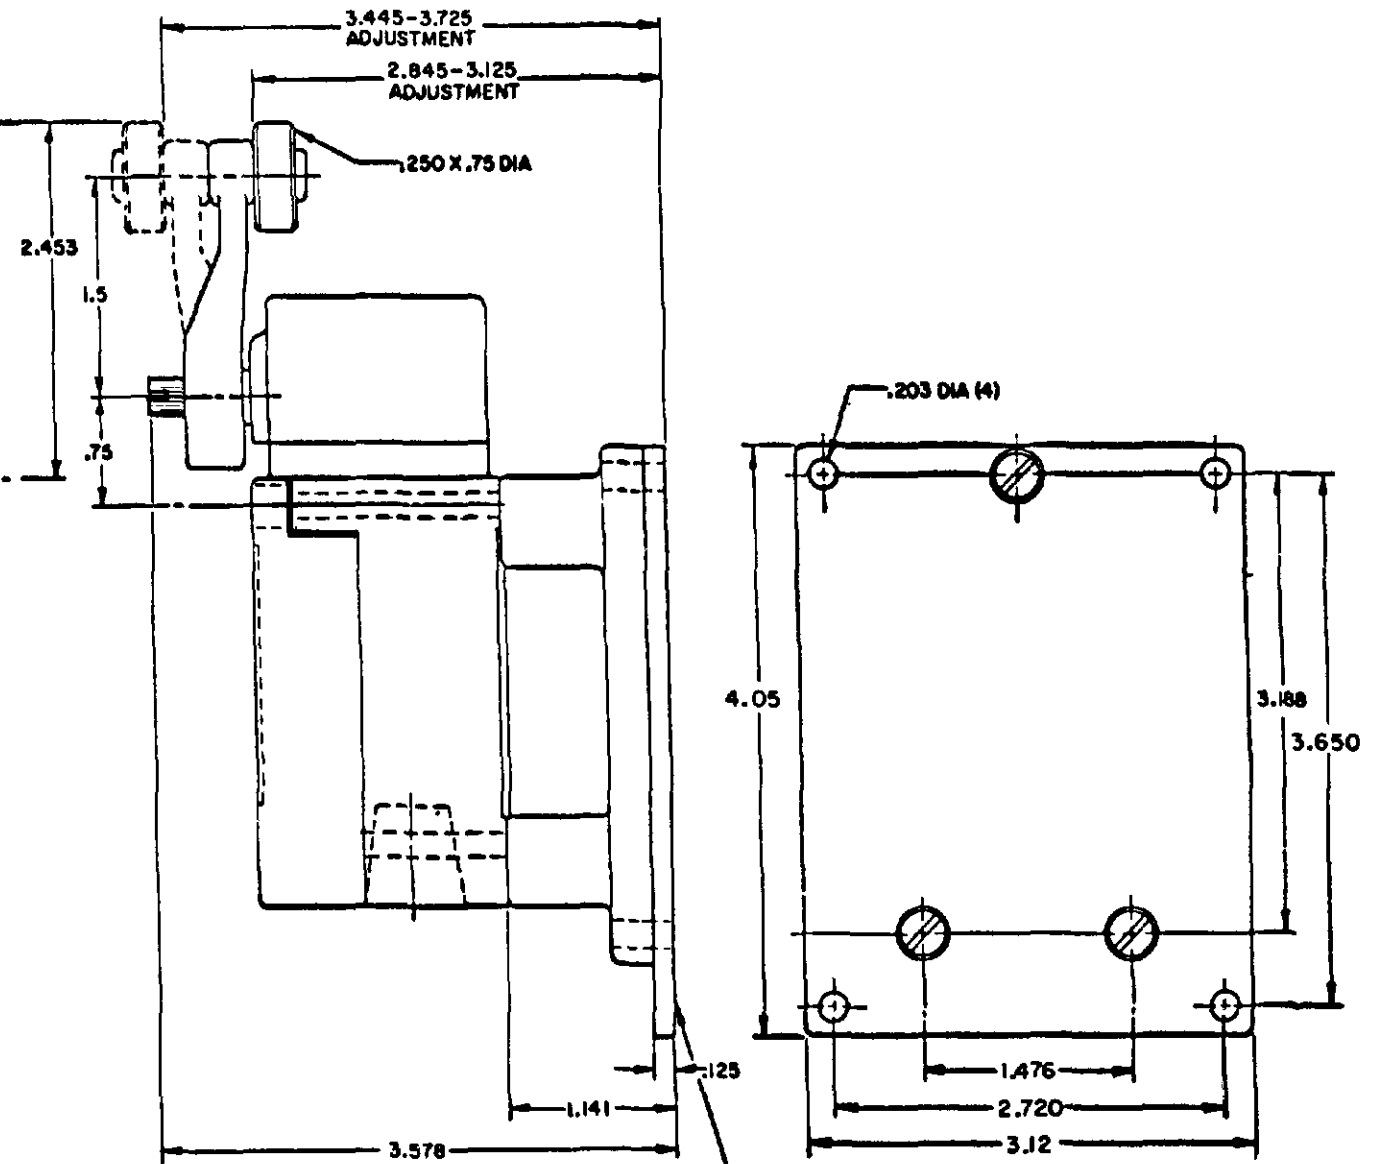


LSZ4004 (FURNISHED ASSEMBLED) CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 301LS TYPE (LIMIT SWITCH NOT INCLUDED)

SINGLE POLE TOP PLUNGER LSZ4003

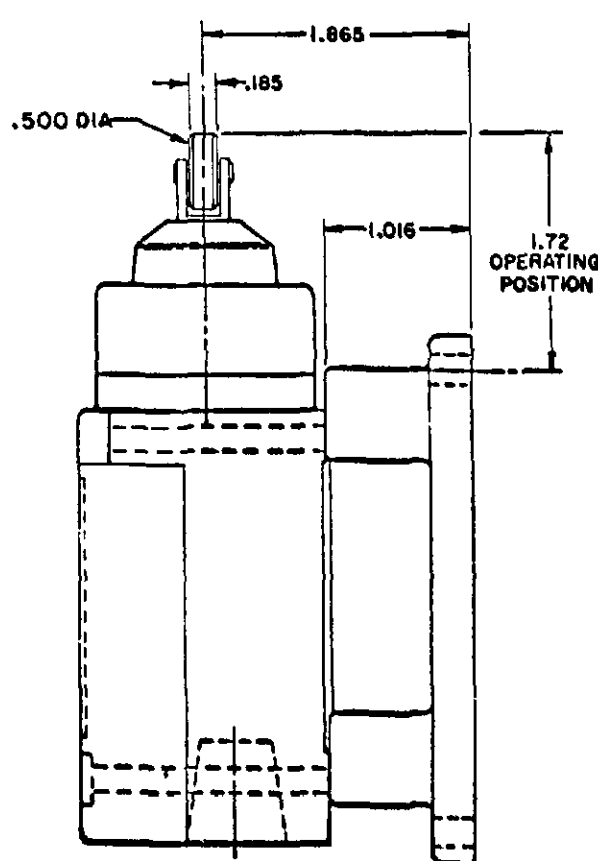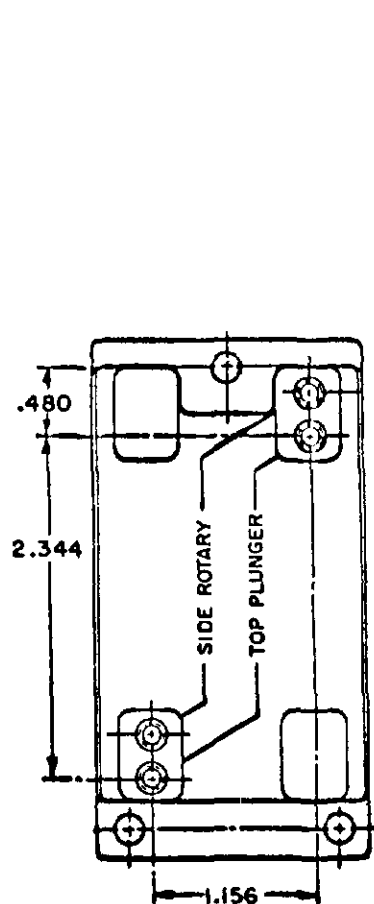

LSZ4003 CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

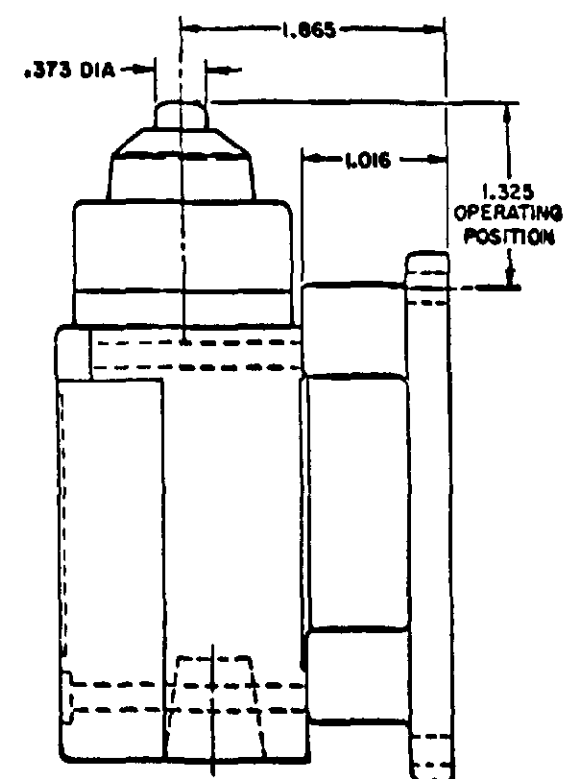

TEMPERATURE LIMITATIONS FOR
DEVICES WITH FLUORSILICONE (LSYAB**) AND VITON (LSYAC**) SEALS

ALL HEAD TYPES WITH SEALS OF		CELLULUBE DETERGENT 5 STAR ASTM #1 ASTM #2 ASTM #3 ASTM #4 HOUGHTON SAFE 271 HOUGHTON SAFE 280 1010, 1055, 1120 MINERAL OIL PETR. OIL CRUDE SILICON GR & OIL SUNSAFE BEER STODDARD SOLV. CHLORINATED SOLVENTS CITRIC ACID DI-ESTER SYN. LUBRICANTS OZONE PYDRAU; PYROGUARD PETRO. BASE HYDRAULIC OIL LARD OIL SILICATE ESTERS																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								
		3																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																								

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB**) FOR LOW TEMPERATURE APPLICATIONS
- 2 VITON SEALS (LSYAC**) FOR FIRE-RESISTANT FLUIDS
- 3 ALL EXCEPT A60

	LOW LIMIT	HIGH LIMIT
LSYAB	-40°F	+250°F
LSYAC	+10°F	+250°F
LSYBB	-20°F	+250°F
LSYBC	+30°F	+250°F
LSYCB	-40°F	+200°F
LSYCC	+10°F	+250°F
LSYDB	-40°F	+200°F
LSYDC	+10°F	+250°F
LSYEB	-40°F	+200°F
LSYEC	+10°F	+250°F
LSYFB	-40°F	+200°F
LSYFC	+10°F	+250°F
LSYGB	-20°F	+200°F
LSYGC	+30°F	+250°F
LSYHB	-20°F	+250°F
LSYHC	+30°F	+250°F
LSYJB	-40°F	+250°F
LSYJC	+30°F	+250°F
LSYKB	-20°F	+250°F
LSYKC	+30°F	+250°F
LSYLB	-40°F	+250°F
LSYLC	+10°F	+250°F
LSYMB	-40°F	+250°F
LSYMC	+10°F	+250°F
LSYNB	-20°F	+250°F
LSYNC	+30°F	+250°F
LSYPB	-40°F	+250°F
LSYPC	+10°F	+250°F
LSYRB	-20°F	+250°F
LSYRC	+30°F	+250°F
LSYVB	-40°F	+200°F
LSYVC	+10°F	+250°F
LSYWB	-40°F	+200°F
LSYWC	+10°F	+250°F

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А