


OPERATING CHARACTERISTICS	LSYA		LSYR		LSYN	LSYP		LSYH		LSYL	LSYM	LSYS	LSYU	
	MOMENTARY		MOMENTARY LOW TORQUE		MAINTAINED	MOMENTARY LOW PRETRAVEL AND DIFF. TRAVEL		MOMENTARY LOW PRETRAVEL AND LOW TORQUE		SEQUENCE DOUBLE POLE ONLY	CENTER NEUTRAL DOUBLE POLE ONLY	GRAVITY RETURN	LOW PRETRAVEL	
PRETRAVEL(MAX)	15°		15°		65°	9°		9°		1ST STEP 15° 2ND STEP 10° ADD'L	18°	NOT APPLICABLE	5°	
OVERTRAVEL(MIN)	60°		60°		20°	68°		68°		48°	57°	NOT APPLICABLE	70°	
DIFFERENTIAL TRAVEL(MAX)	SINGLE POLE 5°	DOUBLE POLE 7°	SINGLE POLE 5°	DOUBLE POLE 7°	40°	SINGLE POLE 3°	DOUBLE POLE 4°	SINGLE POLE 3°	DOUBLE POLE 4°	5°	10°	12°	SGL POLE 3°	DBL POLE 4°
TOTAL TRAVEL (REF)	75°		75°		90°	75°		75°		75°	75°	360°	75°	
OPERATING TORQUE(MAX)	4 IN. LBS		1.7 IN. LBS		4 IN. LBS	4 IN. LBS		1.7 IN. LBS		4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS	
FULL TRAVEL TORQUE(MAX)	4 IN. LBS		1.7 IN. LBS			4 IN. LBS		1.7 IN. LBS		4 IN. LBS	4 IN. LBS	5 IN-OZ	4 IN. LBS	


SIDE ROTARY

SINGLE POLE

DOUBLE POLE


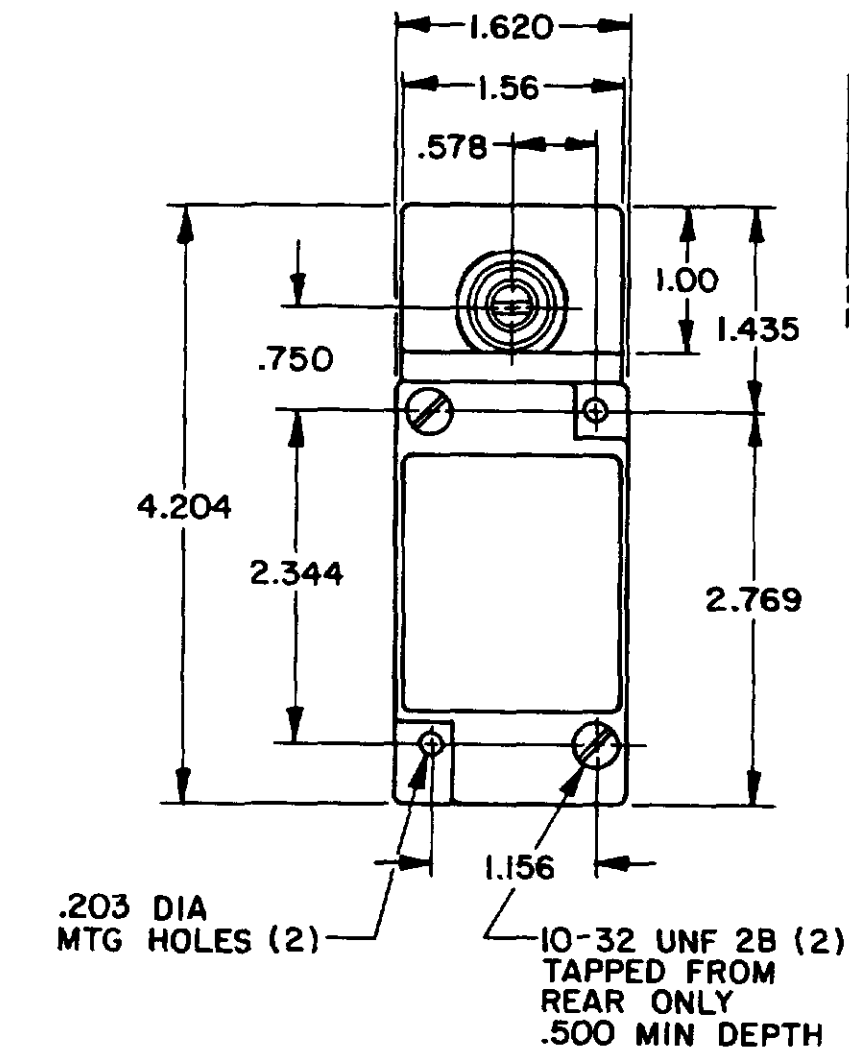


FLOUROSILICONE SEALS: LSYABI, LSYHBI, LSYNBI, LSYBBI, LSYRBI, LSYHB3, LSYPB3, LSYRB3, LSYSB1
VITON: LSYAC1, LSYHCI, LSYNC1, LSYPC1, LSYRC1, LSYAC3, LSYHC3, LSYNC3, LSYPC3, LSYRC3, LSYSC1

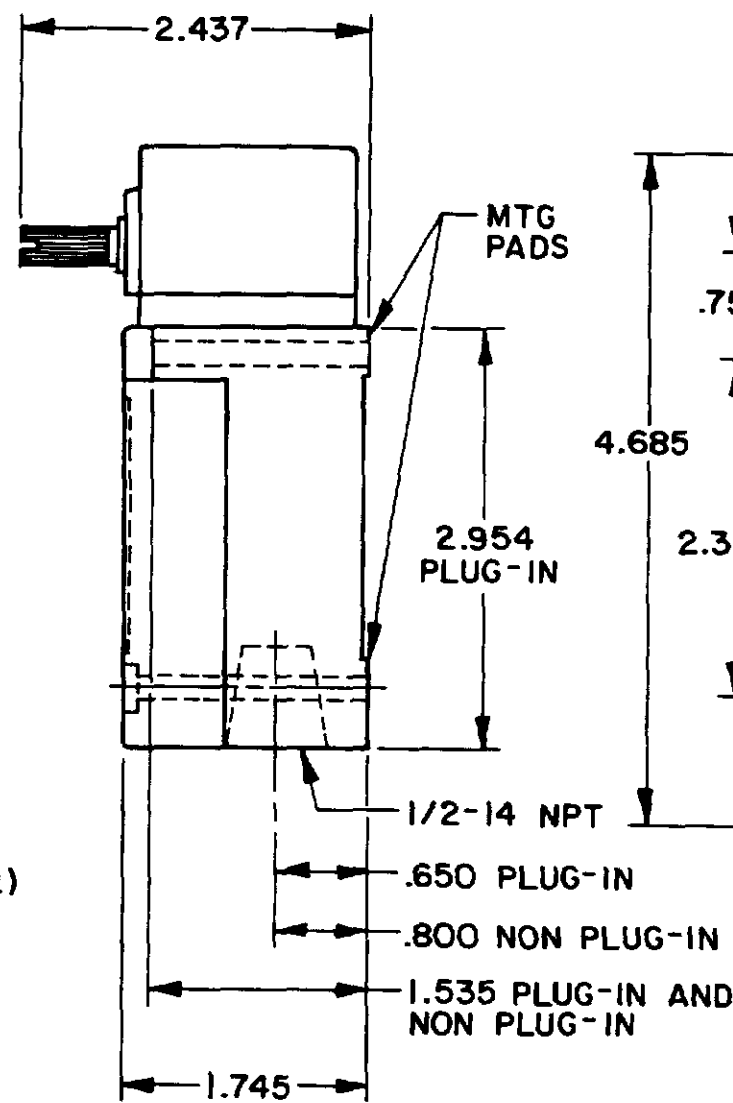


FLOUROSILICONE SEALS: LSYAB2, LSYHB2, LSYMB2, LSYNB2, LSYPB2, LSYRB2, LSYAB4, LSYHB4, LSYMB4, LSYNB4, LSYPB4, LSYRB4

* (LSYAB6, LSYHB6, LSYMB6, LSYNB6, LSYPB6, LSYRB6, LSYAB7, LSYHB7, LSYMB7, LSYNB7, LSYPB7, LSYRB7 HAVE 1/2-14 CONDUIT HOLE)

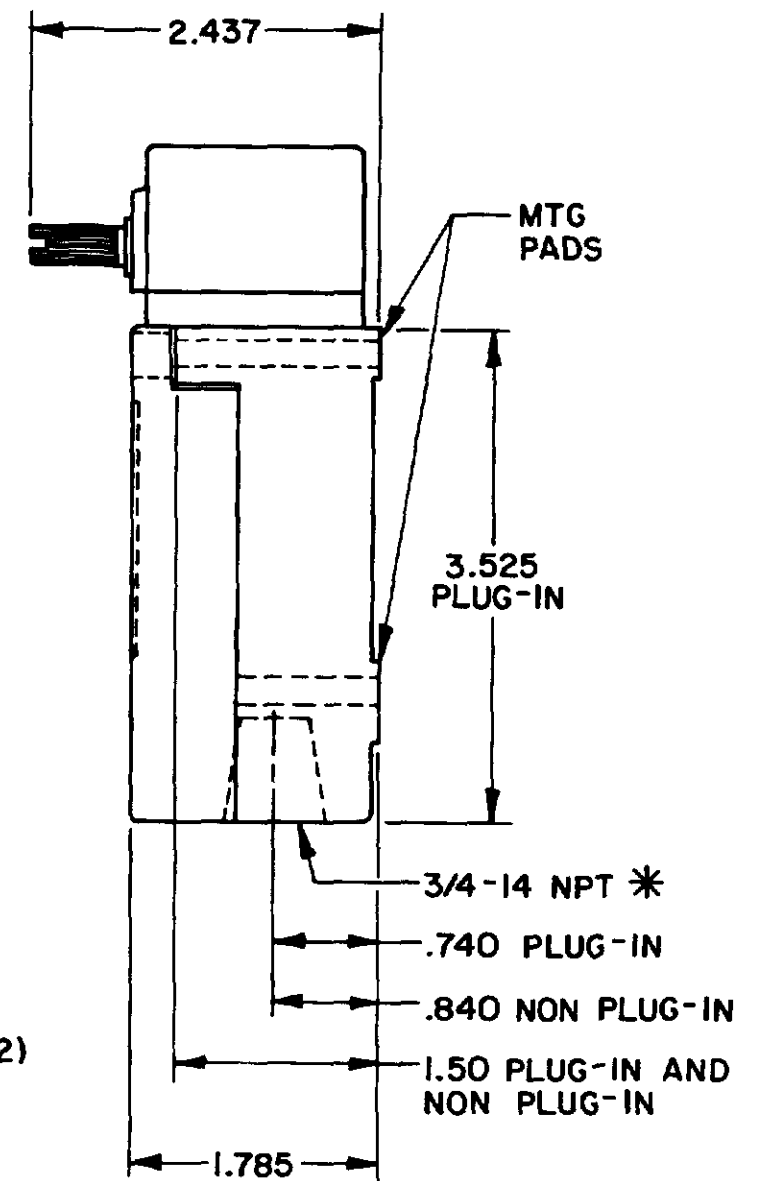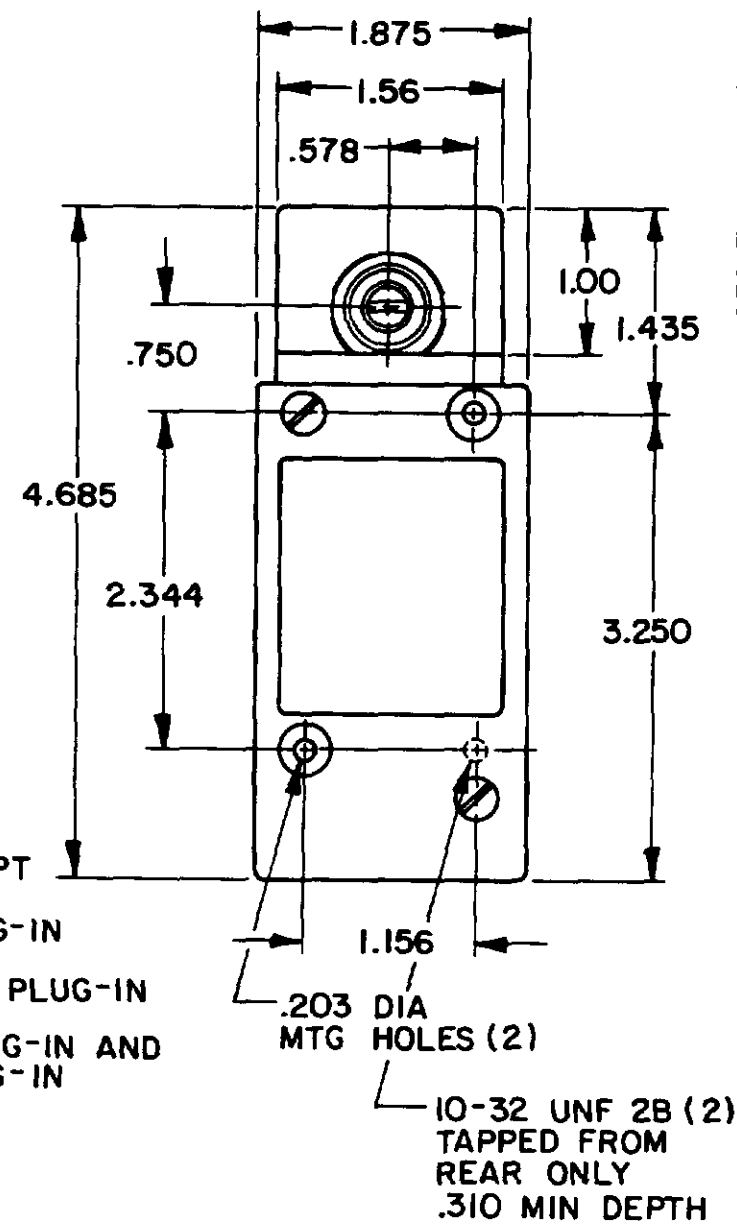


VITON SEALS: LSYAC2, LSYHC2, LSYNC2, LSYPC2, LSYRC2, LSYAC4, LSYHC4, LSYNC4, LSYPC4, LSYRC4, LSYMC2, LSYMC4, LSYMC6, LSYMC7, LSYLC2, LSYLC4, LSYLC6, LSYLC7

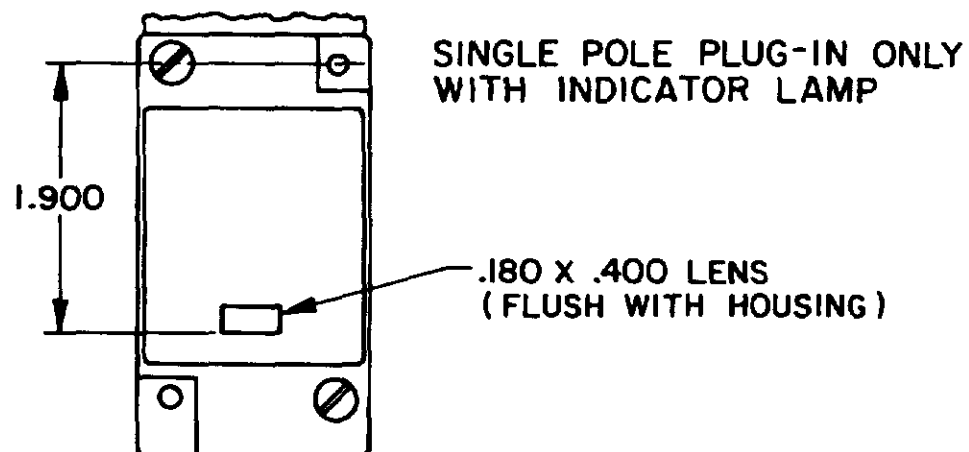


120 LAMP VOLTAGE -
TYPE LSYAB5, LSYHB5, LSYNB5, LSYPB5, LSYRB5, LSYAC5, LSYHC5, LSYNC5, LSYPC5, LSYRC5
240 LAMP VOLTAGE -
TYPE LSYAB8, LSYHB8, LSYNB8, LSYPB8, LSYRB8, LSYAC8, LSYHC8, LSYNC8, LSYPC8, LSYRC8

NOTE
1 - ALL UNITS AVAILABLE WITH FLUOROSILICONE AND VITON SEALS

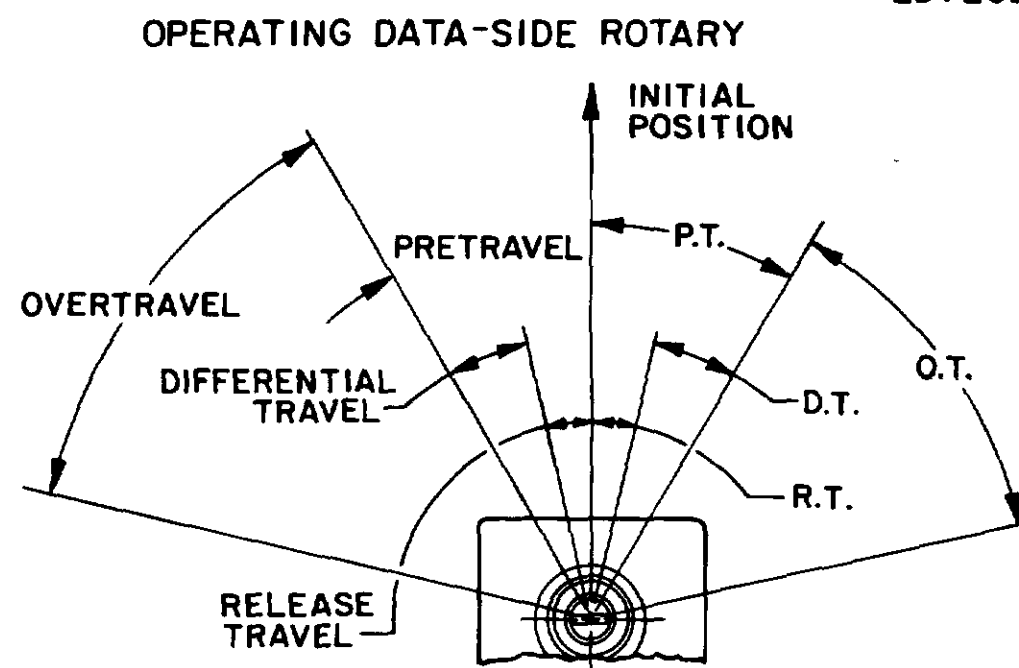

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

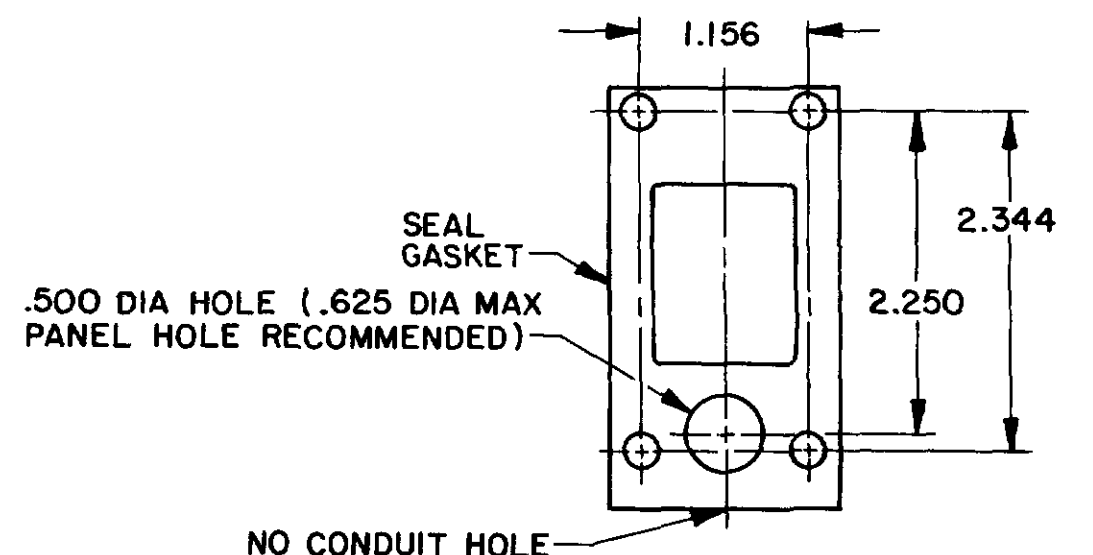

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.
A DIVISION OF HONEYWELL
FED. REG. COIL. 51429



SWITCH-ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1



M LSY SERIES CHART 1
PAGE 1 OF 10

DESIGN UNITS	SCALE	THIRD ANGLE PROJECTION
INCHES FRACTIONS DECIMALS MILLIMETERS CENTIMETERS	NONE DO NOT SCALE PRINT	
WEIGHT		



SIDE ROTARY CAM TRACKING

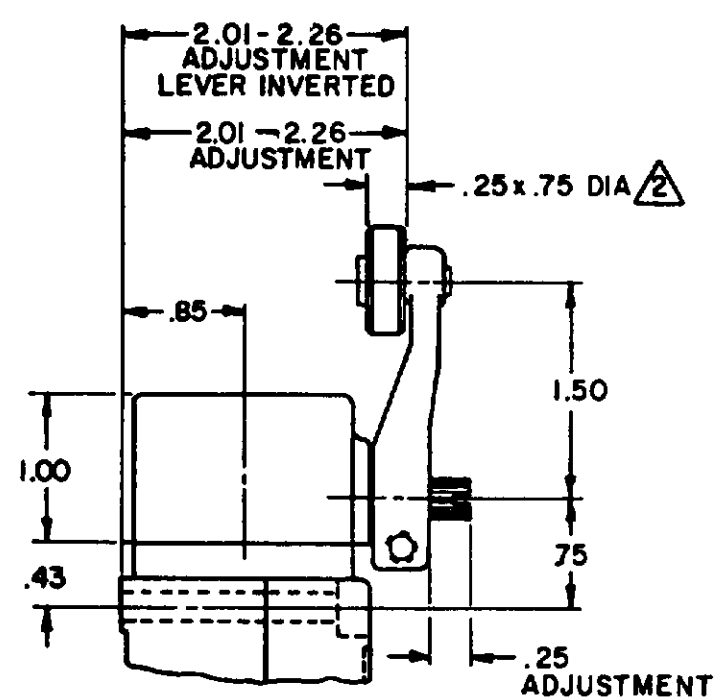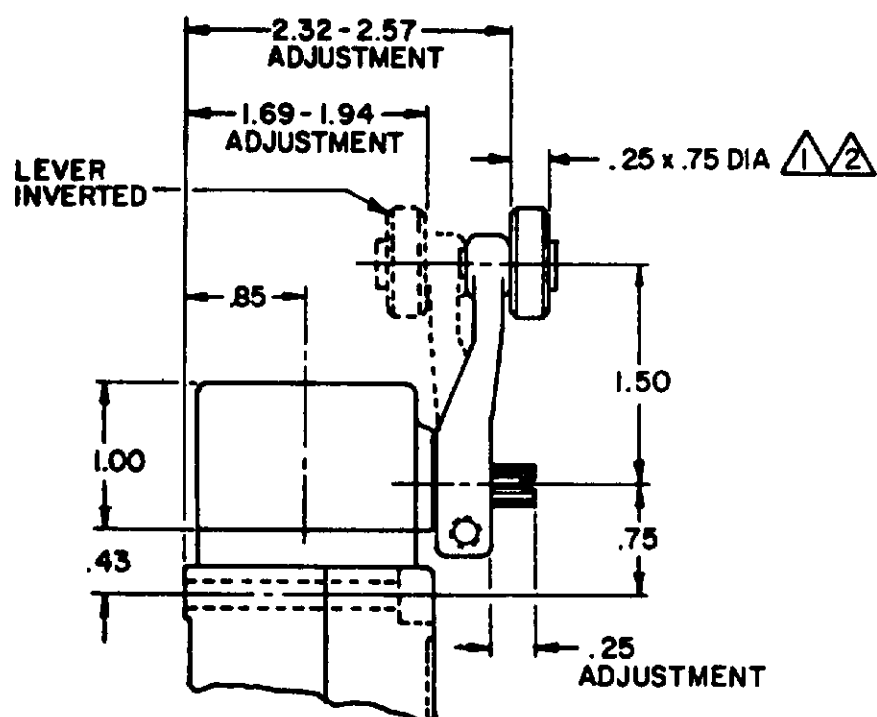

LSZ51 TYPE LEVERS

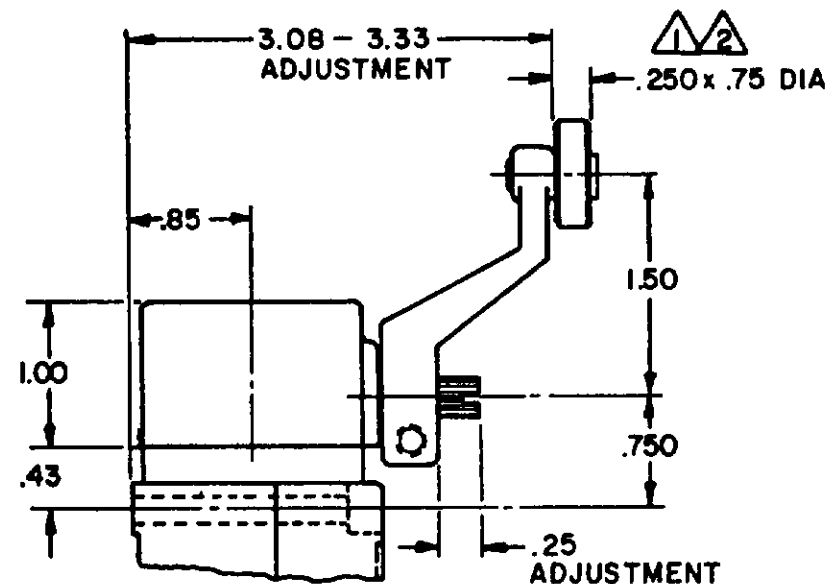
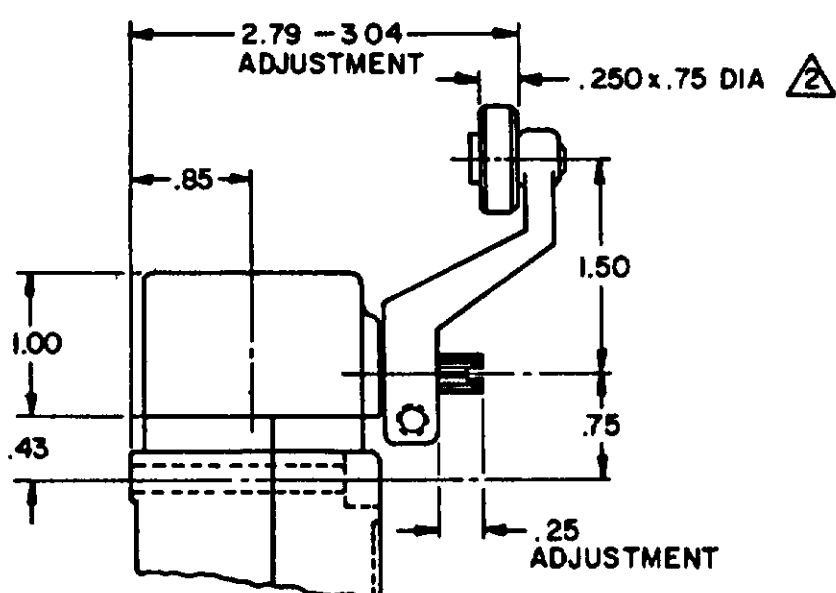


LSZ55 TYPE LEVERS

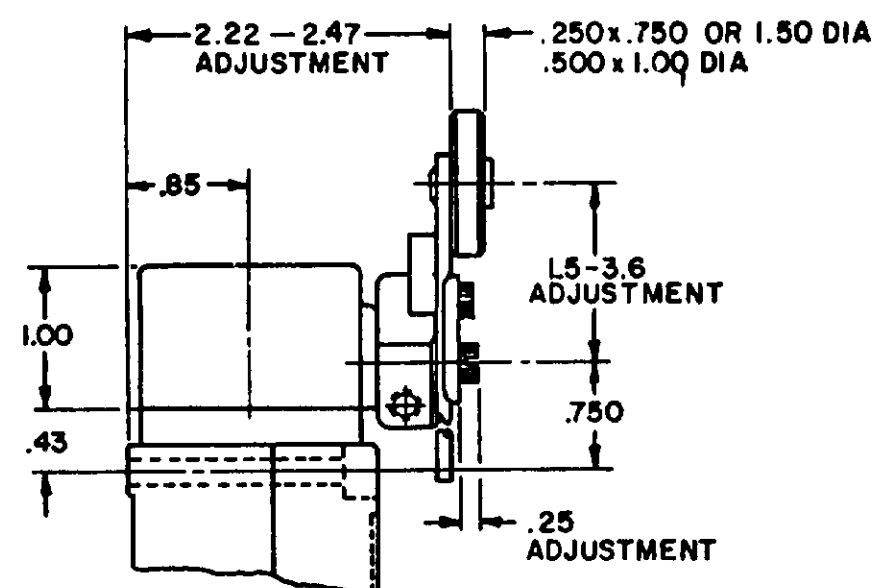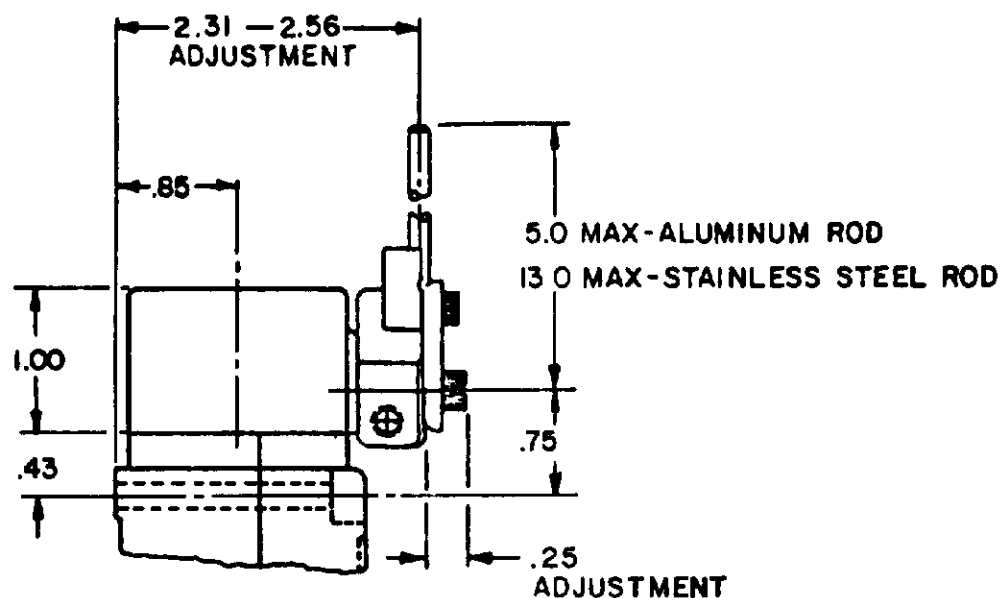

LSZ54 TYPE LEVER

LSZ52 TYPE LEVER

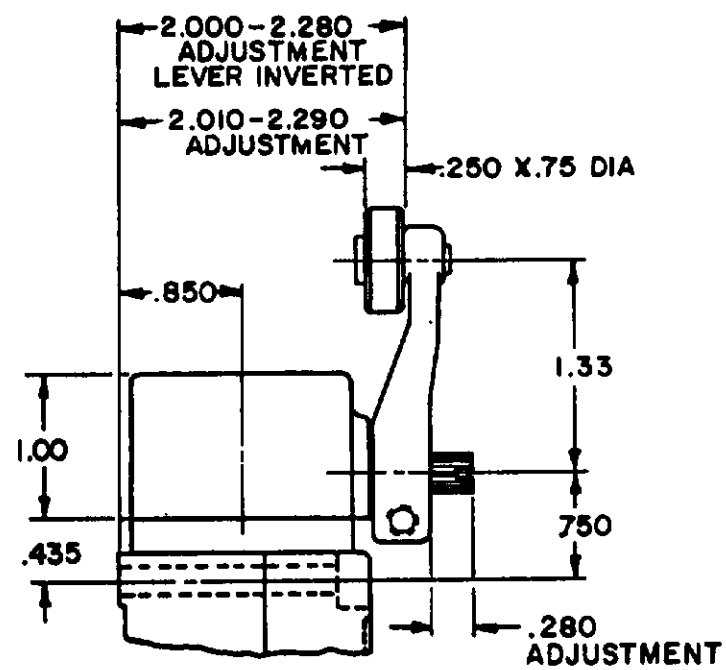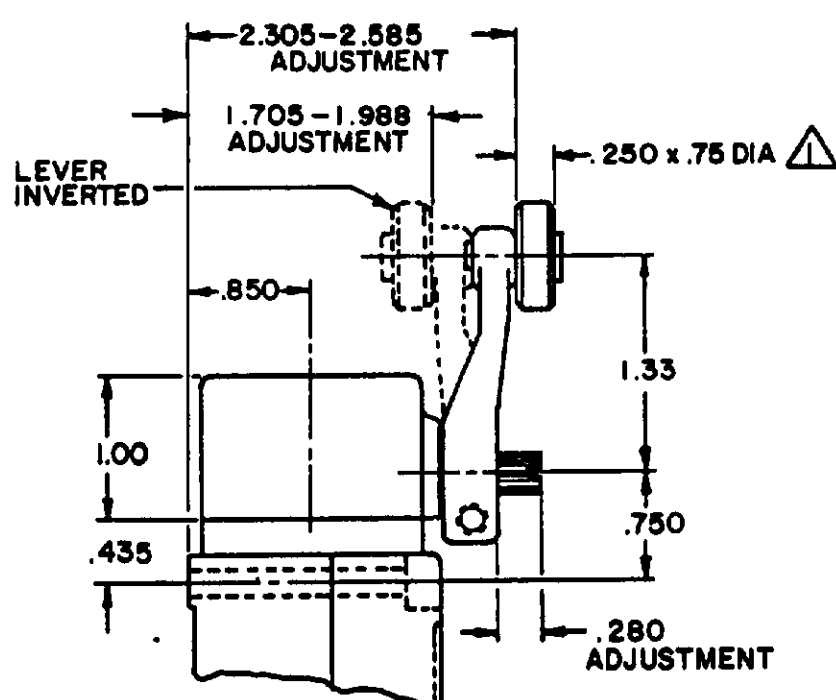

LSZ59 TYPE LEVERS

NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FEEDING CODE 31829

CHART 1

LSY SERIES

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030


TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±


TOP ROTARY

SINGLE POLE

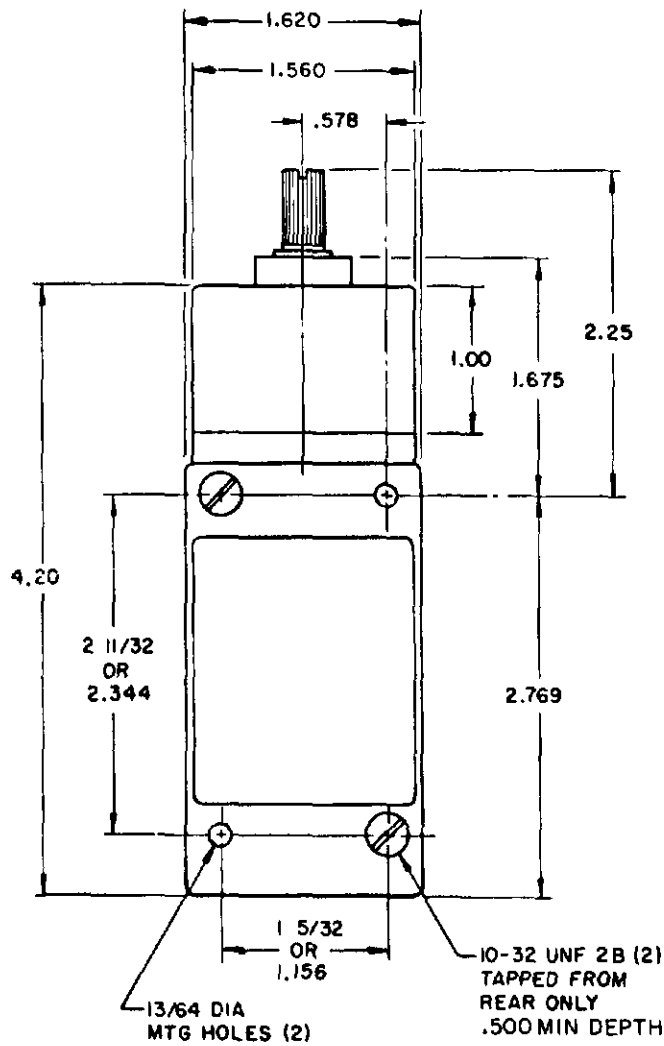



FLOUROSILICONE SEALS
LSYBB1 & LSYBB3

VITON SEALS
LSYBC1 & LSYBC3

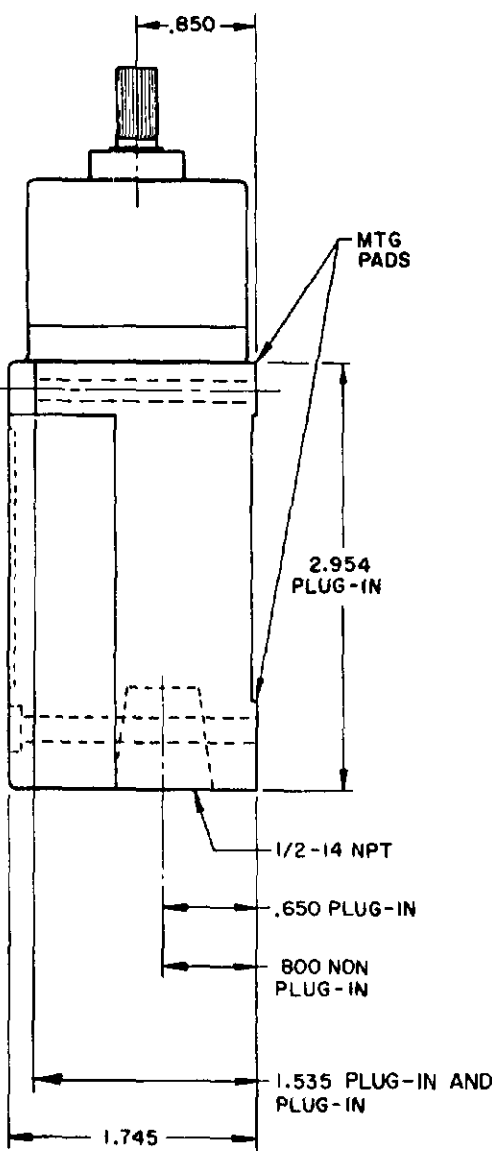

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2.5 IN. LBS	2.5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

DOUBLE POLE

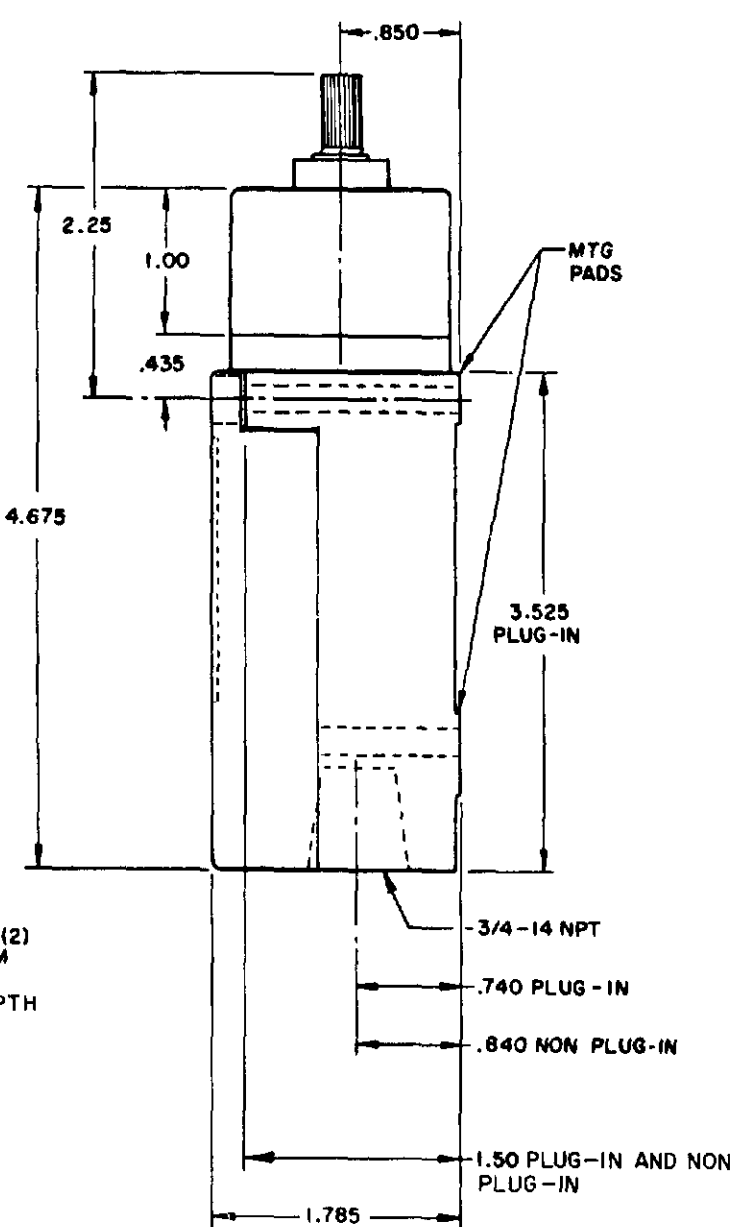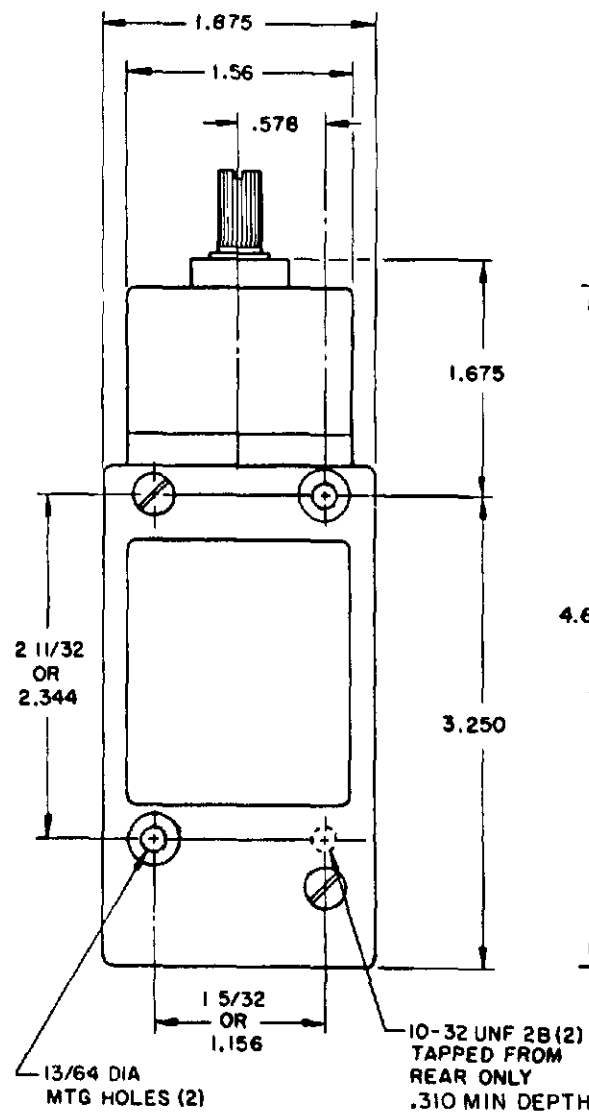

FLOUROSILICONE SEALS
LSYBB2 & LSYBB4
LSYBB6 & LSYBB7 HAVE 1/2-14NPT
CONDUIT HOLE

VITON SEALS
LSYBC2 & LSYBC4, LSYBC6 & LSYBC7
HAVE 1/2-14NPT CONDUIT HOLE

ELECTRICAL RATINGS

10 AMP CONT.

A.C. VOLTAGE	AMPS AT .35 POWER FACTOR			
	SINGL. POL.		DOUBLE POL.	
	MAKE	BREAK	MAKE	BREAK
120	60	6	10	3
240	30	3	15	1.5
480	15	1.5	7.5	.75
600	12	1.2	6	.6


D.C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40

ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT.


VOLTAGE	
5 AC OR DC MIN	.01 AMP MIN
600 AC	720 VA
240 DC	30 WATT

WIRING BASIC SWITCH
(SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

SINGLE POLE
MOMENTARY

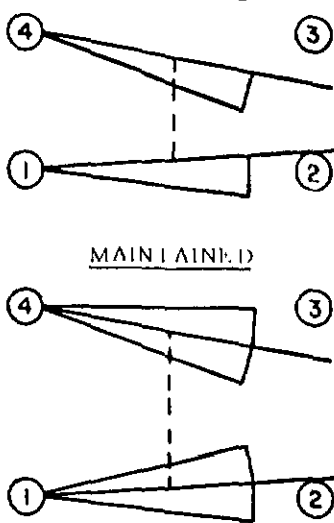


SINGLE POLE
ELECTRONIC DUTY
MOMENTARY

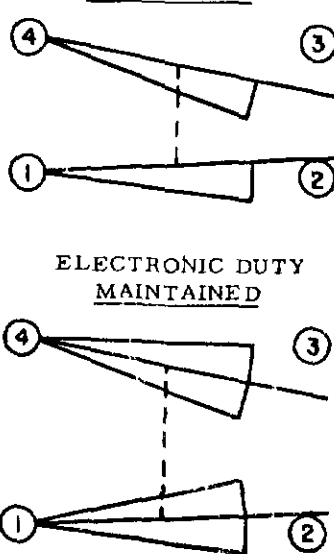


DIRECT ACTING

DOUBLE POLE

MOMENTARY

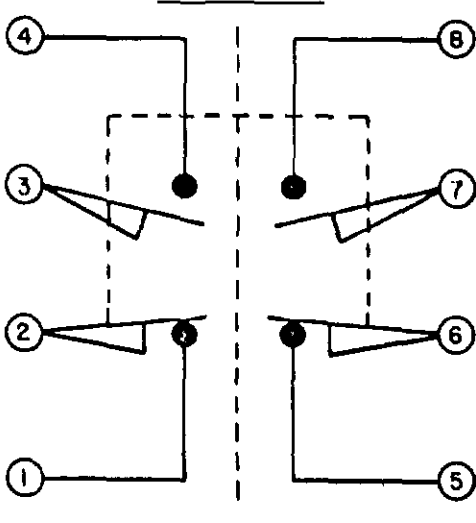

MAINTAINED

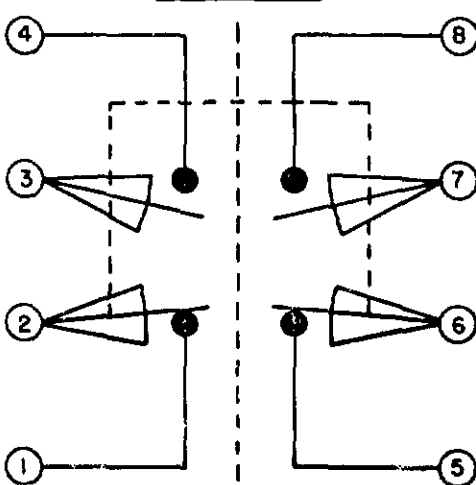

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL
OPERATING CHARACTERISTICS NOT
APPLICABLE


MICRO SWITCH
FREEPORT, L.I., N.Y. U.S.A.
A DIVISION OF HONEYWELL
FID. MFG. CODE 91918

SWITCH - ENCLOSED



LSY SERIES
CHART 1

PLUNGER TYPE TOP


SINGLE POLE

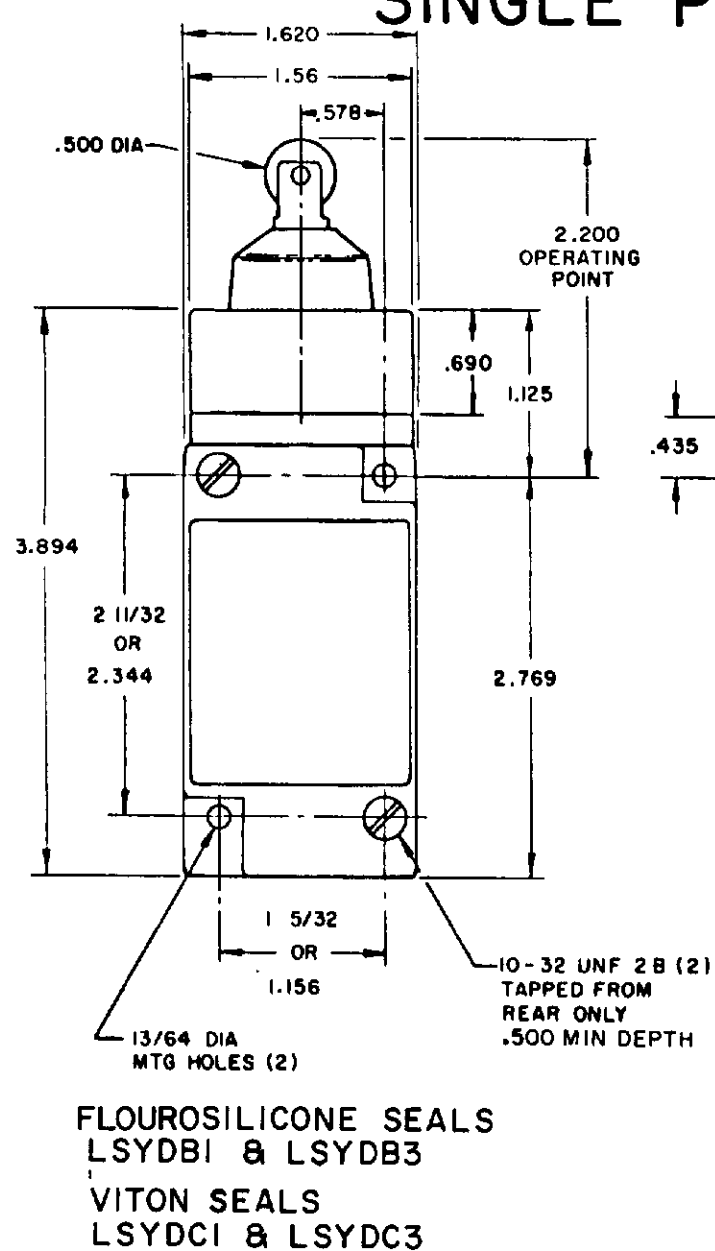

DOUBLE POLE

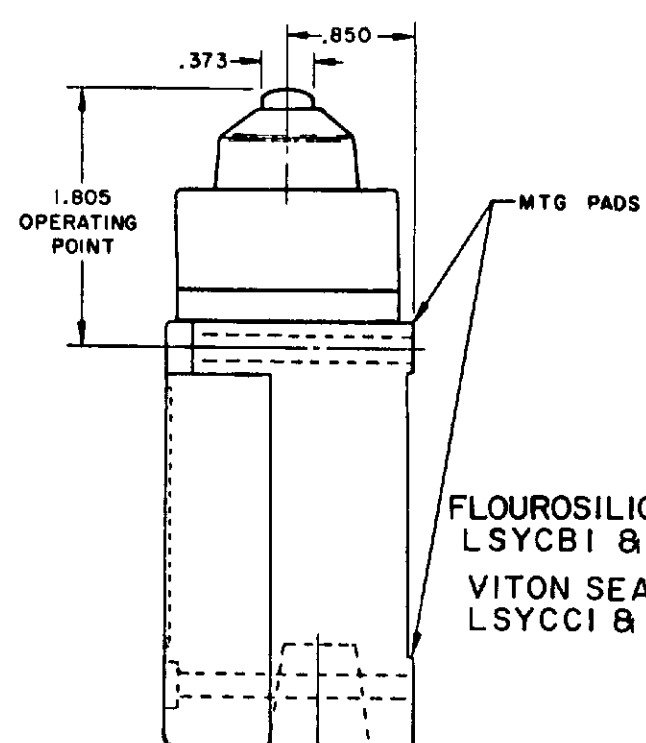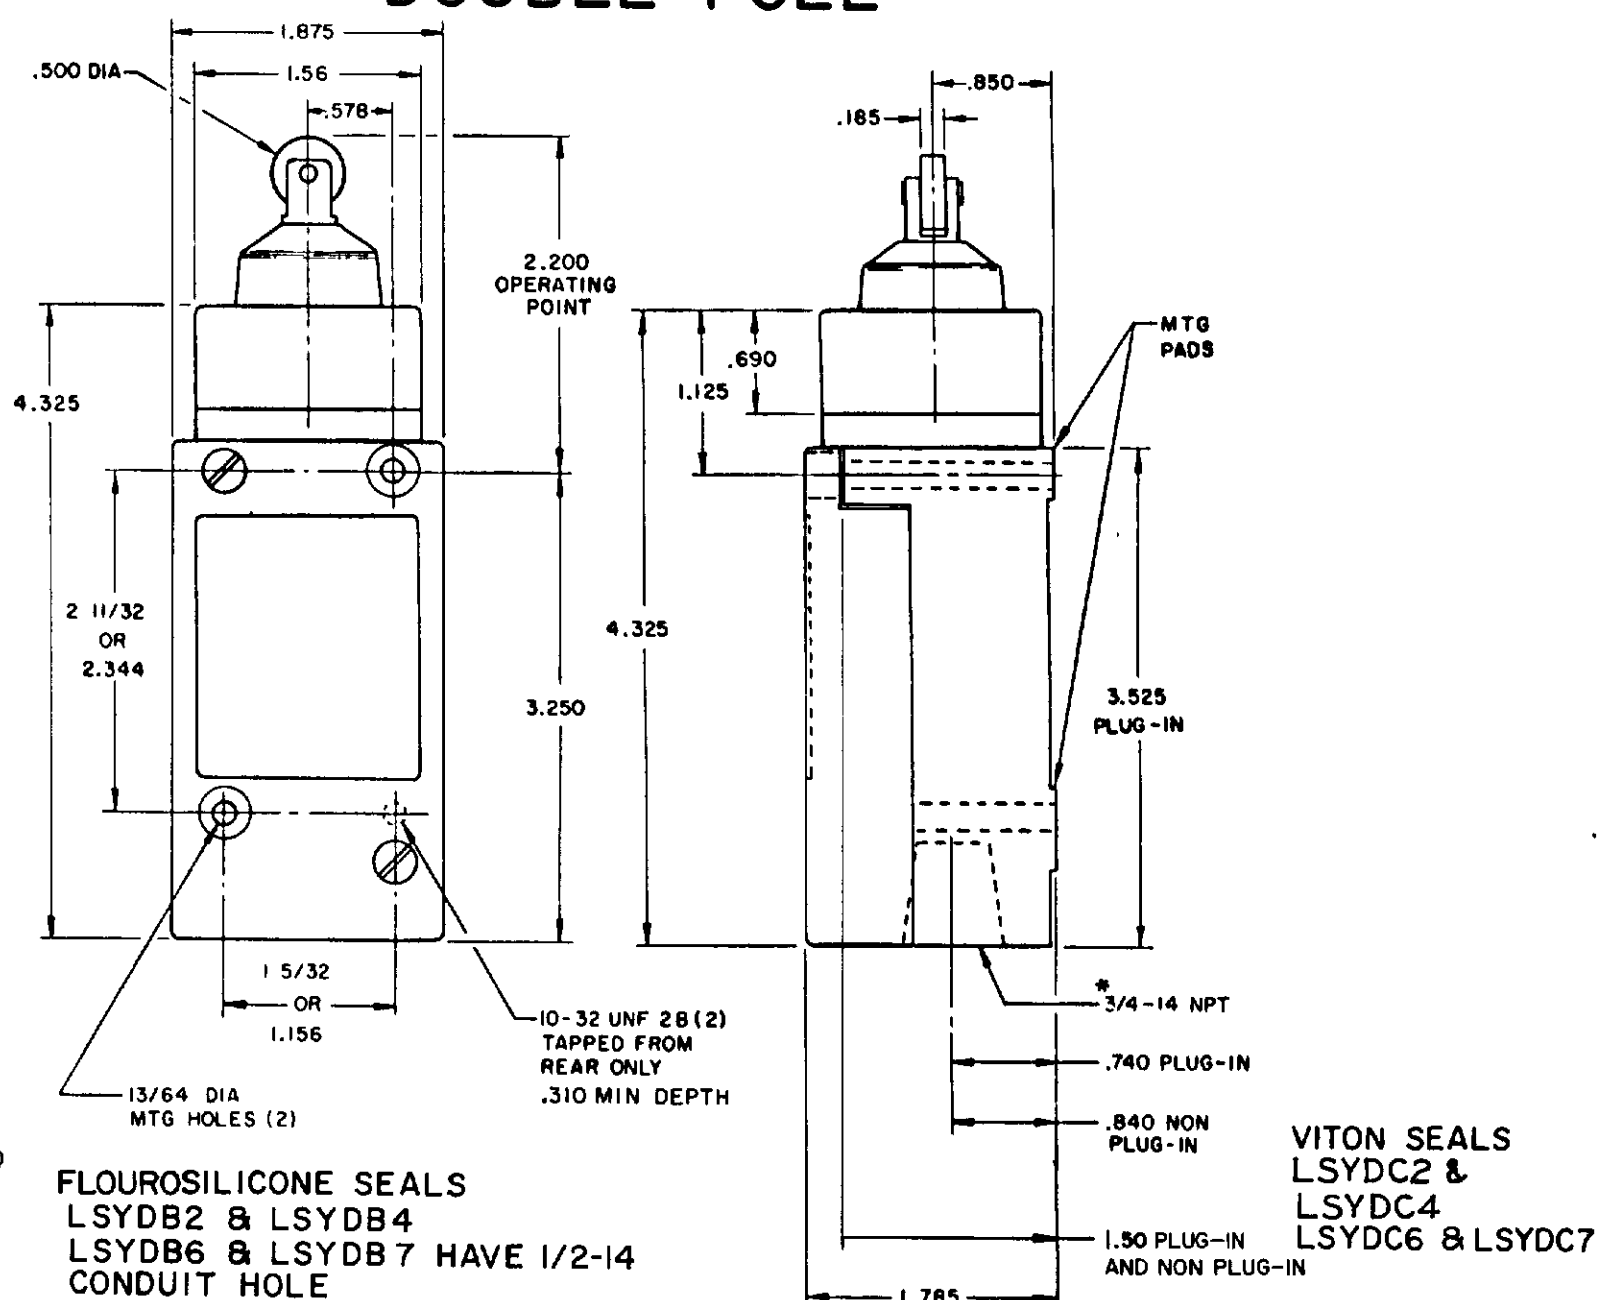


SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

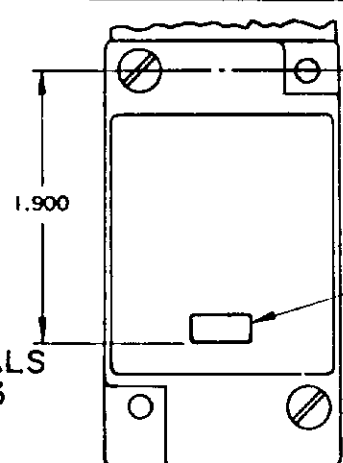

— 180 X .400 LENS
(FLUSH WITH HOUSING)


FLOUROSILICONE SEALS
LSYCB1 & LSYCB3
VITON SEALS
LSYCC1 & LSYCC3

120 LAMP VOLTAGE -
LSYCB 5, LSYDB5, LSYVB5
LSYCC 5, LSYDC5, LSYVC5
240 LAMP VOLTAGE -
LSYCB8, LSYDB8, LSYVB8
LSYCC8, LSYDC8, LSYVC8

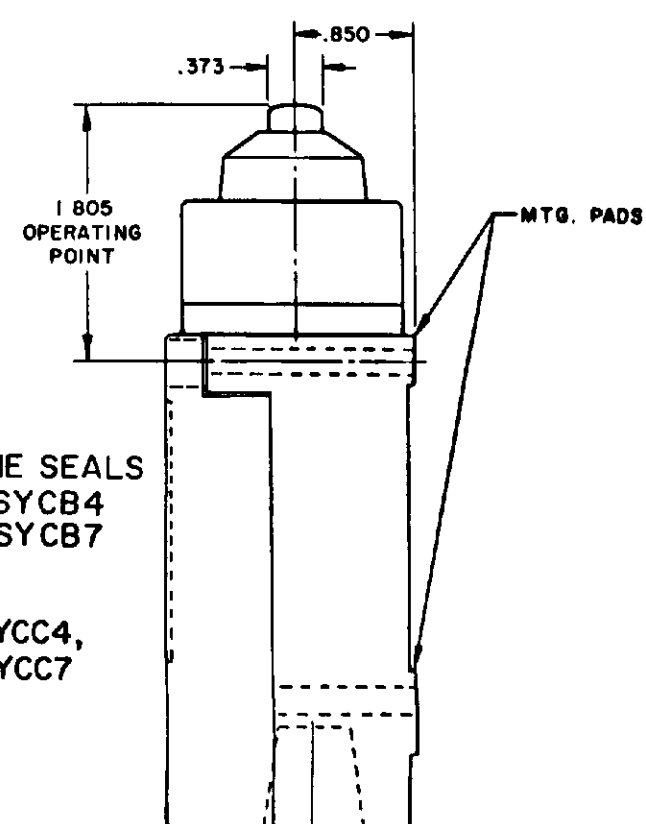


FLOUROSILICONE SEALS
LSYCB2 & LSYCB4
LSYCB6 & LSYCB7

VITON SEALS
LSYCC2 & LSYCC4,
LSYCC6 & LSYCC7

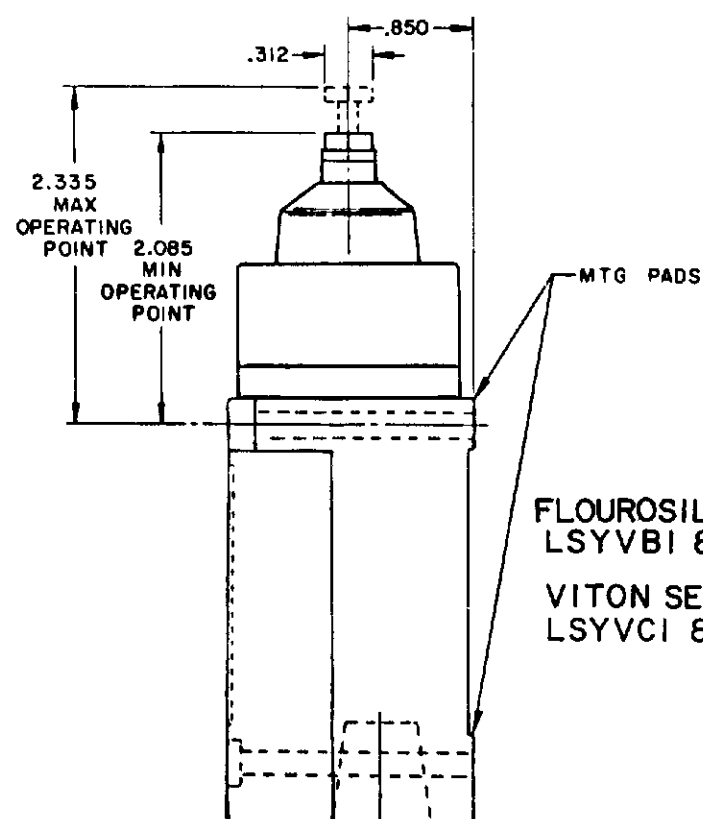


MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

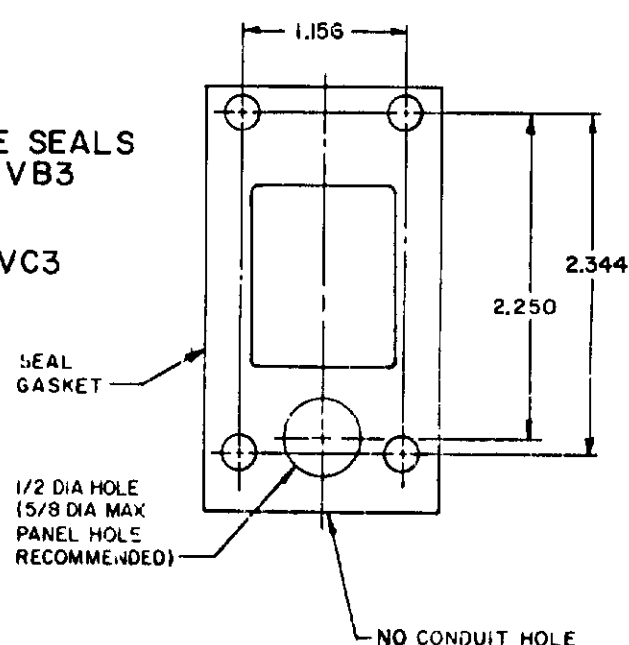

FLOUROSILICONE SEALS
LSYVB2 & LSYVB4,
LSYVB6 & LSYVB7

VITON SEALS
LSYVC2 & LSYVC4,
LSYVC6 & LSYVC7

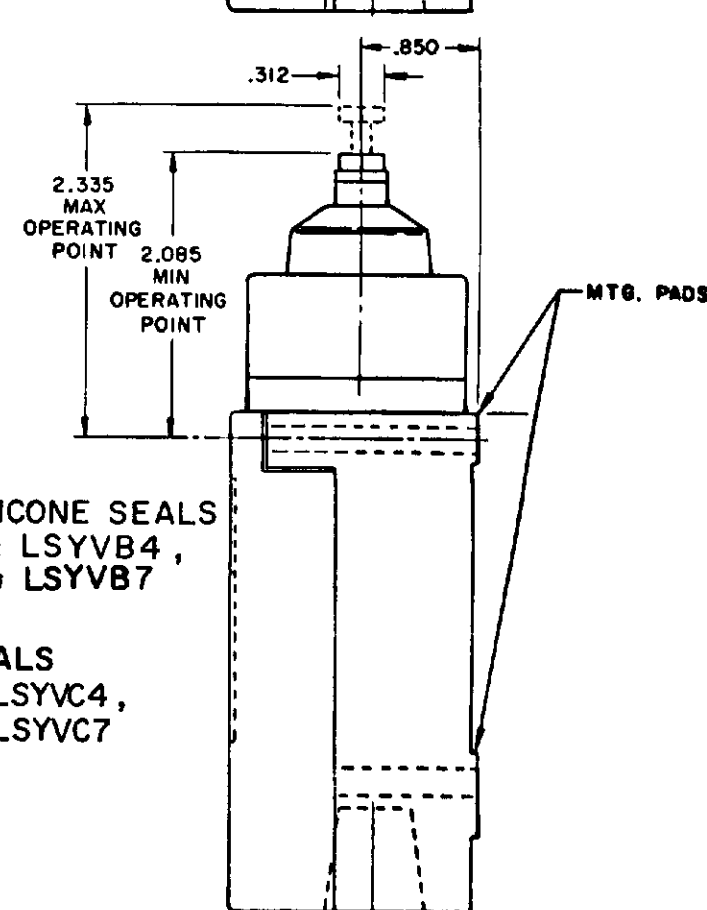

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEMONT, CALIF. 94534 U.S.A.
A DIVISION OF MONEYSWELL
FED. MFG. CODE 91020

SWITCH - ENCLOSED

CHART 1

LSY SERIES









THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF
MONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

DO NOT SCALE PRINT

SIDE PLUNGER TYPE

SINGLE POLE

DOUBLE POLE

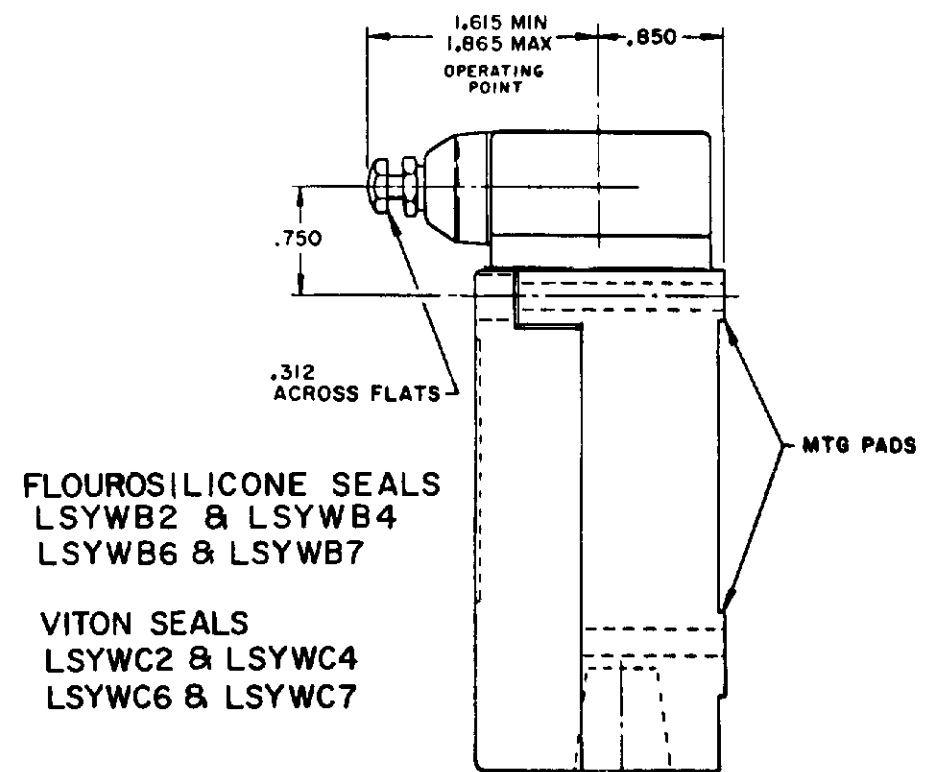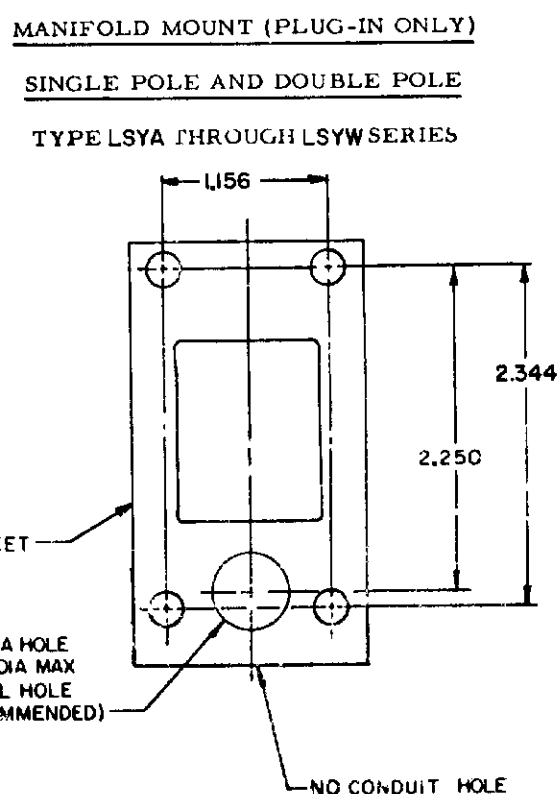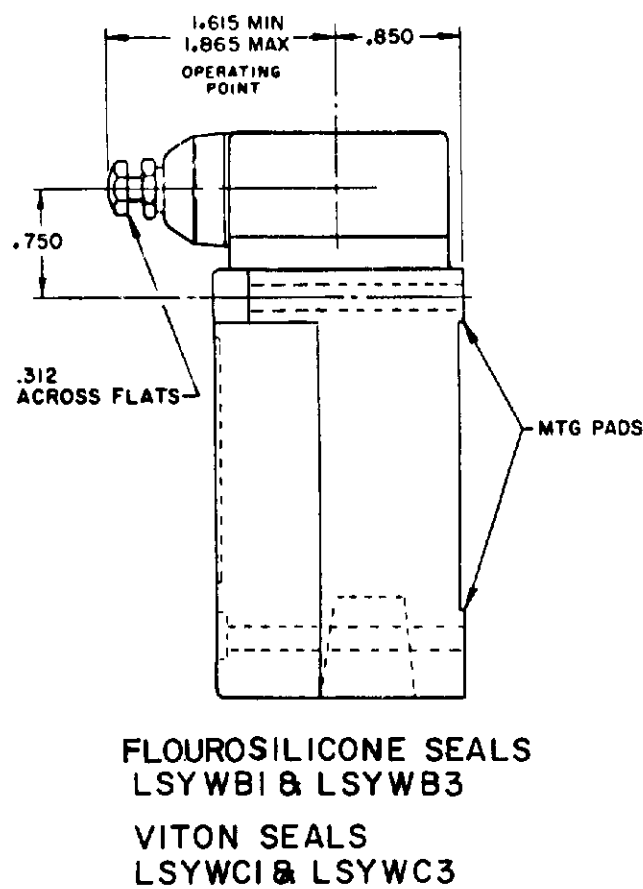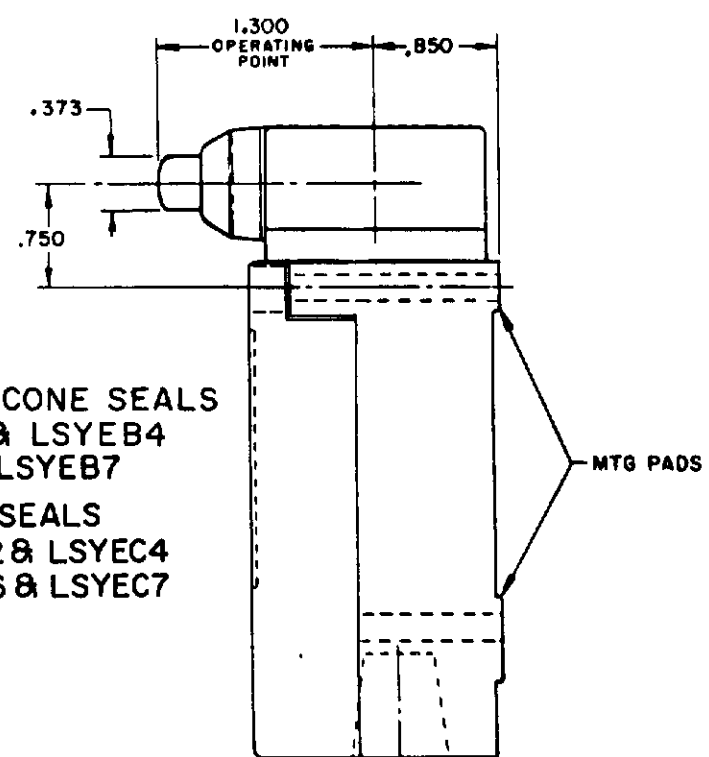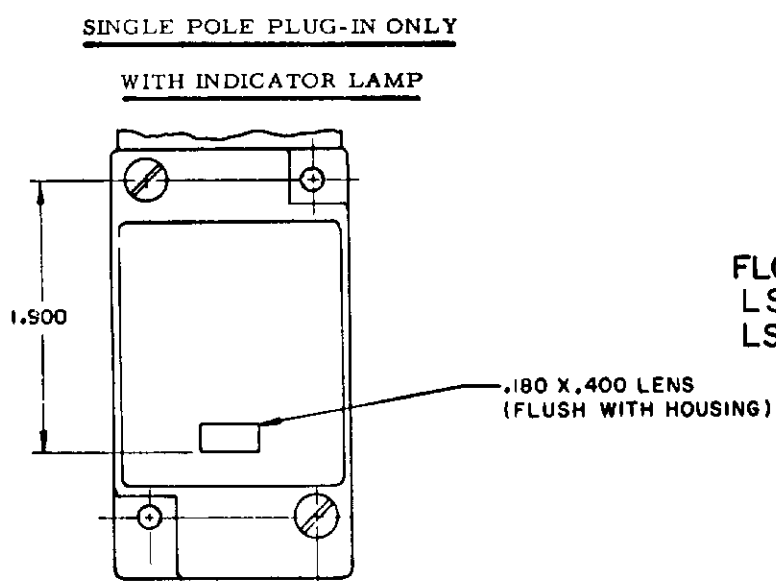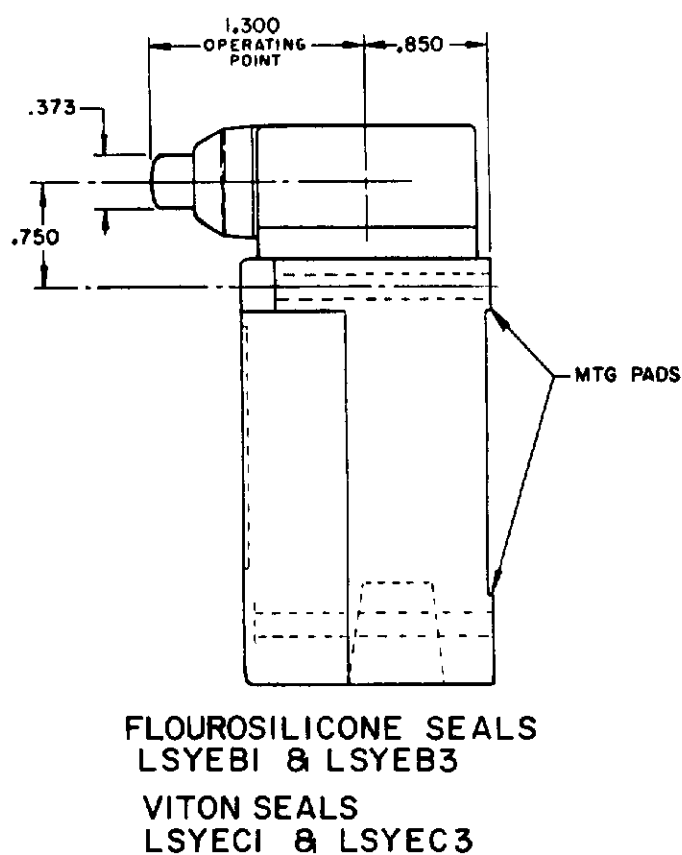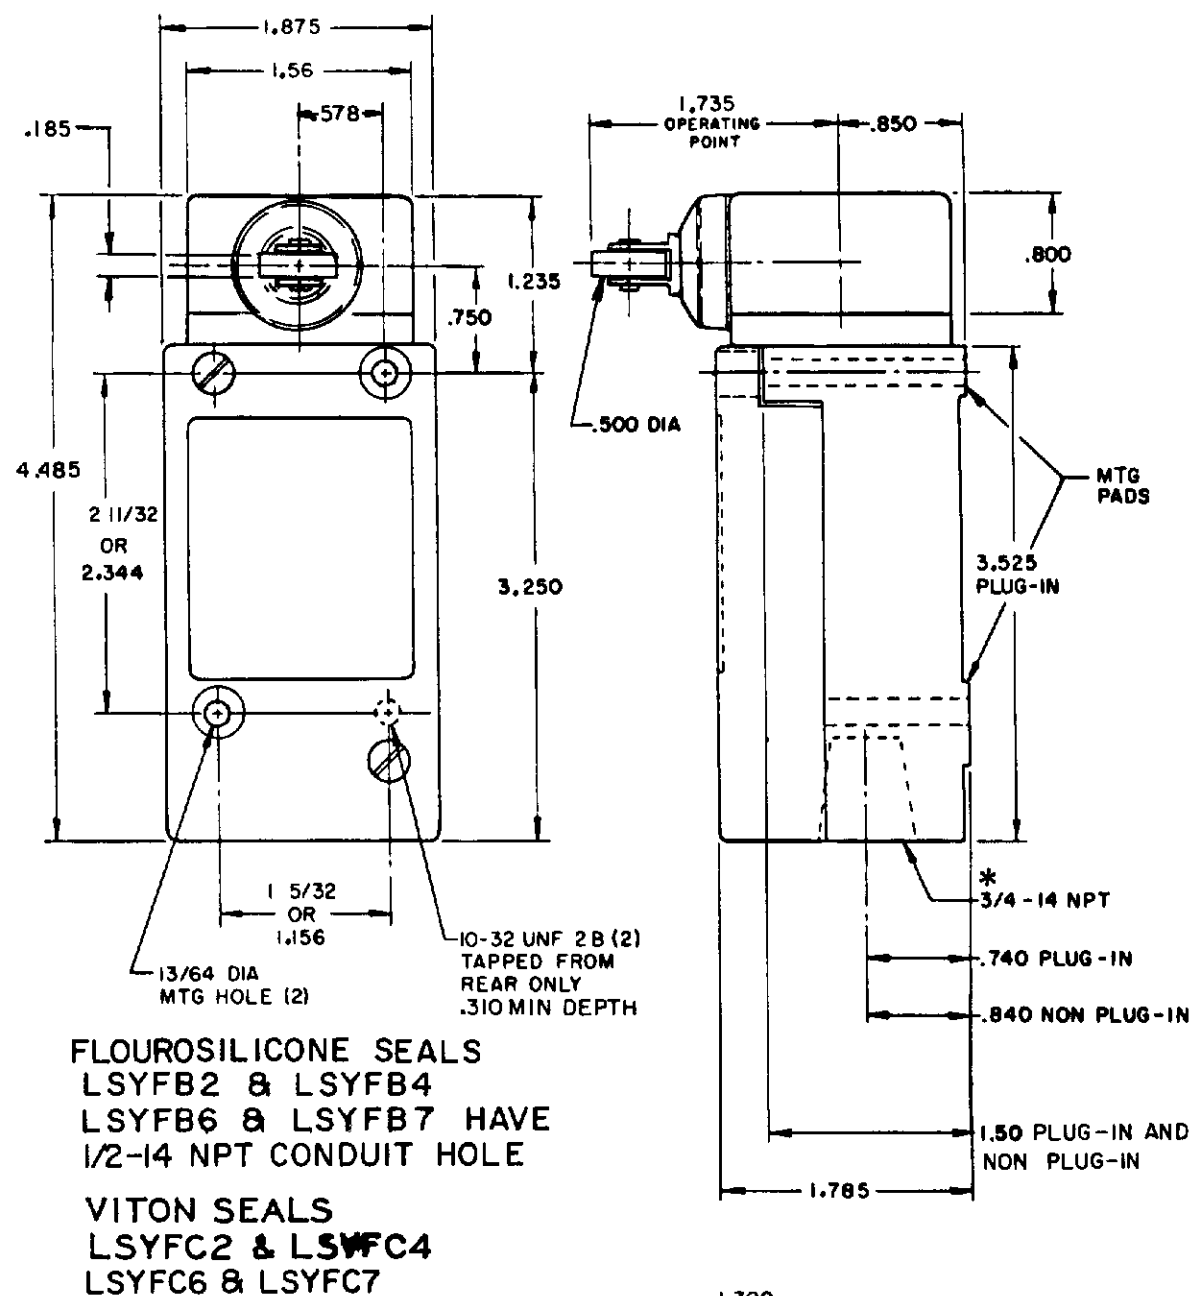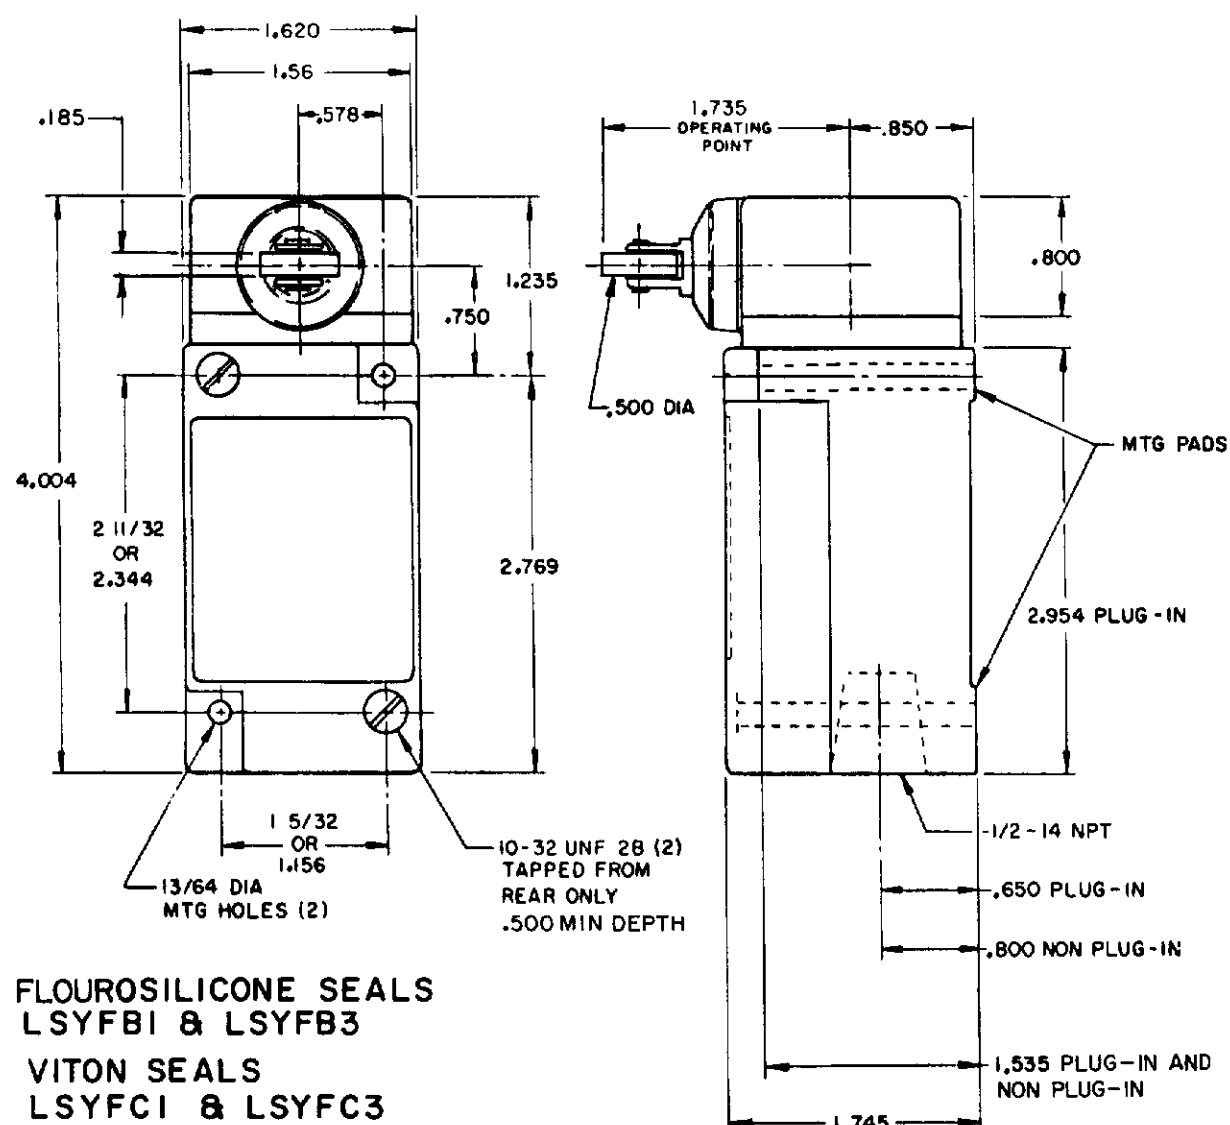


NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH, A DIVISION OF HONEYWELL.
FED. REG. COPY # 933

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE NONE
DO NOT SCALE PRINT

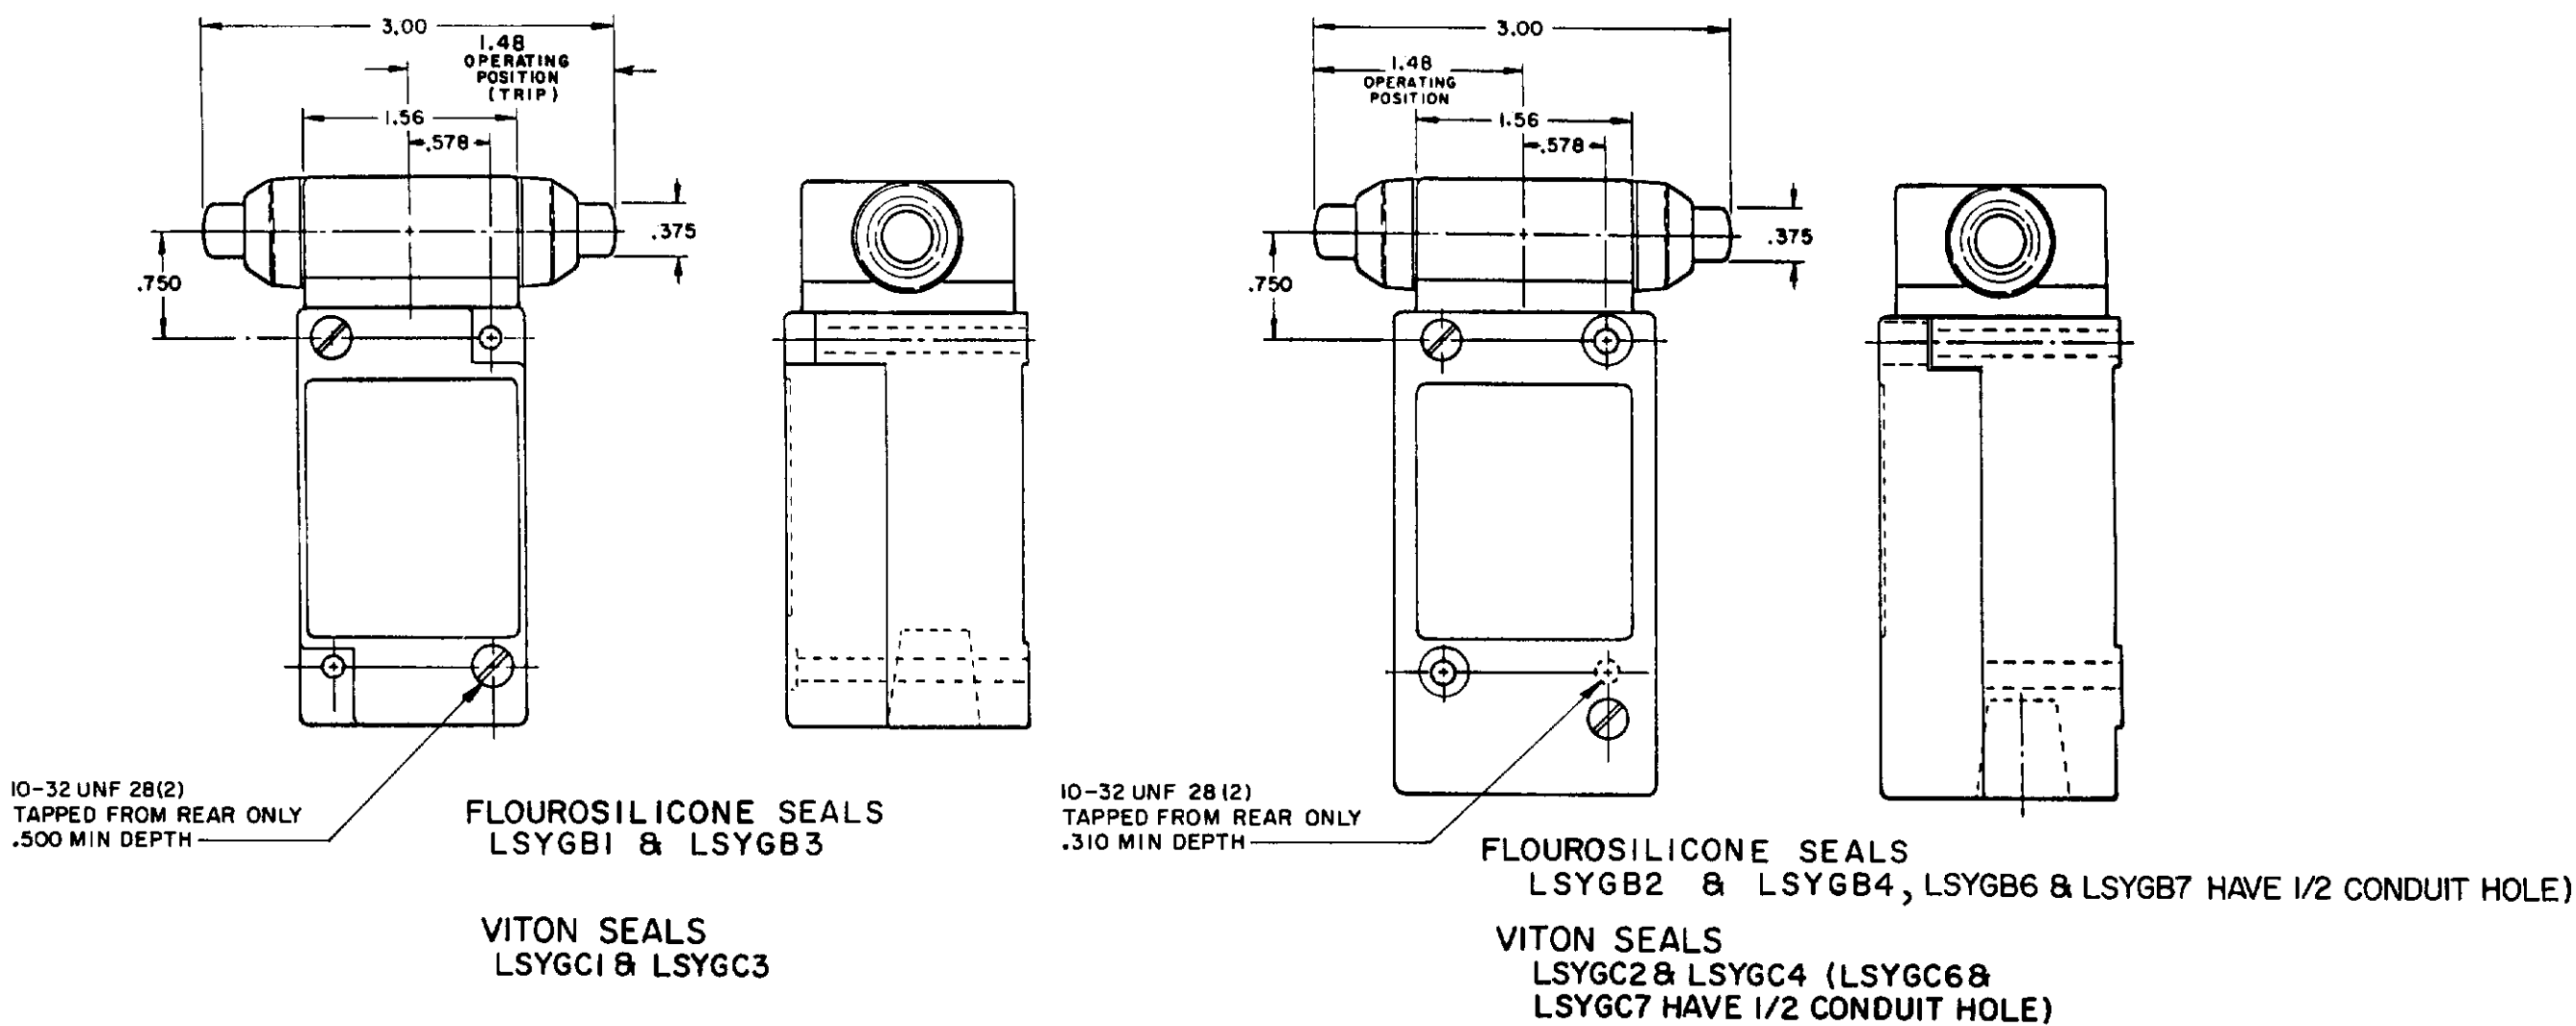

INITIAL POSITION (FREE POSITION) }
OPERATING POINT } PRETRAVEL
FULL TRAVEL } DIFFERENTIAL TRAVEL
OVERTRAVEL


TOP PLUNGER TYPES							
OPERATING POINT GIVEN IN RELATION TO TOP MOUNTING HOLE							
CHARACTERISTICS	LSYC PLUNGER		LSYD ROLLER PLUNGER		LSYV ADJ PLUNGER		SEQUENCE BASIC
							LSYC LSYD LSYV
PRETRAVEL (MAX)	.070		.070		.070		1ST STEP .070 2ND STEP .016 MIN ADD'L
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	.015 EACH STEP
OVERTRAVEL (MIN)	.190		.190		.190		.170
OPERATING FORCE (MAX)	4 LBS		4 LBS		4 LBS		4 LBS
OPERATING POINT	1.805 ± .030		2.200 ± .040		2.085 MIN 2.335 MAX		1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX
FULL OVERTRAVEL FORCE (MAX)	7 LBS		7 LBS		7 LBS		7 LBS

SIDE PLUNGER TYPES							
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD							
CHARACTERISTICS	LSYE PLUNGER	LSYF ROLLER PLUNGER	LSYW ADJ PLUNGER	LSYG PLUNGER MAINTAINED	SEQUENCE BASIC		
					LSYE	LSYF	LSYW
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100 2ND STEP .020 MIN ADD'L		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	.025 EACH STEP		
OVERTRAVEL (MIN)	.190	.190	.190	.080	.170		
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		


WOBBLE STICK

SINGLE POLE


DOUBLE POLE

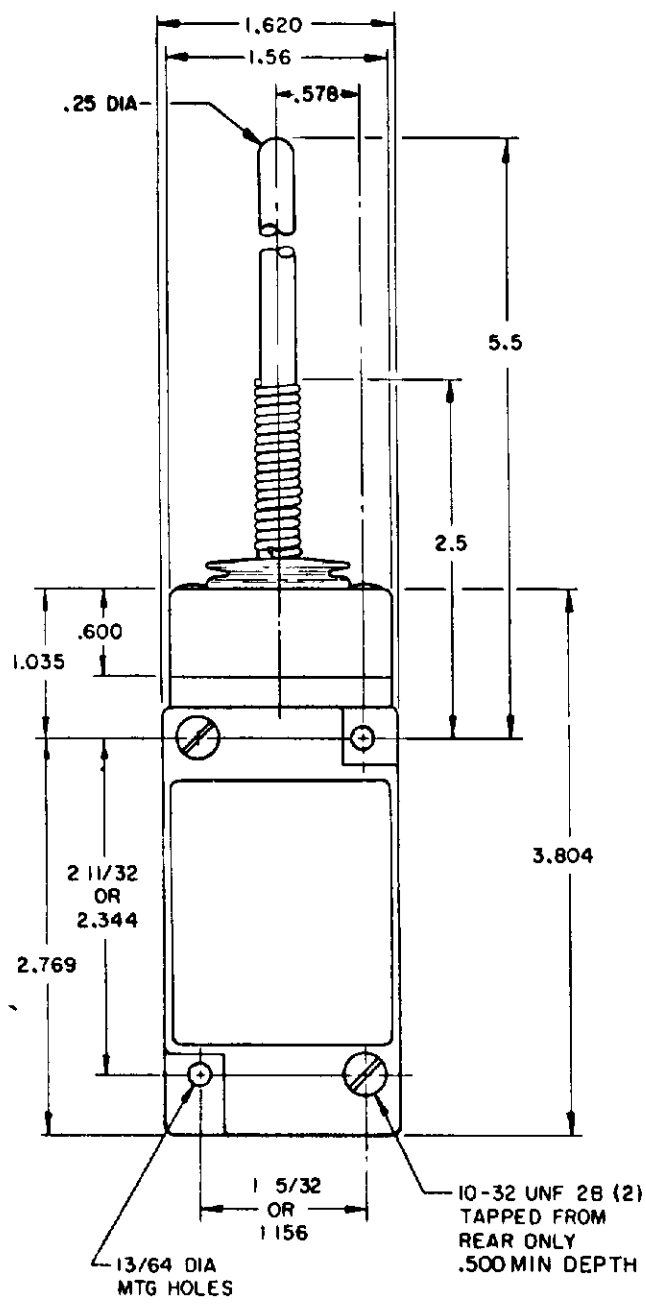


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

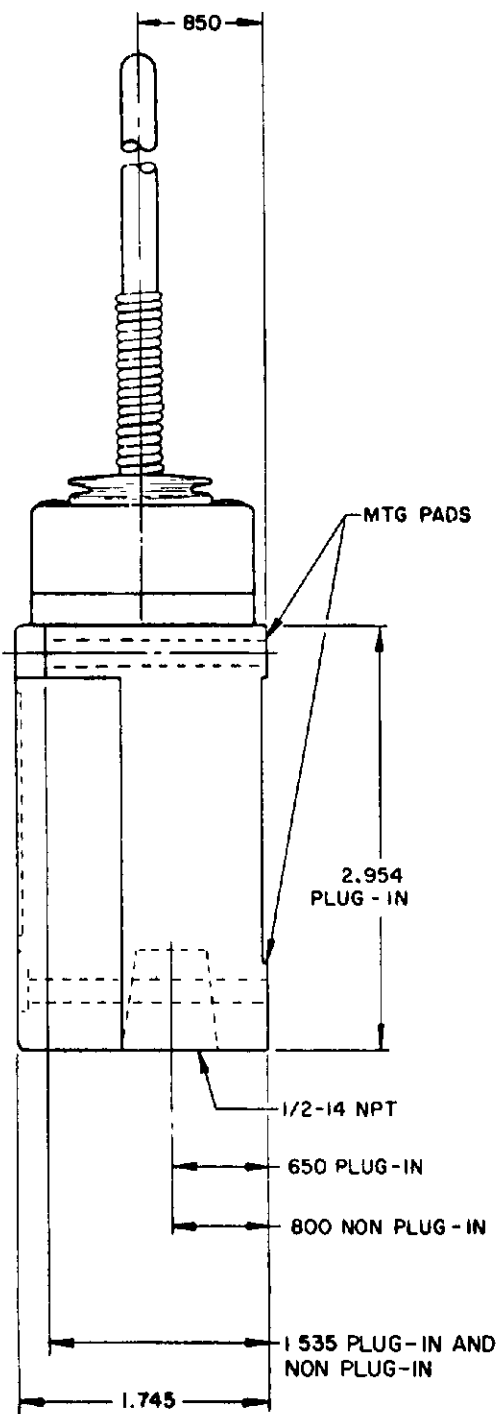


**REPLACEMENT ACTUATOR
LSZ 4009**

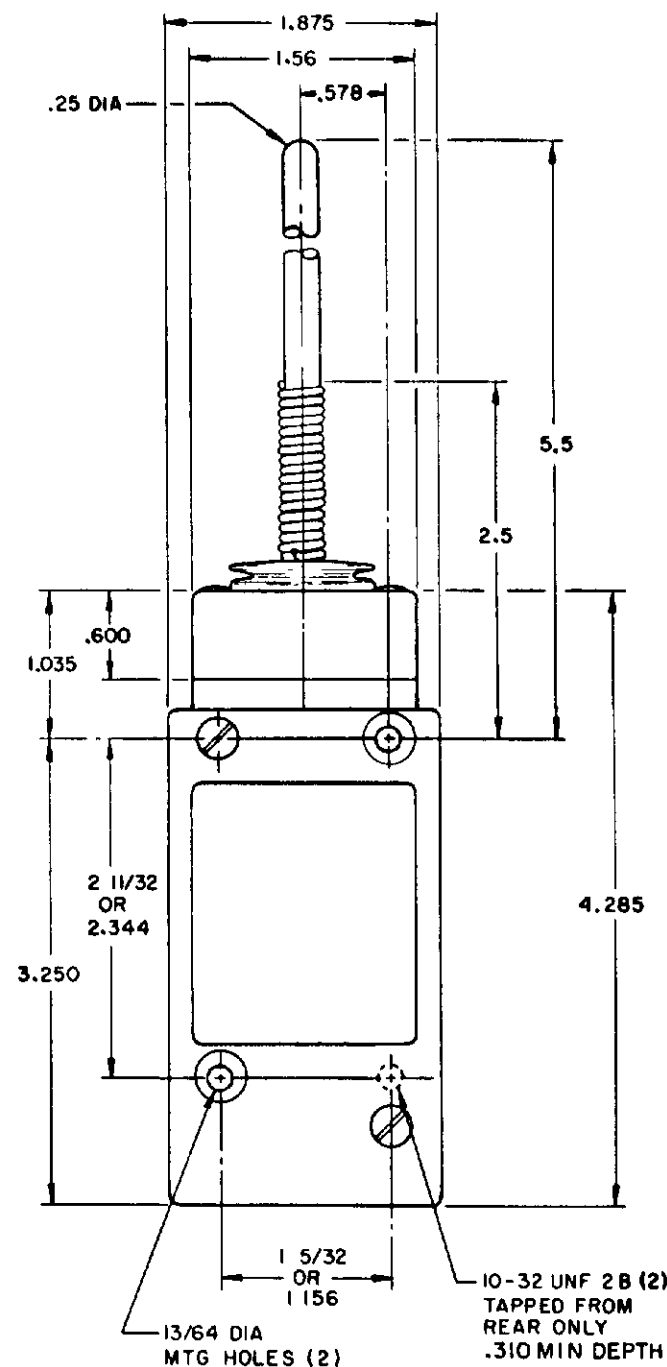


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

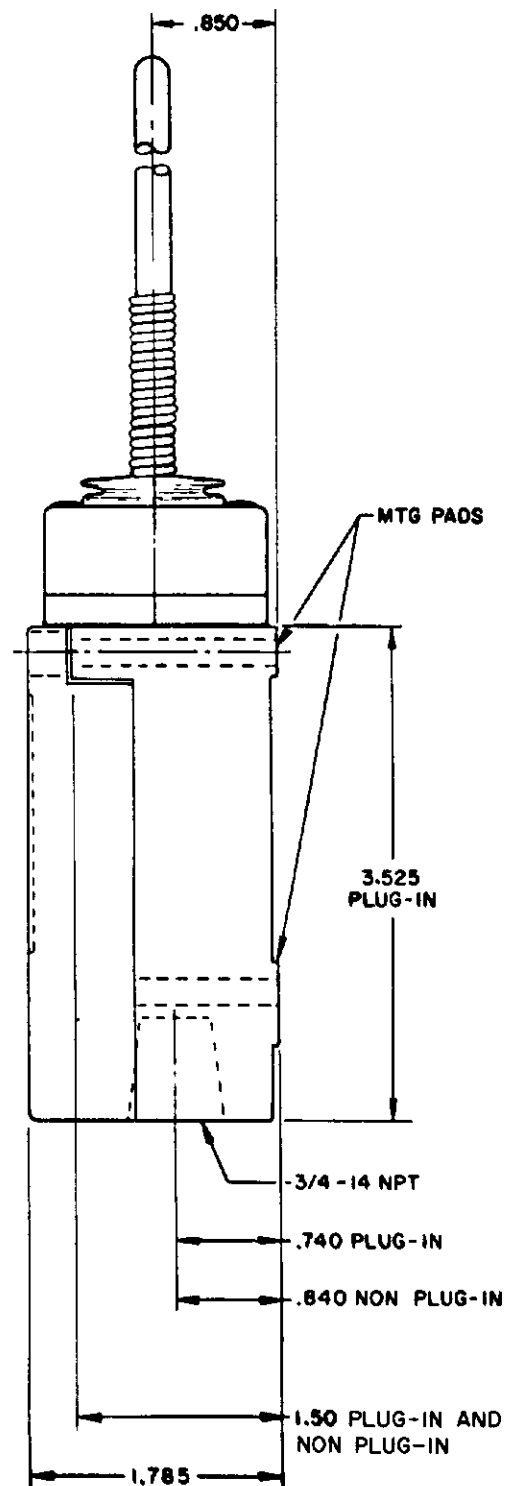

**REPLACEMENT ACTUATOR
LSZ 4011**

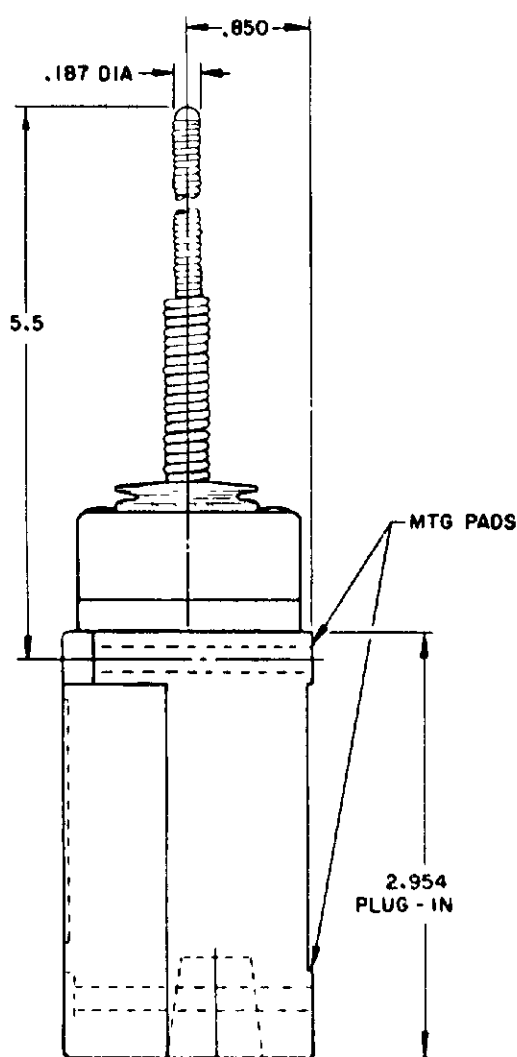


**CABLE EXTENSION
TYPE 7N ACTUATOR**

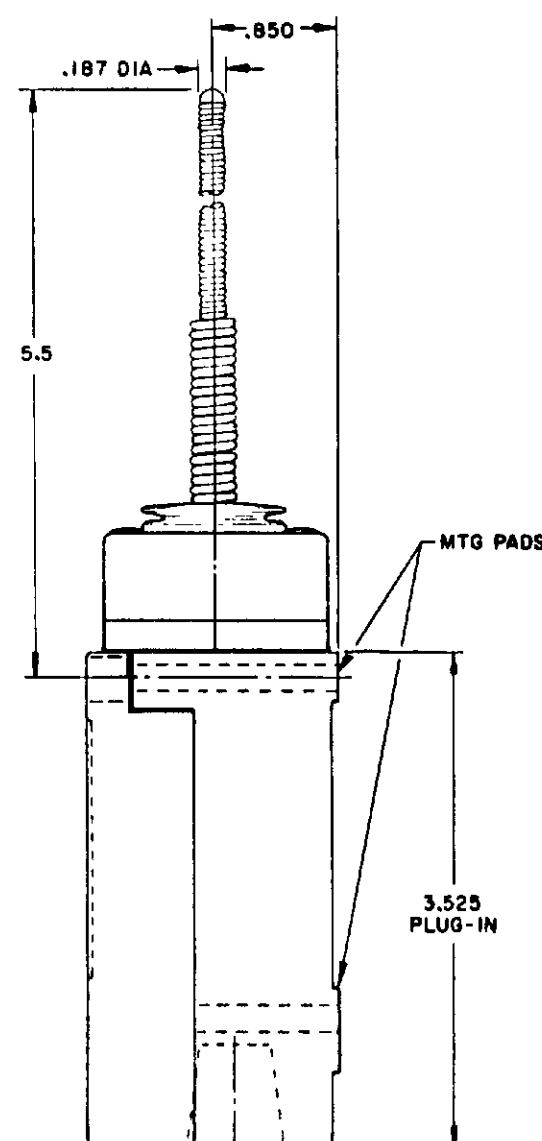

**CABLE EXTENSION
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

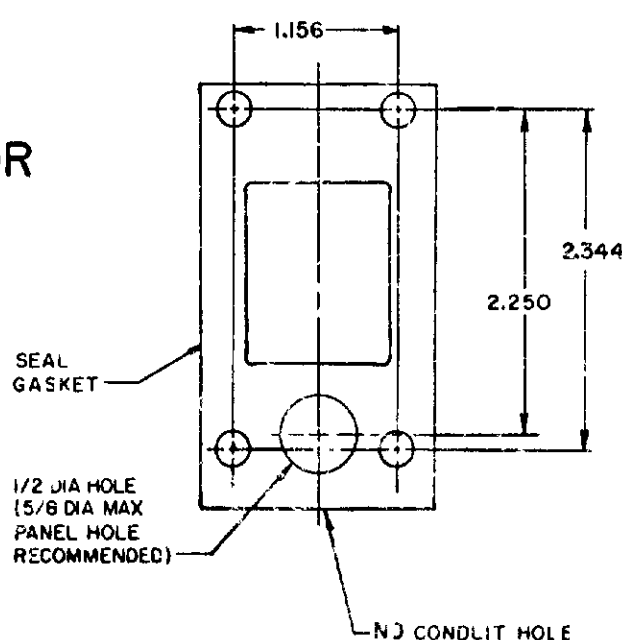

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLUOROSILICONE AND VITON SEALS

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

SWITCH-ENCLOSED

CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT

Technical drawing of a mechanical assembly. The drawing shows a vertical assembly with a central shaft. The shaft has a diameter of .850. The shaft is secured with a nut and a washer. The nut is labeled .075 DIA. The washer is labeled 2.63. The shaft is labeled 13.0. The assembly is mounted on a base. The base is labeled MTG PADS.

Diagram illustrating the front view of the Model 1000 camera. The lens is labeled as **1.80 X .400 LENS (FLUSH WITH HOUSING)**. The overall height of the camera body is indicated as **1.900**.

120 LAMP VOLTAGE TYPE-LSYJB5 & LSYJC5
240 LAMP VOLTAGE TYPE-LSYJB8 & LSYJC8

FLOUROSILICONE SEALS
LSYJBI & LSYJB3

VITON SEALS
LSYJC1 & LSYJC3

CAT WHISKER

[illegible]

WIRE EXTENSION

*TYPE 8A ACTUATOR 5.5 IN.
TYPE 8B ACTUATOR 7.5 IN.
TYPE 8C COIL ACTUATOR 5.5 IN

Technical drawing of a mechanical assembly, likely a valve or actuator component, showing a vertical shaft and internal components.

Key dimensions and features:

- Overall height dimension: 2.56
- Spring length dimension: .850
- Spring wire diameter: .047 DIA
- Internal components labeled: SEALS, YKB4, YKB7, NPT, LE
- Mounting pads labeled: MTG PADS

WIRE EXTENSION REPLACEMENTS

*TYPE 8A ACTUATOR 5.5 IN. - LSZ 4012
TYPE 8B ACTUATOR 7.5 IN. - LSZ 4013
TYPE 8C ACTUATOR 5.5 IN. - LSZ 4014

NOTE-
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

	CAT WHISKER			WOBBLE STICK		
PRETRAVEL (APPROX) IN. RADIUS	5 1/2" WIRE	5 1/2" WIRE	7 1/2" WIRE	ROD	CABLE	WIRE
	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

THIS DRAWING COVERED BY
HONEYWELL THIS DRAWING IS
THE PROPERTY OF HONEYWELL
AND IS NOT TO BE REPRODUCED
OR TRANSMITTED IN ANY FORM
OR BY ANY MEANS, ELECTRONIC
OR MECHANICAL, INCLUDING
PHOTOCOPYING, RECORDING, OR
BY ANY INFORMATION STORAGE
AND RETRIEVAL SYSTEM, WITHOUT
PERMISSION IN WRITING FROM
HONEYWELL INFORMATION
SYSTEMS

SWITCH-ENCLOSED

CHART 1


LSY SERIES

SCALE NONE
DO NOT SCALE PRINT


CONVERSION BASES

SINGLE POLE
(SIDE ROTARY)
LSZ 4003

DOUBLE POLE
(SIDE ROTARY)
LSZ4004

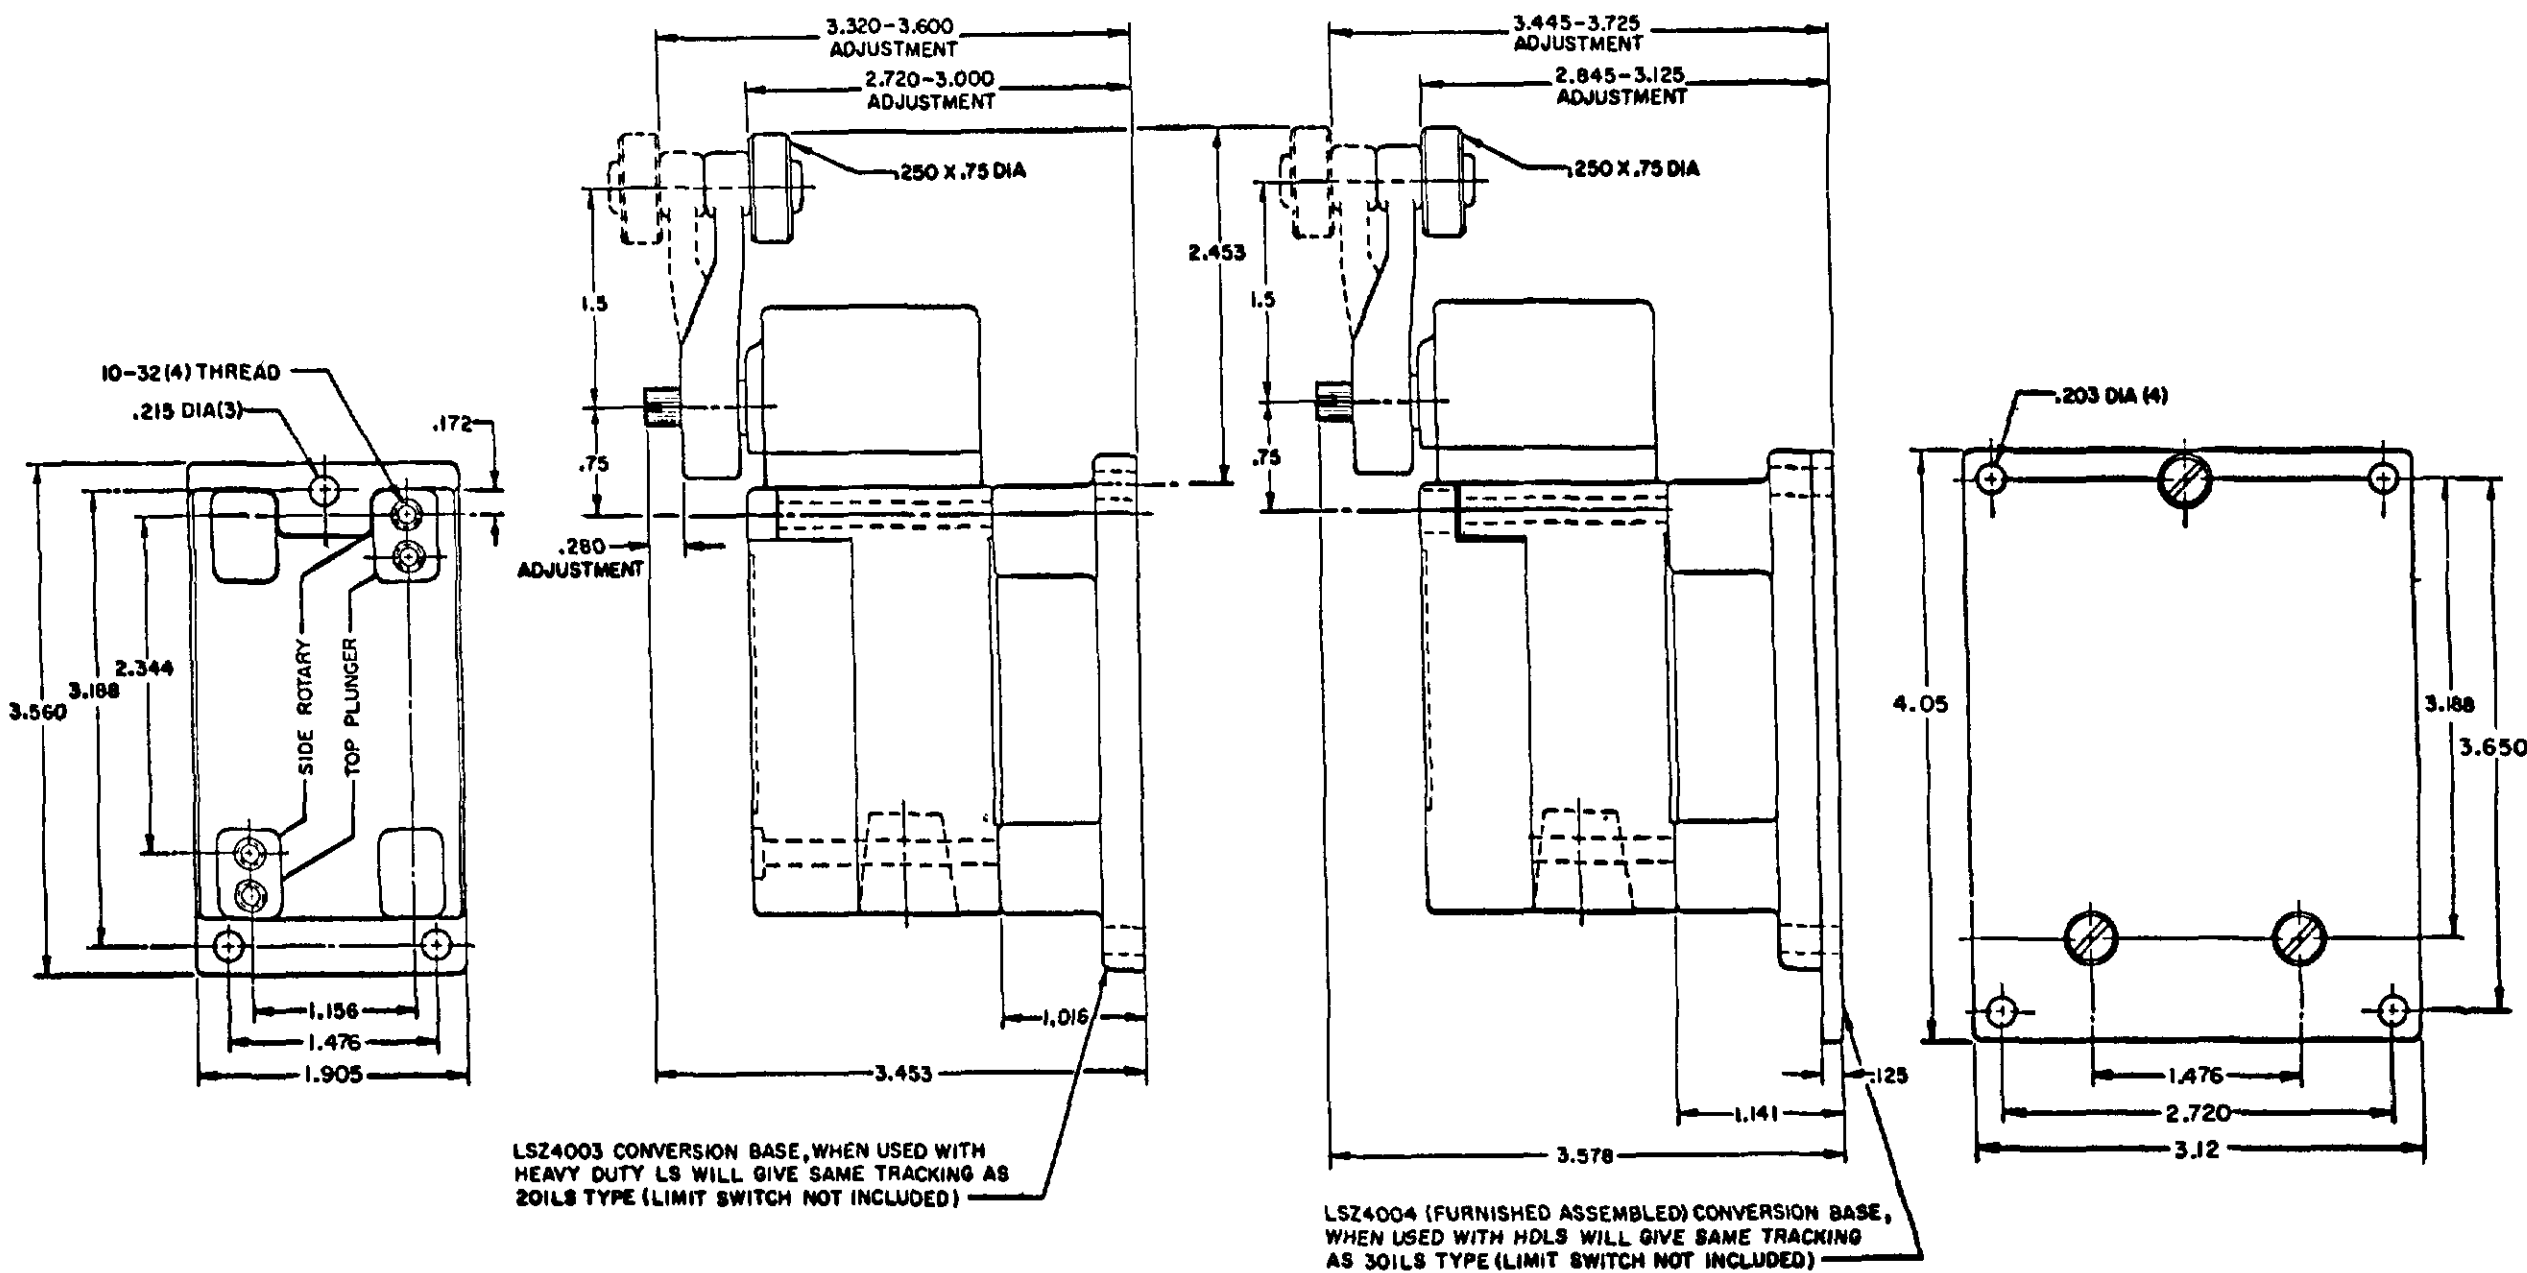

SINGLE POLE
TOP PLUNGER
LSZ4003

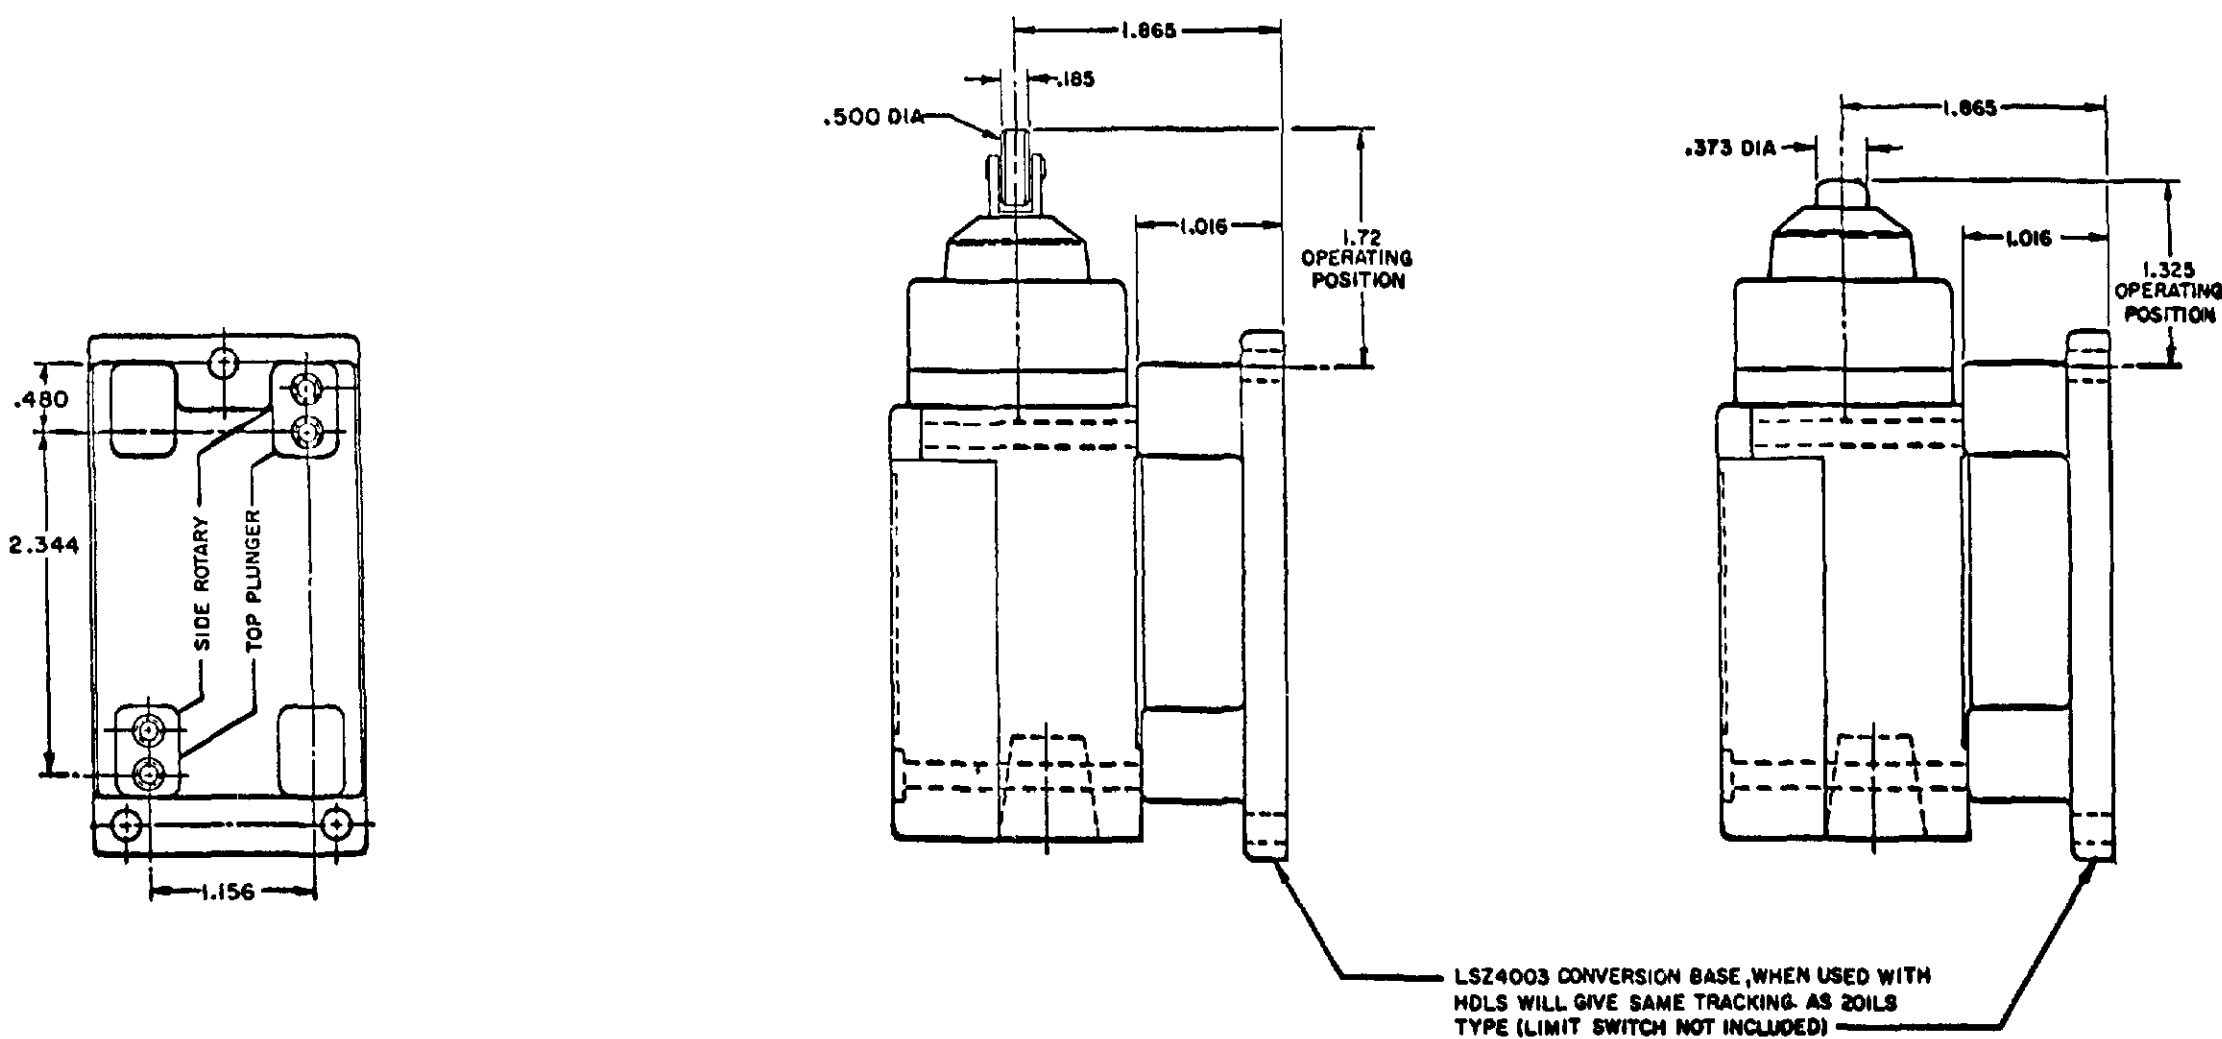

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
A DIVISION OF HONEYWELL
FID. MFG. CODE 9188

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE FULL
DO NOT SCALE PRINT

TEMPERATURE LIMITATIONS FOR
DEVICES WITH FLUOROSILICONE (LSYAB**)
AND VITON (LSYAC**) SEALS

[illegible]

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB**) FOR LOW TEMPERATURE APPLICATIONS
- 2 VITON SEALS (LSYAC**) FOR FIRE-RESISTANT FLUIDS
- 3 ALL EXCEPT A60

	LOW LIMIT	HIGH LIMIT
LSYAB	-40° F	+250° F
LSYAC	+10° F	+250° F
LSYBB	-20° F	+250° F
LSYBC	+30° F	+250° F
LSYCB	-40° F	+200° F
LSYCC	+10° F	+250° F
LSYDB	-40° F	+200° F
LSYDC	+10° F	+250° F
LSYEB	- 40° F	+200° F
LSYEC	+10° F	+250° F
LSYFB	- 40° F	+200° F
LSYFC	+10° F	+250° F
LSYGB	-20° F	+200° F
LSYGC	+30° F	+250° F
LSYHB	-20° F	+250° F
LSYHC	+30° F	+250° F
LSYJB	-40° F	+250° F
LSYJC	+30° F	+250° F
LSYKB	-20° F	+250° F
LSYKC	+30° F	+250° F
LSYLB	-40° F	+250° F
LSYLC	+10° F	+250° F
LSYMB	-40° F	+250° F
LSYMC	+10° F	+250° F
LSYNB	-20° F	+250° F
LSYNC	+30° F	+250° F
LSYPB	-40° F	+250° F
LSYPC	+10° F	+250° F
LSYRB	-20° F	+250° F
LSYRC	+30° F	+250° F
LSYVB	-40° F	+200° F
LSYVC	+10° F	+250° F
LSYWB	- 40° F	+200° F
LSYWC	+10° F	+250° F

SCALE

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

TOLERANCES ARE IN INCHES

TOLERANCES ARE

FIN. PLAYS	(.001)	1.000
FIN. PLAYS	(.001)	1.000
FIN. PLAYS	(.001)	1.000
FIN. PLAYS	(.001)	1.000

NOT TO SCALE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSY SERIES
CHART 1

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		10JUL07		RELEASE NO CO-78499		REPLACES LSY SERIES																																																									
ISSUE		7																																																																			
<table border="1"> <tr> <td colspan="2">REVISONS</td> <td colspan="2">A</td> <td colspan="2">1994B</td> <td colspan="2">C</td> <td colspan="2">10 JAN 00</td> <td colspan="2">B</td> <td colspan="2">200704</td> </tr> <tr> <td colspan="2"></td> <td colspan="2">C</td> <td colspan="2">23 JUN 00</td> <td colspan="2">C</td> <td colspan="2">200853</td> <td colspan="2">D</td> <td colspan="2">21 JUL 00</td> </tr> <tr> <td colspan="2"></td> <td colspan="2">E</td> <td colspan="2">0012601</td> <td colspan="2">C</td> <td colspan="2">23 JAN 01</td> <td colspan="2">AK</td> <td colspan="2">19APR05</td> </tr> <tr> <td colspan="2"></td> <td colspan="2">F</td> <td colspan="2">10031956</td> <td colspan="2">BS</td> <td colspan="2">10JUL07</td> <td colspan="2">JAF</td> <td colspan="2">12 SEP 94</td> </tr> </table>														REVISONS		A		1994B		C		10 JAN 00		B		200704				C		23 JUN 00		C		200853		D		21 JUL 00				E		0012601		C		23 JAN 01		AK		19APR05				F		10031956		BS		10JUL07		JAF		12 SEP 94	
REVISONS		A		1994B		C		10 JAN 00		B		200704																																																									
		C		23 JUN 00		C		200853		D		21 JUL 00																																																									
		E		0012601		C		23 JAN 01		AK		19APR05																																																									
		F		10031956		BS		10JUL07		JAF		12 SEP 94																																																									
RASTER		DRAWN		GJW		24 AUG 91		CHECK		JAF		12 SEP 94																																																									

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		RELEASE NO CO-78499		REPLACES LSY SERIES	
ISSUE		7						PSR		10JUL07	
REVISONS		A		1994B		C		19APR05		CHECK	
B		200704		23 JUN 00		C		200853		AK	
D		202198		23 JUL 01		E		0012601		CHECK	
F		10031956		BS		10JUL07		JAF		12 SEP 94	
G		10031956		BS		10JUL07		JAF		12 SEP 94	
H		10031956		BS		10JUL07		JAF		12 SEP 94	
I		10031956		BS		10JUL07		JAF		12 SEP 94	
J		10031956		BS		10JUL07		JAF		12 SEP 94	
K		10031956		BS		10JUL07		JAF		12 SEP 94	
L		10031956		BS		10JUL07		JAF		12 SEP 94	
M		10031956		BS		10JUL07		JAF		12 SEP 94	
N		10031956		BS		10JUL07		JAF		12 SEP 94	
O		10031956		BS		10JUL07		JAF		12 SEP 94	
P		10031956		BS		10JUL07		JAF		12 SEP 94	
Q		10031956		BS		10JUL07		JAF		12 SEP 94	
R		10031956		BS		10JUL07		JAF		12 SEP 94	
S		10031956		BS		10JUL07		JAF		12 SEP 94	
T		10031956		BS		10JUL07		JAF		12 SEP 94	
U		10031956		BS		10JUL07		JAF		12 SEP 94	
V		10031956		BS		10JUL07		JAF		12 SEP 94	
W		10031956		BS		10JUL07		JAF		12 SEP 94	
X		10031956		BS		10JUL07		JAF		12 SEP 94	
Y		10031956		BS		10JUL07		JAF		12 SEP 94	
Z		10031956		BS		10JUL07		JAF		12 SEP 94	
AA		10031956		BS		10JUL07		JAF		12 SEP 94	
AB		10031956		BS		10JUL07		JAF		12 SEP 94	
AC		10031956		BS		10JUL07		JAF		12 SEP 94	
AD		10031956		BS		10JUL07		JAF		12 SEP 94	
AE		10031956		BS		10JUL07		JAF		12 SEP 94	
AF		10031956		BS		10JUL07		JAF		12 SEP 94	
AG		10031956		BS		10JUL07		JAF		12 SEP 94	
AH		10031956		BS		10JUL07		JAF		12 SEP 94	
AI		10031956		BS		10JUL07		JAF		12 SEP 94	
AJ		10031956		BS		10JUL07		JAF		12 SEP 94	
AK		10031956		BS		10JUL07		JAF		12 SEP 94	
AL		10031956		BS		10JUL07		JAF		12 SEP 94	
AM		10031956		BS		10JUL07		JAF		12 SEP 94	
AN		10031956		BS		10JUL07		JAF		12 SEP 94	
AO		10031956		BS		10JUL07		JAF		12 SEP 94	
AP		10031956		BS		10JUL07		JAF		12 SEP 94	
AQ		10031956		BS		10JUL07		JAF		12 SEP 94	
AR		10031956		BS		10JUL07		JAF		12 SEP 94	
AS		10031956		BS		10JUL07		JAF		12 SEP 94	
AT		10031956		BS		10JUL07		JAF		12 SEP 94	
AU		10031956		BS		10JUL07		JAF		12 SEP 94	
AV		10031956		BS		10JUL07		JAF		12 SEP 94	
AW		1003									

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А