

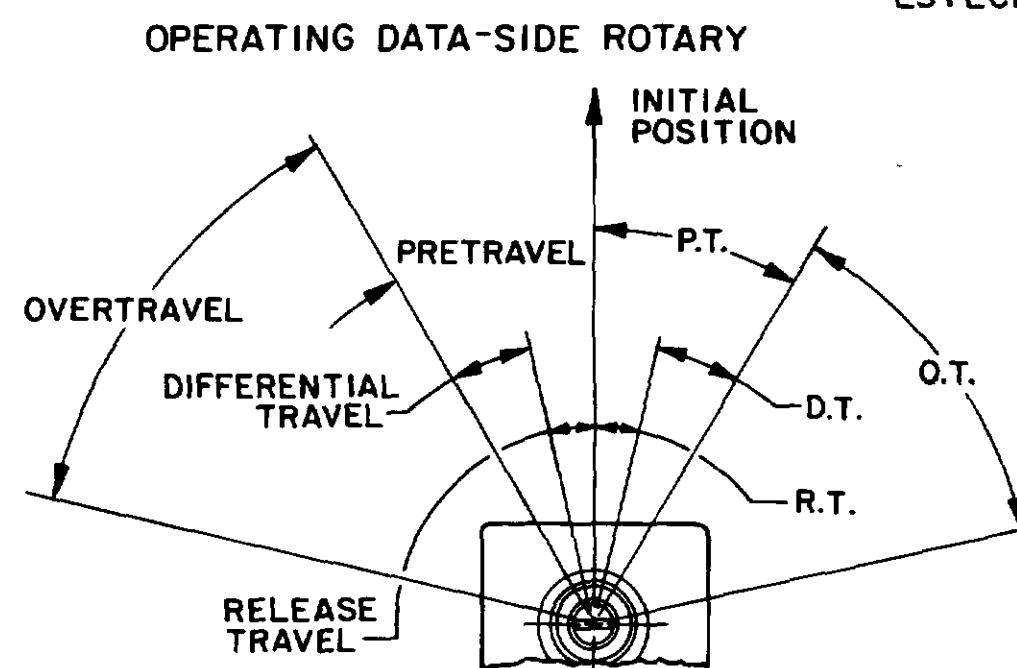
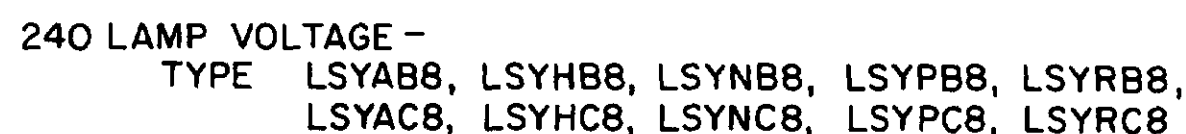


DOUBLE POLE

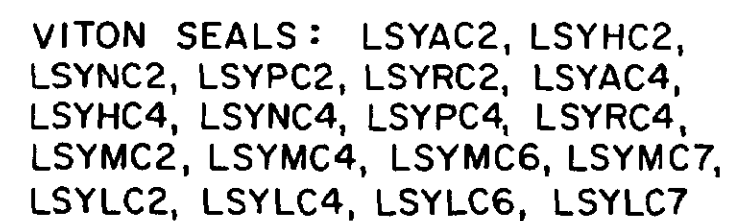

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES


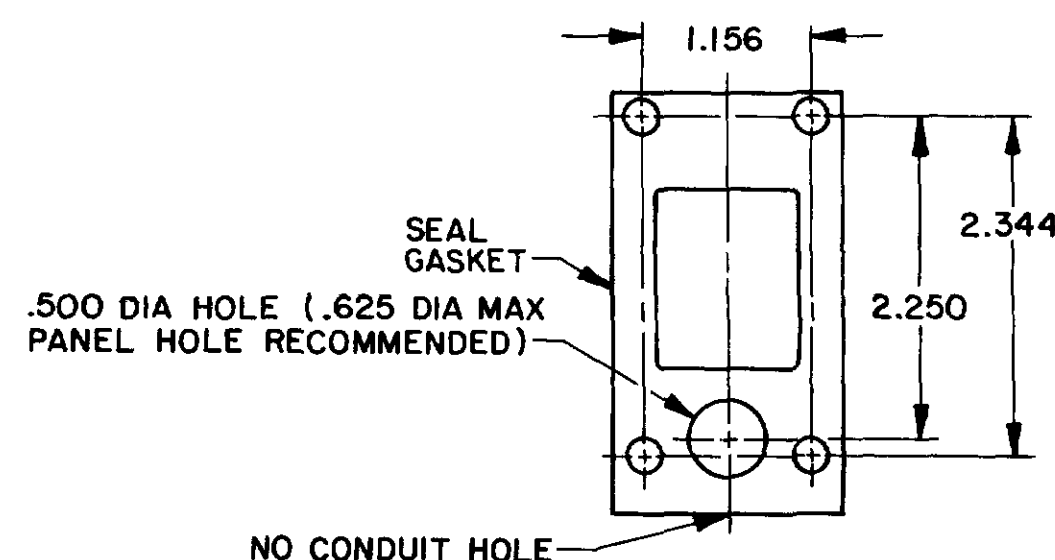


NOTE
1 - ALL UNITS AVAILABLE WITH
FLUOROSILICONE AND VITON SEALS



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.	MICRO SWITCH FREEPORT ILLINOIS U.S.A. A DIVISION OF HONEYWELL TEL. 408. 604. 7100	SWITCH - ENCLOSED	CATALOG LISTING LSY SERIES CHART 1
--	---	---------------------------------	---

SCALE NONE		THRU AND E PROTECTION	WEIGHT	DESIGN UNITS		TOLERANCES		DO NOT SCALE PRINT
				1/16" = 1"	1/8" = 1"	1/16" = 1"	1/8" = 1"	
DRAWING TITLE: CONCRETE FOUNDATION				DRAWING NUMBER: 100-100-100		DRAWING DATE: 10/10/10		DRAWING SCALE: 1/4" = 1'
DRAWING BY: J. D. SMITH				DRAWING CHECKED BY: J. D. SMITH		DRAWING APPROVED BY: J. D. SMITH		
DRAWING REVISION: 1.0				DRAWING REVISION: 1.0		DRAWING REVISION: 1.0		DRAWING SCALE: 1/4" = 1'
DRAWING REVISION: 1.0				DRAWING REVISION: 1.0		DRAWING REVISION: 1.0		



SIDE ROTARY CAM TRACKING

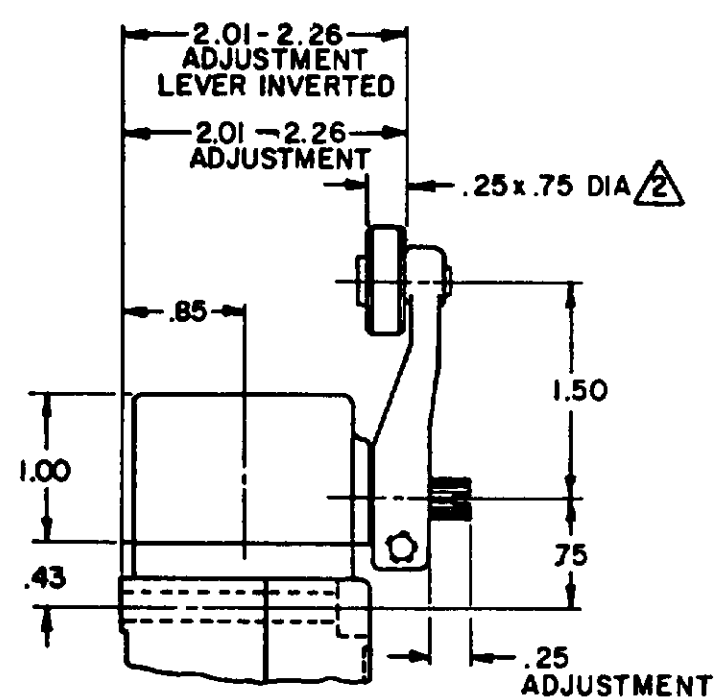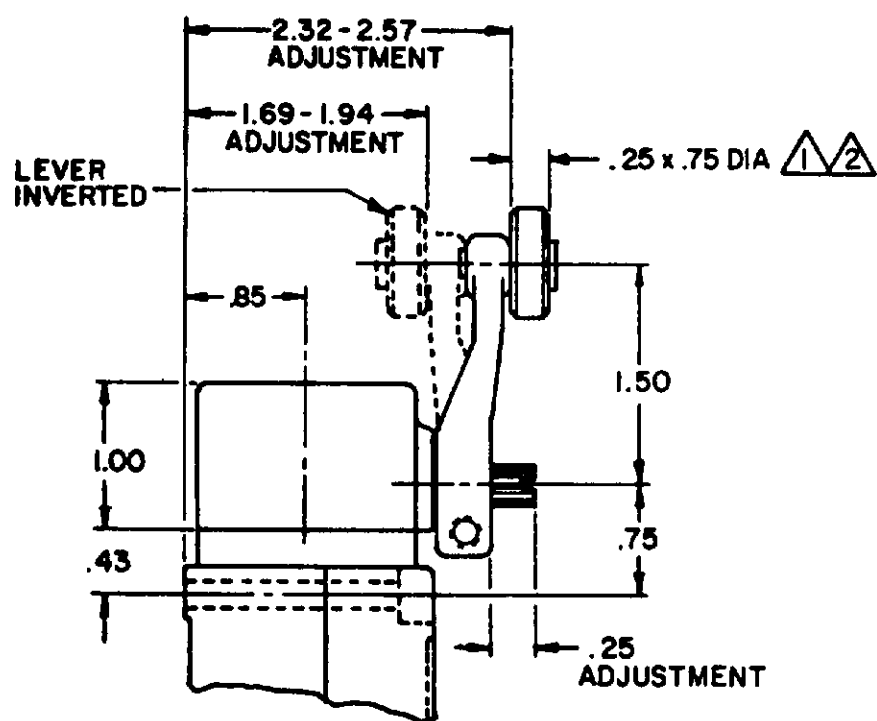

LSZ51 TYPE LEVERS

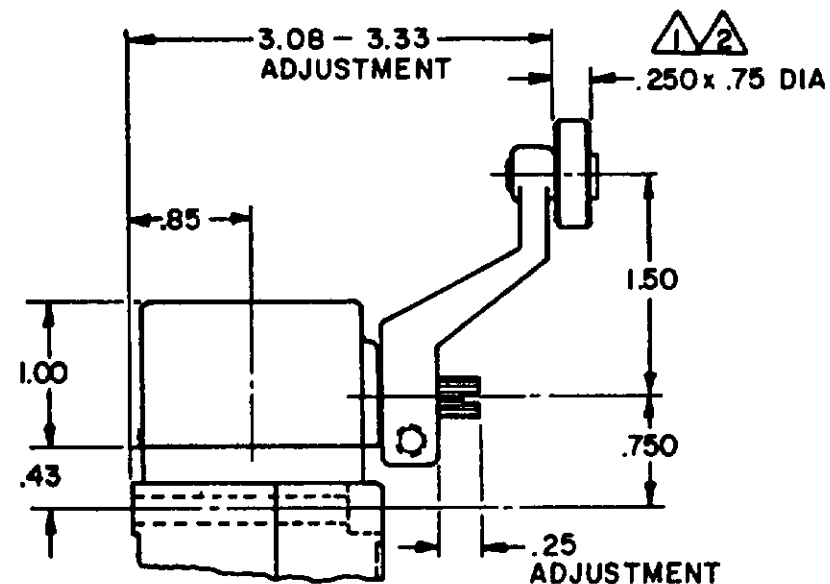
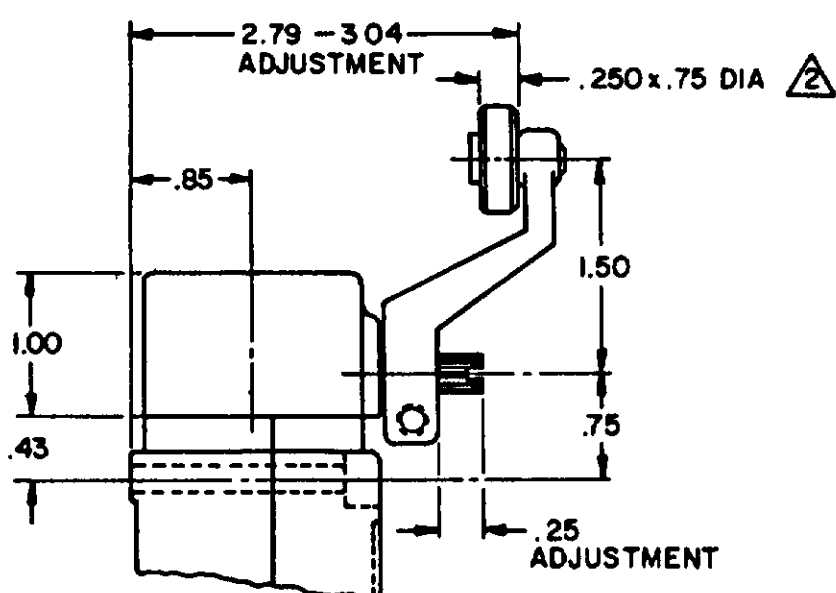


LSZ55 TYPE LEVERS

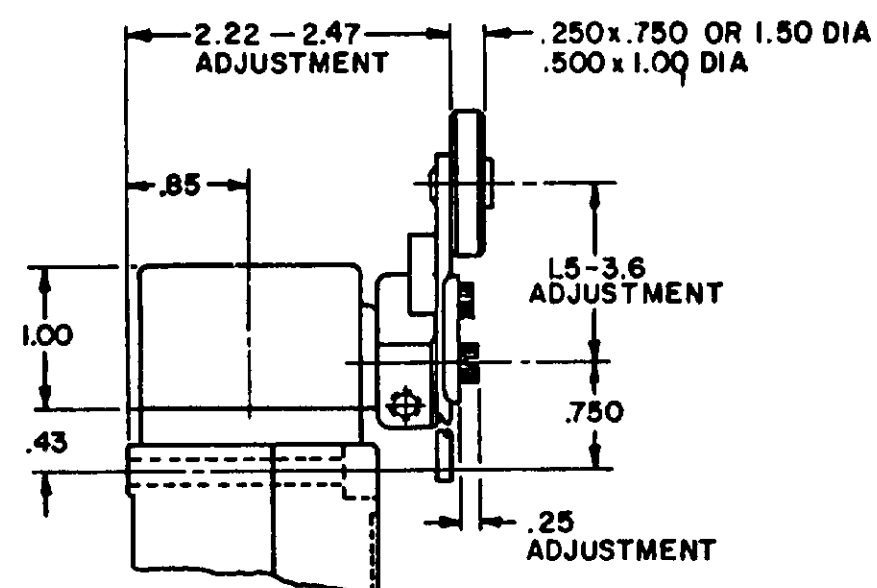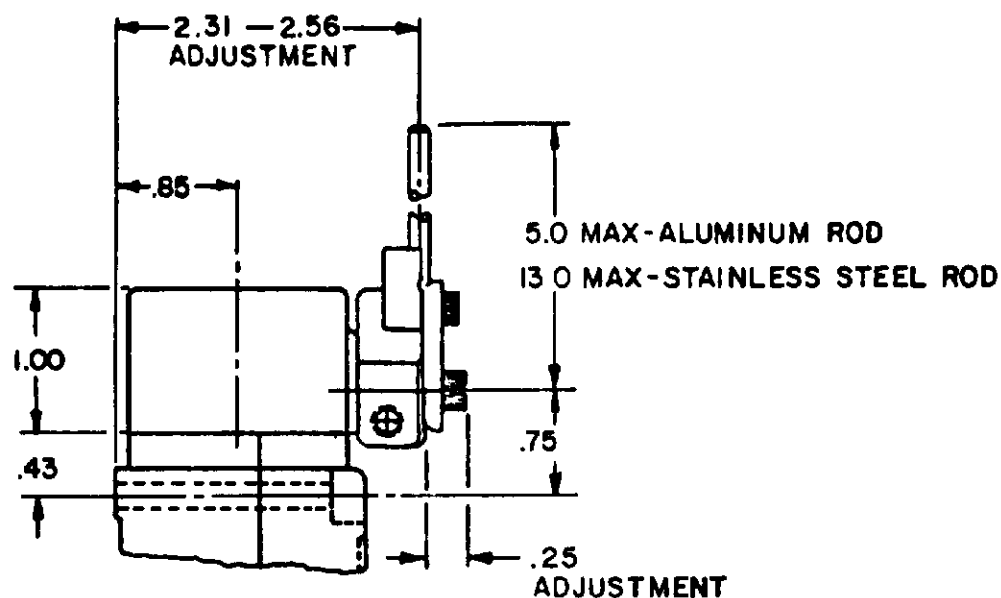

LSZ54 TYPE LEVER

LSZ52 TYPE LEVER

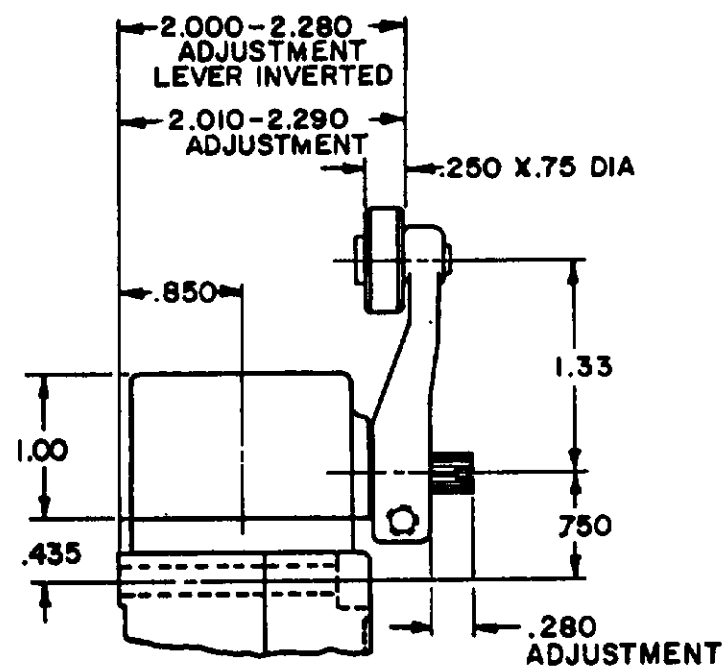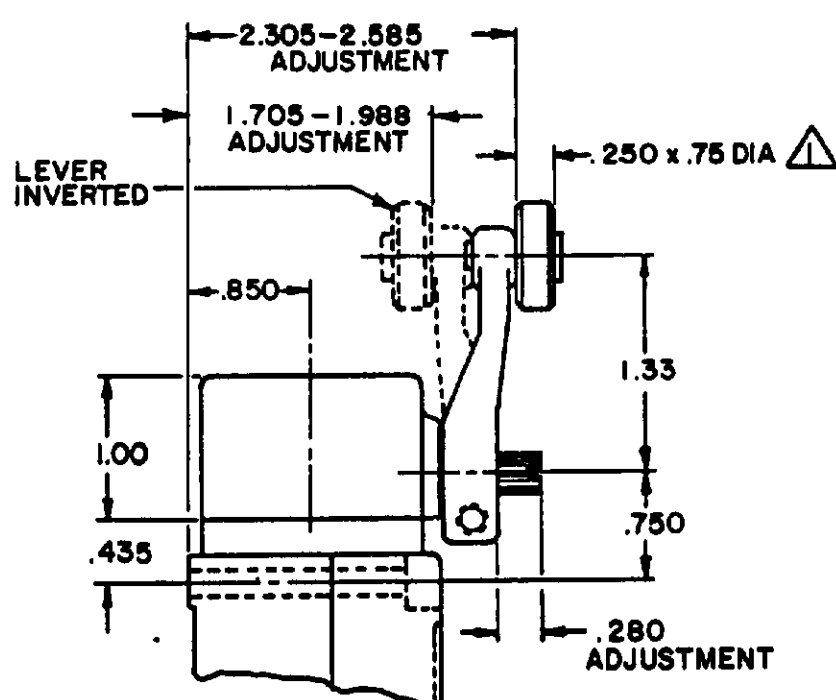

LSZ59 TYPE LEVERS

NOTES

- 1 - ALSO AVAILABLE IN .250 X 1.500 DIA NYLON, BUT LEVER CANNOT BE INVERTED
- 2 - FOR ADDITIONAL ROLLER WIDTHS AND/OR DIAMETERS REFER TO (M)
- 3 - FOR ADDITIONAL TYPES OF ROLLERS AND LEVERS REFER TO LSZ CHART 1 (M)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

FEEDING CODE 31829

CHART 1

LSY SERIES

THIRD ANGLE PROJECTION

SCALE NONE

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE (.0) ± .030


TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±


TOP ROTARY

SINGLE POLE


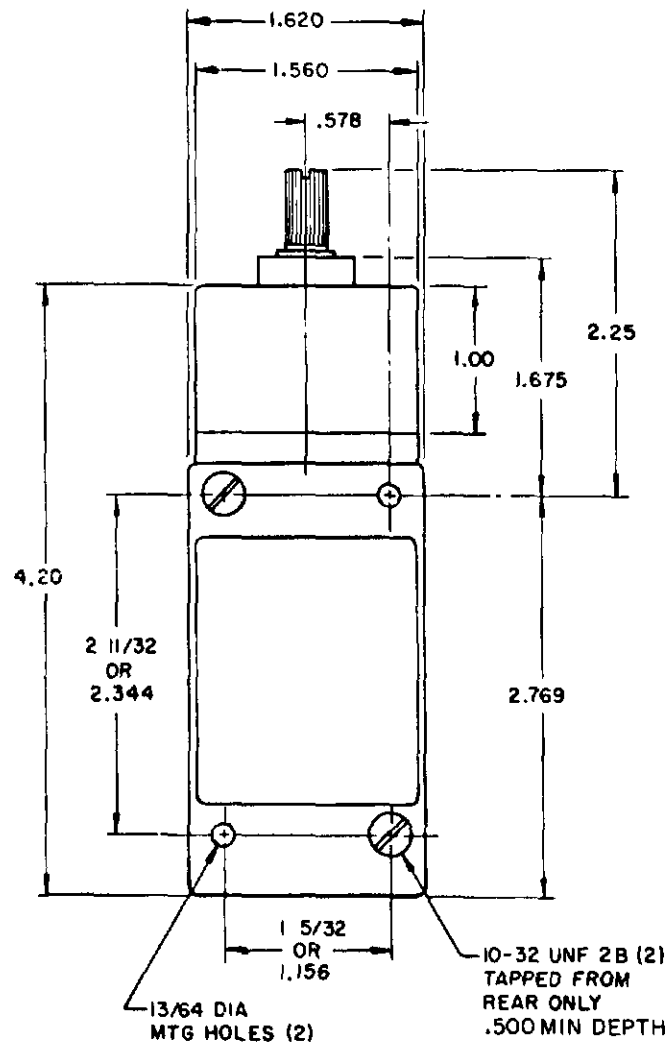


FLOUROSILICONE SEALS
LSYBB1 & LSYBB3

VITON SEALS
LSYBC1 & LSYBC3

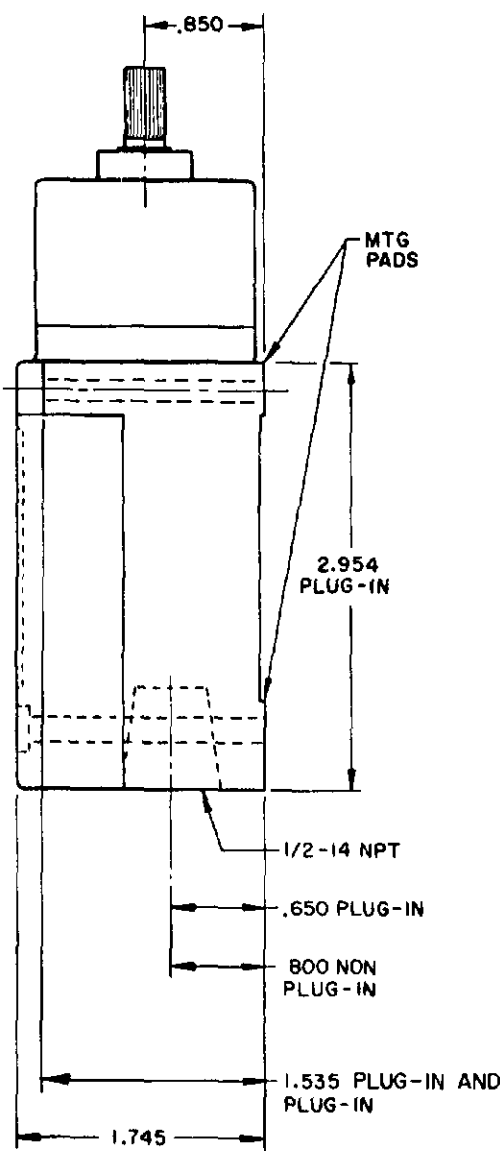

DOUBLE POLE

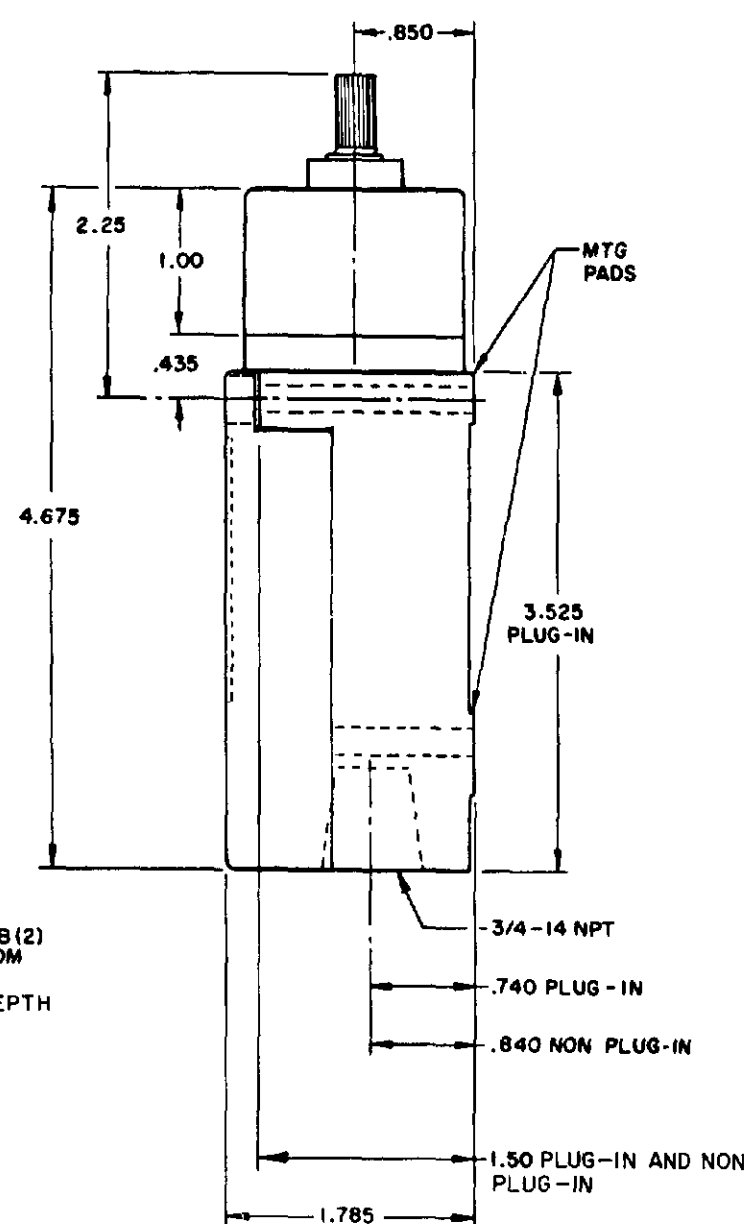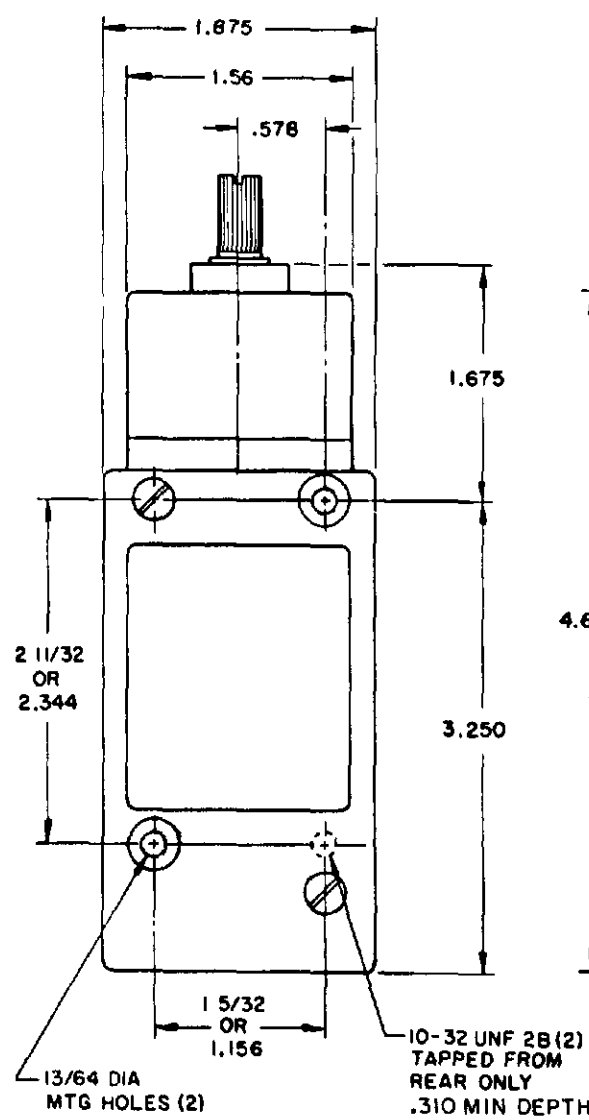

FLOUROSILICONE SEALS
LSYBB2 & LSYBB4
LSYBB6 & LSYBB7 HAVE 1/2-14 NPT
CONDUIT HOLE

VITON SEALS
LSYBC2 & LSYBC4, LSYBC6 & LSYBC7
HAVE 1/2-14 NPT CONDUIT HOLE

PRETRAVEL MAX	SINGLE POLE 25°	DOUBLE POLE 25°
OVERTRAVEL MIN	110°	110°
DIFFERENTIAL TRAVEL MAX	10°	12°
OPERATING TORQUE MAX	2.5 IN. LBS	2.5 IN. LBS
TOTAL TRAVEL (REF)	135°	135°

ELECTRICAL RATINGS

10 AMP CONT.

A.C. VOLTAGE	AMPS AT .35 POWER FACTOR			
	SINGL. POL.		DOUBL. POL.	
	MAKE	BREAK	MAKE	BREAK
120	60	6	10	3
240	30	3	15	1.5
480	15	1.5	7.5	.75
600	12	1.2	6	.6

D.C. VOLTAGE	MAKE & BREAK INDUCTIVE	RESISTIVE
120	0.25	0.80
240	0.15	0.40


ELECTRONIC DUTY BASIC SWITCH
10 AMP CONT.

VOLTAGE	
5 AC OR DC MIN	.01 AMP MIN
600 AC	720 VA
240 DC	30 WATT


WIRING BASIC SWITCH (SAME POLARITY MUST BE OBSERVED FOR EACH POLE)

SINGLE POLE

MOMENTARY

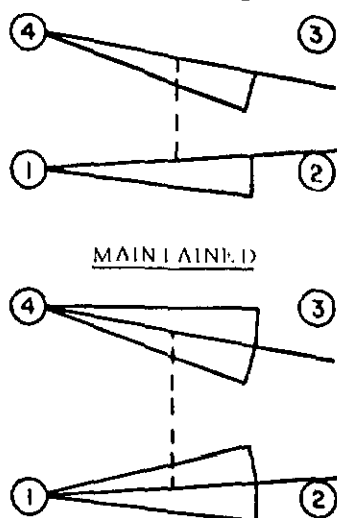


MAINTAINED




SINGLE POLE

ELECTRONIC DUTY MOMENTARY



ELECTRONIC DUTY MAINTAINED




DIRECT ACTING




DOUBLE POLE

MOMENTARY

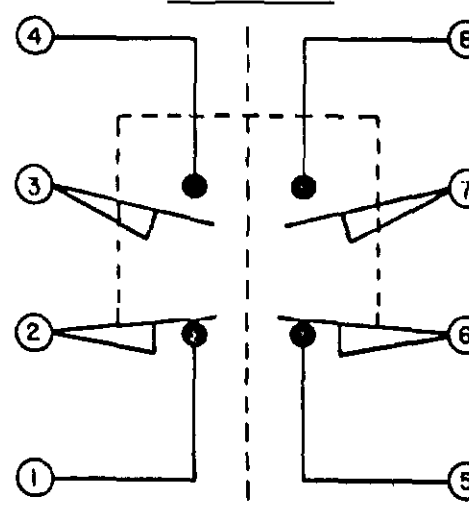

MAINTAINED

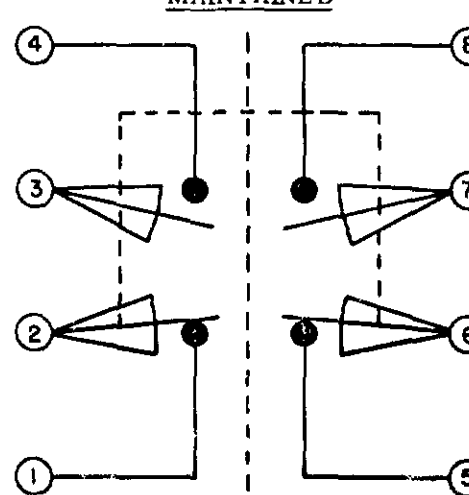

DIRECT ACTING (ALSO RATED AT A.C. 10
AMP CONT.)

D.C. VOLTAGE	MAKE AND BREAK AMPS	
	INDUCTIVE	RESISTIVE
30	4.2	4.2
120	1.1	1.1
240	.55	.55

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

2 DIFFERENTIAL TRAVEL ON ALL
OPERATING CHARACTERISTICS NOT
APPLICABLE






SCALE NONE
DO NOT SCALE PRINT

MICRO SWITCH
FREEPORT, L.I., N.Y. U.S.A.
A DIVISION OF HONEYWELL
FID. MFG. CODE 91918


SWITCH - ENCLOSED

LSY SERIES
CHART 1

PLUNGER TYPE TOP

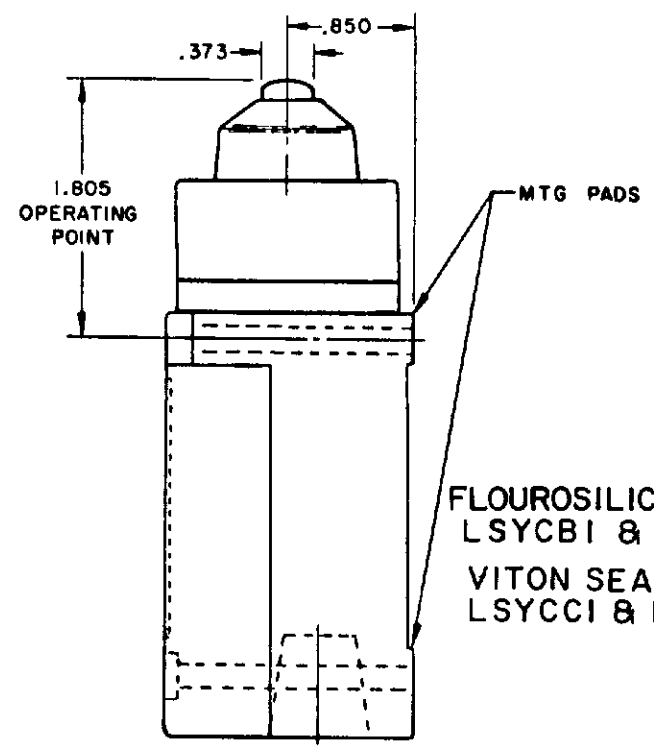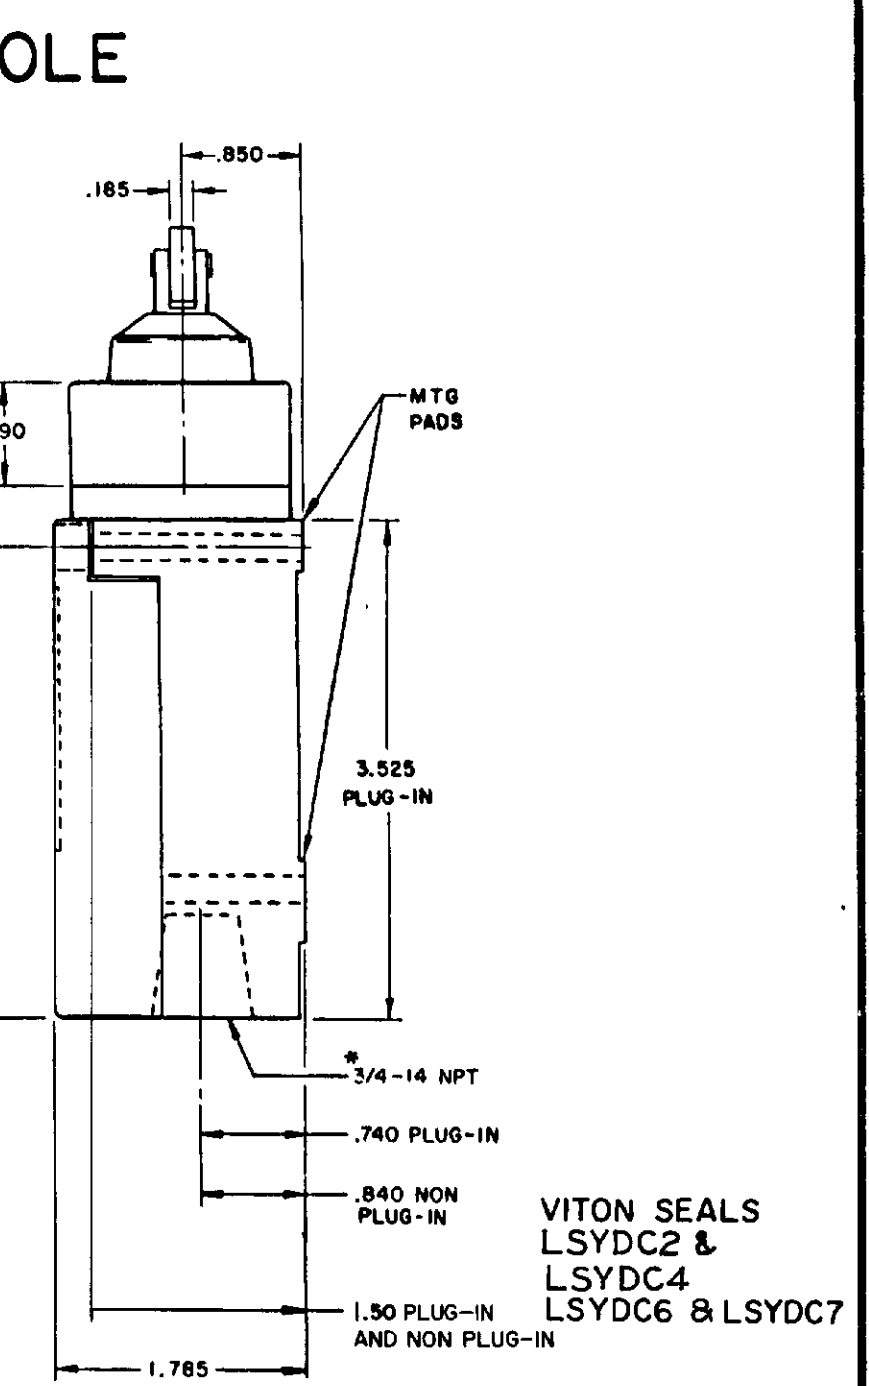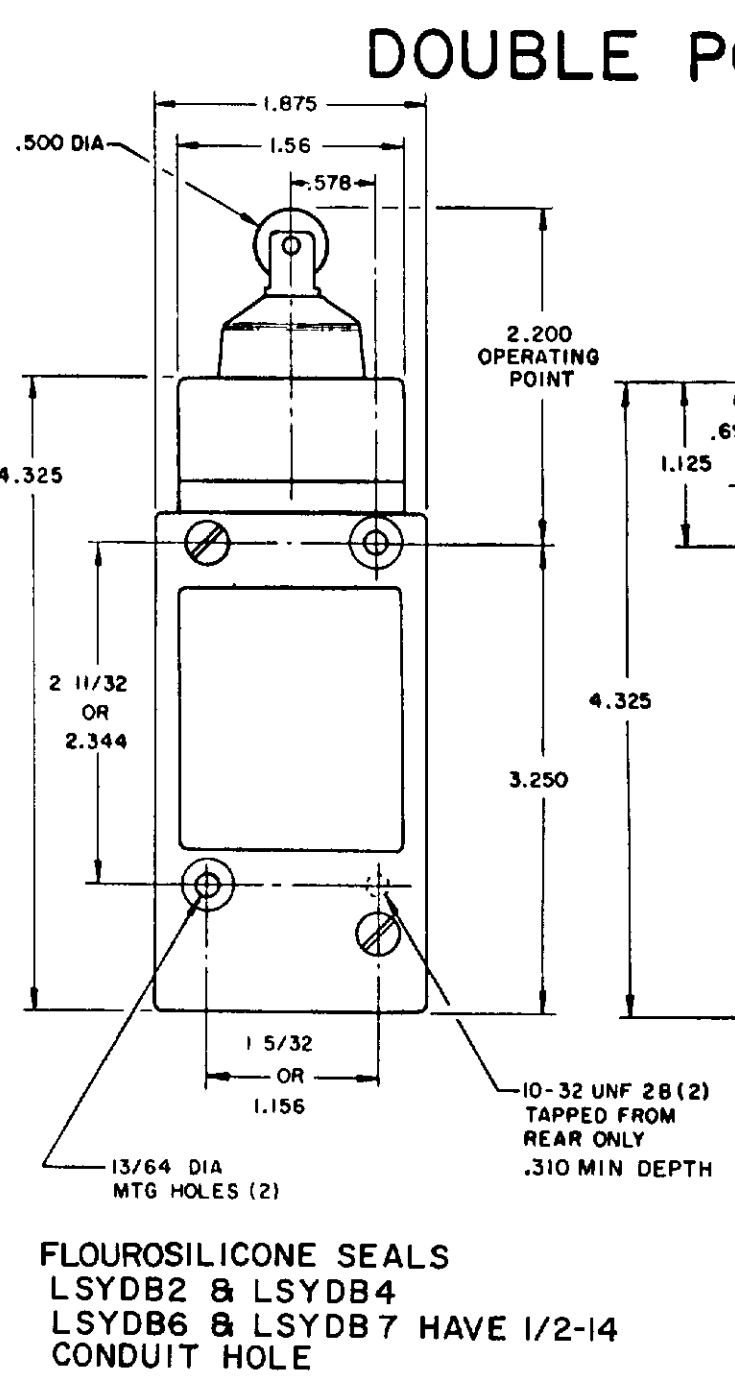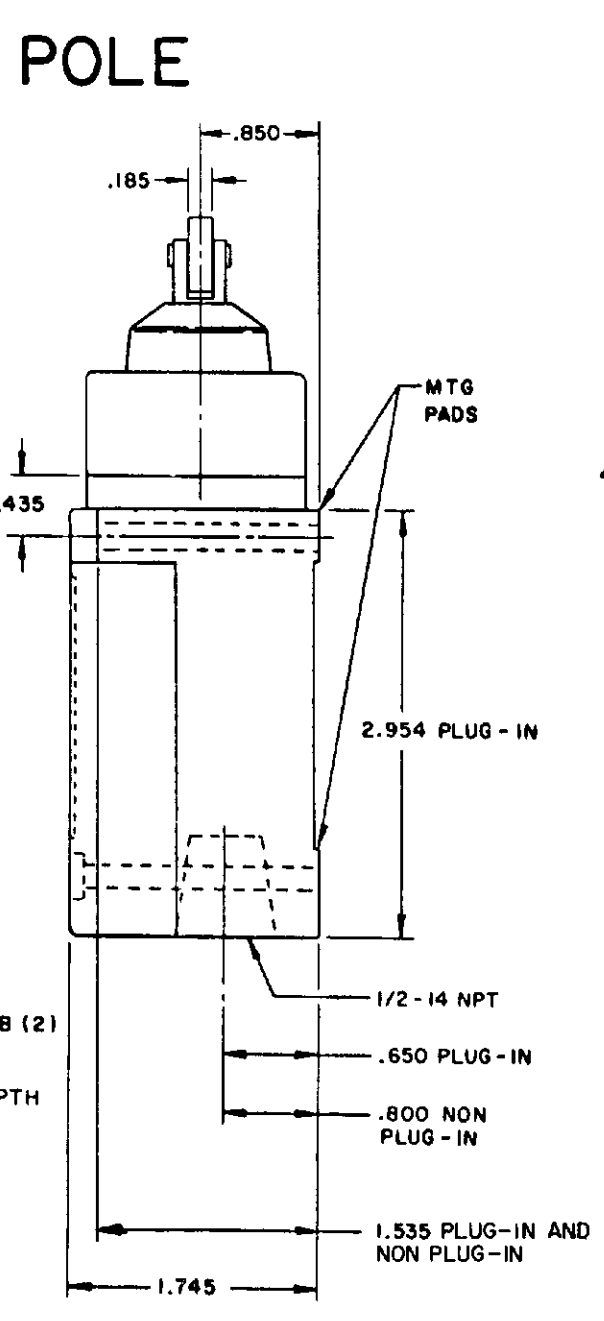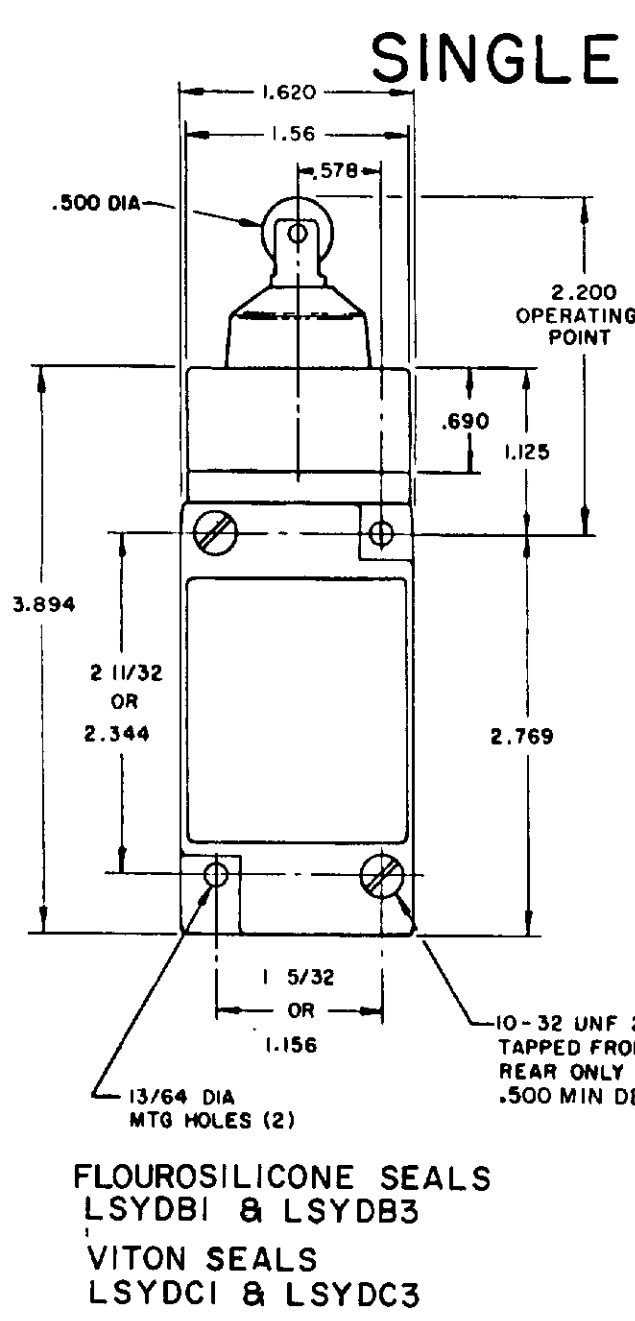


SINGLE POLE PLUG-IN ONLY
WITH INDICATOR LAMP

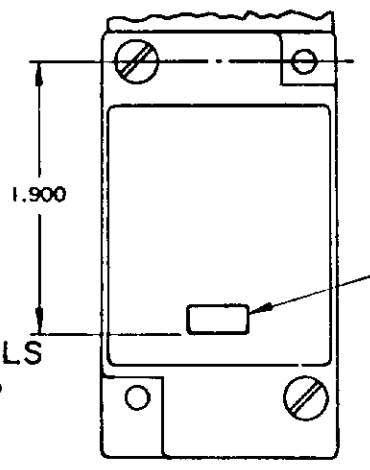


FLOUROSILICONE SEALS
LSYCB1 & LSYCB3
VITON SEALS
LSYCC1 & LSYCC3

120 LAMP VOLTAGE -
LSYCB 5, LSYDB5, LSYVB5
LSYCC5, LSYDC5, LSYVC5
240 LAMP VOLTAGE -
LSYCB8, LSYDB8, LSYVB8
LSYCC8, LSYDC8, LSYVC8

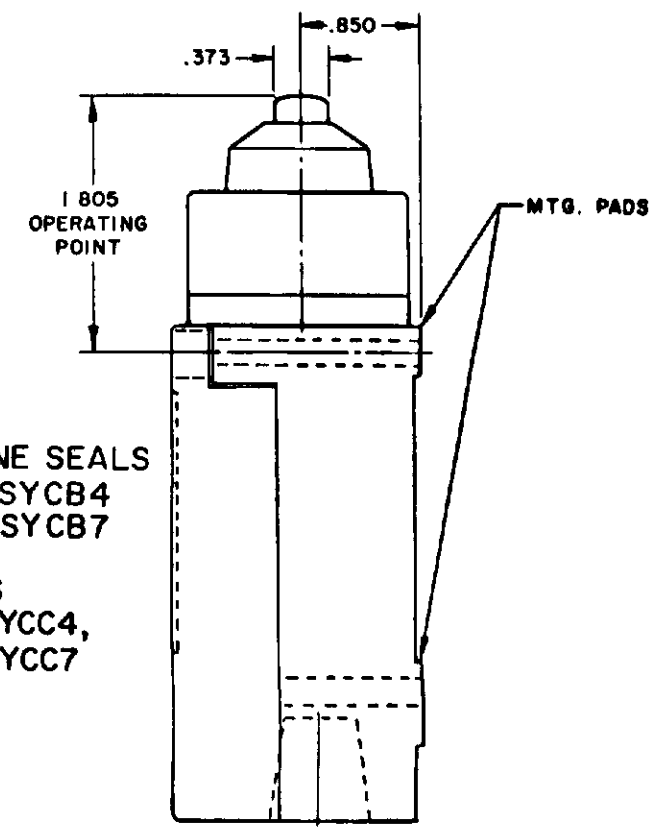


FLOUROSILICONE SEALS
LSYCB2 & LSYCB4
LSYCB6 & LSYCB7
VITON SEALS
LSYCC2 & LSYCC4,
LSYCC6 & LSYCC7

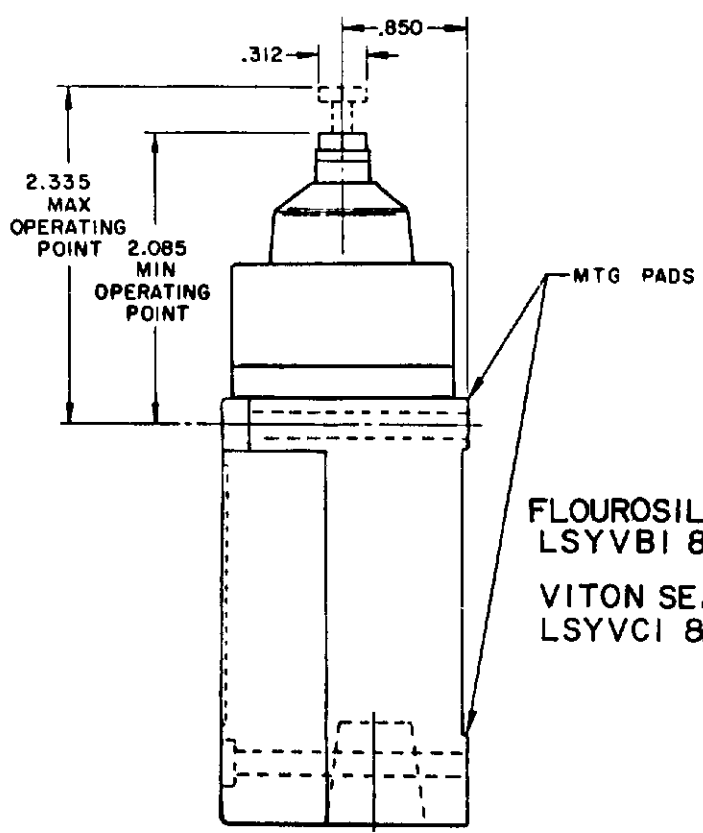


MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

FLOUROSILICONE SEALS
LSYVB1 & LSYVB3
VITON SEALS
LSYVC1 & LSYVC3

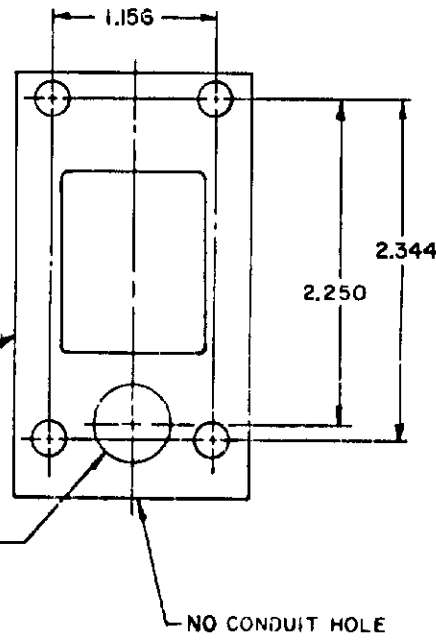

FLOUROSILICONE SEALS
LSYVB2 & LSYVB4,
LSYVB6 & LSYVB7
VITON SEALS
LSYVC2 & LSYVC4,
LSYVC6 & LSYVC7

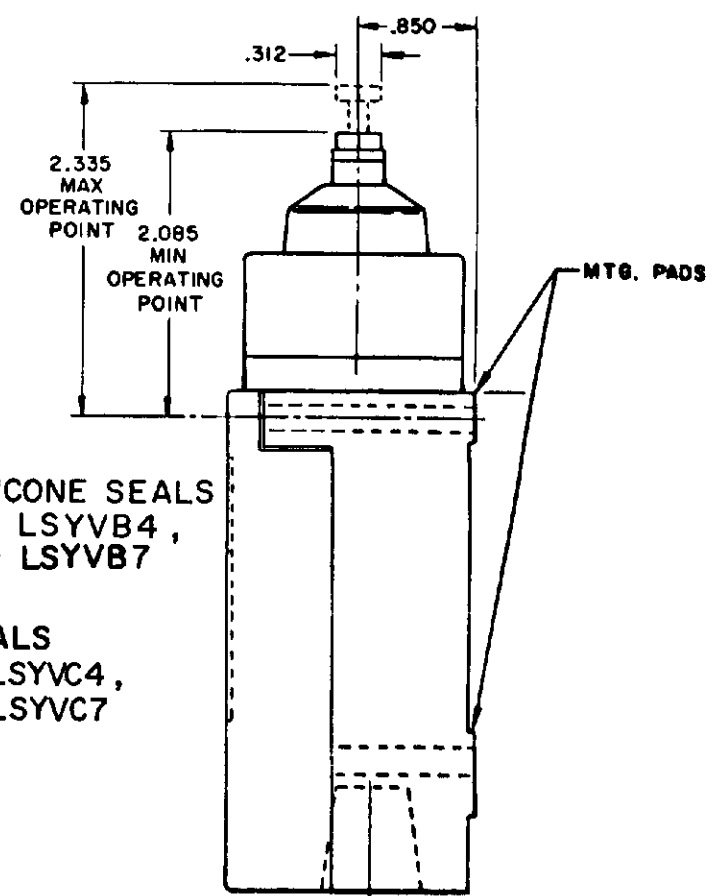


MICRO SWITCH
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF
MONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.
A DIVISION OF MONEYWELL
FID. MFG. CO. 2011 2111

SWITCH - ENCLOSED

LSY SERIES
CHART 1

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

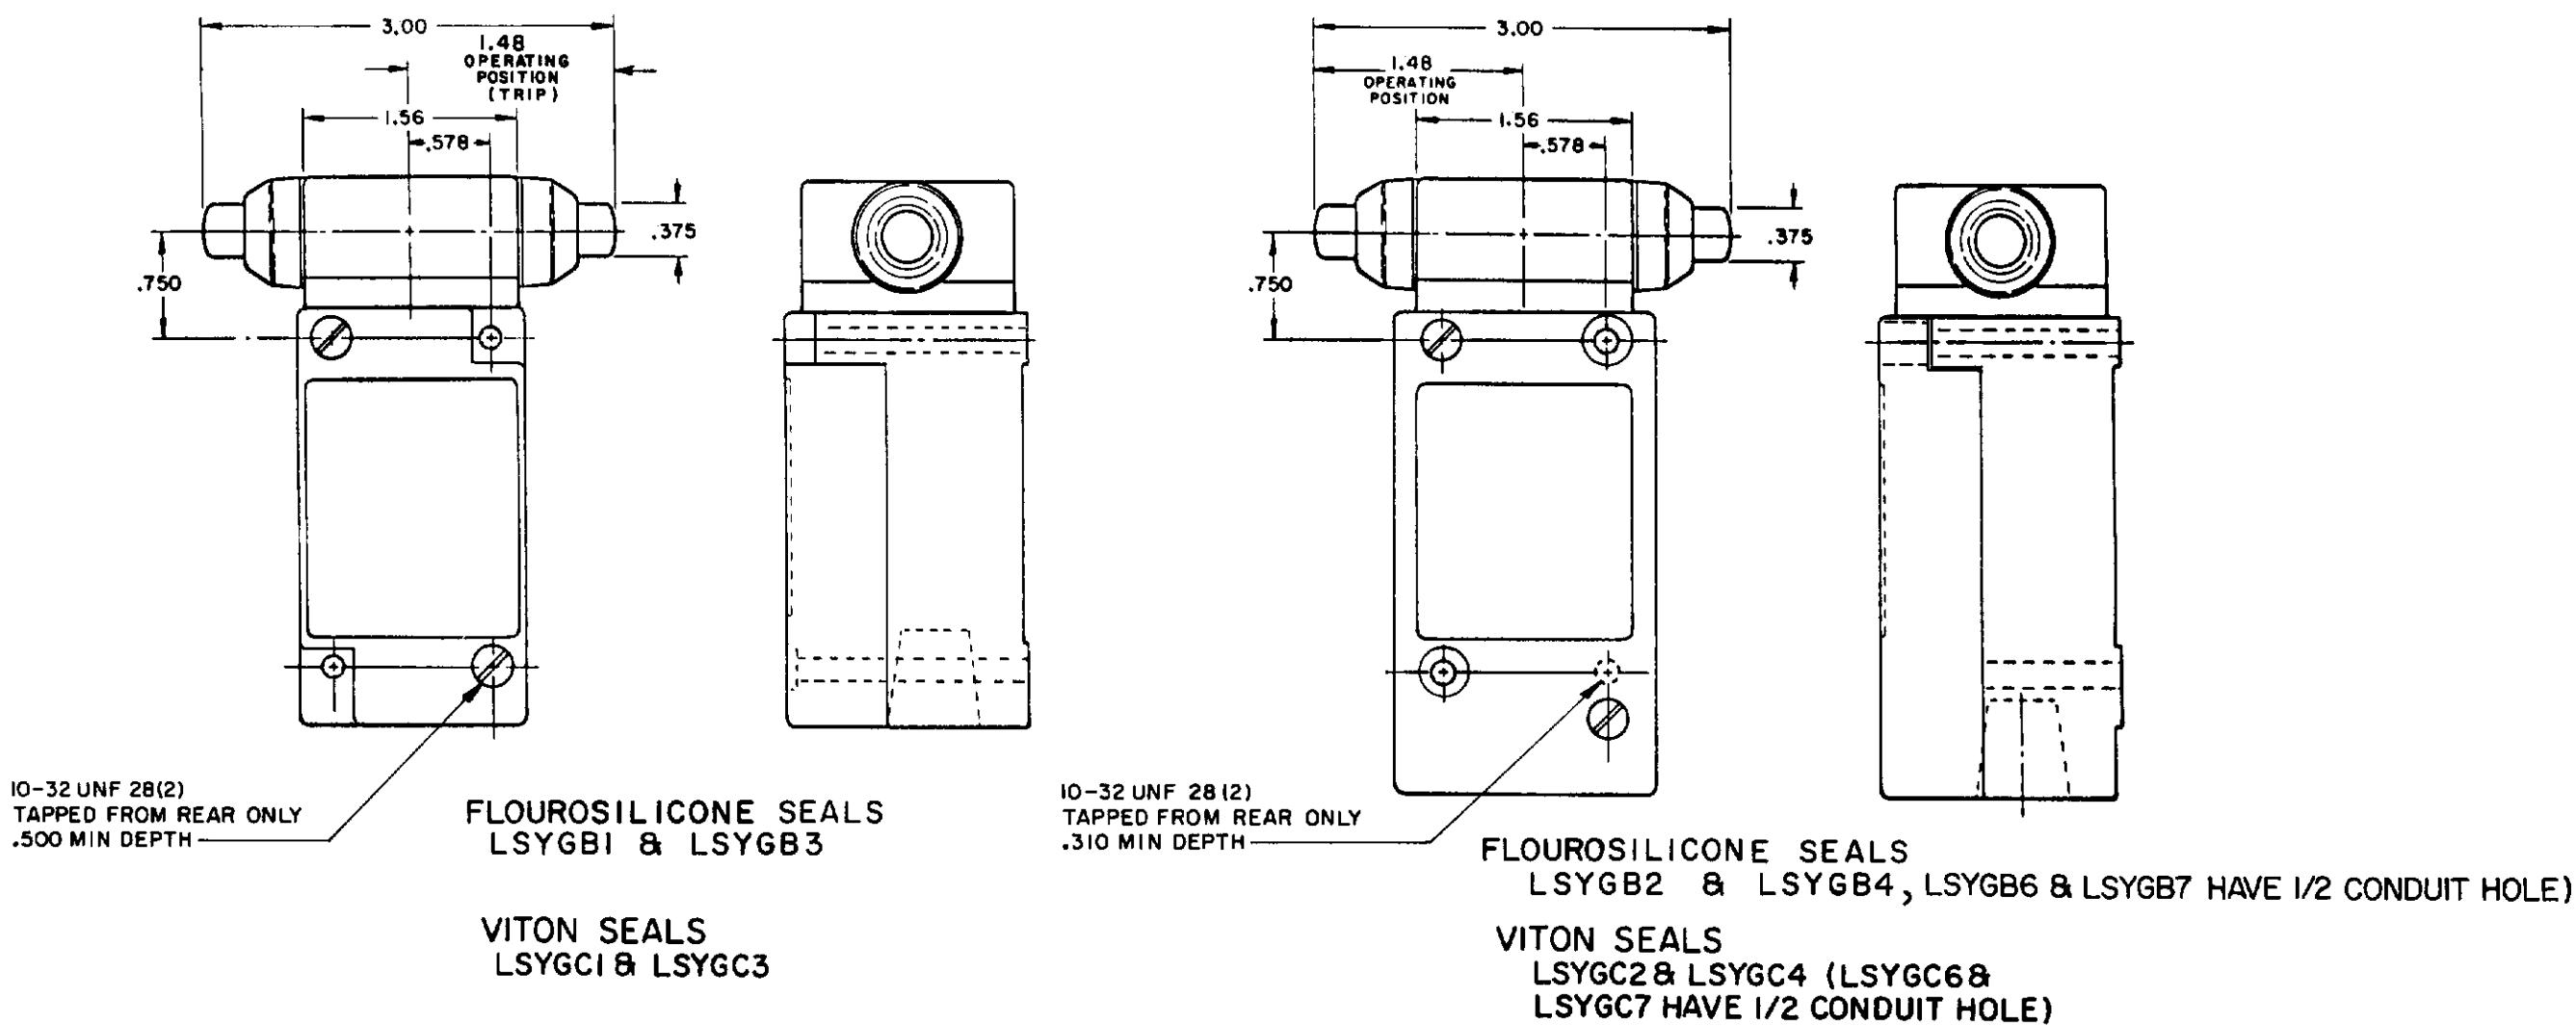

INITIAL POSITION (FREE POSITION) }
OPERATING POINT } PRETRAVEL
FULL TRAVEL } DIFFERENTIAL TRAVEL
OVERTRAVEL


TOP PLUNGER TYPES							
OPERATING POINT GIVEN IN RELATION TO TOP MOUNTING HOLE							
CHARACTERISTICS	LSYC PLUNGER		LSYD ROLLER PLUNGER		LSYV ADJ PLUNGER		SEQUENCE BASIC
							LSYC LSYD LSYV
PRETRAVEL (MAX)	.070		.070		.070		1ST STEP .070 2ND STEP .016 MIN ADD'L
DIFFERENTIAL TRAVEL (MAX)	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	SINGLE POLE .015	DOUBLE POLE .020	.015 EACH STEP
OVERTRAVEL (MIN)	.190		.190		.190		.170
OPERATING FORCE (MAX)	4 LBS		4 LBS		4 LBS		4 LBS
OPERATING POINT	1.805 ± .030		2.200 ± .040		2.085 MIN 2.335 MAX		1ST STEP 1.815±.030 2.210±.040 2.095 MIN / 2.345 MAX
FULL OVERTRAVEL FORCE (MAX)	7 LBS		7 LBS		7 LBS		7 LBS

SIDE PLUNGER TYPES							
OPERATING POINT GIVEN IN RELATION TO CENTER OF HEAD							
CHARACTERISTICS	LSYE PLUNGER	LSYF ROLLER PLUNGER	LSYW ADJ PLUNGER	LSYG PLUNGER MAINTAINED	SEQUENCE BASIC		
					LSYE	LSYF	LSYW
PRETRAVEL (MAX)	.100	.100	.100	.170	1ST STEP .100 2ND STEP .020 MIN ADD'L		
DIFFERENTIAL TRAVEL (MAX)	.045	.045	.045	.090	.025 EACH STEP		
OVERTRAVEL (MIN)	.190	.190	.190	.080	.170		
OPERATING FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		
OPERATING POINT	1.300 ± .030	1.735 ± .040	1.615 MIN 1.865 MAX	1.480 ± .030	1ST STEP 1.310±.030 1.745±.040 1.625 MIN / 1.875 MAX		
FULL OVERTRAVEL FORCE (MAX)	6 LBS	6 LBS	6 LBS	10 LBS	6 LBS		


WOBBLE STICK

SINGLE POLE


DOUBLE POLE

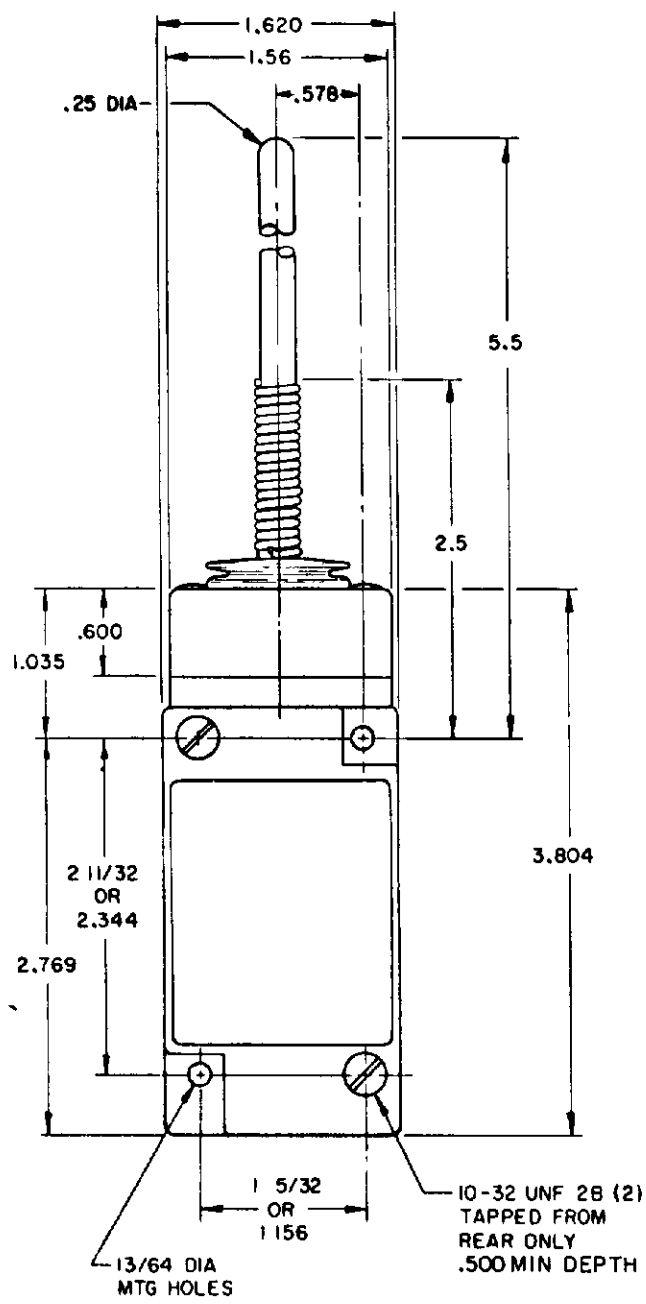


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

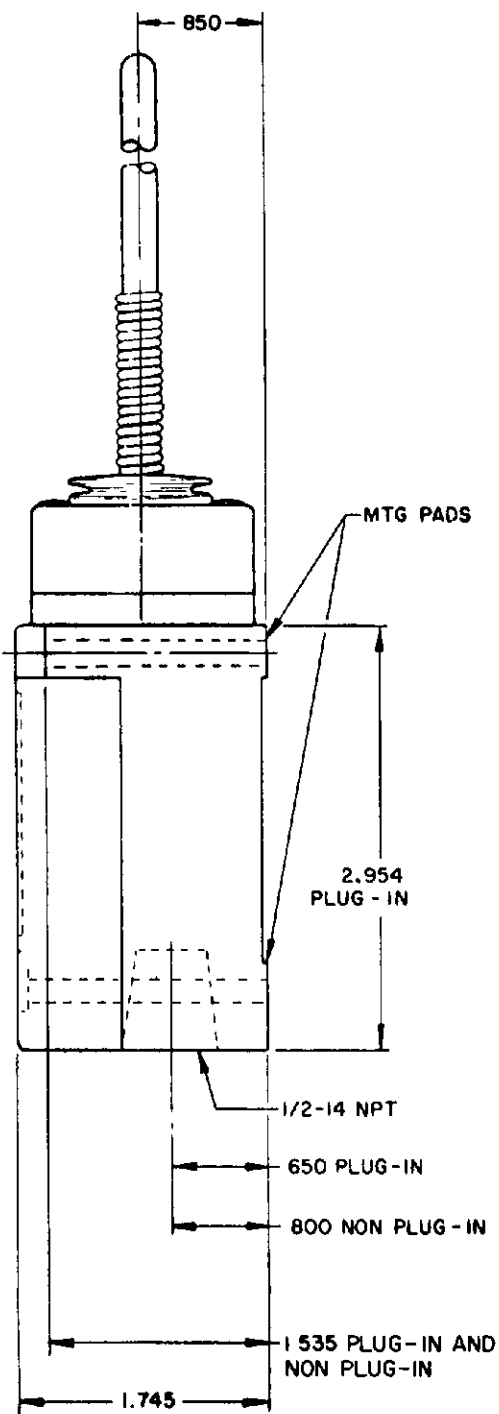


**REPLACEMENT ACTUATOR
LSZ 4009**

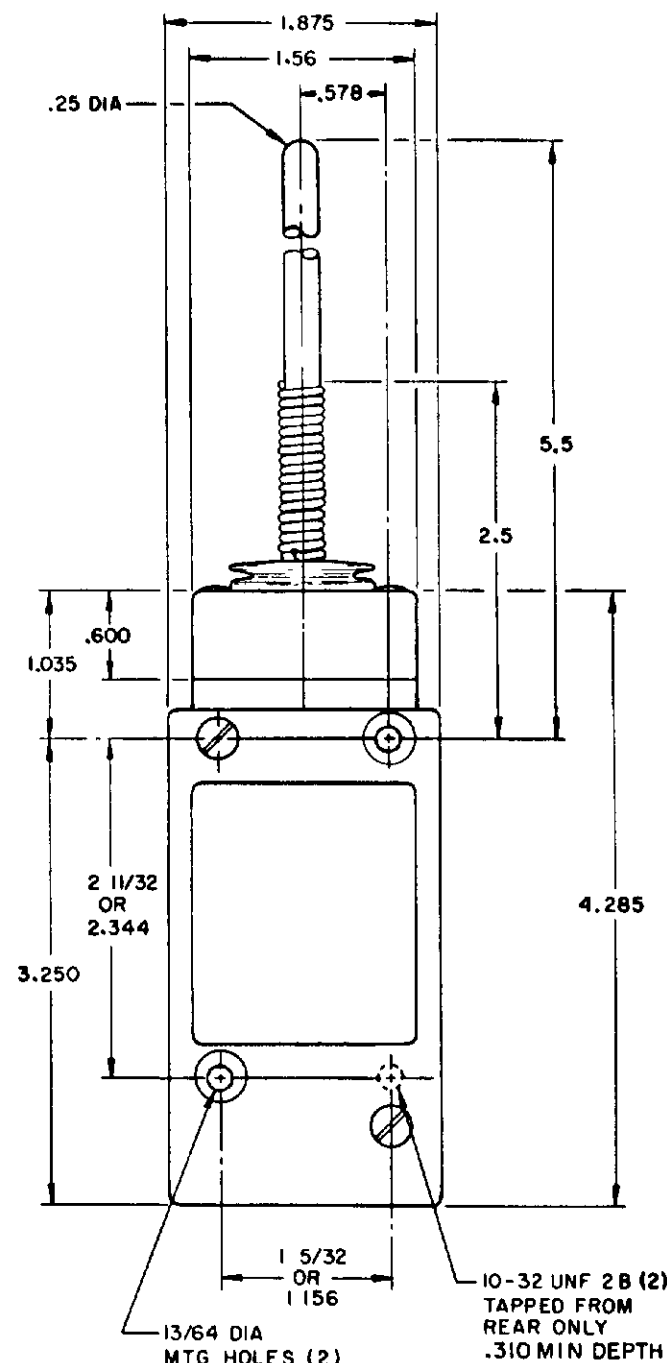


**PLASTIC EXTENSION
TYPE 7A ACTUATOR**

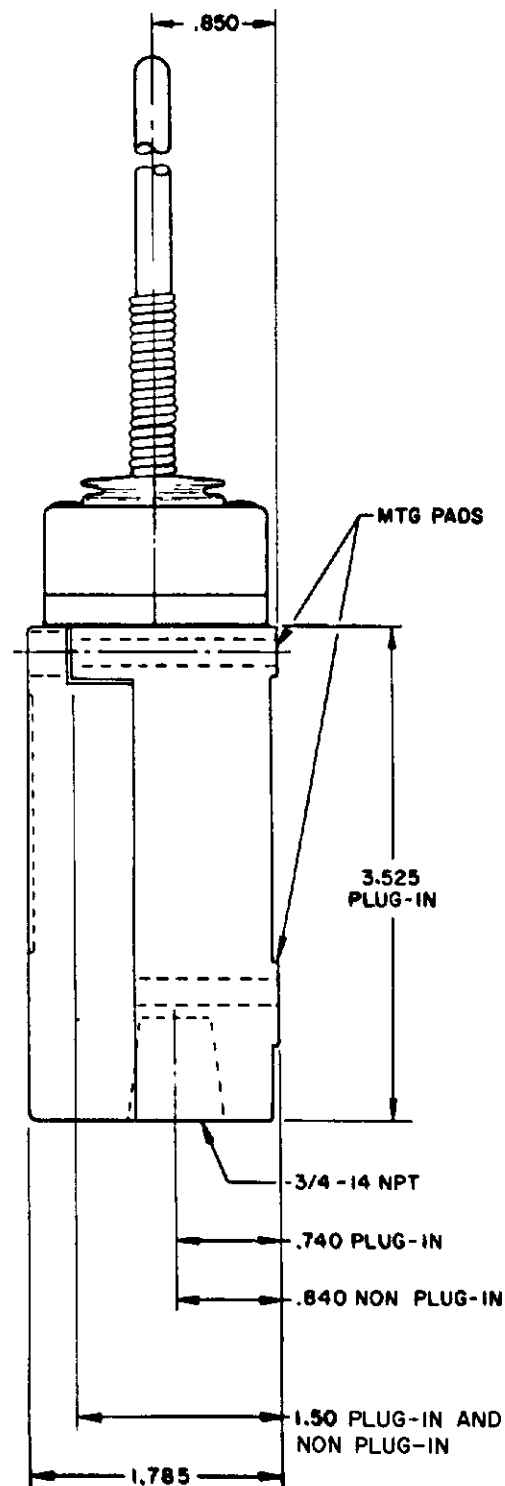

**REPLACEMENT ACTUATOR
LSZ 4011**

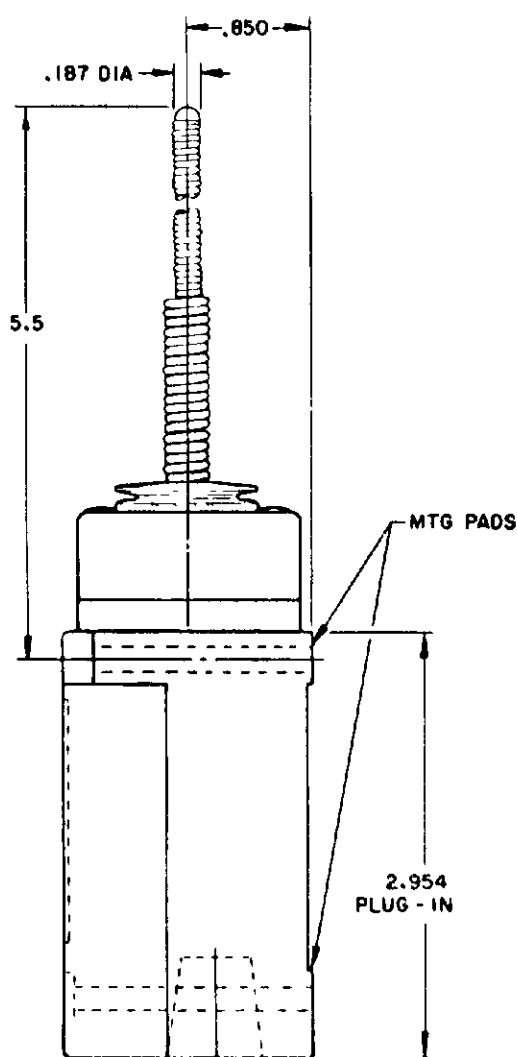


**CABLE EXTENSION
TYPE 7N ACTUATOR**

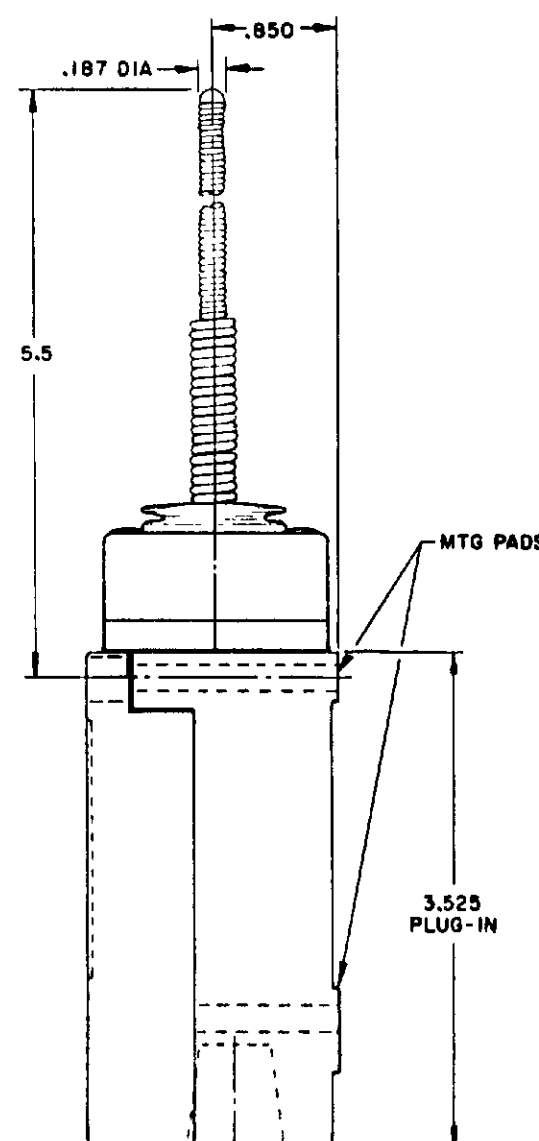

**CABLE EXTENSION
TYPE 7N ACTUATOR**

MANIFOLD MOUNT (PLUG-IN ONLY)
SINGLE POLE AND DOUBLE POLE
TYPE LSYA THROUGH LSYW SERIES

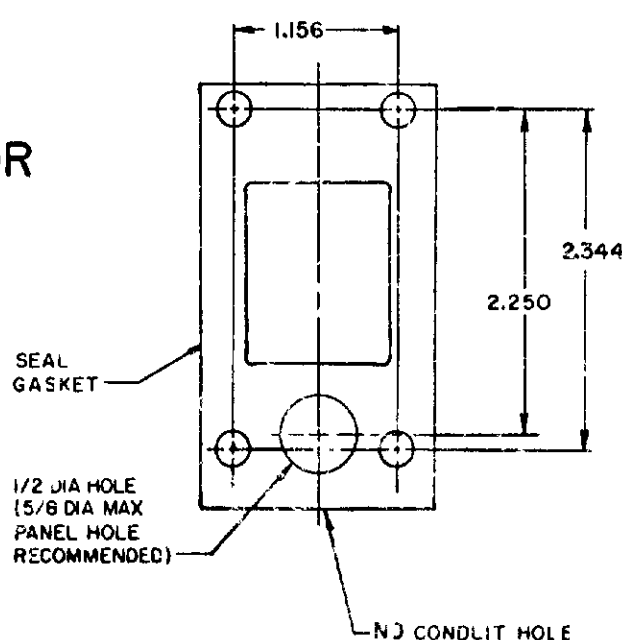

NOTES:
1 - ALL UNITS AVAILABLE WITH
FLOUROSILICONE AND VITON SEALS

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL

SWITCH-ENCLOSED

CHART 1

LSY SERIES

SCALE NONE
DO NOT SCALE PRINT

Technical drawing of a mechanical assembly (Fig. 1). The drawing shows a vertical shaft with a diameter of .850. A spring is mounted on the shaft, with a height of 2.63. The total height of the assembly is 13.0. The base of the assembly is labeled MTG PADS.

[illegible]

Technical drawing of a mechanical assembly. The drawing shows a cross-section of a component with a central vertical shaft. The shaft has a diameter of .850. A dimension of 13.0 is shown for the total height of the assembly. A dimension of 2.63 is shown for the height of the central shaft section. A label .075 DIA points to a small hole in the shaft. A label MTG PADS points to a set of dashed lines representing mounting pads. The drawing is labeled C5 and C8.

LSYJC6 & LSYJC7 HAVE 1/2-14 NPT CONDUIT HOLE

A cross-sectional diagram of a mechanical assembly. The diagram shows a vertical shaft with a diameter of .850 at the top. A dimension line on the left indicates a distance of 2.56 from the base to a specific point on the shaft, marked with an asterisk (*). A label .047 DIA points to a small feature on the shaft. Below the shaft, there are two sets of seals: FLOUROSILICONE SEALS (LSYKBI & LSYKB3) and VITON SEALS (LSYKCI & LSYKC3). The assembly is supported by MTG PADS (mounting pads) at the base.

Technical drawing of a seal assembly. The drawing shows a cross-section of a cylindrical component with a central threaded rod. The rod has a diameter of .047 DIA. The total height of the assembly is 2.56. The distance from the top of the assembly to the center of the threaded rod is .850. The drawing also shows a seal assembly with a seal ring and a seal ring gasket. The seal assembly is labeled with the text: SEALS, YKB4, YKB7, NPT, and OLE. The seal ring is labeled with the text: MTG PADS.

*TYPE 8A ACTUATOR 5.5 IN. - LSZ 4012
TYPE 8B ACTUATOR 7.5 IN. - LSZ 4013
TYPE 8C ACTUATOR 5.5 IN. - LSZ 4014

	CAT WHISKER			WOBBLE STICK		
PRETRAVEL (APPROX) IN. RADIUS	5 1/2" WIRE	5 1/2" WIRE	7 1/2" WIRE	ROD	CABLE	WIRE
	2	2	4.5	1.0	1.5	4.0
OPERATING FORCE-OZ (MAX)	7.0	5.0	3.0	10.0	7.0	5.0

SCALE NONE
DO NOT SCALE PRINT

MICRO SWITCH
FREEPORT ILLINOIS U.S.A.
A DIVISION OF HONEYWELL
FED. REG. CODE 9193

SWITCH-ENCLOSED


CHART 1

LSY SERIES

MSY SERIES CHART
PAGE 8 OF 10


CONVERSION BASES

SINGLE POLE (SIDE ROTARY) LSZ 4003

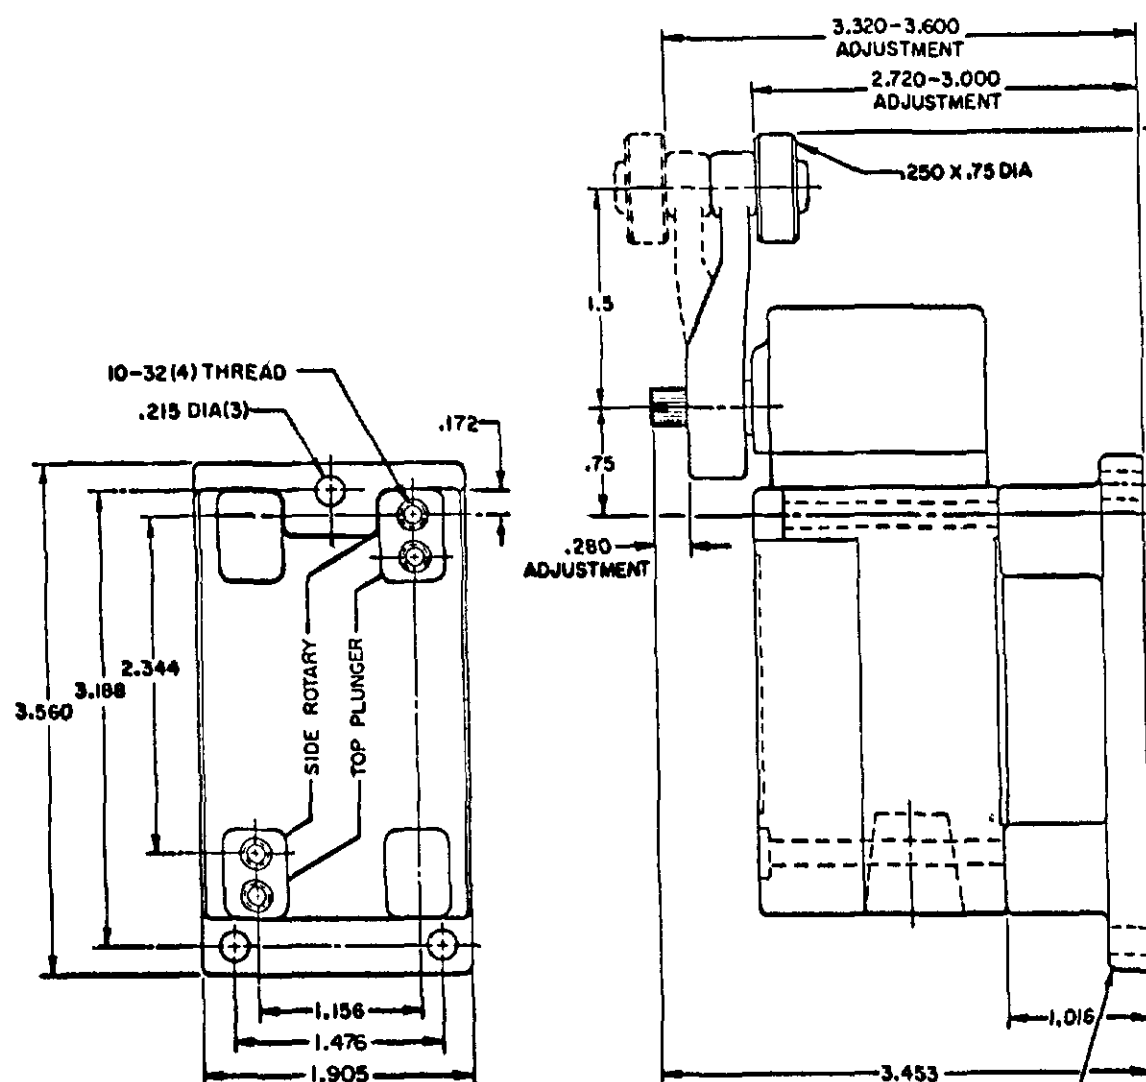




LSZ4003 CONVERSION BASE, WHEN USED WITH HEAVY DUTY LS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

DOUBLE POLE (SIDE ROTARY) LSZ4004

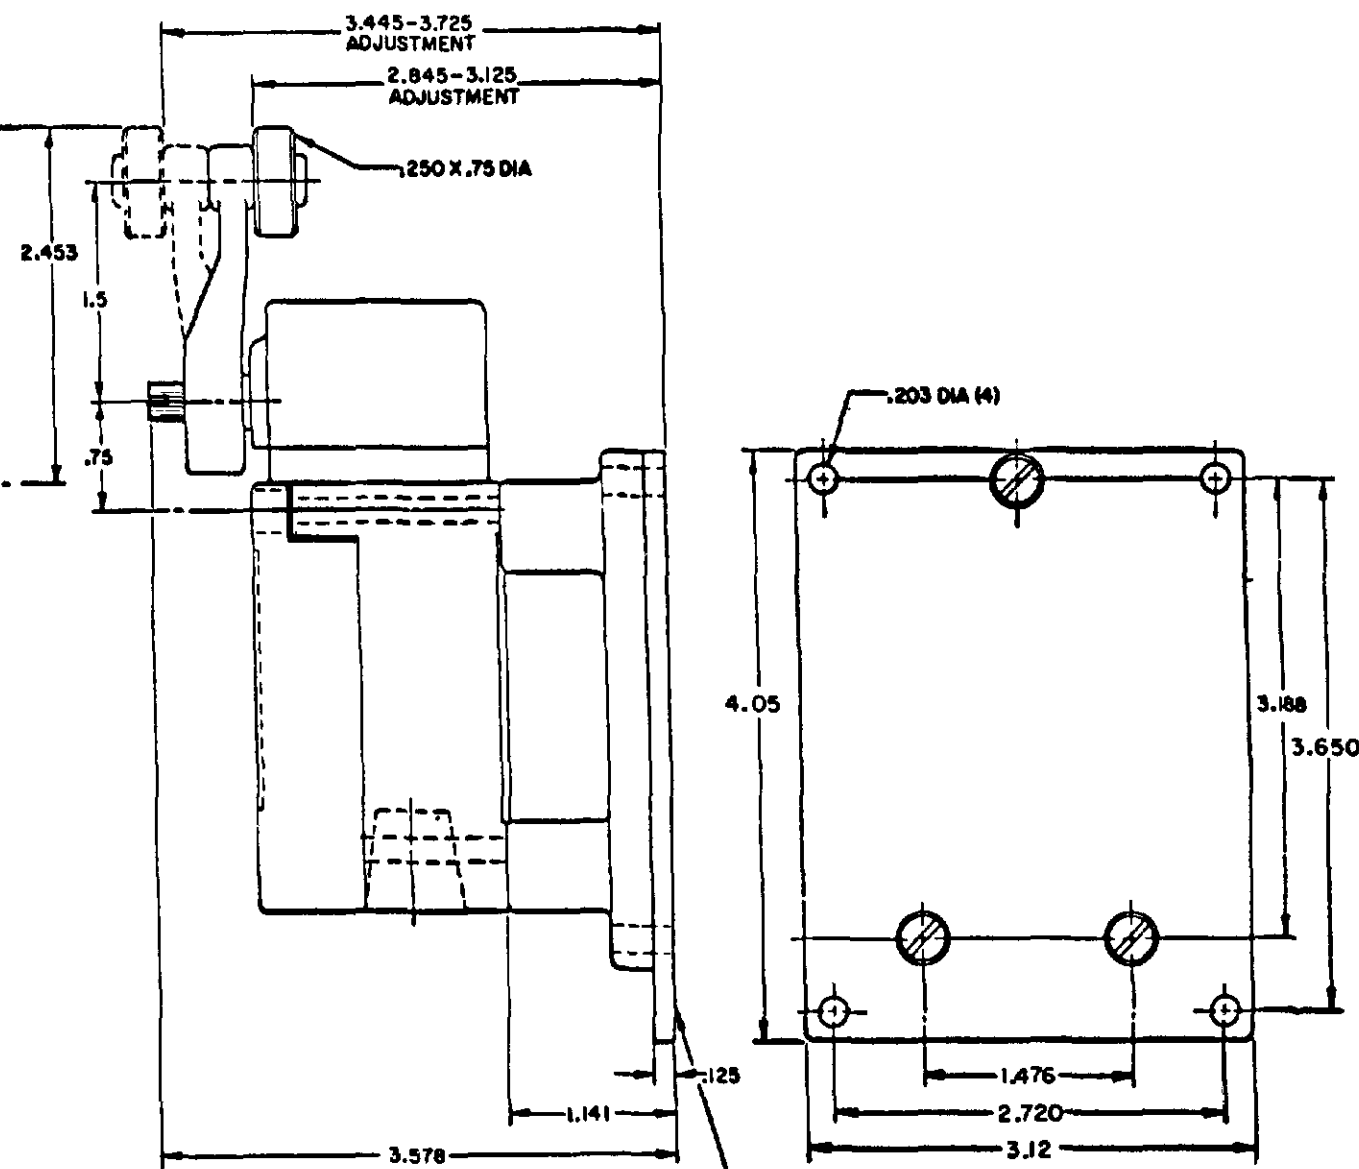

LSZ4004 (FURNISHED ASSEMBLED) CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 301LS TYPE (LIMIT SWITCH NOT INCLUDED)

SINGLE POLE TOP PLUNGER LSZ4003

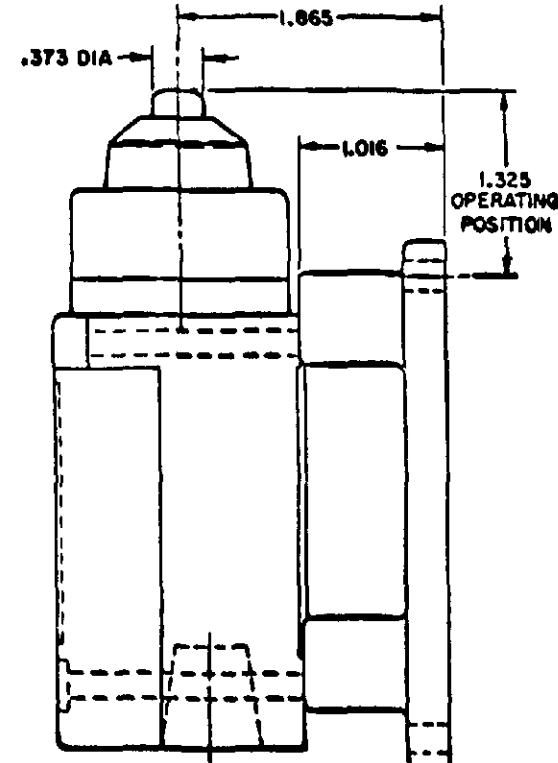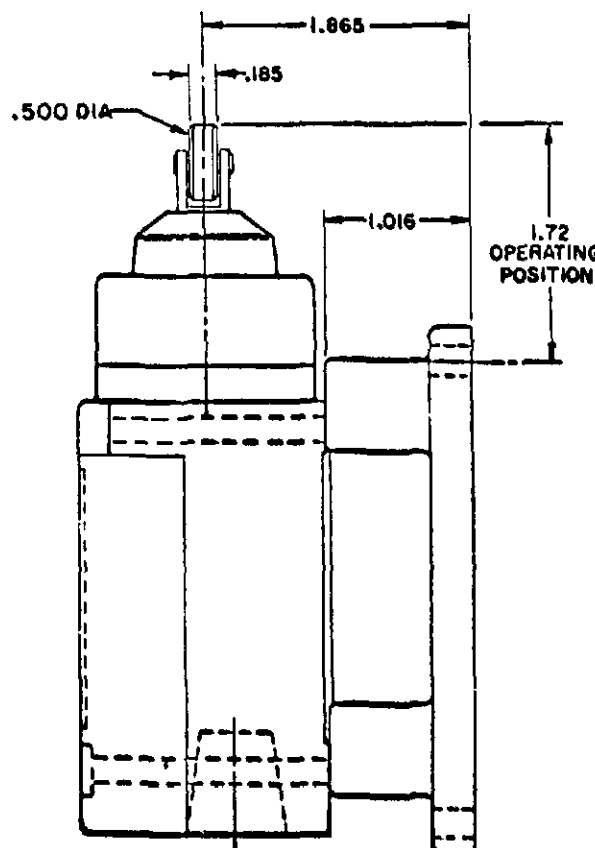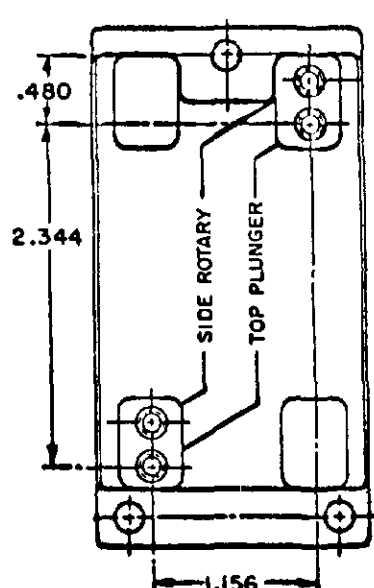

LSZ4003 CONVERSION BASE, WHEN USED WITH HDLS WILL GIVE SAME TRACKING AS 201LS TYPE (LIMIT SWITCH NOT INCLUDED)

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
A DIVISION OF HONEYWELL
FREEPORT, ILLINOIS U.S.A.
FID. MFG. CODE 9188

SWITCH - ENCLOSED

LSY SERIES
CATALOG LISTING
CHART 1

SCALE FULL
DO NOT SCALE PRINT

TEMPERATURE LIMITATIONS FOR
DEVICES WITH FLUORSILICONE (LSYAB**) AND VITON (LSYAC**) SEALS

[illegible]

CODE: 1 SATISFACTORY 2 FAIR 3 DOUBTFUL 4 UNSATISFACTORY

- 1 FLUORSILICONE SEAL (LSYAB**) FOR LOW TEMPERATURE APPLICATIONS
- 2 VITON SEALS (LSYAC**) FOR FIRE-RESISTANT FLUIDS
- 3 ALL EXCEPT A60

	LOW LIMIT	HIGH LIMIT
LSYAB	-40° F	+250° F
LSYAC	+10° F	+250° F
LSYBB	-20° F	+250° F
LSYBC	+30° F	+250° F
LSYCB	-40° F	+200° F
LSYCC	+10° F	+250° F
LSYDB	-40° F	+200° F
LSYDC	+10° F	+250° F
LSYEB	- 40° F	+200° F
LSYEC	+10° F	+250° F
LSYFB	- 40° F	+200° F
LSYFC	+10° F	+250° F
LSYGB	-20° F	+200° F
LSYGC	+30° F	+250° F
LSYHB	-20° F	+250° F
LSYHC	+30° F	+250° F
LSYJB	-40° F	+250° F
LSYJC	+30° F	+250° F
LSYKB	-20° F	+250° F
LSYKC	+30° F	+250° F
LSYLB	-40° F	+250° F
LSYLC	+10° F	+250° F
LSYMB	-40° F	+250° F
LSYMC	+10° F	+250° F
LSYNB	-20° F	+250° F
LSYNC	+30° F	+250° F
LSYPB	-40° F	+250° F
LSYPC	+10° F	+250° F
LSYRB	-20° F	+250° F
LSYRC	+30° F	+250° F
LSYVB	-40° F	+200° F
LSYVC	+10° F	+250° F
LSYWB	- 40° F	+200° F
LSYWC	+10° F	+250° F

SCALE

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

TOLERANCES ARE IN INCHES

TOLERANCES ARE

FIN. PLAYS	(.001)	1.000
INT. PLAYS	(.001)	1.000
SHK. PLAYS	(.0005)	1.000
STOCKS		

NOTES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH A DIVISION OF HONEYWELL THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

MICRO SWITCH
FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED MFG CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
LSY SERIES
CHART 1

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		RELEASE NO CO-78499		REPLACES LSY SERIES	
ISSUE		7						PSR		10JUL07	
REVISONS		A		1994B		C		19APR05		CHECK	
B		200704		23 JUN 00		C		200853		21 JUL 00	
D		202198		23 JUN 01		E		0012601		23 JUL 01	
F		10031956		BS		10JUL07		SPK		19APR05	
JAF		12 SEP 94		JAF		24 AUG 91		GJW		24 AUG 91	
DRAWN		MASTER									

CATALOG LISTING		M		LSY SERIES CHART 1		PAGE 10 OF 10		RELEASE NO CO-78499		REPLACES LSY SERIES																																																																									
ISSUE		7						PSR		10JUL07																																																																									
<table border="1"> <tr> <td colspan="2">REVISONS</td> <td colspan="2">CHECK</td> <td colspan="2">19APR05</td> <td colspan="2">AK</td> <td colspan="2">CHECK</td> <td colspan="2">12 SEP 94</td> </tr> <tr> <td>A</td> <td>00019948</td> <td>C SL</td> <td>10 JAN 00</td> <td>B</td> <td>200704</td> <td>C SL</td> <td>23 JUN 00</td> <td>D</td> <td>202198</td> <td>E</td> <td>0012601</td> </tr> <tr> <td colspan="2"></td> <td colspan="2">C SL</td> <td colspan="2">23 JAN 01</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2"></td> <td colspan="2">SPK</td> <td colspan="2">19APR05</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2"></td> <td colspan="2">10031956</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> <tr> <td colspan="2"></td> <td colspan="2">BS</td> <td colspan="2">10JUL07</td> <td colspan="2"></td> <td colspan="2"></td> <td colspan="2"></td> </tr> </table>												REVISONS		CHECK		19APR05		AK		CHECK		12 SEP 94		A	00019948	C SL	10 JAN 00	B	200704	C SL	23 JUN 00	D	202198	E	0012601			C SL		23 JAN 01										SPK		19APR05										10031956												BS		10JUL07							
REVISONS		CHECK		19APR05		AK		CHECK		12 SEP 94																																																																									
A	00019948	C SL	10 JAN 00	B	200704	C SL	23 JUN 00	D	202198	E	0012601																																																																								
		C SL		23 JAN 01																																																																															
		SPK		19APR05																																																																															
		10031956																																																																																	
		BS		10JUL07																																																																															
RASTER		DRAWN																																																																																	
GJW		24 AUG 91		CHECK		JAF																																																																													

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А