



### AC and CG3 Series

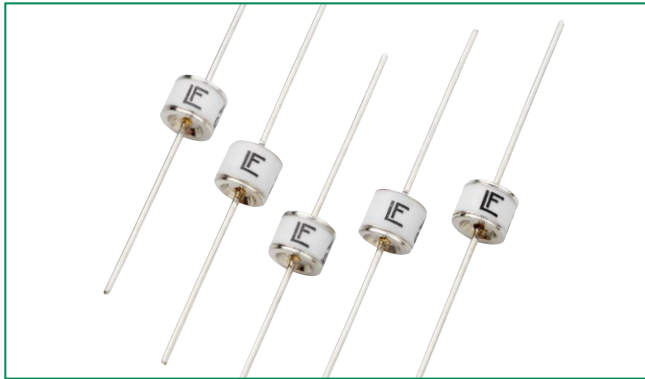


#### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E320116*           |

\*NOTE: CG3 7.5 product UL approval is currently pending

#### 2 Electrode GDT Graphical Symbol



#### Additional Information



**Datasheet  
AC Series**



**Resources  
AC Series**



**Samples  
AC Series**



**Datasheet  
CG3 Series**



**Resources  
CG3 Series**



**Samples  
CG3 Series**

#### Description

Littelfuse AC series two-electrode line protectors provide a high degree of surge protection in AC line applications. The two models, AC120 and AC240 are designed for use with 120VAC and 240VAC lines respectively. They are able to extinguish AC follow-on currents of at least 200A.

Littelfuse CG3 two electrode high voltage (1.0 - 7.5 KV) devices are designed for surge protection and high isolation applications, and for applications for which bias voltages or signal levels of several hundred volts are normally present.

#### Features

- Rugged ceramic-metal construction
- Available in tape-and-reel packaging
- Low capacitance (<1.5 pF)
- Available with or without leads

#### Applications

##### AC Series:

- Long branch circuits (AC wall outlet)
- Short branch circuits (at breaker box, computer, etc)
- Power supplies
- Test equipment
- Submersible pumps
- Medical electronics

##### CG3 Series:

- CRT terminals
- CATV equipment
- Antennas
- Power supplies
- Medical electronics

### Electrical Characteristics

| Part Number              | Device Dimension Type | Device Specifications (at 25°C) |      |      |  |  |                       |                     | Life Ratings                             |                                    |   |  |  |  |
|--------------------------|-----------------------|---------------------------------|------|------|--|--|-----------------------|---------------------|--|------------------------------------|---|--|--|--|
|                          |                       | DC Breakdown in Volts (@100V/s) |      |      | Impulse Break-down in Volts (@100V/μs) | Impulse Break-down In Volts (@1 Kv/μsec) | Insulation Resistance | Capacitance (@1MHz) | Arc Voltage (on state Voltage) @1Amp Min | Max Follow On Current <sup>3</sup> | Nominal AC Discharge Current (10x1sec @50-60Hz) | AC Discharge Current (1 x 50Hz 9 cycles) | Nominal Impulse Discharge Current <sup>4</sup> (@8/20μs) | Max Surge Current <sup>5</sup> (@8/20μs) |
|                          |                       | MIN                             | TYP  | MAX  | MAX                                    |  | MIN                   | MAX                 | TYP                                      |                                    |   |  |  |  |
| AC120 <sup>1</sup>       | A                     | 230                             | 285  | 340  | 500                                    | 550                                      | 10 GΩ (at 100V)       | <1.5 pf             | ~ 25 V                                   | 200 Amps                           | 5 A   | 65 A                                     | 10 shots 5kA   | 1 shot 10kA                              |
| AC240 <sup>1</sup>       | A                     | 480                             | 600  | 720  | 1100                                   | 1200                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 1.0 <sup>1</sup>     | A                     | 800                             | 1000 | 1200 | 1400                                   | 1500                                     | 10 GΩ (at 100V)       | <1.5 pf             | ~ 25 V                                   | 200 Amps                           | N/A   | N/A                                      | 10 shots 5kA   | 1 shot 10kA                              |
| CG3 1.1 <sup>1</sup>     | A                     | 880                             | 1100 | 1320 | 1600                                   | 1700                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 1.2 <sup>1</sup>     | A                     | 960                             | 1200 | 1440 | 1700                                   | 1800                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 1.3 <sup>1</sup>     | A                     | 1040                            | 1300 | 1560 | 1800                                   | 1900                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 1.5 <sup>1</sup>     | A                     | 1200                            | 1500 | 1800 | 1800                                   | 2000                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 2.0 <sup>1</sup>     | A                     | 1600                            | 2000 | 2400 | 2500                                   | 2750                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 2.5 <sup>1</sup>     | A                     | 2000                            | 2500 | 3000 | 3200                                   | 3500                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 2.7 <sup>1</sup>     | A                     | 2160                            | 2700 | 3240 | 3600                                   | 4000                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 3.0 <sup>1</sup>     | A                     | 2400                            | 3000 | 3600 | 4000                                   | 4200                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 3.3 <sup>1</sup>     | A                     | 2640                            | 3300 | 3960 | 4600                                   | 4700                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 4.0 <sup>2</sup>     | B                     | 3200                            | 4000 | 4800 | 5800                                   | 6000                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 4.5 <sup>2</sup>     | B                     | 3600                            | 4500 | 5400 | 6150                                   | 6500                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 5.0 <sup>2</sup>     | B                     | 4000                            | 5000 | 6000 | 7500                                   | 8000                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 6.2 <sup>2,7</sup>   | B                     | 4960                            | 6200 | 7440 | 8100                                   | 9500                                     |                       |                     |  |                                    |   |  |  |  |
| CG3 6.5 <sup>2,7</sup>   | B                     | 5200                            | 6500 | 7800 | 9500                                   | 10000                                    |                       |                     |  |                                    |   |  |  |  |
| CG3 7.5 <sup>2,6,7</sup> | B                     | 6000                            | 7500 | 9000 | 10000                                  | 10600                                    |                       |                     |  |                                    |   |  |  |  |

NOTES:


1. Refer to Production Dimensions section, outline A devices
2. Refer to Production Dimensions section, outline B devices
3. Tested to UL1449 – 120V r.m.s. for AC120, 230V r.m.s. all others.  
Conducted with suitable MOV connected in series.
4. 10 x [5(+) and 5(-)] applications 5kA @ 8/20μs
5. 1 x [1(+) and 1(-)] application 10kA @ 8/20μs
6. CG3 7.5 product UL approval is currently pending
7. When ordering this item, use suffix code D004 when entering the part number.  
The older product version without D004 suffix code has been discontinued.  
Refer to Part Numbering System section for additional information.

### Product Characteristics


|  |   |
|--|---|
| <b>Materials</b>                           | <p><b>Core Outline A &amp; B items:</b><br/>Device: Tin Plated 17.5±12.5 Microns</p> <p><b>Axial Outline A &amp; B items:</b><br/>Device &amp; Wire: Tin Plated 17.5±12.5 Microns</p> |
| <b>Product Marking</b>                     | LF Logo, Voltage and date code;<br>Black ink positive print   |
| <b>Glow to arc transition current</b>      | < 0.5Amps   |
| <b>Glow Voltage</b>                        | ~ 140 Volts   |
| <b>Storage and Operational Temperature</b> | -40 to +90  |

### Soldering Parameters - Reflow Soldering (Surface Mount Devices)

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Pb – Free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (Min to Max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 5°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Temperature ( $t_l$ )            | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 10 – 30 seconds         |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 260°C                   |

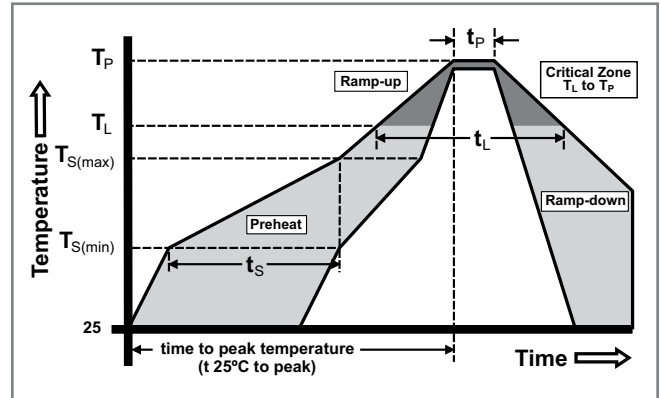

### Soldering Parameters - Wave Soldering (Thru-Hole Devices)

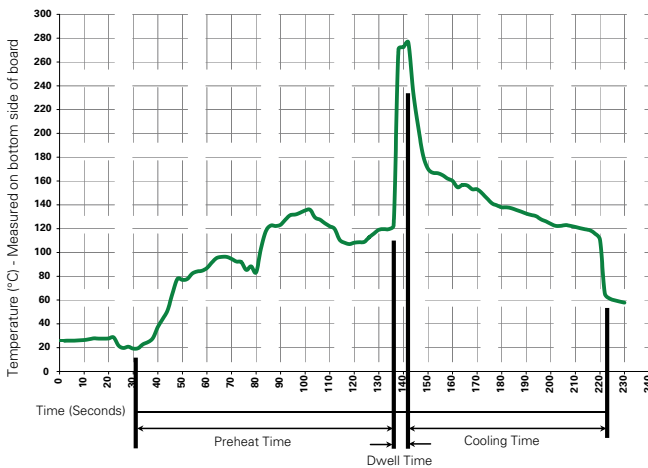



### Recommended Process Parameters:

| Wave Parameter  | Lead-Free Recommendation |
|---|--------------------------|
| <b>Preheat:</b><br>(Depends on Flux Activation Temperature) (Typical Industry Recommendation) |                          |
| Temperature Minimum:  | 100° C                   |
| Temperature Maximum:  | 150° C                   |
| Preheat Time:   | 60-180 seconds           |
| <b>Solder Pot Temperature:</b>  | 280° C Maximum           |
| <b>Solder Dwell Time:</b>   | 2-5 seconds              |


### Soldering Parameters - Hand Soldering

Solder Iron Temperature: 350° C +/- 5°C  
 Heating Time: 5 seconds max.

### Device Dimensions

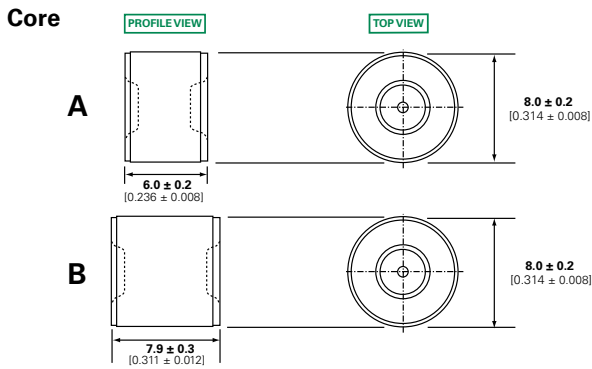
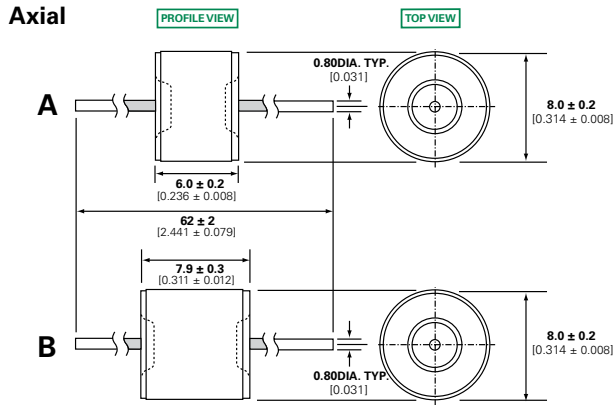


### Part Numbering System and Ordering Information

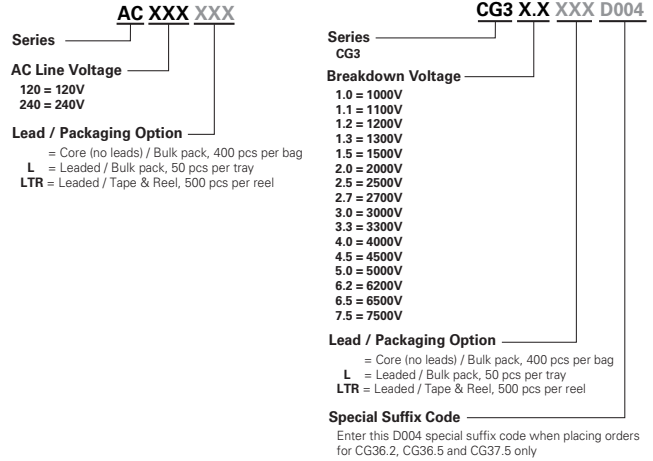

### Packaging Dimensions

#### For 'LTR' Option Code Axial Lead Items

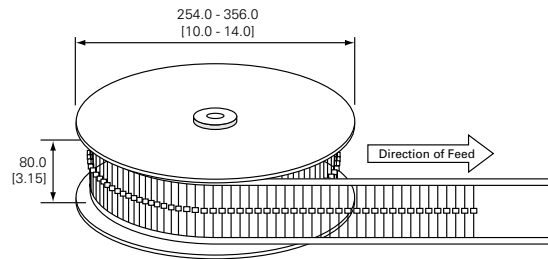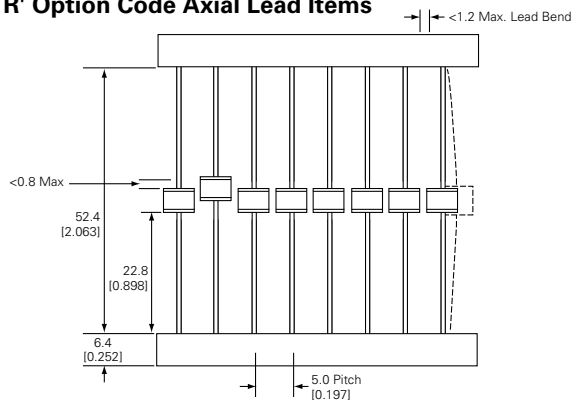

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А