



# 1 Watt Surface Mount Zener Diodes

Qualified per MIL-PRF-19500/115

## DESCRIPTION

This surface mountable Zener diode series is similar to the 1N3016B-1 through 1N3045B-1 JEDEC registration in the DO-13 package except that it meets the surface mount DO-213AB outline. It is an ideal selection for applications of high density and low parasitic requirements. Due to its glass hermetic seal qualities and metallurgically enhanced internal construction, it is also well suited for high-reliability applications where it is available in JAN, JANTX, and JANTXV military qualifications. Lower voltages are also available in the 1N3821AUR-1 through 1N3828AUR-1 series (3.3 V to 7.5 V) in the same package (see separate data sheet).

**Important:** For the latest information, visit our website <http://www.microsemi.com>.

## FEATURES

- Leadless surface mount equivalents to the JEDEC registered 1N3016 through 1N3045 number series.
- Zener voltage range: 6.8 volts to 110 volts.
- Hermetically sealed, double plug glass construction.
- Metallurgically bonded.
- Voltage tolerances of 5%, 2%, and 1% available.
- JAN, JANTX, and JANTXV qualifications also available per MIL-PRF-19500/115. (See [part nomenclature](#) for all available options.)
- RoHS compliant versions available (commercial grade only).

## APPLICATIONS / BENEFITS


- Regulates voltage over a broad operating current and temperature range.
- Wide selection from 6.8 to 110 V.
- Low reverse (leakage) currents.
- Leadless package for surface mounting.
- Ideal for high-density situations.
- Metallurgically enhanced internal contact design for greater reliability and lower thermal resistance.
- Non-sensitive to ESD.
- Inherently radiation hard as described in Microsemi "[MicroNote 050](#)".

## MAXIMUM RATINGS

| Parameters/Test Conditions             | Symbol              | Value       | Unit |
|----------------------------------------|---------------------|-------------|------|
| Junction and Storage Temperature       | $T_J$ and $T_{STG}$ | -55 to +175 | °C   |
| Thermal Resistance Junction-to-End Cap | $R_{\theta JEC}$    | 50          | °C/W |
| DC Power Dissipation <sup>(1)</sup>    | $P_D$               | 1.0         | W    |
| Forward Voltage @ 200 mA               | $V_F$               | 1.2         | V    |
| Solder Temperature @ 10 s              | $T_{SP}$            | 260         | °C   |

**Notes:** 1. Derate linearly starting at  $T_{EC}$  125 °C to zero at 175 °C (see [Figure1](#)).

Qualified Levels:  
JAN, JANTX, and  
JANTXV



**DO-213AB (MELF,  
LL41) Package**

Also available in:

**DO-41 package**  
(glass axial-leaded)

 [1N3016B-1 – 1N3045B-1](#)

### MSC – Lawrence

6 Lake Street,  
Lawrence, MA 01841  
Tel: 1-800-446-1158 or  
(978) 620-2600  
Fax: (978) 689-0803

### MSC – Ireland

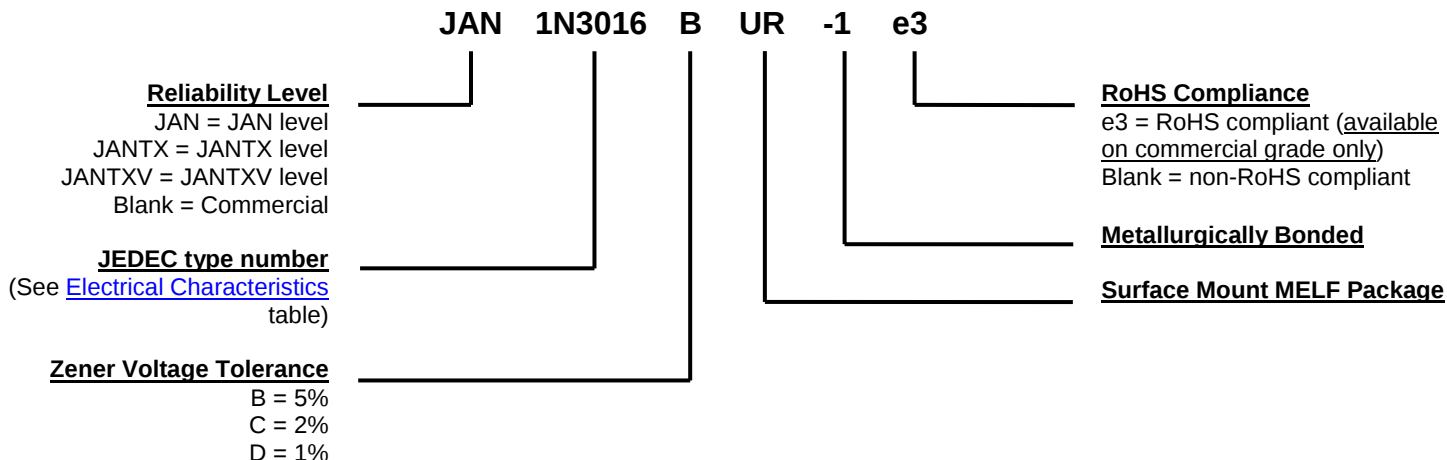
Gort Road Business Park,  
Ennis, Co. Clare, Ireland  
Tel: +353 (0) 65 6840044  
Fax: +353 (0) 65 6822298

**Website:**

[www.microsemi.com](http://www.microsemi.com)

**MECHANICAL and PACKAGING**

- CASE: Hermetically sealed glass MELF package.
- TERMINALS: Tin/lead or RoHS compliant matte-tin finished copper clad steel available (commercial grade only). Solderable per MIL-STD-750, method 2026.
- MARKING: Cathode band.
- POLARITY: Diode to be operated with the banded end positive with respect to the opposite end for Zener regulation.
- MOUNTING SURFACE SELECTION: The Axial Coefficient of Expansion (COE) of this device is approximately +6PPM/°C. The COE of the Mounting Surface System should be selected to provide a suitable match with this device.
- TAPE & REEL optional: Standard per EIA-481-1-A with 12 mm tape. Consult factory for quantities.
- WEIGHT: Approximately 0.05 grams.
- See [Package Dimensions](#) on last page.

**PART NOMENCLATURE**

**SYMBOLS & DEFINITIONS**

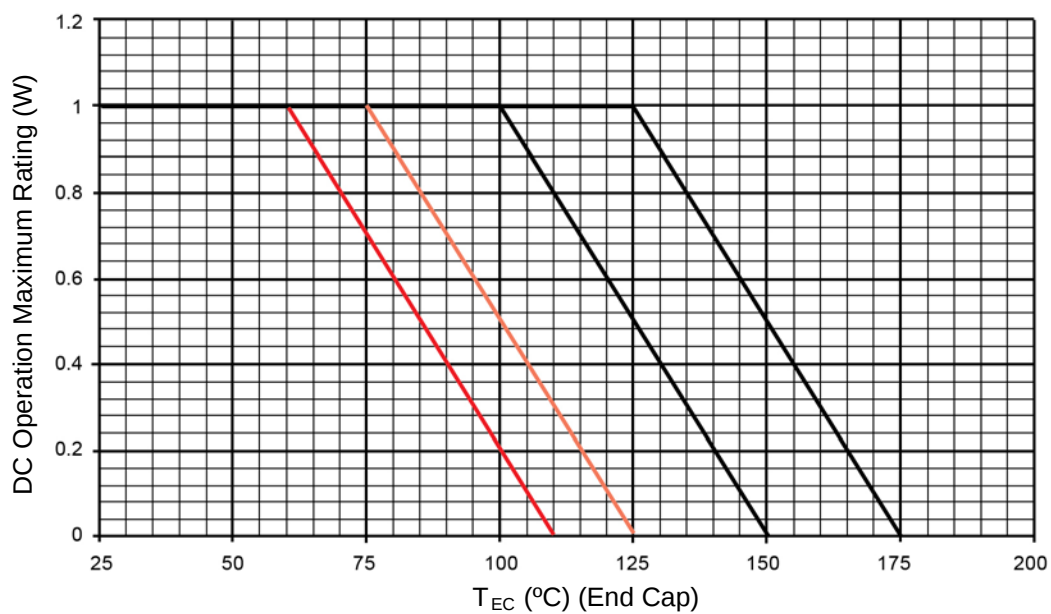
| Symbol                | Definition                                                                                                                                                                                                                                      |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $I_R$                 | Reverse Current: The maximum reverse (leakage) current that will flow at the specified voltage and temperature.                                                                                                                                 |
| $I_Z, I_{ZT}, I_{ZK}$ | Regulator Current: The dc regulator current ( $I_Z$ ), at a specified test point ( $I_{ZT}$ ), near breakdown knee ( $I_{ZK}$ ).                                                                                                                |
| $I_{ZM}$              | Maximum Regulator (Zener) Current: The maximum rated dc current for the specified power rating.                                                                                                                                                 |
| $V_F$                 | Maximum Forward Voltage: The maximum forward voltage the device will exhibit at a specified current.                                                                                                                                            |
| $V_R$                 | Reverse Voltage: The reverse voltage dc value, no alternating component.                                                                                                                                                                        |
| $V_Z$                 | Zener Voltage: The Zener voltage the device will exhibit at a specified current ( $I_Z$ ) in its breakdown region.                                                                                                                              |
| $Z_{ZT}$ or $Z_{ZK}$  | Dynamic Impedance: The small signal impedance of the diode when biased to operate in its breakdown region at a specified rms current modulation (typically 10% of $I_{ZT}$ or $I_{ZK}$ ) and superimposed on $I_{ZT}$ or $I_{ZK}$ respectively. |

**\*ELECTRICAL CHARACTERISTICS @ 25 °C**

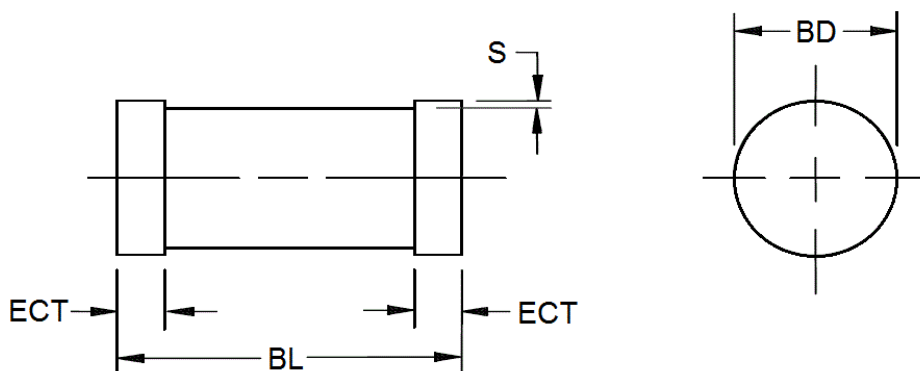
| JEDEC TYPE<br>NUMBER | NOMINAL<br>ZENER<br>VOLTAGE<br>V <sub>Z</sub> @ I <sub>ZT</sub><br>(Note 1) | ZENER<br>TEST<br>CURRENT<br>I <sub>ZT</sub> | MAXIMUM ZENER IMPEDANCE<br>(Note 3) |                                   |      | MAXIMUM<br>ZENER<br>CURRENT<br>I <sub>ZM</sub><br>(Note 3) | MAXIMUM<br>REVERSE<br>LEAKAGE<br>CURRENT† |       | MAXIMUM<br>TEMP. COEFF.<br>OF ZENER<br>VOLTAGE<br>α <sub>VZ</sub> |
|----------------------|-----------------------------------------------------------------------------|---------------------------------------------|-------------------------------------|-----------------------------------|------|------------------------------------------------------------|-------------------------------------------|-------|-------------------------------------------------------------------|
|                      |                                                                             |                                             | Z <sub>ZT</sub> @ I <sub>ZT</sub>   | Z <sub>ZK</sub> @ I <sub>ZK</sub> |      |                                                            | I <sub>R</sub> @ V <sub>R</sub>           | Volts |                                                                   |
|                      |                                                                             |                                             |                                     | Ohms                              | Ohms |                                                            |                                           |       |                                                                   |
|                      | Volts                                                                       | mA                                          | Ohms                                | Ohms                              | mA   | mA                                                         | μA                                        |       | %/°C                                                              |
| 1N3016BUR-1          | 6.8                                                                         | 37                                          | 3.5                                 | 700                               | 1.0  | 140                                                        | 150                                       | 5.2   | 0.061                                                             |
| 1N3017BUR-1          | 7.5                                                                         | 34                                          | 4.0                                 | 700                               | .5   | 125                                                        | 100                                       | 5.7   | 0.065                                                             |
| 1N3018BUR-1          | 8.2                                                                         | 31                                          | 4.5                                 | 700                               | .5   | 115                                                        | 50                                        | 6.2   | 0.070                                                             |
| 1N3019BUR-1          | 9.1                                                                         | 28                                          | 6                                   | 700                               | .5   | 105                                                        | 25                                        | 6.9   | 0.073                                                             |
| 1N3020BUR-1          | 10                                                                          | 25                                          | 7                                   | 700                               | .25  | 95                                                         | 25                                        | 7.6   | 0.076                                                             |
| 1N3021BUR-1          | 11                                                                          | 23                                          | 8                                   | 700                               | .25  | 85                                                         | 10                                        | 8.4   | 0.078                                                             |
| 1N3022BUR-1          | 12                                                                          | 21                                          | 9                                   | 700                               | .25  | 80                                                         | 10                                        | 9.1   | 0.081                                                             |
| 1N3023BUR-1          | 13                                                                          | 19                                          | 10                                  | 700                               | .25  | 74                                                         | 10                                        | 9.9   | 0.085                                                             |
| 1N3024BUR-1          | 15                                                                          | 17                                          | 14                                  | 700                               | .25  | 63                                                         | 10                                        | 11.4  | 0.088                                                             |
| 1N3025BUR-1          | 16                                                                          | 15.5                                        | 16                                  | 700                               | .25  | 60                                                         | 10                                        | 12.2  | 0.089                                                             |
| 1N3026BUR-1          | 18                                                                          | 14                                          | 20                                  | 750                               | .25  | 52                                                         | 10                                        | 13.7  | 0.091                                                             |
| 1N3027BUR-1          | 20                                                                          | 12.5                                        | 22                                  | 750                               | .25  | 47                                                         | 10                                        | 15.2  | 0.092                                                             |
| 1N3028BUR-1          | 22                                                                          | 11.5                                        | 23                                  | 750                               | .25  | 43                                                         | 10                                        | 16.7  | 0.093                                                             |
| 1N3029BUR-1          | 24                                                                          | 10.5                                        | 25                                  | 750                               | .25  | 40                                                         | 10                                        | 18.2  | 0.094                                                             |
| 1N3030BUR-1          | 27                                                                          | 9.5                                         | 35                                  | 750                               | .25  | 34                                                         | 10                                        | 20.6  | 0.096                                                             |
| 1N3031BUR-1          | 30                                                                          | 8.5                                         | 40                                  | 1000                              | .25  | 31                                                         | 10                                        | 22.8  | 0.098                                                             |
| 1N3032BUR-1          | 33                                                                          | 7.5                                         | 45                                  | 1000                              | .25  | 28                                                         | 10                                        | 25.1  | 0.099                                                             |
| 1N3033BUR-1          | 36                                                                          | 7.0                                         | 50                                  | 1000                              | .25  | 26                                                         | 10                                        | 27.4  | 0.100                                                             |
| 1N3034BUR-1          | 39                                                                          | 6.5                                         | 60                                  | 1000                              | .25  | 23                                                         | 10                                        | 29.7  | 0.101                                                             |
| 1N3035BUR-1          | 43                                                                          | 6.0                                         | 70                                  | 1500                              | .25  | 21                                                         | 10                                        | 32.7  | 0.102                                                             |
| 1N3036BUR-1          | 47                                                                          | 5.5                                         | 80                                  | 1500                              | .25  | 19                                                         | 10                                        | 35.8  | 0.102                                                             |
| 1N3037BUR-1          | 51                                                                          | 5.0                                         | 95                                  | 1500                              | .25  | 18                                                         | 10                                        | 38.8  | 0.103                                                             |
| 1N3038BUR-1          | 56                                                                          | 4.5                                         | 110                                 | 2000                              | .25  | 17                                                         | 10                                        | 42.6  | 0.103                                                             |
| 1N3039BUR-1          | 62                                                                          | 4.0                                         | 125                                 | 2000                              | .25  | 15                                                         | 10                                        | 47.1  | 0.104                                                             |
| 1N3040BUR-1          | 68                                                                          | 3.7                                         | 150                                 | 2000                              | .25  | 14                                                         | 10                                        | 51.7  | 0.104                                                             |
| 1N3041BUR-1          | 75                                                                          | 3.3                                         | 175                                 | 2000                              | .25  | 12                                                         | 10                                        | 56.0  | 0.105                                                             |
| 1N3042BUR-1          | 82                                                                          | 3.0                                         | 200                                 | 3000                              | .25  | 11                                                         | 10                                        | 62.2  | 0.106                                                             |
| 1N3043BUR-1          | 91                                                                          | 2.8                                         | 250                                 | 3000                              | .25  | 10                                                         | 10                                        | 69.2  | 0.108                                                             |
| 1N3044BUR-1          | 100                                                                         | 2.5                                         | 350                                 | 3000                              | .25  | 9.0                                                        | 10                                        | 76.0  | 0.11                                                              |
| 1N3045BUR-1          | 110                                                                         | 2.3                                         | 450                                 | 4000                              | .25  | 8.3                                                        | 10                                        | 83.6  | 0.11                                                              |

\*JEDEC Registered Data. †Not JEDEC Data.

- NOTES:**
1. Zener voltage ( $V_Z$ ) is measured with junction in thermal equilibrium with still air at a temperature of 25 °C. The test currents ( $I_{ZT}$ ) at nominal voltages provide a constant 0.25 watts.
  2. The Zener impedance is derived when a 60 cycle ac current having an rms value equal to 10% of the dc Zener current ( $I_{ZT}$  or  $I_{ZK}$ ) is superimposed on  $I_{ZT}$  or  $I_{ZK}$ . Zener impedance is measured at 2 points to ensure a sharp knee on the breakdown curve and to eliminate unstable units. See [MicroNote 202](#) for variation in dynamic impedance with different Zener currents.
  3. These values of  $I_{ZM}$  may often be exceeded in the case of individual diodes. The values shown are calculated for a unit at the high voltage end of its tolerance range. Allowance has also been made for the rise in Zener voltage above  $V_{ZT}$  that results from Zener impedance and the increase in junction temperature as a unit approaches thermal equilibrium at a dissipation of 1 watt. The  $I_{ZM}$  values shown for +/- 5% tolerance units may be used with little error for +/- 10% tolerance units, but should be reduced by 7% to include a +/- 20% tolerance unit near the high voltage end of its tolerance range.

**GRAPHS**



**FIGURE 1**  
Temperature-Power Derating Curve

**PACKAGE DIMENSIONS**


| Symbol     | Dimensions |       |             |       |
|------------|------------|-------|-------------|-------|
|            | Inch       |       | Millimeters |       |
|            | Min        | Max   | Min         | Max   |
| <b>BD</b>  | 0.094      | 0.105 | 2.39        | 2.67  |
| <b>BL</b>  | 0.189      | 0.205 | 4.80        | 5.21  |
| <b>ECT</b> | 0.014      | 0.022 | 0.360       | 0.560 |
| <b>S</b>   | 0.001 min  |       | 0.03 min    |       |

**NOTES:**

1. Dimensions are in inches. Millimeters are given for general information only.
2. Gap not controlled, shape of body and gap not controlled.
3. In accordance with ASME Y14.5M, diameters are equivalent to  $\Phi$ x symbology.

**PAD LAYOUT**


| Ltr      | Inch  | mm   |
|----------|-------|------|
| <b>A</b> | 0.276 | 7.00 |
| <b>B</b> | 0.070 | 1.8  |
| <b>C</b> | 0.110 | 2.8  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Microchip:

[1N3044BUR-1](#) [1N3021BUR-1](#) [1N3026BUR-1](#) [1N3033BUR-1](#) [CDLL3020](#) [CDLL3020A](#) [CDLL3036B](#) [1N3040BUR-1](#)  
[1N3025BUR-1](#) [CDLL3031B](#) [1N3017BUR-1](#) [1N3035BUR-1](#) [CDLL3039B](#) [CDLL3030](#) [CDLL3020B](#) [1N3039BUR-1](#)  
[CDLL3038B](#) [CDLL3017B](#) [CDLL3019B](#) [CDLL3040B](#) [CDLL3034B](#) [CDLL3035B](#) [1N3029BUR-1](#) [1N3024BUR-1](#)  
[1N3037BUR-1](#) [1N3038BUR-1](#) [1N3034BUR-1](#) [CDLL3023B](#) [1N3027BUR-1](#) [1N3032BUR-1](#) [CDLL3018B](#) [CDLL3027B](#)  
[1N3019BUR-1](#) [CDLL3030A](#) [1N3028BUR-1](#) [CDLL3042B](#) [1N3045BUR-1](#) [1N3030BUR-1](#) [CDLL3025B](#) [1N3043BUR-](#)  
[1](#) [CDLL3044B](#) [1N3016BUR-1](#) [1N3036BUR-1](#) [CDLL3028B](#) [CDLL3026B](#) [CDLL3024B](#) [JANTXV1N3021BUR-1](#)  
[CDLL3041B](#) [1N3031BUR-1](#) [CDLL3043B](#) [CDLL3030B](#) [CDLL3032B](#) [1N3018BUR-1](#) [CDLL3037B](#) [CDLL3045B](#)  
[CDLL3029B](#) [1N3020BUR-1](#) [1N3023BUR-1](#) [CDLL3022B](#) [1N3022BUR-1](#) [CDLL3033B](#) [CDLL3016B](#) [1N3042BUR-1](#)  
[1N3041BUR-1](#) [CDLL3021B](#) [1N3022DUR-1](#) [JAN1N3036CUR-1/TR](#) [JANTX1N3026CUR-1/TR](#) [JAN1N3037CUR-1/TR](#)  
[JANTX1N3042DUR-1/TR](#) [JANTX1N3038DUR-1/TR](#) [JAN1N3018CUR-1/TR](#) [CDLL3024B/TR](#) [JANTX1N3039BUR-1/TR](#)  
[JAN1N3030BUR-1/TR](#) [JAN1N3045BUR-1/TR](#) [JANTX1N3042BUR-1/TR](#) [JAN1N3021BUR-1/TR](#) [1N3026BUR-1/TR](#)  
[JANTX1N3032DUR-1/TR](#) [JAN1N3027CUR-1/TR](#) [JANTX1N3017BUR-1/TR](#) [JAN1N3039BUR-1/TR](#)  
[JANTX1N3039CUR-1/TR](#) [JAN1N3033BUR-1/TR](#) [JANTXV1N3016BUR-1/TR](#) [JANTX1N3023CUR-1/TR](#)  
[JAN1N3042BUR-1/TR](#) [JANTX1N3029CUR-1/TR](#) [JAN1N3036BUR-1/TR](#) [JAN1N3018DUR-1/TR](#) [JANTX1N3032CUR-](#)  
[1/TR](#) [JANTX1N3038BUR-1/TR](#) [JAN1N3018BUR-1/TR](#) [JAN1N3030CUR-1/TR](#) [JANTX1N3020BUR-1/TR](#)  
[JAN1N3043CUR-1/TR](#) [JAN1N3019BUR-1/TR](#) [JAN1N3037BUR-1/TR](#) [JAN1N3029CUR-1/TR](#)

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели,  
кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А