

### FEATURES

- Low Cost
- Multiple Package Styles
- Internal Input and Output
- Filtering
- Non-Conductive Case
- High Output Power Density:  
10 Watts/Inch<sup>3</sup>
- Extended Temperature Range:  
-25°C to +85°C
- Efficiency to 79%
- RoHS Compliant

**NOT RECOMMENDED FOR NEW DESIGNS**  
 See product selection chart  
 for alternatives



The HPR1XXC Series uses advanced circuit design and packaging technology to deliver superior reliability and performance. A 170kHz push-pull oscillator is used in the input stage. Beat-frequency oscillation problems are reduced when using the HPR1XXC Series with high frequency isolation amplifiers.

Reduced parts count and high efficiency add to the reliability of the HPR1XXC Series. The high efficiency of the HPR1XXC Series means less internal power dissipation, as low as 190mW.

With reduced heat dissipation the HPR1XXC Series can operate at higher temperatures with no degradation. In addition, the high efficiency of the HPR1XXC Series means the series is able to offer greater than 10 W/inch<sup>3</sup> of output power density. Operation down to no load will not impact the reliability of the series, although a  $\geq 1$  mA minimum load is needed to realize published specifications.

The HPR1XXC Series provides the user a low cost converter without sacrificing reliability. The use of surface mounted devices and advanced manufacturing technologies make it possible to offer premium performance and low cost.

**SPECIFICATIONS** All specifications are typical at  $T_A = +25^\circ\text{C}$  nominal input voltage unless otherwise specified.

### PRODUCT SELECTION CHART

Model	Nominal Input Voltage	Rated Output Voltage	Rated Output Current	Input Current		Reflected Ripple Current	Efficiency	Recommended Alternatives	
	V <sub>DC</sub>	V <sub>DC</sub>	mA	No Load	Rated Load				
				mA		mAp-p	%		
NOT RECOMMENDED FOR NEW DESIGNS	HPR100C	5	5	150	20	216	10	69	NMR100C / MER1S0505SC
	HPR101C	5	12	62	20	212	5	70	NMR101C / MER1S0512SC
	HPR102C	5	15	50	20	212	5	71	NMR102C / MER1S0515SC
	HPR103C	5	±5	±75	20	218	5	68	NMA0505SC / MEA1D0505SC
	HPR104C	5	±12	±30	20	212	5	68	NMA0512SC / MEA1D0512SC
	HPR105C	5	±15	±25	20	200	5	75	NMA0515SC / MEA1D0515SC
	HPR106C	12	5	150	10	90	5	69	NMR106C / MER1S1205SC
	HPR107C	12	12	62	10	81	5	77	NMR107C / MER1S1212SC
	HPR110C	12	±12	±30	10	81	5	74	NMA1212SC / MEA1D1212SC
	HPR111C	12	±15	±25	10	81	5	77	NMA1215SC / MEA1D1215SC
	HPR112C	15	5	150	8	72	5	69	MER1S1505SC
	HPR113C	15	12	62	8	72	5	69	MER1S1512SC
	HPR116C	15	±12	±30	8	63	5	76	MEA1D1512SC
	HPR117C	15	±15	±25	8	63	5	79	MEA1D1515SC
	HPR118C	24	5	150	8	48	15	65	MER1S2405SC
	HPR120C	24	15	50	8	45	15	76	MER1S2415SC
	HPR122C	24	±12	±30	8	45	15	67	MEA1D2412SC
	HPR123C	24	±15	±25	8	45	15	69	MEA1D2415SC
OBSOLETE	HPR108C	12	15	50	10	81	5	77	NMR108C / MER1S1215SC
	HPR109C	12	±5	±75	10	88	5	71	NMA1205SC / MEA1D1205SC
	HPR114C	15	15	50	8	72	5	69	MER1S1515SC
	HPR115C	15	±5	±75	8	72	5	69	MEA1D1505SC
	HPR119C	24	12	62	8	48	15	65	MER1S2412SC
HPR121C	24	±5	±75	8	45	15	69	MEA1D2405SC	



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

### SPECIFICATIONS, ALL MODELS

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage unless otherwise specified.

	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
INPUT	<b>INPUT</b>					
	Voltage Range		4.5	5	5.5	VDC
			10.8	12	13.2	VDC
			13.5	15	16.5	VDC
		21.6	24	26.4	VDC	
	Voltage Rise Time See Typical Performance Curves & Application Notes: "Capacitive Loading Effects on Start-Up of DC/DC Converters"					
OUTPUT	<b>OUTPUT</b>					
	Rated Power				750	mW
	Voltage Setpoint Accuracy	Rated Load, Nominal $V_{IN}$			$\pm 5$	%
	Ripple & Noise	BW = DC to 10MHz		150	200	mVp-p
		BW = 10Hz to 2MHz		30	40	mVrms
	Voltage (Over Input Voltage Range)	1mA to Rated Current, $V_{OUT} = 5V$		4.75	7	VDC
		1mA to Rated Current, $V_{OUT} = 12V$		11.40	15	VDC
		1mA to Rated Current, $V_{OUT} = 15V$		14.25	18	VDC
	Temperature Coefficient			.01	.05	%/°C
	<b>REGULATION</b>					
Load Regulation (All other modes)	Rated Load to 1mA Load		3		%	
GENERAL	<b>GENERAL ISOLATION</b>					
	Rated Voltage		750			VDC
	Test Voltage	60 Hz, 10 Seconds	750			Vrms
	Resistance		10			GΩ
	Capacitance			25	100	pF
	Leakage Current	$V_{ISO} = 240\text{VAC}, 60\text{Hz}$		2	8.5	μArms
	Switching Frequency			170		kHz
	Frequency Change	Over Line and Load		24		%
	Package Weight				3	g
	MTTF per MIL-HDBK-217, Rev. F*	Circuit Stress Method				
	Ground Benign	$T_A = +25^\circ\text{C}$	7.9			MHr
	Fixed Ground	$T_A = +35^\circ\text{C}$	1.9			MHr
	Naval Sheltered	$T_A = +35^\circ\text{C}$	1.2			MHr
	Airborne Uninhabited Fighter	$T_A = +35^\circ\text{C}$	300			kHr
	<b>TEMPERATURE</b>					
	Specification		-25	+25	+85	°C
Operation		-40		+100	°C	
Storage		-40		+110	°C	

### SOLDERING INFORMATION


The HPR1XXC devices are intended for wave soldering or manual soldering.

**They are not intended to be subject to surface mount processes under any circumstances.**


The normal wave soldering process can be used with these devices where the device is subjected to a maximum wave temperature of  $260^\circ\text{C}$  for a period of no more than 10 seconds. Within this time and temperature range, the integrity of the device's plastic body will not be compromised and internal temperatures within the converter will not exceed  $175^\circ\text{C}$ . Care should be taken to control manual soldering limits identical to that of wave soldering.

**TYPICAL PERFORMANCE CURVES**

Specifications are at  $T_A = +25^\circ\text{C}$  nominal input voltage and nominal load.

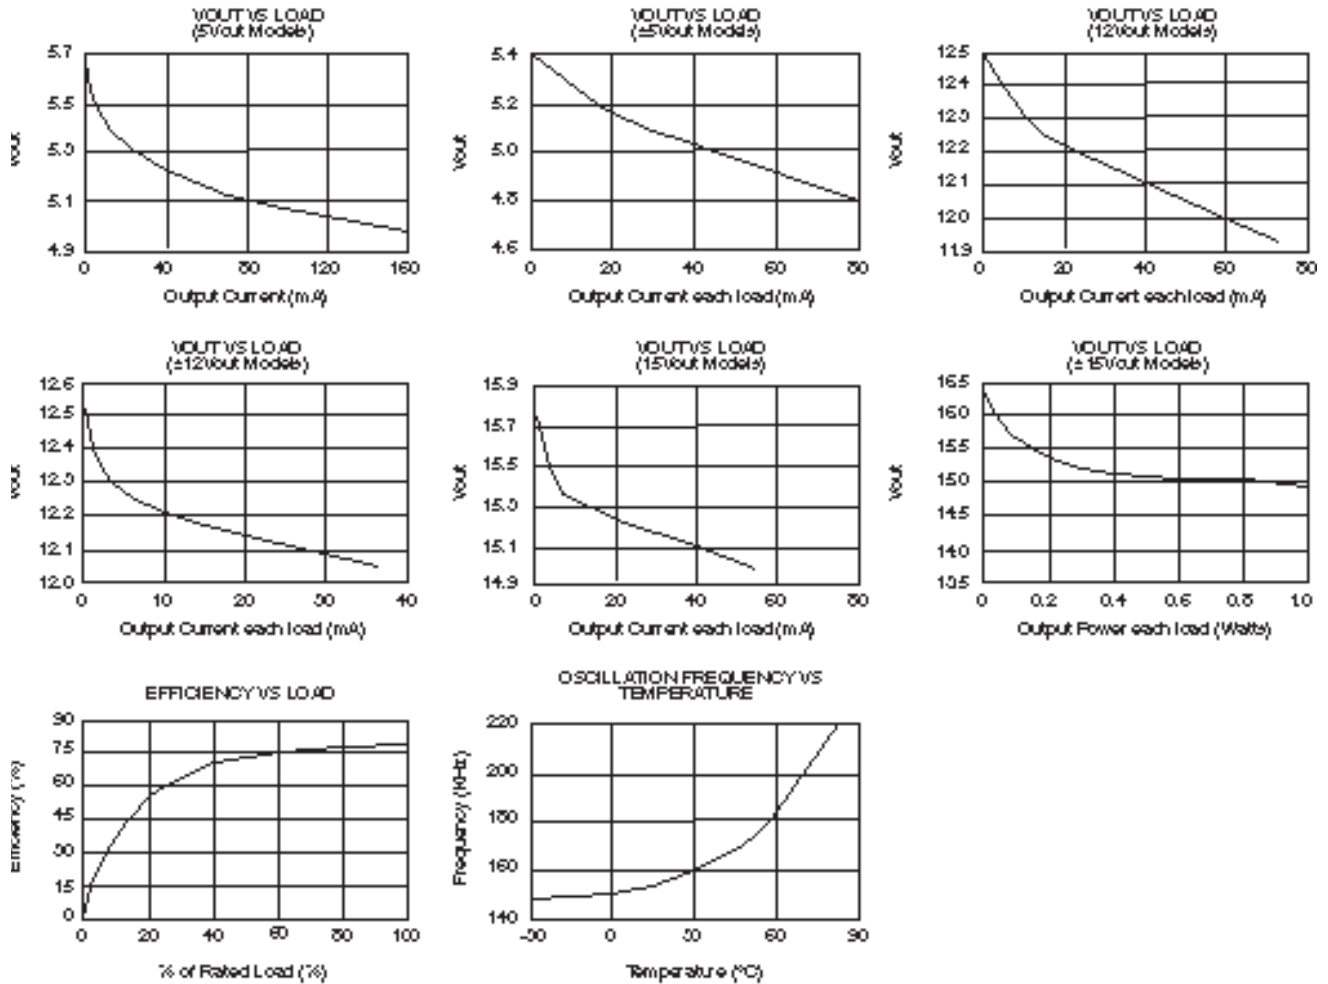

**SAFE OPERATING AREA**

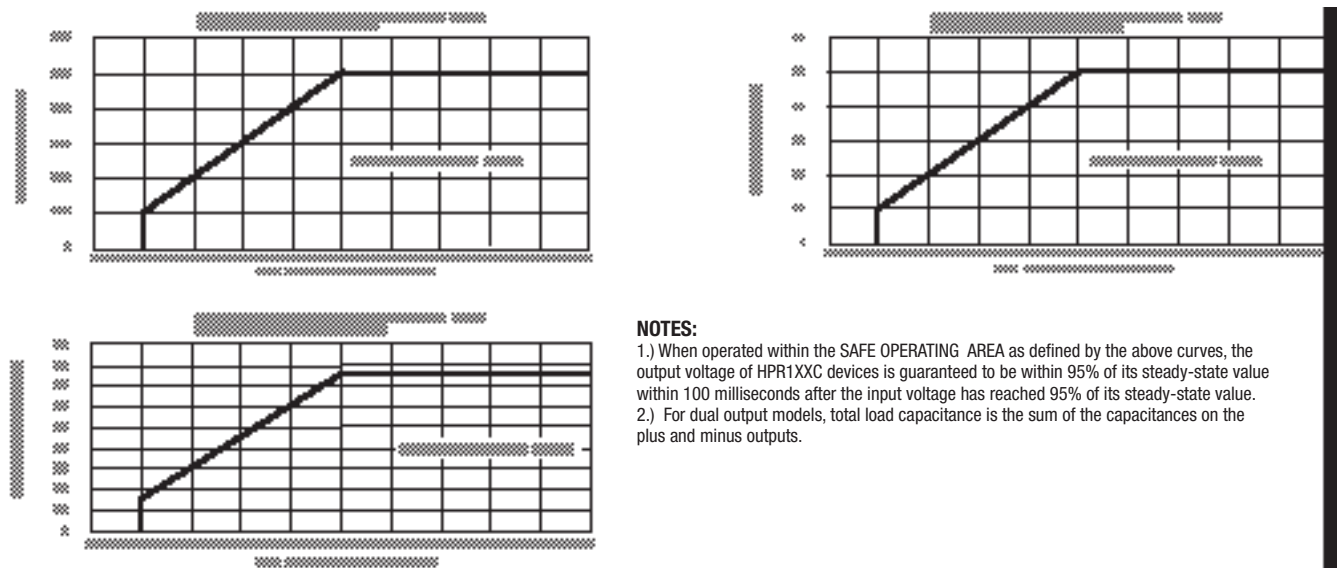


**NOTES:**

- 1.) When operated within the SAFE OPERATING AREA as defined by the above curves, the output voltage of HPR1XXC devices is guaranteed to be within 95% of its steady-state value within 100 milliseconds after the input voltage has reached 95% of its steady-state value.
- 2.) For dual output models, total load capacitance is the sum of the capacitances on the plus and minus outputs.

**MECHANICAL**

**“SIP” PACKAGE/PINOUT**

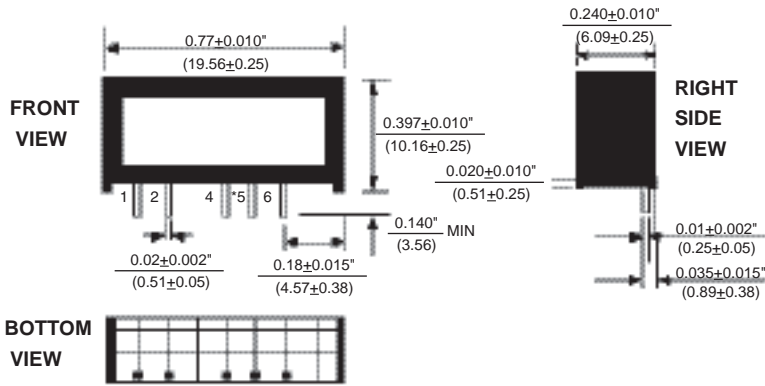

**Notes:**  
 All dimensions are in inches (millimeters).  
 GRID: 0.100 inches (2.54 millimeters)  
 PIN PLACEMENT TOLERANCE:  $\pm 0.015"$   
 MATERIAL: Lead material is phosphor bronze; lead finish is 100-300 microinches of matte tin over a nickel barrier layer of 5-40 microinches.  
 \*Common pin not present on single output models.


**PIN CONNECTIONS**

1.	+VIN
2.	-VIN
4.	-VOUT
5.	COM*
6.	+VOUT

**ABSOLUTE MAXIMUM RATINGS**

Internal Power Dissipation ..... 450mW  
 Short Circuit Duration..... Momentary

**ORDERING INFORMATION**

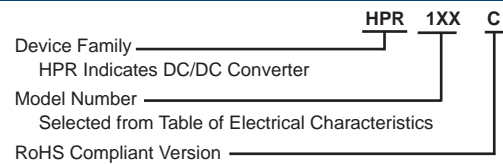

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



## JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: [ocean@oceanchips.ru](mailto:ocean@oceanchips.ru)

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А