


1210L Series

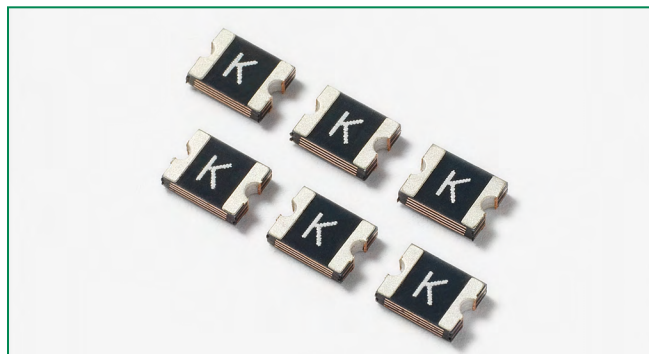

Agency Approvals

| AGENCY | AGENCY FILE NUMBER |
|---|--------------------|
|  | E183209 |
|  | R50119118 |

Description

The 1210L Series PTC provides surface mount overcurrent protection for applications where space is at a premium and resettable protection is desired.



Features

- RoHS compliant, lead-free and halogen-free
- Fast response to fault currents
- Compact design saves board space
- Low resistance
- Low-profile
- Compatible with high temperature solders

Applications

- USB peripherals
- Disk drives
- CD-ROMs
- PC motherboards - plug and play protection
- Mobile phones - battery and port protection
- PDAs / digital cameras
- Game console port protection

Electrical Characteristics

| Part Number | Marking | I _{hold} (A) | I _{trip} (A) | V _{max} (Vdc) | I _{max} (A) | P _d typ. (W) | Maximum Time To Trip | | Resistance | | Agency Approvals | |
|-------------|---------|-----------------------|-----------------------|------------------------|----------------------|-------------------------|----------------------|-------------|----------------------|-----------------------|---|---|
| | | | | | | | Current (A) | Time (Sec.) | R _{min} (Ω) | R _{1max} (Ω) |  |  |
| 1210L005 | A | 0.05 | 0.15 | 30 | 10 | 0.60 | 0.25 | 1.50 | 3.600 | 50.00 | X | X |
| 1210L010 | B | 0.10 | 0.30 | 30 | 10 | 0.60 | 0.50 | 1.50 | 1.600 | 15.00 | X | X |
| 1210L020 | C | 0.20 | 0.40 | 30 | 10 | 0.60 | 8.00 | 0.02 | 0.800 | 5.000 | X | X |
| 1210L035 | E | 0.35 | 0.70 | 6 | 100 | 0.60 | 8.00 | 0.20 | 0.320 | 1.300 | X | X |
| 1210L050 | F | 0.50 | 1.00 | 13.2 | 100 | 0.60 | 8.00 | 0.05 | 0.250 | 0.900 | X | X |
| 1210L075 | G | 0.75 | 1.50 | 6 | 100 | 0.60 | 8.00 | 0.10 | 0.130 | 0.400 | X | X |
| 1210L075/24 | G2 | 0.75 | 1.50 | 24 | 100 | 0.60 | 8.00 | 0.10 | 0.130 | 0.400 | X | X |
| 1210L110/12 | H1 | 1.10 | 2.20 | 12 | 100 | 0.6 | 8.00 | 0.10 | 0.060 | 0.210 | X | X |
| 1210L110/16 | HF | 1.10 | 2.20 | 16 | 100 | 0.6 | 8.00 | 0.10 | 0.060 | 0.210 | X | X |
| 1210L110TH | H | 1.10 | 2.20 | 8 | 100 | 0.60 | 8.00 | 0.10 | 0.060 | 0.210 | X | X |
| 1210L150TH | K | 1.50 | 3.00 | 6 | 100 | 0.80 | 8.00 | 0.30 | 0.040 | 0.110 | X | X |
| 1210L175 | V | 1.75 | 3.50 | 6 | 100 | 0.80 | 8.00 | 0.60 | 0.020 | 0.080 | X | X |
| 1210L200 | L | 2.00 | 4.00 | 6 | 100 | 0.80 | 8.00 | 1.00 | 0.015 | 0.070 | X | X |

I_{hold} = Hold current: maximum current device will pass without tripping in 20°C still air.
 I_{trip} = Trip current: minimum current at which the device will trip in 20°C still air.
 V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})
 I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})

P_d = Power dissipated from device when in the tripped state at 20°C still air.
 R_{min} = Minimum resistance of device in initial (un-soldered) state.
 R_{typ} = Typical resistance of device in initial (un-soldered) state.
 R_{1max} = Maximum resistance of device at 20°C measured one hour after tripping or reflow soldering of 260°C for 20 sec.


Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.

Temperature Derating

| Part Number | Ambient Operation Temperature | | | | | | | | |
|-------------|-------------------------------|-------|------|------|------|------|------|------|------|
| | -40°C | -20°C | 0°C | 20°C | 40°C | 50°C | 60°C | 70°C | 85°C |
| | Hold Current (A) | | | | | | | | |
| 1210L005 | 0.08 | 0.07 | 0.06 | 0.05 | 0.04 | 0.04 | 0.03 | 0.03 | 0.02 |
| 1210L010 | 0.16 | 0.14 | 0.12 | 0.10 | 0.08 | 0.07 | 0.06 | 0.05 | 0.03 |
| 1210L020 | 0.29 | 0.26 | 0.22 | 0.20 | 0.16 | 0.14 | 0.13 | 0.11 | 0.08 |
| 1210L035 | 0.47 | 0.45 | 0.40 | 0.35 | 0.33 | 0.28 | 0.24 | 0.21 | 0.18 |
| 1210L050 | 0.76 | 0.67 | 0.58 | 0.50 | 0.43 | 0.40 | 0.36 | 0.32 | 0.28 |
| 1210L075 | 1.00 | 0.97 | 0.86 | 0.75 | 0.64 | 0.59 | 0.54 | 0.48 | 0.40 |
| 1210L075/24 | 1.00 | 0.97 | 0.86 | 0.75 | 0.64 | 0.59 | 0.54 | 0.48 | 0.40 |
| 1210L110/12 | 1.65 | 1.47 | 1.27 | 1.10 | 0.92 | 0.83 | 0.73 | 0.63 | 0.52 |
| 1210L110/16 | 1.65 | 1.47 | 1.27 | 1.10 | 0.92 | 0.83 | 0.73 | 0.63 | 0.52 |
| 1210L110TH | 1.60 | 1.42 | 1.26 | 1.10 | 0.94 | 0.86 | 0.80 | 0.70 | 0.58 |
| 1210L150TH | 2.30 | 2.02 | 1.76 | 1.50 | 1.24 | 1.11 | 1.00 | 0.85 | 0.65 |
| 1210L175 | 2.45 | 2.22 | 2.01 | 1.75 | 1.45 | 1.26 | 1.10 | 0.98 | 0.80 |
| 1210L200 | 2.60 | 2.44 | 2.35 | 2.00 | 1.78 | 1.67 | 1.50 | 1.45 | 1.10 |


Note:
The temperature derating data is only for reference, please contact Littelfuse technical support for detail temperature derating information.

Average Time Current Curves

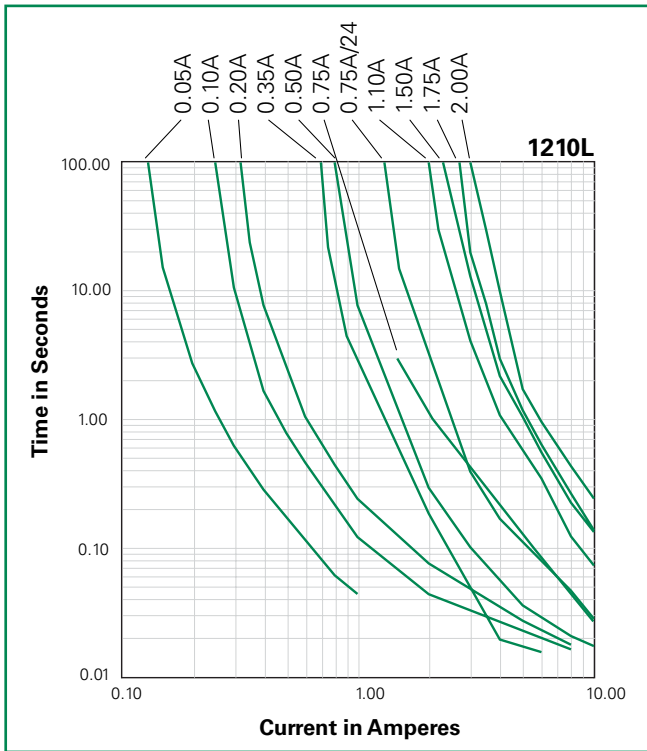

The average time current curves and Temperature Derating curve performance is affected by a number of variables, and these curves provided as guidance only. Customer must verify the performance in their application.

Temperature Derating Curve

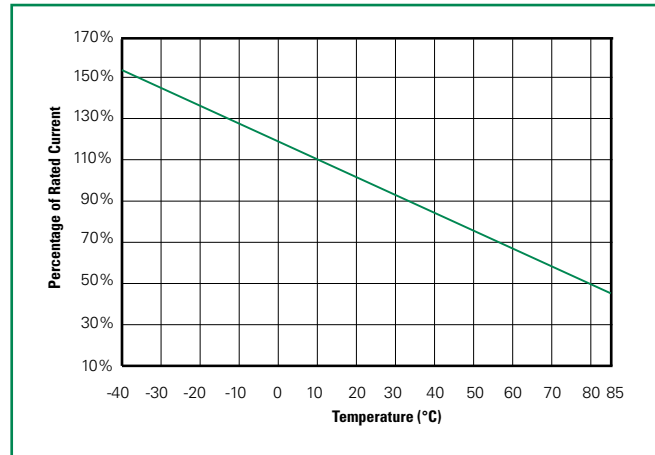

Note:
Typical Temperature derating curve, refer to table for derating data

Soldering Parameters

| | | |
|--|----------------------------------|------------------|
| Profile Feature | Pb-Free Assembly | |
| Average Ramp-Up Rate ($T_{S(max)}$ to T_P) | 3°C/second max | |
| Pre Heat: | Temperature Min ($T_{S(min)}$) | 150°C |
| | Temperature Max ($T_{S(max)}$) | 200°C |
| | Time (Min to Max) (t_s) | 60 – 180 secs |
| Time Maintained Above: | Temperature (T_L) | 217°C |
| | Temperature (t_L) | 60 – 150 seconds |
| Peak / Classification Temperature (T_P) | 260 ^{+0/-5} °C | |
| Time within 5°C of actual peak Temperature (t_p) | 20 – 40 seconds | |
| Ramp-down Rate | 6°C/second max | |
| Time 25°C to peak Temperature (T_P) | 8 minutes Max. | |



- All temperature refer to topside of the package, measured on the package body surface
- If reflow temperature exceeds the recommended profile, devices may not meet the performance requirements
- Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead
- Recommended maximum paste thickness is 0.25mm (0.010inch)
- Devices can be cleaned using standard industry methods and solvents
- Devices can be reworked using the standard industry practices

Physical Specifications

| | |
|---------------------------|--|
| Terminal Material | Solder-Plated Copper (Solder Material: Matte Tin (Sn)) |
| Lead Solderability | Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3. |

Environmental Specifications

| | |
|--|--|
| Operating/Storage Temperature | -40°C to +85°C |
| Maximum Device Surface Temperature in Tripped State | 125°C |
| Passive Aging | +85°C, 1000 hours -/+5% typical resistance change |
| Humidity Aging | +85°C, 85, R.H., 1000 hours -/+5% typical resistance change |
| Thermal Shock | MIL-STD-202, Method 107 +85°C/-40°C, 20 times -30% typical resistance change |
| Solvent Resistance | MIL-STD-202, Method 215 No change |
| Vibration | MIL-STD-883, Method 2007, Condition A No change |
| Moisture Level Sensitivity | Level 1, J-STD-020 |


Dimensions

MARKING CODE VARIES
WITH AMPERAGE RATING
(See Electrical Characteristics Table)
SHOWN IS 1.5AMP RATING



| Part Number | A | | | | B | | | | C | | | | D | | | | E | | | |
|-------------|--------|------|-----|------|--------|------|------|------|--------|------|------|------|--------|------|------|------|--------|------|------|------|
| | Inches | | mm | | Inches | | mm | | Inches | | mm | | Inches | | mm | | Inches | | mm | |
| | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max |
| 1210L005 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.05 | 0.75 | 1.25 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L010 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.05 | 0.75 | 1.25 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L020 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.02 | 0.04 | 0.60 | 1.00 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L035 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.02 | 0.03 | 0.50 | 0.85 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L050 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.02 | 0.03 | 0.50 | 0.85 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L075 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.02 | 0.03 | 0.50 | 0.85 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L075/24 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.05 | 0.07 | 1.20 | 1.80 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L110/12 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.05 | 0.75 | 1.25 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L110/16 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.05 | 0.75 | 1.25 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L110TH | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.04 | 0.05 | 0.30 | 0.71 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L150TH | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.07 | 0.75 | 1.07 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L175 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.02 | 0.04 | 0.60 | 1.00 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |
| 1210L200 | 0.12 | 0.14 | 3.0 | 3.43 | 0.09 | 0.11 | 2.35 | 2.80 | 0.03 | 0.06 | 0.80 | 1.60 | 0.01 | 0.03 | 0.25 | 0.75 | 0.004 | 0.02 | 0.10 | 0.50 |

Part Ordering Number System

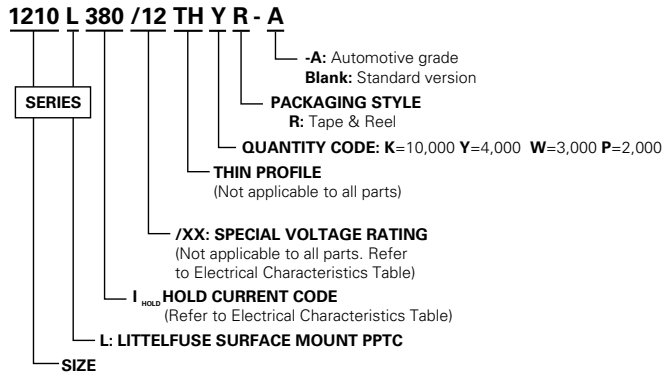


Packaging Options

| Part Number | Ordering Number | Halogen Free | I _{hold} (A) | I _{hold} Code | Packaging Option | Quantity | Quantity & Packaging Codes |
|-------------|-----------------|--------------|-----------------------|------------------------|------------------|----------|----------------------------|
| 1210L005 | 1210L005WR | Yes | 0.05 | 005 | Tape and Reel | 3000 | WR |
| 1210L010 | 1210L010WR | Yes | 0.10 | 010 | Tape and Reel | 3000 | WR |
| 1210L020 | 1210L020WR | Yes | 0.20 | 020 | Tape and Reel | 3000 | WR |
| 1210L035 | 1210L035YR | Yes | 0.35 | 035 | Tape and Reel | 4000 | YR |
| 1210L050 | 1210L050YR | Yes | 0.50 | 050 | Tape and Reel | 4000 | YR |
| 1210L075 | 1210L075YR | Yes | 0.75 | 075 | Tape and Reel | 4000 | YR |
| 1210L075/24 | 1210L075/24PR | Yes | 0.75 | 075 | Tape and Reel | 2000 | PR |
| 1210L110/12 | 1210L110/12WR | Yes | 1.10 | 110 | Tape and Reel | 3,000 | WR |
| 1210L110/16 | 1210L110/16WR | Yes | 1.10 | 110 | Tape and Reel | 3,000 | WR |
| 1210L110TH | 1210L110THYR | Yes | 1.10 | 110 | Tape and Reel | 4000 | YR |
| 1210L150TH | 1210L150THWR | Yes | 1.50 | 150 | Tape and Reel | 3000 | WR |
| 1210L175 | 1210L175WR | Yes | 1.75 | 175 | Tape and Reel | 3000 | WR |
| 1210L200 | 1210L200PR | Yes | 2.00 | 200 | Tape and Reel | 2000 | PR |

Tape and Reel Specifications

| TAPE SPECIFICATIONS: EIA-481-1 (mm) | | | | |
|-------------------------------------|--|--|----------------------------------|-------------------------------------|
| | Packaging Code "YR": 1210L035 1210L050 1210L075 1210L110TH | Packaging Code "WR": 1210L005 1210L010 1210L020 1210L110/12 1210L110/16 1210L150TH 1210L175 | Packaging Code "PR": 1210L200 | Packaging Code "PR": 1210L075/24 |
| W | 8.00+/-0.30 | 8.00+/-0.30 | 8.00+/-0.30 | 8.00+/-0.30 |
| F | 3.50+/-0.05 | 3.50+/-0.05 | 3.50+/-0.05 | 3.50+/-0.05 |
| E₁ | 1.75+/-0.10 | 1.75+/-0.10 | 1.75+/-0.10 | 1.75+/-0.10 |
| D₀ | 1.55+/-0.05 | 1.55+/-0.05 | 1.55+/-0.05 | 1.55+/-0.05 |
| D₁ | 1.00 (min) | 1.00 (min) | 1.00 (min) | 1.00+0.25/-0 |
| P₀ | 4.00+/-0.10 | 4.00+/-0.10 | 4.00+/-0.10 | 4.00+/-0.10 |
| P₁ | 4.00+/-0.10 | 4.00+/-0.10 | 4.00+/-0.10 | 4.00+/-0.10 |
| P₂ | 2.00+/-0.05 | 2.00+/-0.05 | 2.00+/-0.05 | 2.00+/-0.05 |
| A₀ | 2.82+/-0.10 | 2.82+/-0.10 | 2.80+/-0.10 | 2.80+/-0.10 |
| B₀ | 3.46+/-0.10 | 3.50+/-0.10 | 3.50+/-0.10 | 3.55+/-0.10 |
| T | 0.25+/-0.10 | 0.20+/-0.10 | 0.25+/-0.10 | 0.25+/-0.10 |
| K₀ | 1.00+/-0.10 | 1.30+/-0.10 | 1.60+/-0.10 | 1.75+/-0.10 |
| <i>Leader min.</i> | 390 | 390 | 390 | 390 |
| <i>Trailer min.</i> | 160 | 160 | 160 | 160 |

| REEL DIMENSIONS: EIA-481-1 (mm) | |
|------------------------------------|-------------|
| C | Ø178+/-1.0 |
| D | Ø60.2+/-0.5 |
| H | 11.0+/-0.05 |
| W | 9.0+/-1.5 |

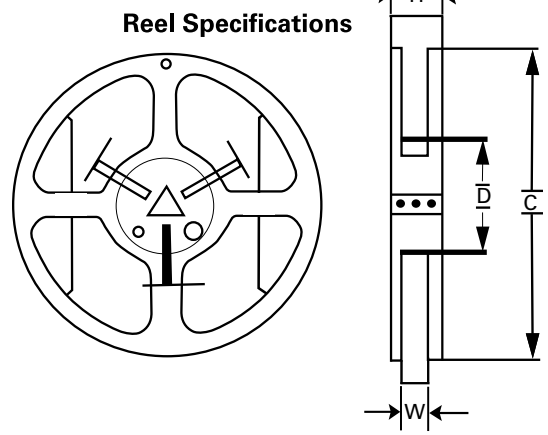

WARNING

- Users shall independently assess the suitability of these devices for each of their applications
- Operation of these devices beyond the stated maximum ratings could result in damage to the devices and lead to electrical arcing and/or fire
- These devices are intended to protect against the effects of temporary over-current or over-temperature conditions and are not intended to perform as protective devices where such conditions are expected to be repetitive or prolonged in duration
- Exposure to silicon-based oils, solvents, electrolytes, acids, and similar materials can adversely affect the performance of these PPTC devices
- These devices undergo thermal expansion under fault conditions, and thus shall be provided with adequate space and be protected against mechanical stresses
- Circuits with inductance may generate a voltage (L di/dt) above the rated voltage of the PPTC device.

Компания «Океан Электроники» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Поставка оригинальных импортных электронных компонентов напрямую с производств Америки, Европы и Азии, а так же с крупнейших складов мира;
- Широкая линейка поставок активных и пассивных импортных электронных компонентов (более 30 млн. наименований);
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Помощь Конструкторского Отдела и консультации квалифицированных инженеров;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Поставка электронных компонентов под контролем ВП;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- При необходимости вся продукция военного и аэрокосмического назначения проходит испытания и сертификацию в лаборатории (по согласованию с заказчиком);
- Поставка специализированных компонентов военного и аэрокосмического уровня качества (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Actel, Aeroflex, Peregrine, VPT, Syfer, Eurofarad, Texas Instruments, MS Kennedy, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Компания «Океан Электроники» является официальным дистрибьютором и эксклюзивным представителем в России одного из крупнейших производителей разъемов военного и аэрокосмического назначения «JONHON», а так же официальным дистрибьютором и эксклюзивным представителем в России производителя высокотехнологичных и надежных решений для передачи СВЧ сигналов «FORSTAR».



JONHON

«JONHON» (основан в 1970 г.)

Разъемы специального, военного и аэрокосмического назначения:

(Применяются в военной, авиационной, аэрокосмической, морской, железнодорожной, горно- и нефтедобывающей отраслях промышленности)

«FORSTAR» (основан в 1998 г.)

ВЧ соединители, коаксиальные кабели, кабельные сборки и микроволновые компоненты:

(Применяются в телекоммуникациях гражданского и специального назначения, в средствах связи, РЛС, а так же военной, авиационной и аэрокосмической отраслях промышленности).



Телефон: 8 (812) 309-75-97 (многоканальный)

Факс: 8 (812) 320-03-32

Электронная почта: ocean@oceanchips.ru

Web: <http://oceanchips.ru/>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, д. 2, корп. 4, лит. А